



# EMC TEST REPORT For VCCI

Test Report No. : KES-E1-17T0305-R1  
Date of Issue : Feb. 24, 2023  
Product name : NETWORK CAMERA  
Model/Type No. : XNV-6120  
Variant Model : -  
Applicant : Hanwha Vision Co., Ltd  
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, Republic of Korea  
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED  
2. D-TECH CO.,LTD.  
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,  
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam  
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,  
Korea (Suwon Industrial Complex)  
Date of Receipt : Apr. 14, 2017  
Test date : Apr. 29, 2017  
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Sung Keun, Park  
EMC Test Engineer

Reviewed by

Dong-Hun, Jang  
EMC Technical Manager

Tested by Young Suk, Song  
(Retired person)  
Proxy signature : Sung Keun, Park

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-E1-17T0305-R1

Page (2) of (48)

**REPORT REVISION HISTORY**

| Date          | Test Report No.   | Revision History                                                                                                              |
|---------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------|
| May. 02, 2017 | KES-E1-17T0305    | Issued                                                                                                                        |
| Feb. 24, 2023 | KES-E1-17T0305-R1 | Change the Model/Type No., Applicant, Applicant Address, manufacturer and manufacturer Address at the request of the customer |
|               |                   |                                                                                                                               |
|               |                   |                                                                                                                               |
|               |                   |                                                                                                                               |
|               |                   |                                                                                                                               |
|               |                   |                                                                                                                               |
|               |                   |                                                                                                                               |
|               |                   |                                                                                                                               |
|               |                   |                                                                                                                               |

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## TABLE OF CONTENTS

|                                                      |                                                             |    |
|------------------------------------------------------|-------------------------------------------------------------|----|
| 1.0                                                  | General Product Description.....                            | 4  |
| 1.1                                                  | Test Voltage & Frequency .....                              | 6  |
| 1.2                                                  | Variant Model Differences .....                             | 6  |
| 1.3                                                  | Device Modifications .....                                  | 6  |
| 1.4                                                  | Equipment Under Test.....                                   | 6  |
| 1.5                                                  | Support Equipments .....                                    | 6  |
| 1.6                                                  | External I/O Cabling .....                                  | 7  |
| 1.7                                                  | EUT Operating Mode(s) .....                                 | 8  |
| 1.8                                                  | Configuration .....                                         | 9  |
| 1.9                                                  | Calibration Details of Equipment Used for Measurement ..... | 11 |
| 1.10                                                 | Test Facility .....                                         | 11 |
| 1.11                                                 | Laboratory Accreditations and Listings .....                | 11 |
| 2.0                                                  | Test Regulations.....                                       | 12 |
| 2.1                                                  | Conducted Emissions Mains Power Ports.....                  | 14 |
| 2.2                                                  | Conducted Emissions at Telecommunication Ports.....         | 15 |
| 2.3                                                  | Radiated Electric Field Emissions(Below 1 GHz) .....        | 16 |
| 2.4                                                  | Radiated Electric Field Emissions(Above 1 GHz) .....        | 17 |
| APPENDIX A – TEST DATA.....                          |                                                             | 18 |
| Conducted Emissions at Mains Power Ports.....        |                                                             | 18 |
| Conducted Emissions at Telecommunication Ports ..... |                                                             | 20 |
| Radiated Electric Field Emissions(Below 1 GHz) ..... |                                                             | 27 |
| Radiated Electric Field Emissions(Above 1 GHz) ..... |                                                             | 29 |
| Test Setup Photos and Configuration .....            |                                                             | 41 |
| Conducted Voltage Emissions .....                    |                                                             | 41 |
| Conducted Telecommunication Emissions .....          |                                                             | 42 |
| Radiated Electric Field Emissions(Below 1 GHz) ..... |                                                             | 43 |
| Radiated Electric Field Emissions(Above 1 GHz) ..... |                                                             | 44 |
| EUT External Photographs .....                       |                                                             | 45 |
| EUT Internal Photographs .....                       |                                                             | 46 |

## 1.0 General Product Description

### Main Specifications of EUT are:

| XNV-6120                    |                                                                                                                                                                                                                                                                  |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video                       |                                                                                                                                                                                                                                                                  |
| Imaging Device              | 1/2.8" 2M CMOS                                                                                                                                                                                                                                                   |
| Total Pixels                | 1945(H) x 1109(V) 2.16M                                                                                                                                                                                                                                          |
| Effective Pixels            | 1945(H) x 1097(V) 2.13M                                                                                                                                                                                                                                          |
| Scanning System             | Progressive                                                                                                                                                                                                                                                      |
| Min. Illumination           | Color : 0.03 Lux (1/30sec, F1.6)<br>B/W : 0.003 Lux (1/30sec, F1.6)                                                                                                                                                                                              |
| S / N Ratio                 | 50dB                                                                                                                                                                                                                                                             |
| Video Out                   | CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation<br>USB : Micro USB type B, 1280x720, for installation                                                                                                                                  |
| Lens                        |                                                                                                                                                                                                                                                                  |
| Focal Length (Zoom Ratio)   | 5.2~62.4mm(Optical 12X)                                                                                                                                                                                                                                          |
| Max. Aperture Ratio         | F1.6 (Wide) ~ F3.0(Tele)                                                                                                                                                                                                                                         |
| Angular Field of View       | W : 54.58(H) X 32.19(V) X 61.40(D)<br>T : 5.30(H) X 3.00(V) X 6.06(D)                                                                                                                                                                                            |
| Min. Object Distance        | 2.1m                                                                                                                                                                                                                                                             |
| Focus Control               | Auto / Manual / One Push                                                                                                                                                                                                                                         |
| Lens Type                   | DC Auto Iris                                                                                                                                                                                                                                                     |
| Mount Type                  | Board-in type                                                                                                                                                                                                                                                    |
| Pan / Tilt / Rotate         |                                                                                                                                                                                                                                                                  |
| Pan Range                   | 0° ~ +354°                                                                                                                                                                                                                                                       |
| Tilt Range                  | 0° ~ +75°                                                                                                                                                                                                                                                        |
| Rotate Range                | 0° ~ +355°                                                                                                                                                                                                                                                       |
| Operational                 |                                                                                                                                                                                                                                                                  |
| Camera Title                | Off / On (Displayed up to 85 characters)<br>- W/W : English/Numeric/Special Characters<br>- China : English/Numeric/Special/Chinese Characters<br>- Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution |
| Day & Night                 | Auto (ICR) / Color / B/W / External / Schedule                                                                                                                                                                                                                   |
| Backlight Compensation      | Off / BLC / HLC(Masking/Dimming), WDR                                                                                                                                                                                                                            |
| Wide Dynamic Range          | 150dB                                                                                                                                                                                                                                                            |
| Contrast Enhancement        | SSDR (Off / On)                                                                                                                                                                                                                                                  |
| Digital Noise Reduction     | SSNR5 (2D+3D Noise Filter) (Off / On)                                                                                                                                                                                                                            |
| Digital Image Stabilization | Off / On                                                                                                                                                                                                                                                         |
| Defog                       | Auto / Manual / Off                                                                                                                                                                                                                                              |
| Motion Detection            | Off/ On(8ea, 8point Polygonal zones)                                                                                                                                                                                                                             |
| Privacy Masking             | Off / On (32ea, Rectangle zones)<br>- Color : Grey/Green/Red/Blue/Black/White<br>- Mosaic                                                                                                                                                                        |
| Gain Control                | Off / Low / Middle / High                                                                                                                                                                                                                                        |
| White Balance               | ATW / AWC / Manual / Indoor / Outdoor (included Mercury & Sodium)                                                                                                                                                                                                |
| Contrast                    | level adjustment                                                                                                                                                                                                                                                 |
| LDC                         | On/Off (5 levels with Min/Max)                                                                                                                                                                                                                                   |
| Electronic Shutter Speed    | Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)                                                                                                                                                                                                               |
| Digital Zoom                | 24X                                                                                                                                                                                                                                                              |
| Preset                      | 300 ea                                                                                                                                                                                                                                                           |
| Image Rotation              | Flip : On/Off<br>Mirror : On/Off<br>Hallway : 90° / 270°                                                                                                                                                                                                         |
| Video & Audio Analytics     | Tampering, Loitering, Directional Detection, Defocus Detection, Fog Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection, Motion Detection Sound Classification                                                              |
| Alarm                       | Input 1ea / Output 1ea                                                                                                                                                                                                                                           |
| Alarm events                | Alarm Input, Motion Detection, Video & Audio Analytics, Network Disconnect                                                                                                                                                                                       |
| Alarm events                | File upload via FTP, E-Mail<br>Notification via E-Mail<br>local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers<br>External output<br>preset                                                                                                            |
| Audio out                   | Line out (3.5mm mono jack), Max output level: 1 Vrms                                                                                                                                                                                                             |
| Pixel Counter               | support                                                                                                                                                                                                                                                          |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-E1-17T0305-R1  
Page (5) of (48)

|                                   |                                                                                                                                                                                                                                                                                                               |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network                           |                                                                                                                                                                                                                                                                                                               |
| Ethernet                          | RJ-45 (10/100BASE-T)                                                                                                                                                                                                                                                                                          |
| Video Compression Format          | H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High Motion JPEG                                                                                                                                                                                                                                             |
| Resolution                        | 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240                                                                                                                                                                                             |
| Max. Framerate                    | H.264/H.265 : Max. 60fps at all resolutions<br>Motion JPEG : Max. 30fps at all resolutions                                                                                                                                                                                                                    |
| Smart Codec                       | Manual Mode (area-based : 5EA)                                                                                                                                                                                                                                                                                |
| WiseStream II                     | support                                                                                                                                                                                                                                                                                                       |
| Video Quality Adjustment          | H.264/H.265/MJPEG : Target Bitrate Level Control                                                                                                                                                                                                                                                              |
| Bitrate Control Method            | H.264/H.265 : CBR or VBR<br>Motion JPEG : VBR                                                                                                                                                                                                                                                                 |
| Streaming Capability              | Multiple Streaming (Up to 10 Profiles)                                                                                                                                                                                                                                                                        |
| Audio Compression Format          | G.711 u-law / G.726 Selectable<br>G.726 (ADPCM) 8KHz, G.711 8KHz<br>G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps<br>AAC-LC : 48Kbps at 16KHz                                                                                                                                                                        |
| Audio Communication               | Bi-directional (2-Way)                                                                                                                                                                                                                                                                                        |
| IP                                | IPv4, IPv6                                                                                                                                                                                                                                                                                                    |
| Protocol                          | TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour                                                                                                                               |
| Security                          | HTTPS(SSL) Login Authentication<br>Digest Login Authentication<br>IP Address Filtering<br>User access Log<br>802.1X Authentication (EAP-TLS, EAP-LEAP)                                                                                                                                                        |
| Streaming Method                  | Unicast / Multicast                                                                                                                                                                                                                                                                                           |
| Max. User Access                  | 20 users at Unicast Mode                                                                                                                                                                                                                                                                                      |
| Edge Storage                      | SD/SDHC/SDXC 2slot (up to 512 GB)<br>- Continuous recording(1st slot to 2nd slot)<br>- Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded.<br>NAS(Network Attached Storage)<br>Local PC for Instant Recording                                                                           |
| Application Programming Interface | ONVIF Profile S/G<br>SUNAPI 2.0(HTTP API)<br>Wisenet Open Platform                                                                                                                                                                                                                                            |
| Webpage Language                  | English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek                                                                                                                                                           |
| Web Viewer                        | Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12<br>Non-plugin Webviewer<br>Supported Browser: Google Chrome 56, MS Edge 39, Mozilla Firefox 49(Window 64bit only) , Apple Safari 10 (Mac OS X only)<br>Plug-in Webviewer<br>Supported Browser : MS Explore 11, Apple Safari 10 (Mac OS X only) |
| Central Management Software       | SmartViewer                                                                                                                                                                                                                                                                                                   |
| Environmental                     |                                                                                                                                                                                                                                                                                                               |
| Operating Temperature / Humidity  | -40°C ~ +55°C(-40°F ~ +131°F) / Less than 90% RH<br>* Start up should be done at above -35°C                                                                                                                                                                                                                  |
| Storage Temperature / Humidity    | -50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH                                                                                                                                                                                                                                                             |
| Ingress Protection                | IP67, IP66, NEMA 4X                                                                                                                                                                                                                                                                                           |
| Vandal Resistance                 | IK10                                                                                                                                                                                                                                                                                                          |
| Electrical                        |                                                                                                                                                                                                                                                                                                               |
| Input Voltage / Current           | AC24V, DC12V,PoE(IEEE802.3af,Class3)                                                                                                                                                                                                                                                                          |
| Power Consumption                 | 24V AC : Max. 8.2W<br>12V DC : Max. 7W<br>PoE : Max. 7.8W                                                                                                                                                                                                                                                     |
| Mechanical                        |                                                                                                                                                                                                                                                                                                               |
| Color / Material                  | Ivory / Aluminum                                                                                                                                                                                                                                                                                              |
| Dimension (WxHxD)                 | Ø160 x H128.5mm                                                                                                                                                                                                                                                                                               |
| Weight                            | 985g                                                                                                                                                                                                                                                                                                          |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage      ☐ 230 Vac    ☐ 100 Vac    ☒ 24 Vac    ☒ 12 Vdc    ☒ PoE  
Frequency    ☒ 50 Hz    ☐ 60 Hz    ☐        Hz

## 1.2 Variant Model Differences

Not applicable

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

| Description    | Model Number | Serial Number | Manufacturer                                | Remarks |
|----------------|--------------|---------------|---------------------------------------------|---------|
| NETWORK CAMERA | XNV-6120     | -             | HANWHA VISION<br>VIETNAM COMPANY<br>LIMITED | E.U.T   |

## 1.5 Support Equipments

| Description      | Model Number  | Serial Number   | Manufacturer                       | Remarks |
|------------------|---------------|-----------------|------------------------------------|---------|
| POE Adaptor      | POE36U-1AT-R  | -               | PHIHONG                            | -       |
| Notebook         | RV518         | HTK991NC600187E | Samsung Electronics Co.,<br>Ltd    | -       |
| Notebook Adaptor | ADP-60ZH      | AD-6019R        | DELTA ELECTRONICS,<br>INC.         | -       |
| Speaker          | BR10000A CUVE | -               | BEIJING EDIFIER HI-<br>TECH GROUP. | -       |
| MIC              | CMK-303       | -               | CAMAC                              | -       |
| Alarm            | SIP-1201DD D0 | -               | SAMSUNG TECHWIN CO.,<br>LTD.       | -       |



## 1.6 External I/O Cabling

- AC 24 V Mode

| Start                     |          | END         |          | Cable Spec. |        |
|---------------------------|----------|-------------|----------|-------------|--------|
| Description               | I/O Port | Description | I/O Port | Length      | Shield |
| NETWORK CAMERA<br>(E.U.T) | RJ-45    | Notebook    | RJ-45    | 3.0         | U      |
|                           | 3.5 mm   | Speaker     | 3.5 mm   | 1.6         | U      |
|                           | 3.5 mm   | MIC         | 3.5 mm   | 1.7         | U      |
|                           | 3 Pin    | Alarm       | 3 Pin    | 1.7         | U      |

- DC 12 V Mode

| Start                     |          | END         |          | Cable Spec. |        |
|---------------------------|----------|-------------|----------|-------------|--------|
| Description               | I/O Port | Description | I/O Port | Length      | Shield |
| NETWORK CAMERA<br>(E.U.T) | RJ-45    | Notebook    | RJ-45    | 3.0         | U      |
|                           | 3.5 mm   | Speaker     | 3.5 mm   | 1.6         | U      |
|                           | 3.5 mm   | MIC         | 3.5 mm   | 1.7         | U      |
|                           | 3 Pin    | Alarm       | 3 Pin    | 1.7         | U      |



- PoE Mode

| Start                     |                 | END         |                 | Cable Spec. |        |
|---------------------------|-----------------|-------------|-----------------|-------------|--------|
| Description               | I/O Port        | Description | I/O Port        | Length      | Shield |
| NETWORK CAMERA<br>(E.U.T) | RJ-45<br>(POE)  | POE Adaptor | RJ-45<br>(POE)  | 3.0         | U      |
|                           | RJ-45           | Notebook    | RJ-45           | 3.0         | U      |
|                           | 3.5 mm          | Speaker     | 3.5 mm          | 1.6         | U      |
|                           | 3.5 mm          | MIC         | 3.5 mm          | 1.7         | U      |
|                           | 3 Pin           | Alarm       | 3 Pin           | 1.7         | U      |
| Notebook                  | RJ-45<br>(DATA) | POE Adaptor | RJ-45<br>(DATA) | 3.0         | U      |

\* Unshielded = U, Shielded = S

## 1.7 EUT Operating Mode(s)


| Test mode    | operating                          |
|--------------|------------------------------------|
| AC 24 V Mode | E.U.T Monitoring, Ping test, 1 kHz |
| DC 12 V Mode | E.U.T Monitoring, Ping test        |
| POE Mode     | E.U.T Monitoring, Ping test        |

| E.U.T Test operating S/W |         |                        |
|--------------------------|---------|------------------------|
| Name                     | Version | Manufacture Company    |
| WebViewer                | -       | Hanwha Vision Co., Ltd |


## 1.8 Configuration

■ AC Main

- AC 24 V Mode

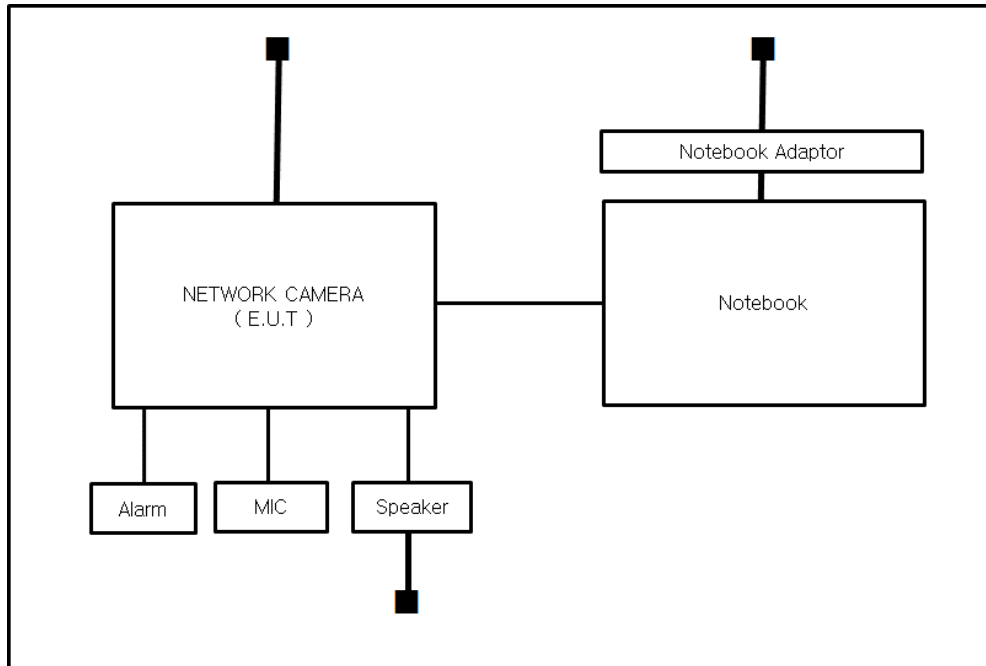


- DC 12 V Mode

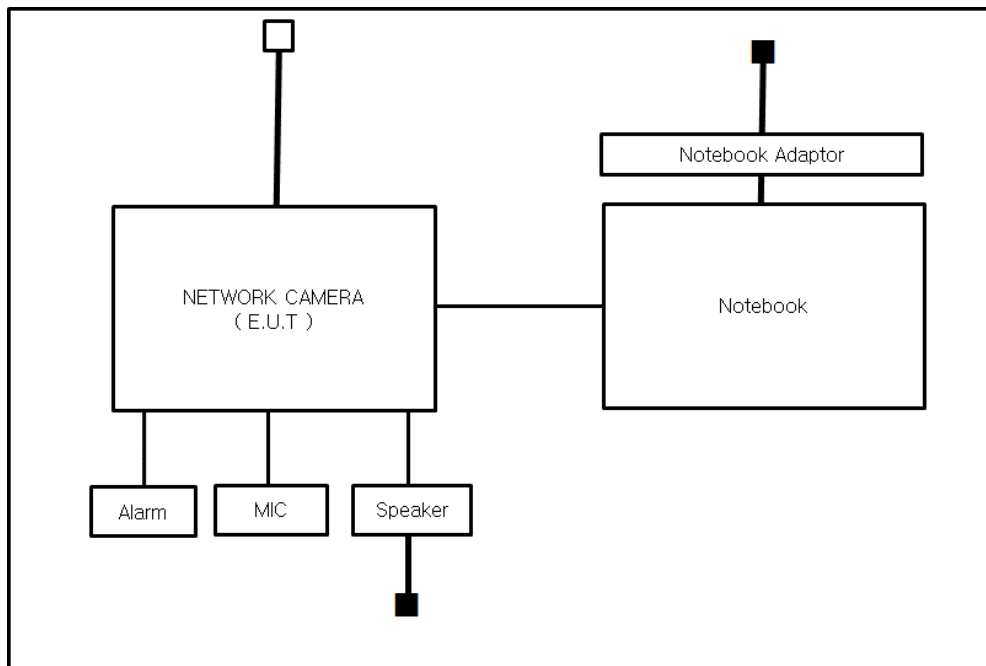

---

- PoE Mode

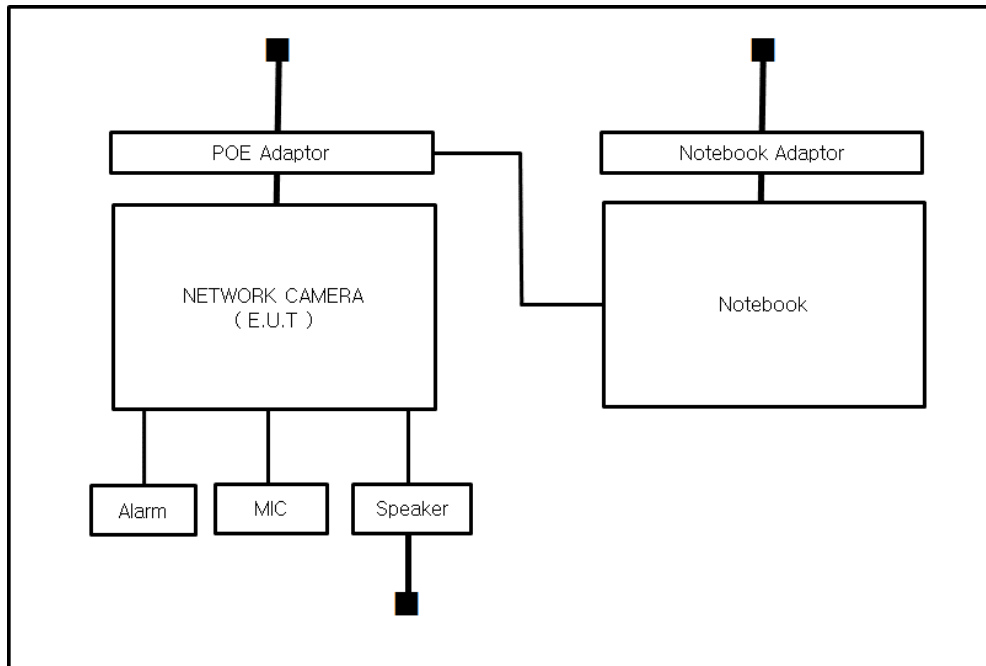

## 1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.10 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

## 1.11 Laboratory Accreditations and Listings

| Country       | Agency         | Scope of Accreditation                                                                                                                  | Logo                                                                                                                           |
|---------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| KOREA         | <b>RRA</b>     | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) | <br>KR0100                                  |
| International | <b>KOLAS</b>   | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) | <br>KT489                                  |
| USA           | <b>FCC</b>     | 3 m & 10 m Semi-Anechoic Chamber<br>Conducted test site to perform FCC Part 15/18 measurements.                                         | <br>KR0100                                |
| Canada        | <b>ISED</b>    | 3 m & 10 m Semi-Anechoic Chamber and Conducted test site                                                                                | <br>23298                                 |
| JAPAN         | <b>VCCI</b>    | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)                                                                          | <br>C-20136, T-20137,<br>R-20181, G-20176 |
| Europe        | <b>TÜV SÜD</b> | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) | <br>CARAT 001633 0004                     |

## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1  
☐ Class A

☐ Group 2  
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547 :2009

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-E1-17T0305-R1  
Page (13) of (48)

☒ **VCCI V-3 / 2015.04**

☒ Class A

☐ Class B

☐ **AS/NZS CISPR22:2009 +A1:2010**

☐ Class A

☐ Class B

☐ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B

☐ ANSI C63.4-2009

☐ **IC Regulation ICES-003 : 2016**

☐ CAN/CSA CISPR 22-10

☐ Class A

☐ Class B

☐ ANSI C63.4-2014

☐ **RE- Directive 2014/53/EU**

☐ EN 301 489-1 V1.9.2

☐ Equipment for fixed use

☐ Equipment for vehicular use

☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## 2.1 Conducted Emissions Mains Power Ports

**Test Date**

Apr. 29, 2017

**Test Location**

Electro wave Shieldroom

**Test Equipment**

| Used                                | Description       | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|-------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W      | EMC32        | R & S        | 9.12.00       | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER | ESR3         | R & S        | 101781        | 04, 27, 2018 |
| <input checked="" type="checkbox"/> | LISN              | ENV216       | R & S        | 101787        | 01, 11, 2018 |
| <input checked="" type="checkbox"/> | LISN              | ESH2-Z5      | R & S        | 100450        | 04, 27, 2018 |
| <input checked="" type="checkbox"/> | PULSE LIMITER     | ESH3-Z2      | R & S        | 101915        | 12, 13, 2017 |

**Test Conditions**

Temperature: 21,2 °C

Relative Humidity: 36,3 %

**Frequency Range of Measurement**

150 kHz to 30 MHz

**Instrument Settings**

IF Band Width: 9 kHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**See Appendix A for test data.

## 2.2 Conducted Emissions at Telecommunication Ports

**Test Date**

Apr. 29, 2017

**Test Location**

Electro wave Shieldroom

**Test Equipment**

| Used                                | Description       | Model Number | Manufacturer    | Serial Number | Cal. Due     |
|-------------------------------------|-------------------|--------------|-----------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W      | EMC32        | R & S           | 9.12.00       | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER | ESR3         | R & S           | 101781        | 04, 27, 2018 |
| <input checked="" type="checkbox"/> | LISN              | ENV216       | R & S           | 101787        | 01, 11, 2018 |
| <input checked="" type="checkbox"/> | LISN              | ESH2-Z5      | R & S           | 100450        | 04, 27, 2018 |
| <input checked="" type="checkbox"/> | PULSE LIMITER     | ESH3-Z2      | R & S           | 101915        | 12, 13, 2017 |
| <input checked="" type="checkbox"/> | 8-WIRE ISN CAT3,5 | ENY81        | Rohde & Schwarz | 100174        | 01, 11, 2018 |
| <input type="checkbox"/>            | 8-WIRE ISN CAT6   | ENY81-CAT6   | Rohde & Schwarz | 101665        | 01, 11, 2018 |

**Test Conditions**

Temperature: 21,2 °C

Relative Humidity: 36,3 %

**Frequency Range of Measurement**

150 kHz to 30 MHz

**Instrument Settings**

IF Band Width: 9 kHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**See Appendix A for test data.

## 2.3 Radiated Electric Field Emissions(Below 1 GHz)

**Test Date**

Apr. 29, 2017

**Test Location**☒ Open Area Test Site #1☐ Open Area Test Site #2**Test Equipment**

| Used                                | Description              | Model Number | Manufacturer    | Serial Number | Cal. Due     |
|-------------------------------------|--------------------------|--------------|-----------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W             | -            | -               | -             | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER        | ESVS10       | Rohde & Schwarz | 826008/014    | 04, 18, 2018 |
| <input type="checkbox"/>            | TRILOG-BROADBAND ANTENNA | VULB9163     | Schwarzbeck     | 714           | 11, 28, 2018 |
| <input checked="" type="checkbox"/> | TRILOG-BROADBAND ANTENNA | VULB9163     | Schwarzbeck     | 715           | 04, 14, 2018 |

**Test Conditions**

Temperature: 23,0 °C

Relative Humidity: 29,0 %

**Frequency Range of Measurement**

30 MHz to 1 GHz

**Instrument Settings**

IF Band Width: 120 kHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**See Appendix A for test data.

## 2.4 Radiated Electric Field Emissions(Above 1 GHz)

### Test Date

Apr. 29, 2017

### Test Location

Semi Anechoic Chamber #2

### Test Equipment

| Used                                | Description              | Model Number | Manufacturer                  | Serial Number | Cal. Due     |
|-------------------------------------|--------------------------|--------------|-------------------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | SEMI ANECHOIC CHAMBER #2 | -            | SEMITEC                       | -             | -            |
| <input checked="" type="checkbox"/> | EMI Test S/W             | e3           | AUDIX                         | 8.083b        | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER        | ESU26        | R & S                         | 100552        | 04, 19, 2018 |
| <input checked="" type="checkbox"/> | BROADBAND PREAMPLIFIER   | BBV 9718     | Schwarzbeck Mess - Elektronik | 9718-246      | 10, 14, 2017 |
| <input checked="" type="checkbox"/> | LOG-PERIODIC ANTENNA     | STLP 9149    | SCHWARZBECK                   | 9149-255      | 05, 17, 2018 |

### Test Conditions

Temperature: 19,2 °C

Relative Humidity: 38,2 %

### Frequency Range of Measurement

1 GHz to 6 GHz

### Instrument Settings

IF Band Width: 1 MHz

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.


## APPENDIX A – TEST DATA

### Conducted Emissions at Mains Power Ports

- AC 24 V Mode

#### [HOT] Common Information

|                   |                    |
|-------------------|--------------------|
| Test Description: | Conducted Emission |
| Model No.:        | XNV-6120N          |
| Mode              | AC 24 V_H          |
| Operator Name:    | KES                |

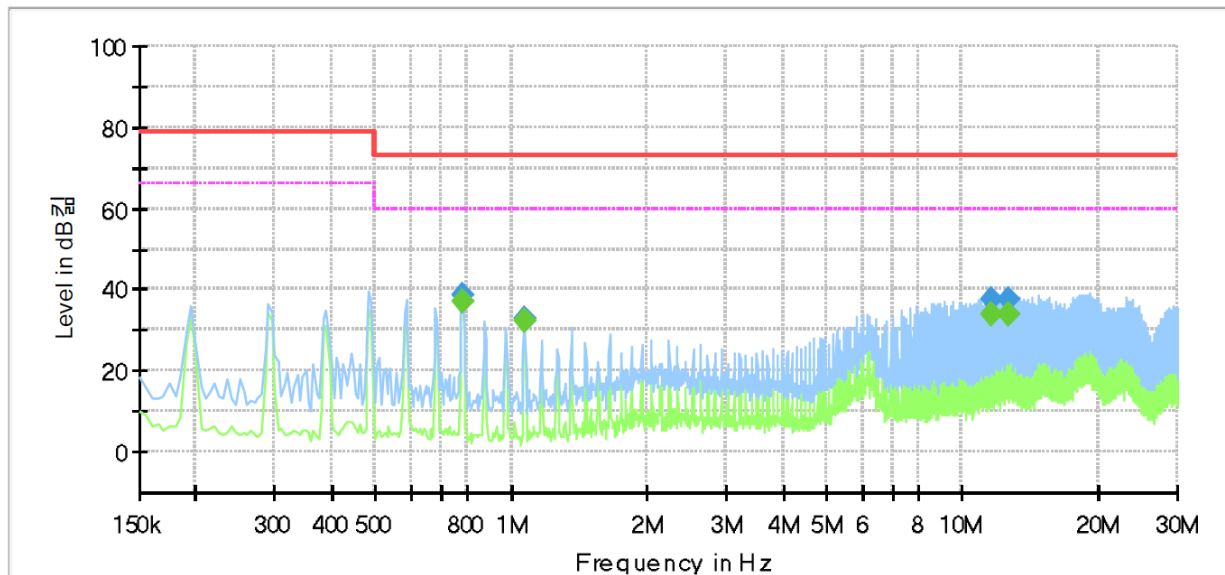

### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.780000        | ---              | 37.21           | 60.00        | 22.79       | 1000.0          | 9.000           | L1   | 20.2       |
| 0.780000        | 38.69            | ---             | 73.00        | 34.31       | 1000.0          | 9.000           | L1   | 20.2       |
| 1.070000        | ---              | 32.17           | 60.00        | 27.83       | 1000.0          | 9.000           | L1   | 20.1       |
| 1.070000        | 32.63            | ---             | 73.00        | 40.37       | 1000.0          | 9.000           | L1   | 20.1       |
| 11.585000       | ---              | 34.03           | 60.00        | 25.97       | 1000.0          | 9.000           | L1   | 20.0       |
| 11.585000       | 37.51            | ---             | 73.00        | 35.49       | 1000.0          | 9.000           | L1   | 20.0       |
| 12.655000       | ---              | 33.90           | 60.00        | 26.10       | 1000.0          | 9.000           | L1   | 20.1       |
| 12.655000       | 37.75            | ---             | 73.00        | 35.25       | 1000.0          | 9.000           | L1   | 20.1       |

#### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

[NEUTRAL]

## Common Information

Test Description: Conducted Emission  
Model No.: XNV-6120N  
Mode: AC 24 V\_N  
Operator Name: KES

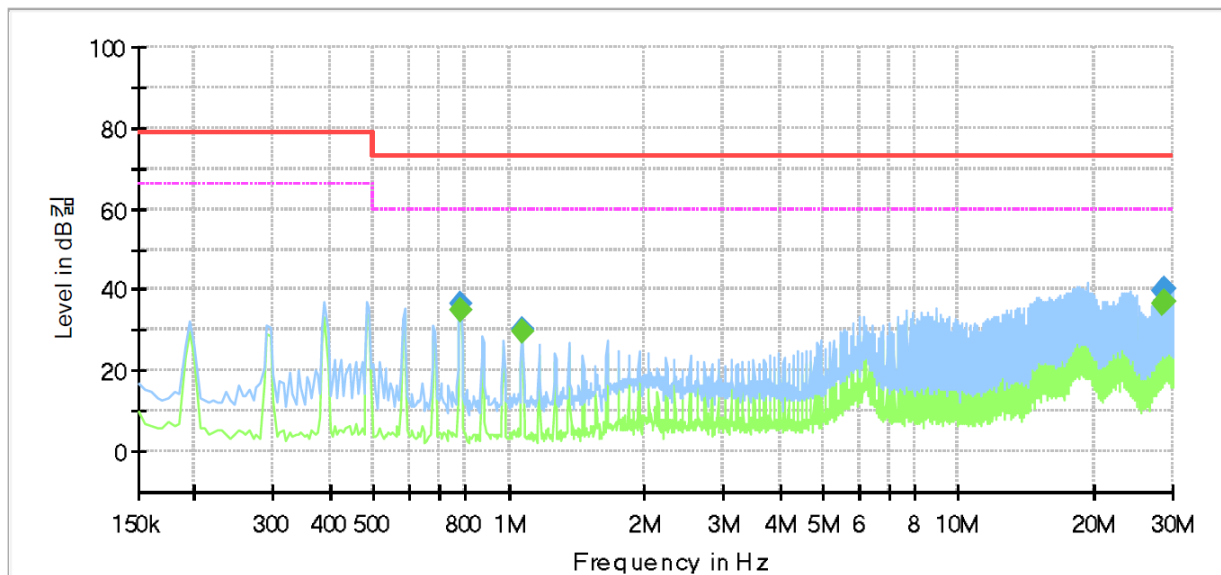

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.780000        | ---              | 34.81           | 60.00        | 25.19       | 1000.0          | 9.000           | N    | 20.2       |
| 0.780000        | 36.28            | ---             | 73.00        | 36.72       | 1000.0          | 9.000           | N    | 20.2       |
| 1.070000        | ---              | 29.86           | 60.00        | 30.14       | 1000.0          | 9.000           | N    | 20.1       |
| 1.070000        | 30.32            | ---             | 73.00        | 42.68       | 1000.0          | 9.000           | N    | 20.1       |
| 28.425000       | ---              | 36.51           | 60.00        | 23.49       | 1000.0          | 9.000           | N    | 20.6       |
| 28.425000       | 39.61            | ---             | 73.00        | 33.39       | 1000.0          | 9.000           | N    | 20.6       |
| 28.715000       | ---              | 37.17           | 60.00        | 22.83       | 1000.0          | 9.000           | N    | 20.6       |
| 28.715000       | 40.17            | ---             | 73.00        | 32.83       | 1000.0          | 9.000           | N    | 20.6       |

### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr


## Conducted Emissions at Telecommunication Ports

- AC 24 V Mode

[10 Mbps]

## Common Information

Test Description: Telecommunication Emission  
 Model No.: XNV-6120N  
 Mode: AC 24 V\_10 Mbps  
 Operator Name: KES

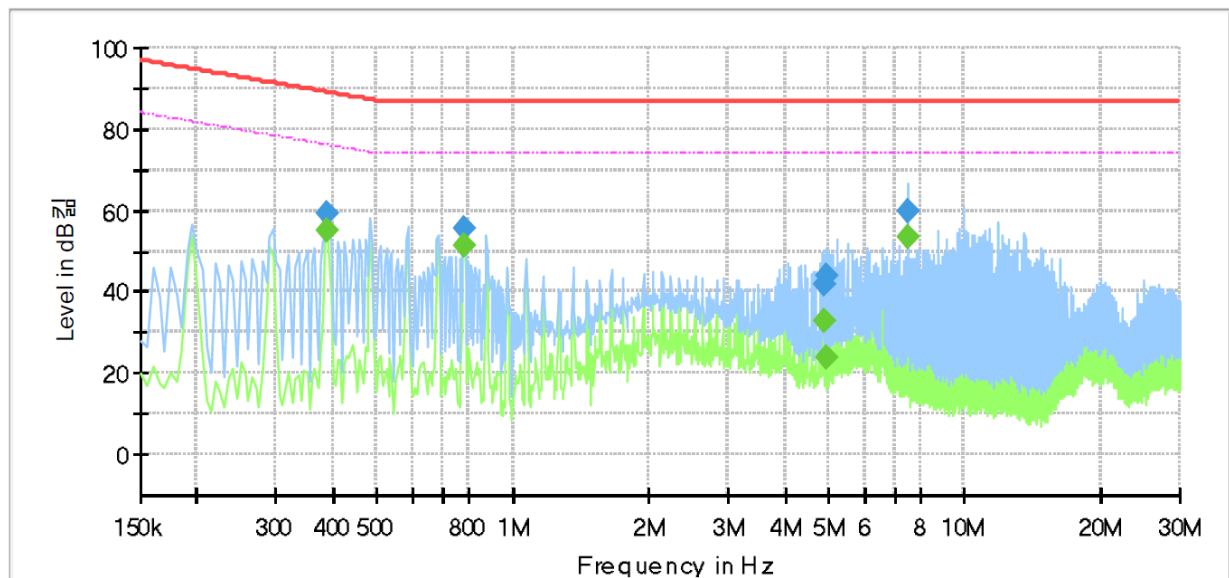

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.390000        | ---              | 54.91           | 76.06        | 21.15       | 1000.0          | 9.000           | Single Line | 20.6       |
| 0.390000        | 59.49            | ---             | 89.06        | 29.57       | 1000.0          | 9.000           | Single Line | 20.6       |
| 0.780000        | ---              | 51.57           | 74.00        | 22.43       | 1000.0          | 9.000           | Single Line | 20.1       |
| 0.780000        | 55.80            | ---             | 87.00        | 31.20       | 1000.0          | 9.000           | Single Line | 20.1       |
| 4.890000        | ---              | 32.67           | 74.00        | 41.33       | 1000.0          | 9.000           | Single Line | 19.5       |
| 4.890000        | 41.93            | ---             | 87.00        | 45.07       | 1000.0          | 9.000           | Single Line | 19.5       |
| 4.930000        | ---              | 23.68           | 74.00        | 50.32       | 1000.0          | 9.000           | Single Line | 19.5       |
| 4.930000        | 43.93            | ---             | 87.00        | 43.07       | 1000.0          | 9.000           | Single Line | 19.5       |
| 7.500000        | ---              | 53.29           | 74.00        | 20.71       | 1000.0          | 9.000           | Single Line | 19.6       |
| 7.500000        | 59.91            | ---             | 87.00        | 27.09       | 1000.0          | 9.000           | Single Line | 19.6       |

### ◆ Calculation

QuasiPeak [dBuV] / CAverage [dBuV] = Reading Value [dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact kes@kes.co.kr

[100 Mbps]

## Common Information

Test Description: Telecommunication Emission  
Model No.: XNV-6120N  
Mode: AC 24 V\_100 Mbps  
Operator Name: KES

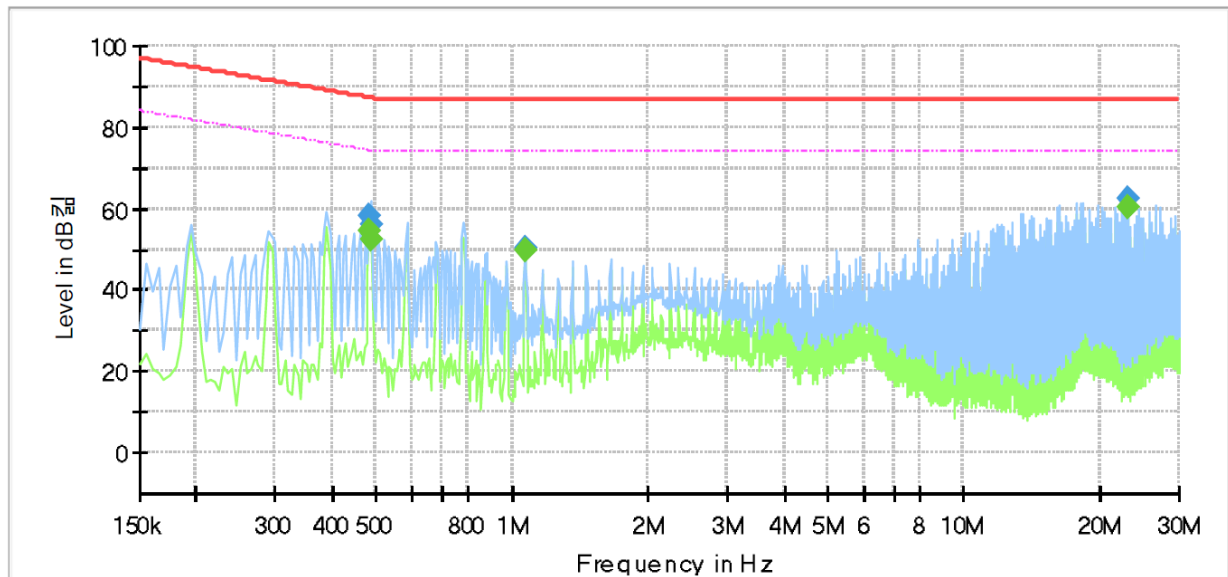

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.485000        | ---              | 54.72           | 74.25        | 19.53       | 1000.0          | 9.000           | Single Line | 20.7       |
| 0.485000        | 58.23            | ---             | 87.25        | 29.02       | 1000.0          | 9.000           | Single Line | 20.7       |
| 0.490000        | ---              | 52.43           | 74.17        | 21.74       | 1000.0          | 9.000           | Single Line | 20.7       |
| 0.490000        | 56.06            | ---             | 87.17        | 31.11       | 1000.0          | 9.000           | Single Line | 20.7       |
| 1.070000        | ---              | 49.59           | 74.00        | 24.41       | 1000.0          | 9.000           | Single Line | 20.2       |
| 1.070000        | 50.23            | ---             | 87.00        | 36.77       | 1000.0          | 9.000           | Single Line | 20.2       |
| 23.130000       | ---              | 60.18           | 74.00        | 13.82       | 1000.0          | 9.000           | Single Line | 20.5       |
| 23.130000       | 62.49            | ---             | 87.00        | 24.51       | 1000.0          | 9.000           | Single Line | 20.5       |

### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
[www.kes.co.kr](http://www.kes.co.kr)

Report No.:  
KES-E1-17T0305-R1  
Page (22) of (48)

---

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

---


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [kes@kes.co.kr](mailto:kes@kes.co.kr)

- DC 12 V Mode

**[10 Mbps]**

## Common Information

Test Description: Telecommunication Emission  
 Model No.: XNV-6120N  
 Mode: DC 12 V\_10 Mbps  
 Operator Name: KES

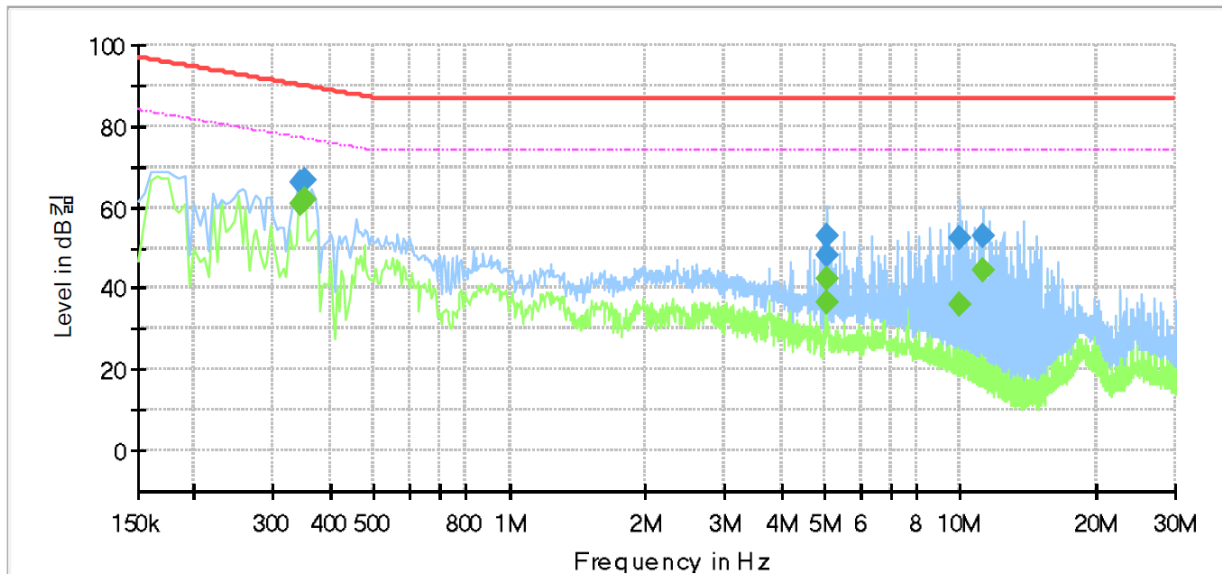

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.345000        | ---              | 60.98           | 77.08        | 16.10       | 1000.0          | 9.000           | Single Line | 20.7       |
| 0.345000        | 66.12            | ---             | 90.08        | 23.96       | 1000.0          | 9.000           | Single Line | 20.7       |
| 0.350000        | ---              | 61.78           | 76.96        | 15.18       | 1000.0          | 9.000           | Single Line | 20.6       |
| 0.350000        | 66.77            | ---             | 89.96        | 23.19       | 1000.0          | 9.000           | Single Line | 20.6       |
| 5.055000        | ---              | 42.34           | 74.00        | 31.66       | 1000.0          | 9.000           | Single Line | 19.5       |
| 5.055000        | 52.91            | ---             | 87.00        | 34.09       | 1000.0          | 9.000           | Single Line | 19.5       |
| 5.060000        | ---              | 36.51           | 74.00        | 37.49       | 1000.0          | 9.000           | Single Line | 19.5       |
| 5.060000        | 48.29            | ---             | 87.00        | 38.71       | 1000.0          | 9.000           | Single Line | 19.5       |
| 10.005000       | ---              | 35.92           | 74.00        | 38.08       | 1000.0          | 9.000           | Single Line | 19.7       |
| 10.005000       | 52.33            | ---             | 87.00        | 34.67       | 1000.0          | 9.000           | Single Line | 19.7       |
| 11.195000       | ---              | 44.63           | 74.00        | 29.37       | 1000.0          | 9.000           | Single Line | 19.8       |
| 11.195000       | 52.68            | ---             | 87.00        | 34.32       | 1000.0          | 9.000           | Single Line | 19.8       |

### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

[100 Mbps]

## Common Information

Test Description: Telecommunication Emission  
 Model No.: XNV-6120N  
 Mode: DC 12 V\_100 Mbps  
 Operator Name: KES

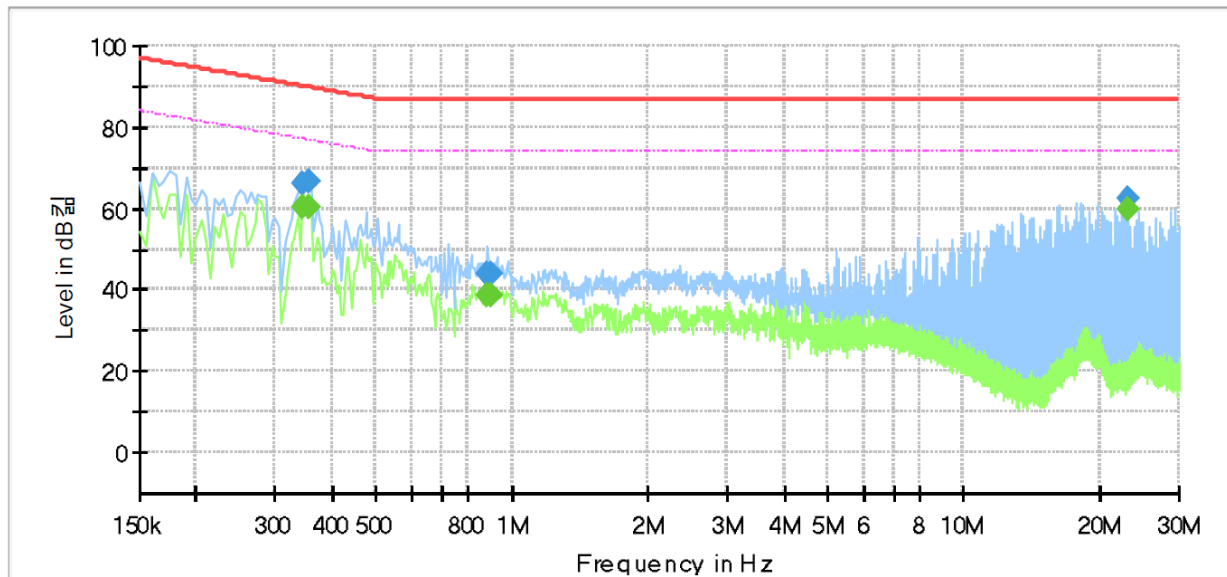

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.345000        | ---              | 60.34           | 77.08        | 16.74       | 1000.0          | 9.000           | Single Line | 20.9       |
| 0.345000        | 66.34            | ---             | 90.08        | 23.74       | 1000.0          | 9.000           | Single Line | 20.9       |
| 0.355000        | ---              | 60.11           | 76.84        | 16.73       | 1000.0          | 9.000           | Single Line | 20.9       |
| 0.355000        | 66.67            | ---             | 89.84        | 23.17       | 1000.0          | 9.000           | Single Line | 20.9       |
| 0.885000        | ---              | 38.44           | 74.00        | 35.56       | 1000.0          | 9.000           | Single Line | 20.3       |
| 0.885000        | 44.18            | ---             | 87.00        | 42.82       | 1000.0          | 9.000           | Single Line | 20.3       |
| 0.895000        | ---              | 38.80           | 74.00        | 35.20       | 1000.0          | 9.000           | Single Line | 20.3       |
| 0.895000        | 44.09            | ---             | 87.00        | 42.91       | 1000.0          | 9.000           | Single Line | 20.3       |
| 23.130000       | ---              | 60.03           | 74.00        | 13.97       | 1000.0          | 9.000           | Single Line | 20.5       |
| 23.130000       | 62.23            | ---             | 87.00        | 24.77       | 1000.0          | 9.000           | Single Line | 20.5       |

### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


The authenticity of the test report, contact kes@kes.co.kr

- PoE Mode

**[10 Mbps]**

## Common Information

Test Description: Telecommunication Emission  
 Model No.: XNV-6120N  
 Mode: POE\_10 Mbps  
 Operator Name: KES

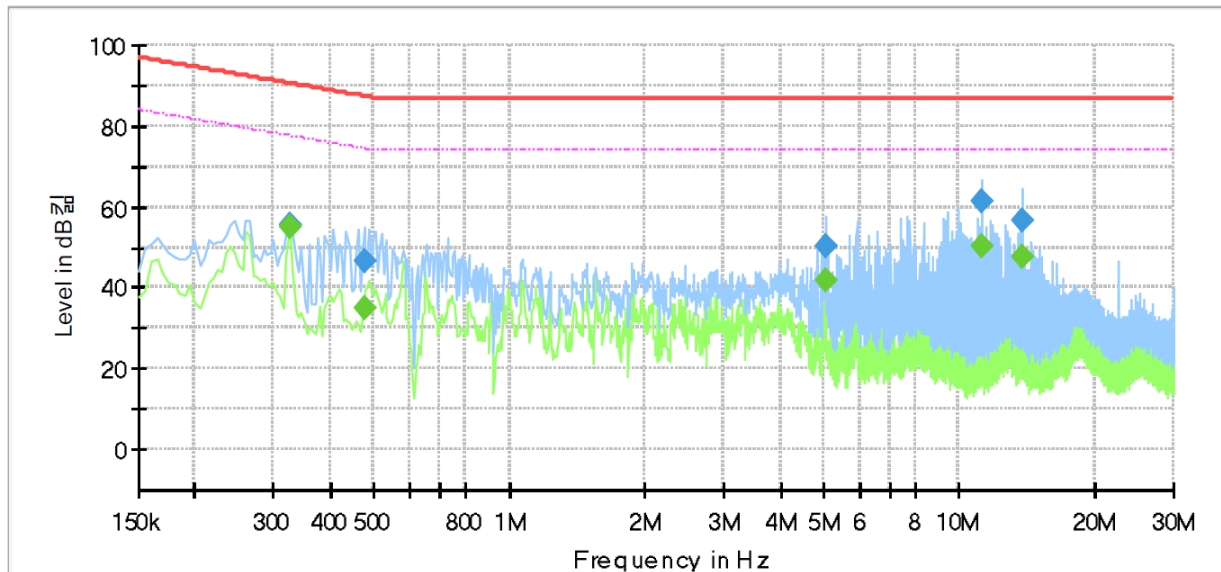

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.325000        | ---              | 54.91           | 77.58        | 22.67       | 1000.0          | 9.000           | Single Line | 20.7       |
| 0.325000        | 55.37            | ---             | 90.58        | 35.21       | 1000.0          | 9.000           | Single Line | 20.7       |
| 0.475000        | ---              | 34.81           | 74.43        | 39.62       | 1000.0          | 9.000           | Single Line | 20.4       |
| 0.475000        | 46.80            | ---             | 87.43        | 40.63       | 1000.0          | 9.000           | Single Line | 20.4       |
| 5.055000        | ---              | 41.94           | 74.00        | 32.06       | 1000.0          | 9.000           | Single Line | 19.5       |
| 5.055000        | 50.27            | ---             | 87.00        | 36.73       | 1000.0          | 9.000           | Single Line | 19.5       |
| 11.250000       | ---              | 50.23           | 74.00        | 23.77       | 1000.0          | 9.000           | Single Line | 19.8       |
| 11.250000       | 61.41            | ---             | 87.00        | 25.59       | 1000.0          | 9.000           | Single Line | 19.8       |
| 13.750000       | ---              | 47.89           | 74.00        | 26.11       | 1000.0          | 9.000           | Single Line | 19.9       |
| 13.750000       | 56.69            | ---             | 87.00        | 30.31       | 1000.0          | 9.000           | Single Line | 19.9       |

### ◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

[100 Mbps]

## Common Information

Test Description: Telecommunication Emission  
Model No.: XNV-6120N  
Mode: POE\_100 Mbps  
Operator Name: KES

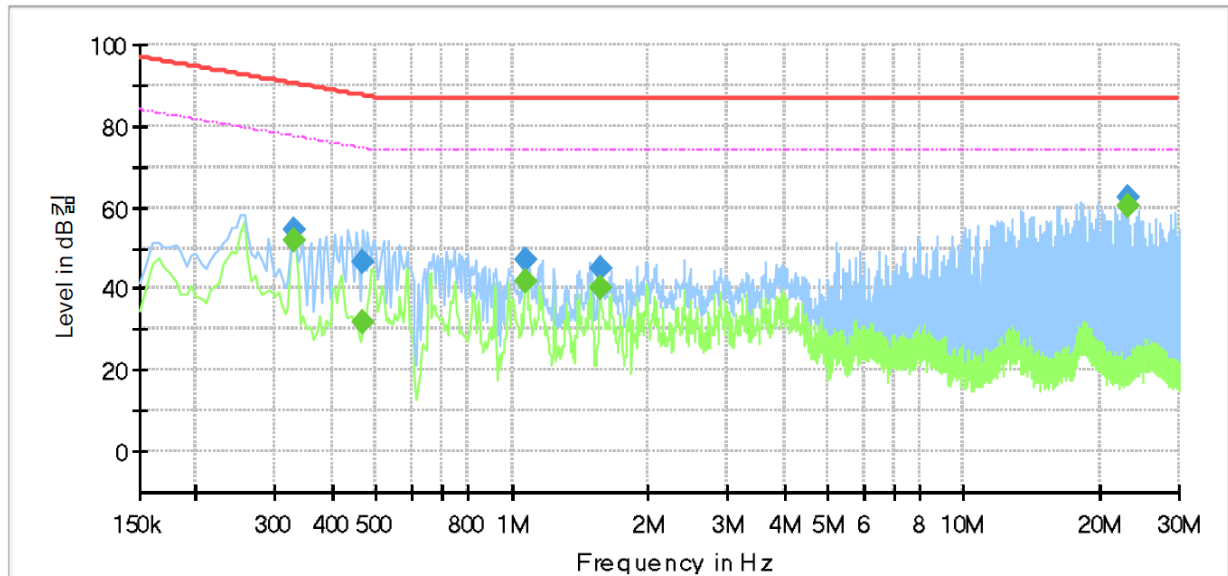

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.330000        | ---              | 51.99           | 77.45        | 25.46       | 1000.0          | 9.000           | Single Line | 21.0       |
| 0.330000        | 54.37            | ---             | 90.45        | 36.08       | 1000.0          | 9.000           | Single Line | 21.0       |
| 0.465000        | ---              | 31.60           | 74.60        | 43.00       | 1000.0          | 9.000           | Single Line | 20.7       |
| 0.465000        | 46.83            | ---             | 87.60        | 40.77       | 1000.0          | 9.000           | Single Line | 20.7       |
| 1.075000        | ---              | 42.09           | 74.00        | 31.91       | 1000.0          | 9.000           | Single Line | 20.2       |
| 1.075000        | 47.07            | ---             | 87.00        | 39.93       | 1000.0          | 9.000           | Single Line | 20.2       |
| 1.570000        | ---              | 40.30           | 74.00        | 33.70       | 1000.0          | 9.000           | Single Line | 20.0       |
| 1.570000        | 45.26            | ---             | 87.00        | 41.74       | 1000.0          | 9.000           | Single Line | 20.0       |
| 23.130000       | ---              | 60.33           | 74.00        | 13.67       | 1000.0          | 9.000           | Single Line | 20.5       |
| 23.130000       | 62.34            | ---             | 87.00        | 24.66       | 1000.0          | 9.000           | Single Line | 20.5       |

### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

## Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode

| Frequency | Amplitude | ANT             | ANT. Height | Correction Factor |               | Corrected Amplitude | Applicable Limit | Margin |
|-----------|-----------|-----------------|-------------|-------------------|---------------|---------------------|------------------|--------|
| [MHz]     | [dBμV]    | Polar.<br>(H/V) | [m]         | ANT.<br>[dB/m]    | Cable<br>[dB] | [dBμV/m]            | [dBμV/m]         | [dB]   |
| 215.45    | 15.20     | H               | 3.24        | 11.80             | 3.32          | 30.32               | 40.00            | 9.68   |
| 215.33    | 15.30     | V               | 2.98        | 11.80             | 3.32          | 30.42               | 40.00            | 9.58   |
| 239.45    | 15.90     | V               | 2.99        | 12.32             | 3.58          | 31.80               | 47.00            | 15.20  |
| 250.69    | 16.40     | H               | 3.32        | 12.56             | 3.70          | 32.66               | 47.00            | 14.34  |
| 299.18    | 16.80     | V               | 3.00        | 13.39             | 4.10          | 34.29               | 47.00            | 12.71  |
| 333.62    | 16.90     | H               | 3.15        | 14.13             | 4.20          | 35.23               | 47.00            | 11.77  |

\* H : Horizontal, V : Vertical

### ◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

- DC 12 V Mode

| Frequency | Amplitude | ANT             | ANT. Height | Correction Factor |               | Corrected Amplitude | Applicable Limit | Margin |
|-----------|-----------|-----------------|-------------|-------------------|---------------|---------------------|------------------|--------|
| [MHz]     | [dBμV]    | Polar.<br>(H/V) | [m]         | ANT.<br>[dB/m]    | Cable<br>[dB] | [dBμV/m]            | [dBμV/m]         | [dB]   |
| 209.63    | 17.30     | V               | 2.42        | 11.68             | 3.26          | 32.24               | 40.00            | 7.76   |
| 216.84    | 15.30     | H               | 3.00        | 11.83             | 3.34          | 30.47               | 40.00            | 9.53   |
| 250.68    | 15.10     | V               | 2.89        | 12.56             | 3.70          | 31.36               | 47.00            | 15.64  |
| 312.79    | 16.30     | V               | 3.10        | 13.68             | 4.14          | 34.12               | 47.00            | 12.88  |
| 334.68    | 15.20     | H               | 2.98        | 14.15             | 4.20          | 33.55               | 47.00            | 13.45  |
| 399.99    | 14.60     | H               | 3.12        | 15.57             | 4.60          | 34.77               | 47.00            | 12.23  |

\* H : Horizontal, V : Vertical

### ◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-E1-17T0305-R1

Page (28) of (48)

**- PoE Mode**

| Frequency | Amplitude | ANT             | ANT. Height | Correction Factor |               | Corrected Amplitude | Applicable Limit | Margin |
|-----------|-----------|-----------------|-------------|-------------------|---------------|---------------------|------------------|--------|
| [MHz]     | [dBμV]    | Polar.<br>(H/V) | [m]         | ANT.<br>[dB/m]    | Cable<br>[dB] | [dBμV/m]            | [dBμV/m]         | [dB]   |
| 42.21     | 17.80     | V               | 3.15        | 12.80             | 1.57          | 32.17               | 40.00            | 7.83   |
| 42.96     | 15.10     | H               | 3.00        | 12.91             | 1.58          | 29.59               | 40.00            | 10.41  |
| 76.59     | 19.60     | V               | 3.38        | 7.83              | 2.02          | 29.45               | 40.00            | 10.55  |
| 250.13    | 16.90     | H               | 3.12        | 12.55             | 3.69          | 33.14               | 47.00            | 13.86  |
| 311.52    | 17.60     | V               | 2.99        | 13.65             | 4.14          | 35.39               | 47.00            | 11.61  |
| 350.16    | 16.90     | H               | 2.98        | 14.49             | 4.25          | 35.64               | 47.00            | 11.36  |

\* H : Horizontal, V : Vertical

**◆ Calculation**

Corrected Amplitude [dBμV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

## Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

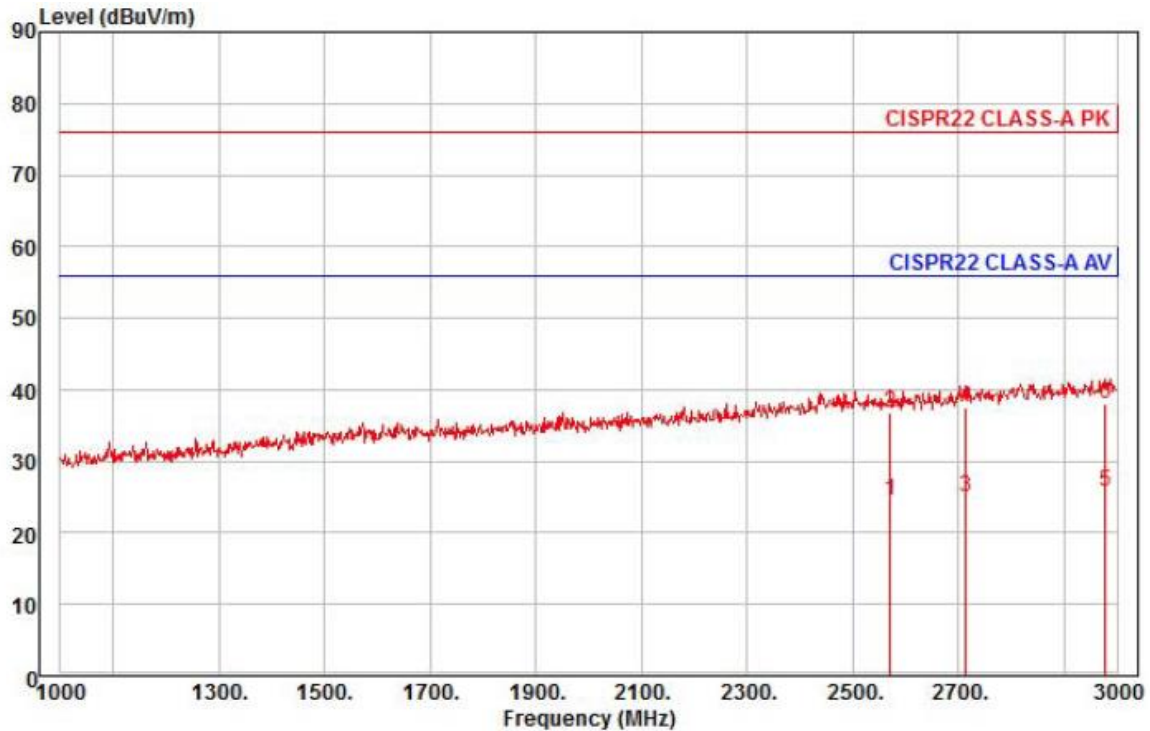

Site : chamber  
 Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal  
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
 Project :  
 Model : XNV-6120N  
 Mode : AC 24 V  
 Memo : 1 ~ 3 GHz


|      | Freq    | Read Level | Ant Factor | Cable Loss | Preamp Factor | TPos | Limit Line | Over Limit | Pol/Phase  | Remark  |
|------|---------|------------|------------|------------|---------------|------|------------|------------|------------|---------|
|      | MHz     | dBuV       | dB/m       | dB         | dB            | deg  | dBuV/m     | dB         |            |         |
| 1    | 2572.00 | 25.54      | 27.89      | 10.68      | 39.62         | 1    | 56.00      | -31.51     | horizontal | Average |
| 2    | 2572.00 | 37.86      | 27.89      | 10.68      | 39.62         | 1    | 76.00      | -39.19     | horizontal | Peak    |
| 3    | 2714.00 | 25.23      | 28.52      | 11.02      | 39.78         | 251  | 56.00      | -31.01     | horizontal | Average |
| 4    | 2714.00 | 37.76      | 28.52      | 11.02      | 39.78         | 251  | 76.00      | -38.48     | horizontal | Peak    |
| 5 pp | 2978.00 | 24.45      | 29.69      | 11.65      | 40.08         | 235  | 56.00      | -30.29     | horizontal | Average |
| 6 pk | 2978.00 | 36.87      | 29.69      | 11.65      | 40.08         | 235  | 76.00      | -37.87     | horizontal | Peak    |

### ◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact kes@kes.co.kr

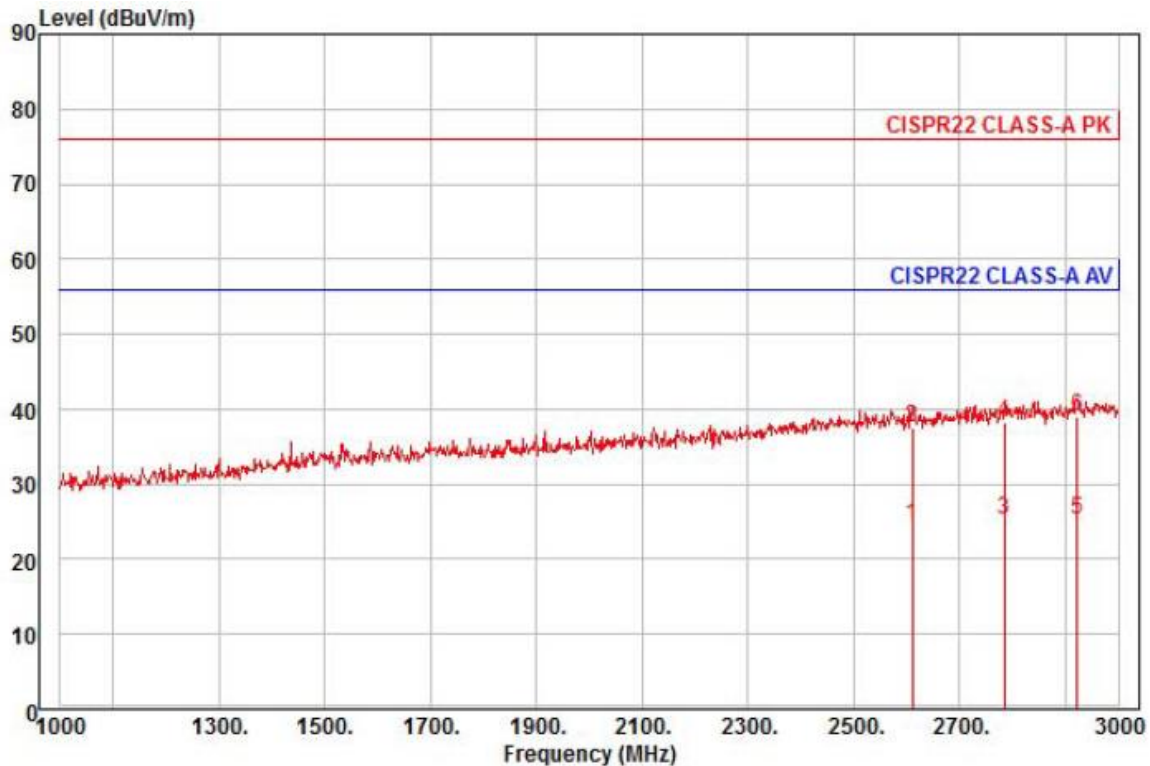

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNV-6120N  
Mode : AC 24 V  
Memo : 1 ~ 3 GHz


|      | Read    | Ant    | Cable | Preamp | TPos  | Limit  | Over  |           |          |
|------|---------|--------|-------|--------|-------|--------|-------|-----------|----------|
| Freq | Level   | Factor | Loss  | Factor |       | Line   | Limit | Pol/Phase | Remark   |
| MHz  | dBuV    | dB/m   | dB    | dB     | deg   | dBuV/m | dB    |           |          |
| 1    | 2612.00 | 25.43  | 28.07 | 10.77  | 39.66 | 267    | 56.00 | -31.39    | vertical |
| 2    | 2612.00 | 38.46  | 28.07 | 10.77  | 39.66 | 267    | 76.00 | -38.36    | vertical |
| 3    | 2786.00 | 25.06  | 28.84 | 11.20  | 39.86 | 115    | 56.00 | -30.76    | vertical |
| 4    | 2786.00 | 38.14  | 28.84 | 11.20  | 39.86 | 115    | 76.00 | -37.68    | vertical |
| 5 pp | 2922.00 | 24.35  | 29.44 | 11.52  | 40.02 | 307    | 56.00 | -30.71    | vertical |
| 6 pk | 2922.00 | 38.03  | 29.44 | 11.52  | 40.02 | 307    | 76.00 | -37.03    | vertical |

#### ◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

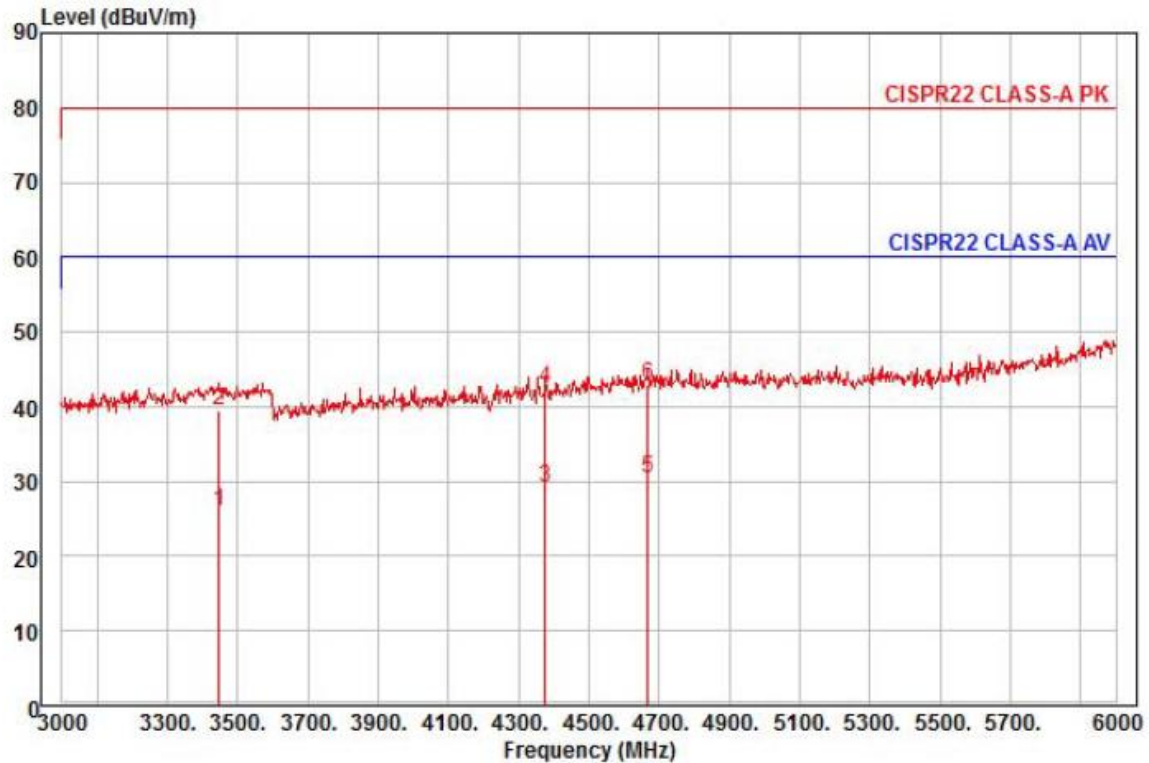

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNV-6120N  
Mode : AC 24 V  
Memo : 3 ~ 6 GHz


|      | Read    | Ant    | Cable | Preamp | TPos  | Limit  | Over  |           |                    |
|------|---------|--------|-------|--------|-------|--------|-------|-----------|--------------------|
| Freq | Level   | Factor | Loss  | Factor |       | Line   | Limit | Pol/Phase | Remark             |
| MHz  | dBuV    | dB/m   | dB    | dB     | deg   | dBuV/m | dB    |           |                    |
| 1    | 3447.00 | 24.02  | 30.24 | 12.53  | 40.80 | 218    | 60.00 | -34.01    | horizontal Average |
| 2    | 3447.00 | 37.50  | 30.24 | 12.53  | 40.80 | 218    | 80.00 | -40.53    | horizontal Peak    |
| 3    | 4377.00 | 23.26  | 32.45 | 14.23  | 40.75 | 28     | 60.00 | -30.81    | horizontal Average |
| 4    | 4377.00 | 36.40  | 32.45 | 14.23  | 40.75 | 28     | 80.00 | -37.67    | horizontal Peak    |
| 5 pp | 4668.00 | 23.26  | 32.94 | 14.81  | 40.60 | 110    | 60.00 | -29.59    | horizontal Average |
| 6 pk | 4668.00 | 35.85  | 32.94 | 14.81  | 40.60 | 110    | 80.00 | -37.00    | horizontal Peak    |

#### ◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

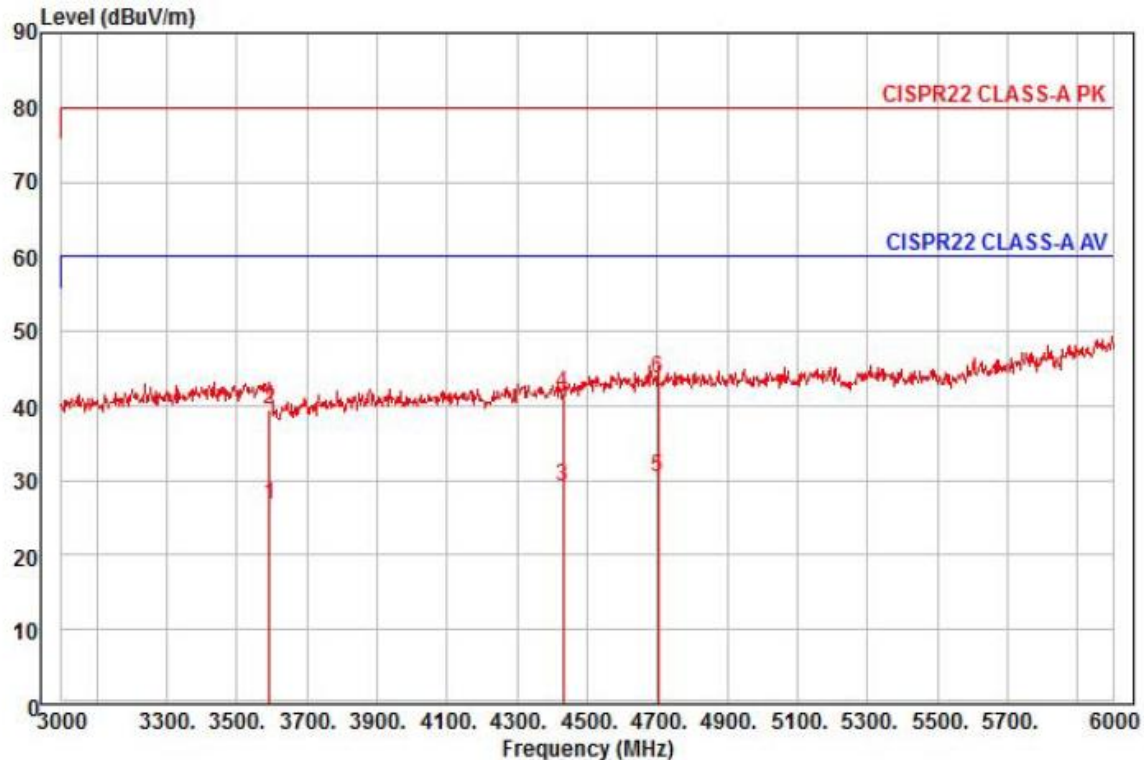

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNV-6120N  
Mode : AC 24 V  
Memo : 3 ~ 6 GHz

|      | Read<br>Freq | Ant<br>Level | Ant<br>Factor | Cable<br>Loss | Preamp<br>Factor | TPos | Limit<br>Line | Over<br>Limit | Pol/Phase | Remark  |
|------|--------------|--------------|---------------|---------------|------------------|------|---------------|---------------|-----------|---------|
|      | MHz          | dBuV         | dB/m          | dB            | dB               | deg  | dBuV/m        | dB            |           |         |
| 1    | 3594.00      | 24.30        | 30.50         | 12.79         | 40.85            | 103  | 60.00         | -33.26        | vertical  | Average |
| 2    | 3594.00      | 37.04        | 30.50         | 12.79         | 40.85            | 103  | 80.00         | -40.52        | vertical  | Peak    |
| 3    | 4431.00      | 23.02        | 32.61         | 14.33         | 40.76            | 69   | 60.00         | -30.80        | vertical  | Average |
| 4    | 4431.00      | 35.56        | 32.61         | 14.33         | 40.76            | 69   | 80.00         | -38.26        | vertical  | Peak    |
| 5 pp | 4701.00      | 23.20        | 32.97         | 14.88         | 40.57            | 136  | 60.00         | -29.52        | vertical  | Average |
| 6 pk | 4701.00      | 36.30        | 32.97         | 14.88         | 40.57            | 136  | 80.00         | -36.42        | vertical  | Peak    |

#### ◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,


Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

- DC 12 V Mode

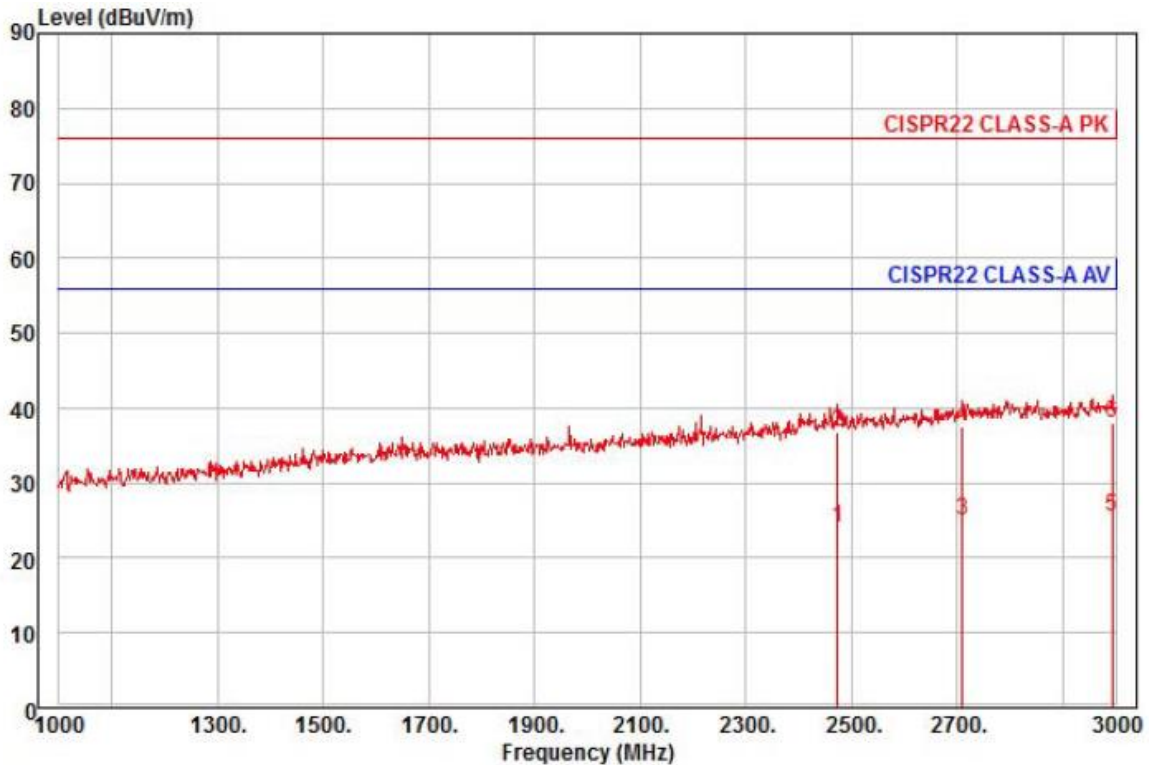

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNV-6120N  
Mode : DC 12 V  
Memo : 1 ~ 3 GHz


|      |         | Read  | Ant    | Cable | Preamp | TPos | Limit  | Over   |            |         |
|------|---------|-------|--------|-------|--------|------|--------|--------|------------|---------|
|      | Freq    | Level | Factor | Loss  | Factor |      | Line   | Limit  | Pol/Phase  | Remark  |
|      | MHz     | dBuV  | dB/m   | dB    | dB     | deg  | dBuV/m | dB     |            |         |
| 1    | 2474.00 | 25.67 | 27.47  | 10.48 | 39.51  | 49   | 56.00  | -31.89 | horizontal | Average |
| 2    | 2474.00 | 38.33 | 27.47  | 10.48 | 39.51  | 49   | 76.00  | -39.23 | horizontal | Peak    |
| 3    | 2710.00 | 25.26 | 28.50  | 11.01 | 39.78  | 155  | 56.00  | -31.01 | horizontal | Average |
| 4    | 2710.00 | 37.88 | 28.50  | 11.01 | 39.78  | 155  | 76.00  | -38.39 | horizontal | Peak    |
| 5 pp | 2994.00 | 24.11 | 29.76  | 11.68 | 40.10  | 333  | 56.00  | -30.55 | horizontal | Average |
| 6 pk | 2994.00 | 36.57 | 29.76  | 11.68 | 40.10  | 333  | 76.00  | -38.09 | horizontal | Peak    |

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

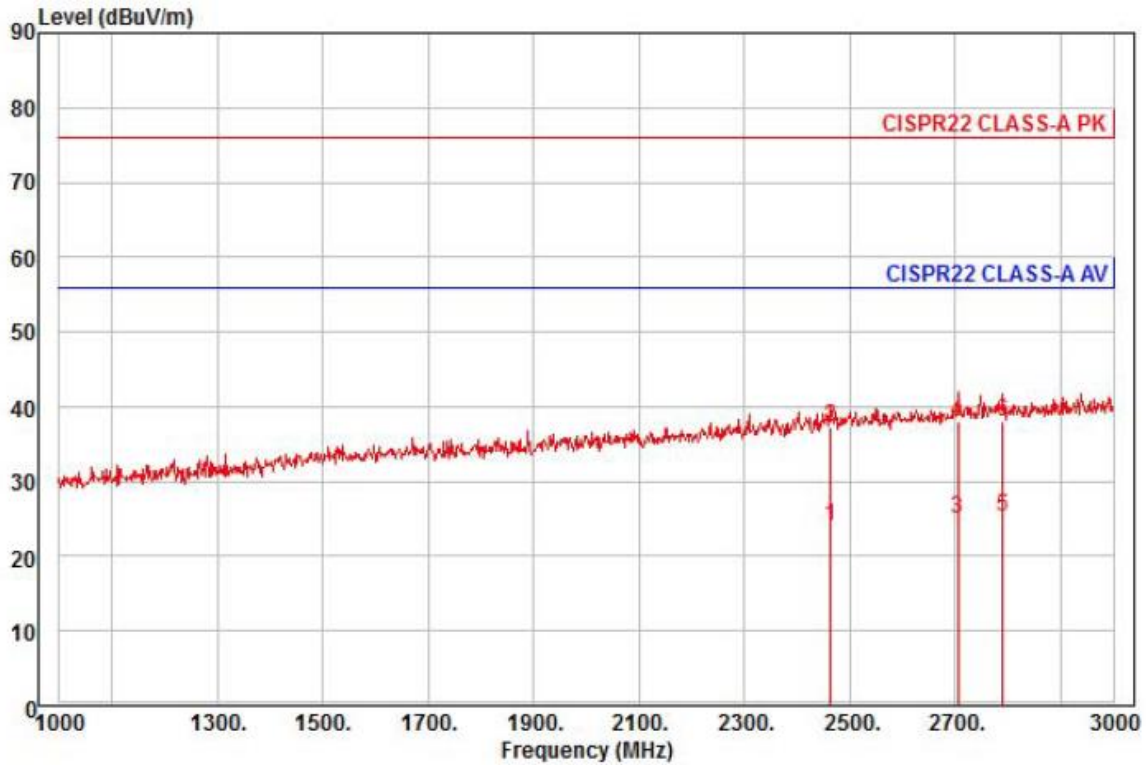

Site : chamber  
 Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical  
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
 Project :  
 Model : XNV-6120N  
 Mode : DC 12 V  
 Memo : 1 ~ 3 GHz


|      | Freq    | Read Level | Ant Factor | Cable Loss | Preamp Factor | TPos | Limit Line | Over Limit | Pol/Phase | Remark  |
|------|---------|------------|------------|------------|---------------|------|------------|------------|-----------|---------|
|      | MHz     | dBuV       | dB/m       | dB         | dB            | deg  | dBuV/m     | dB         |           |         |
| 1    | 2464.00 | 25.59      | 27.43      | 10.46      | 39.49         | 146  | 56.00      | -32.01     | vertical  | Average |
| 2    | 2464.00 | 38.99      | 27.43      | 10.46      | 39.49         | 146  | 76.00      | -38.61     | vertical  | Peak    |
| 3    | 2706.00 | 25.22      | 28.48      | 11.00      | 39.77         | 267  | 56.00      | -31.07     | vertical  | Average |
| 4    | 2706.00 | 38.29      | 28.48      | 11.00      | 39.77         | 267  | 76.00      | -38.00     | vertical  | Peak    |
| 5 pp | 2790.00 | 25.03      | 28.86      | 11.21      | 39.87         | 356  | 56.00      | -30.77     | vertical  | Average |
| 6 pk | 2790.00 | 37.84      | 28.86      | 11.21      | 39.87         | 356  | 76.00      | -37.96     | vertical  | Peak    |

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact kes@kes.co.kr

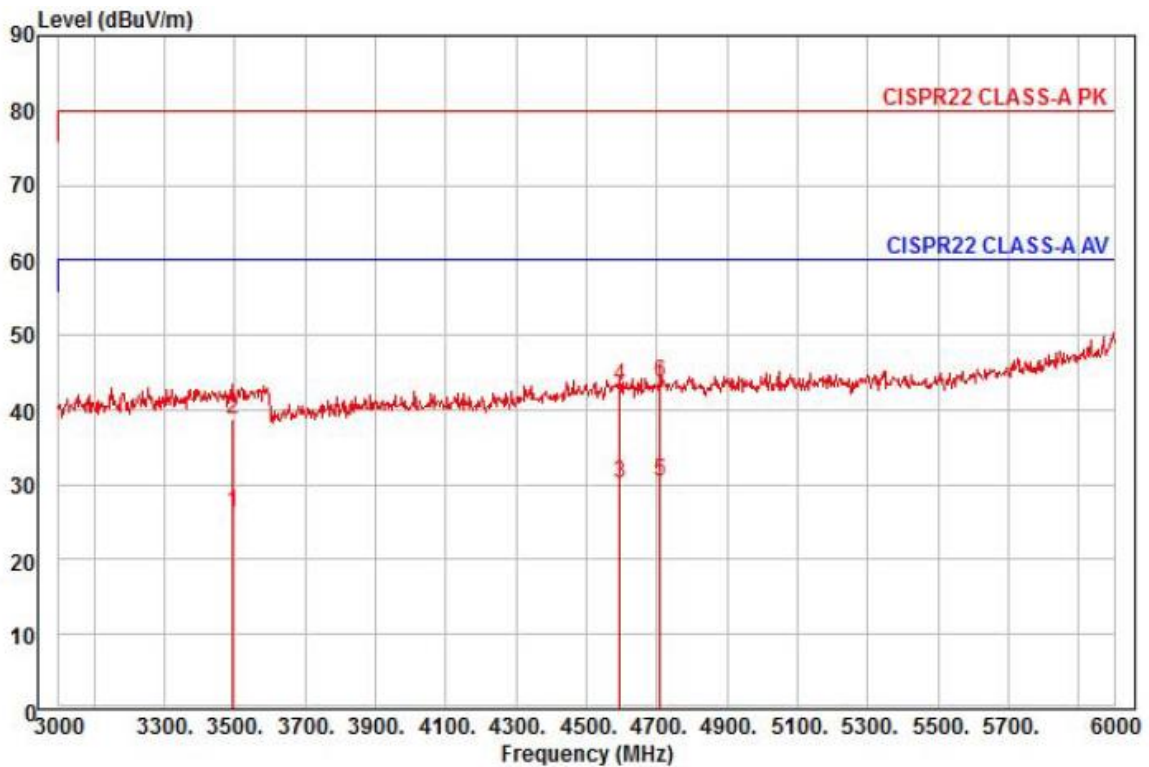

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNV-6120N  
Mode : DC 12 V  
Memo : 3 ~ 6 GHz

|      | Read    | Ant    | Cable | Preamp | TPos  | Limit  | Over  |           |                    |
|------|---------|--------|-------|--------|-------|--------|-------|-----------|--------------------|
| Freq | Level   | Factor | Loss  | Factor |       | Line   | Limit | Pol/Phase | Remark             |
| MHz  | dBuV    | dB/m   | dB    | dB     | deg   | dBuV/m | dB    |           |                    |
| 1    | 3495.00 | 24.20  | 30.29 | 12.62  | 40.87 | 73     | 60.00 | -33.76    | horizontal Average |
| 2    | 3495.00 | 36.80  | 30.29 | 12.62  | 40.87 | 73     | 80.00 | -41.16    | horizontal Peak    |
| 3    | 4596.00 | 23.31  | 32.88 | 14.65  | 40.67 | 126    | 60.00 | -29.83    | horizontal Average |
| 4    | 4596.00 | 36.29  | 32.88 | 14.65  | 40.67 | 126    | 80.00 | -36.85    | horizontal Peak    |
| 5 pp | 4710.00 | 23.11  | 32.98 | 14.90  | 40.56 | 235    | 60.00 | -29.57    | horizontal Average |
| 6 pk | 4710.00 | 36.43  | 32.98 | 14.90  | 40.56 | 235    | 80.00 | -36.25    | horizontal Peak    |

#### ◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]


Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,

Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

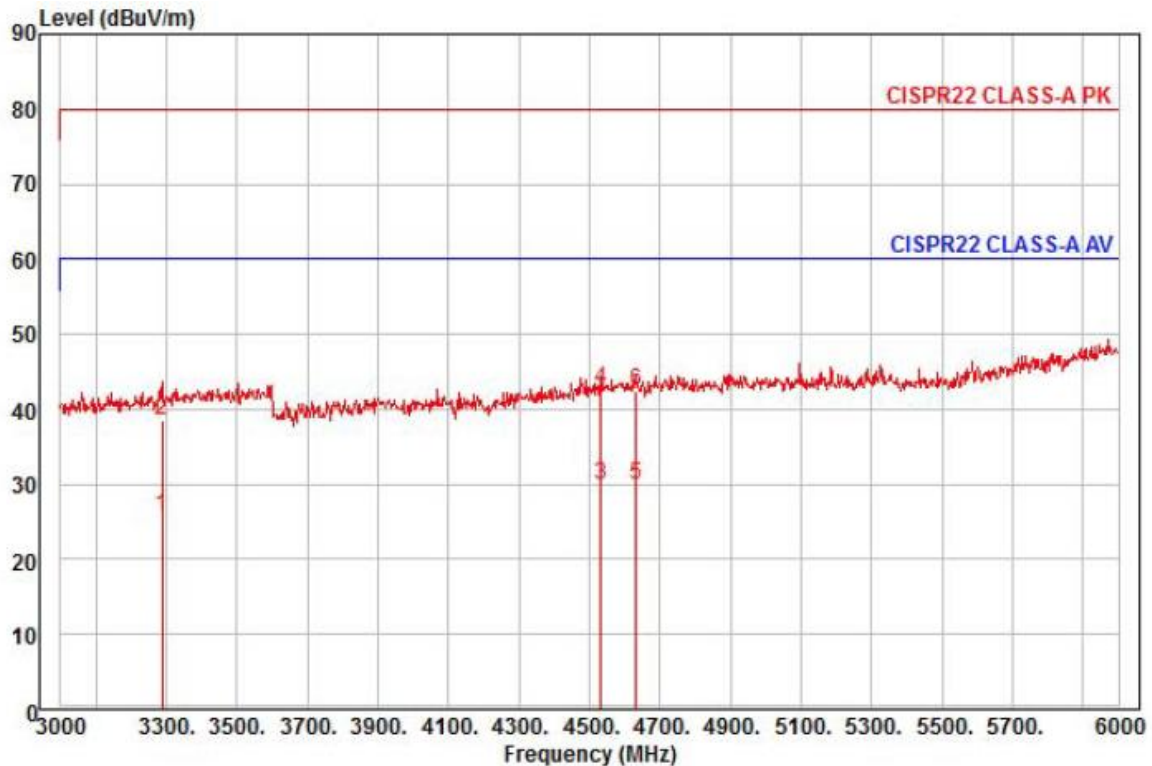

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNV-6120N  
Mode : DC 12 V  
Memo : 3 ~ 6 GHz


|      | Read    | Ant    | Cable | Preamp | TPos  | Limit  | Over  |           |          |
|------|---------|--------|-------|--------|-------|--------|-------|-----------|----------|
| Freq | Level   | Factor | Loss  | Factor |       | Line   | Limit | Pol/Phase | Remark   |
| MHz  | dBuV    | dB/m   | dB    | dB     | deg   | dBuV/m | dB    |           |          |
| 1    | 3288.00 | 23.95  | 30.08 | 12.23  | 40.55 | 24     | 60.00 | -34.29    | vertical |
| 2    | 3288.00 | 36.80  | 30.08 | 12.23  | 40.55 | 24     | 80.00 | -41.44    | vertical |
| 3    | 4533.00 | 23.19  | 32.83 | 14.53  | 40.74 | 331    | 60.00 | -30.19    | vertical |
| 4 pk | 4533.00 | 36.09  | 32.83 | 14.53  | 40.74 | 331    | 80.00 | -37.29    | vertical |
| 5 pp | 4632.00 | 22.94  | 32.91 | 14.73  | 40.64 | 250    | 60.00 | -30.06    | vertical |
| 6    | 4632.00 | 35.46  | 32.91 | 14.73  | 40.64 | 250    | 80.00 | -37.54    | vertical |

#### ◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

- PoE Mode

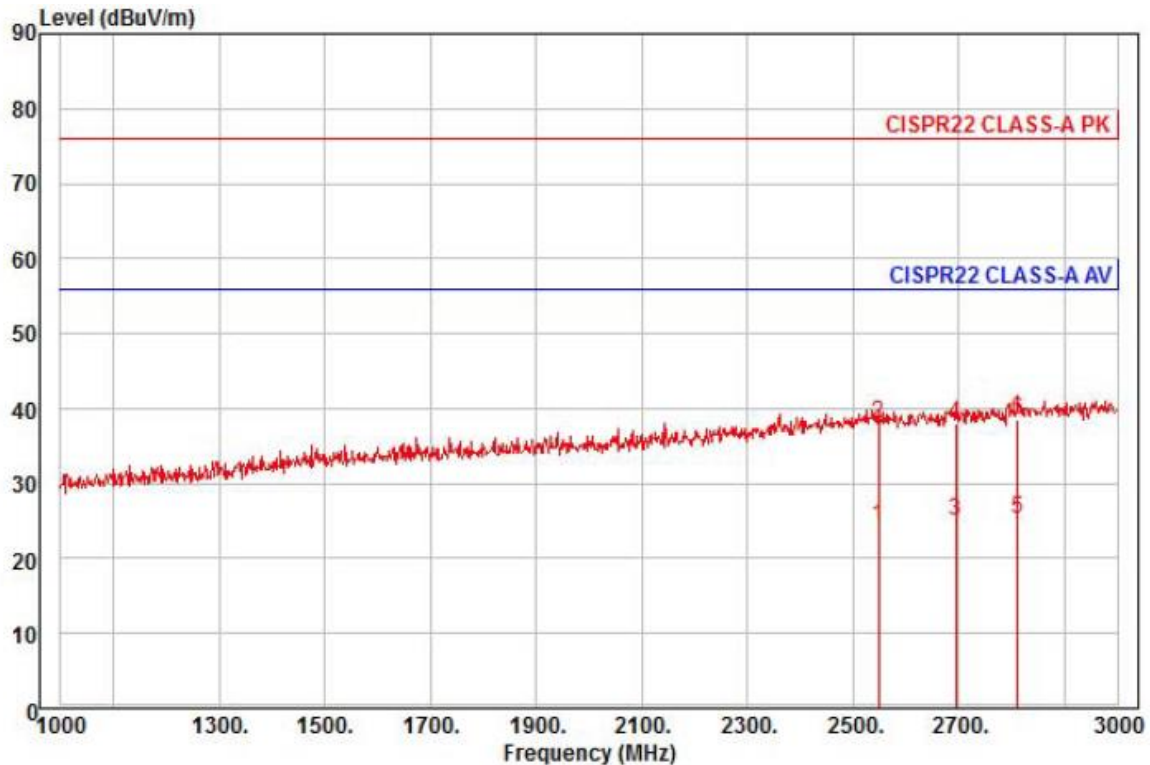

Site : chamber  
 Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal  
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
 Project :  
 Model : XNV-6120N  
 Mode : POE  
 Memo : 1 ~ 3 GHz


|      | Freq    | Read Level | Ant Factor | Cable Loss | Preamp Factor | TPos | Limit Line | Over Limit | Pol/Phase  | Remark  |
|------|---------|------------|------------|------------|---------------|------|------------|------------|------------|---------|
|      | MHz     | dBuV       | dB/m       | dB         | dB            | deg  | dBuV/m     | dB         |            |         |
| 1    | 2548.00 | 25.51      | 27.78      | 10.63      | 39.59         | 50   | 56.00      | -31.67     | horizontal | Average |
| 2    | 2548.00 | 39.18      | 27.78      | 10.63      | 39.59         | 50   | 76.00      | -38.00     | horizontal | Peak    |
| 3    | 2694.00 | 25.26      | 28.43      | 10.97      | 39.76         | 5    | 56.00      | -31.10     | horizontal | Average |
| 4    | 2694.00 | 38.28      | 28.43      | 10.97      | 39.76         | 5    | 76.00      | -38.08     | horizontal | Peak    |
| 5 pp | 2812.00 | 24.96      | 28.96      | 11.26      | 39.89         | 27   | 56.00      | -30.71     | horizontal | Average |
| 6 pk | 2812.00 | 38.16      | 28.96      | 11.26      | 39.89         | 27   | 76.00      | -37.51     | horizontal | Peak    |

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact kes@kes.co.kr

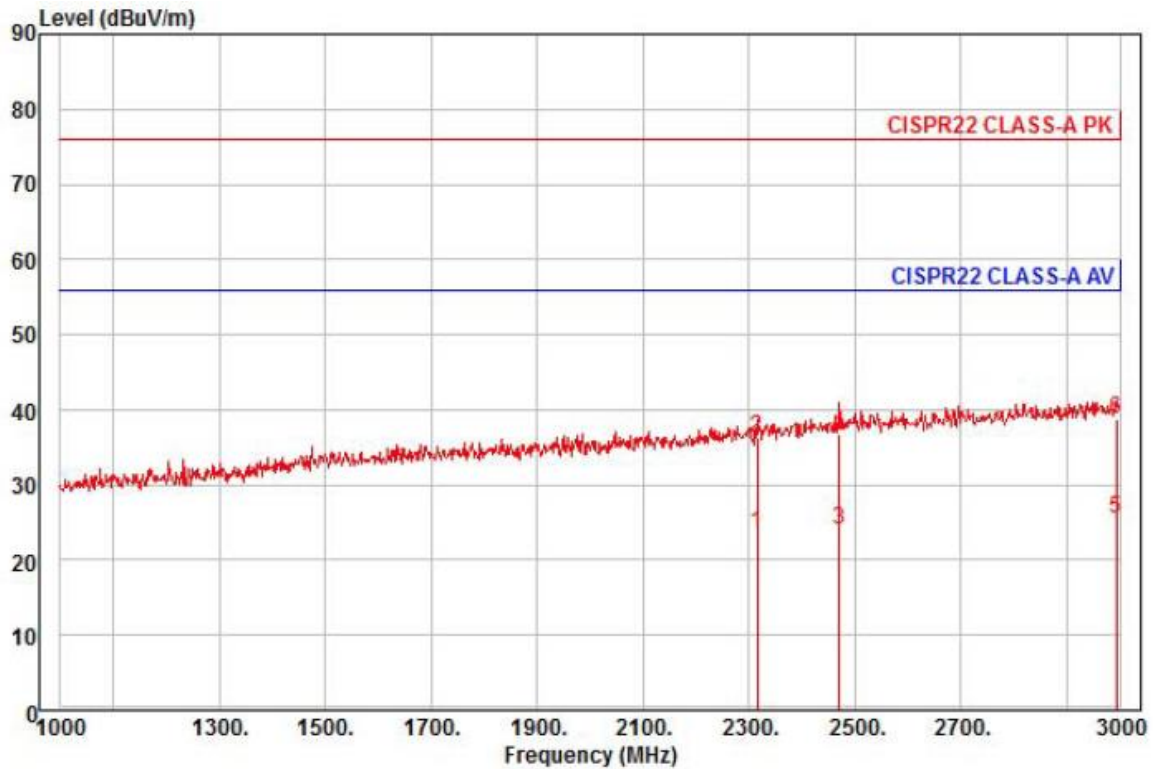

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNV-6120N  
Mode : POE  
Memo : 1 ~ 3 GHz


|      | Read    | Ant    | Cable | Preamp | TPos  | Limit  | Over  |           |          |
|------|---------|--------|-------|--------|-------|--------|-------|-----------|----------|
| Freq | Level   | Factor | Loss  | Factor |       | Line   | Limit | Pol/Phase | Remark   |
| MHz  | dBuV    | dB/m   | dB    | dB     | deg   | dBuV/m | dB    |           |          |
| 1    | 2316.00 | 26.07  | 26.85 | 10.10  | 39.42 | 148    | 56.00 | -32.40    | vertical |
| 2    | 2316.00 | 38.79  | 26.85 | 10.10  | 39.42 | 148    | 76.00 | -39.68    | vertical |
| 3    | 2470.00 | 25.58  | 27.45 | 10.47  | 39.50 | 281    | 56.00 | -32.00    | vertical |
| 4    | 2470.00 | 38.27  | 27.45 | 10.47  | 39.50 | 281    | 76.00 | -39.31    | vertical |
| 5 pp | 2994.00 | 24.25  | 29.76 | 11.68  | 40.10 | 118    | 56.00 | -30.41    | vertical |
| 6 pk | 2994.00 | 37.47  | 29.76 | 11.68  | 40.10 | 118    | 76.00 | -37.19    | vertical |

#### ◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

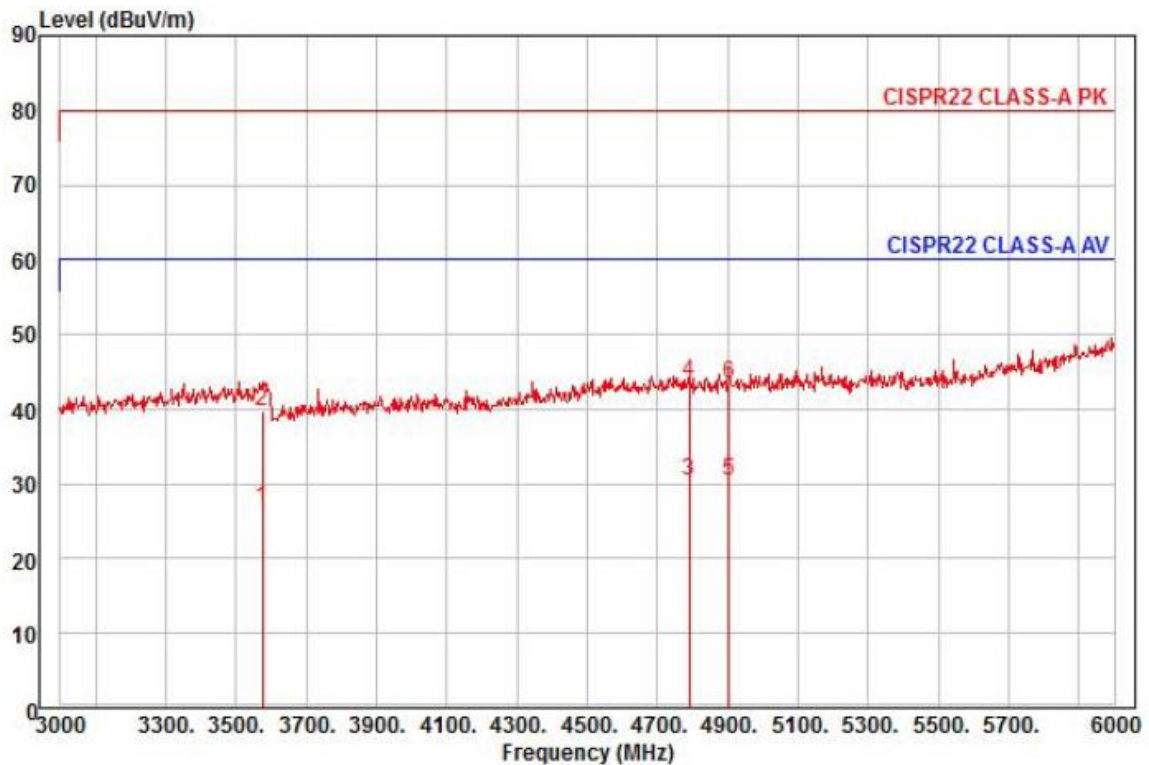

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNV-6120N  
Mode : POE  
Memo : 3 ~ 6 GHz


|      | Read    | Ant    | Cable | Preamp | TPos  | Limit  | Over  |           |                    |
|------|---------|--------|-------|--------|-------|--------|-------|-----------|--------------------|
| Freq | Level   | Factor | Loss  | Factor |       | Line   | Limit | Pol/Phase | Remark             |
| MHz  | dBuV    | dB/m   | dB    | dB     | deg   | dBuV/m | dB    |           |                    |
| 1    | 3576.00 | 24.48  | 30.46 | 12.76  | 40.85 | 55     | 60.00 | -33.15    | horizontal Average |
| 2    | 3576.00 | 37.32  | 30.46 | 12.76  | 40.85 | 55     | 80.00 | -40.31    | horizontal Peak    |
| 3    | 4791.00 | 22.74  | 33.05 | 15.08  | 40.48 | 136    | 60.00 | -29.61    | horizontal Average |
| 4 pk | 4791.00 | 35.89  | 33.05 | 15.08  | 40.48 | 136    | 80.00 | -36.46    | horizontal Peak    |
| 5 pp | 4902.00 | 22.48  | 33.15 | 15.21  | 40.37 | 307    | 60.00 | -29.53    | horizontal Average |
| 6    | 4902.00 | 35.33  | 33.15 | 15.21  | 40.37 | 307    | 80.00 | -36.68    | horizontal Peak    |

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

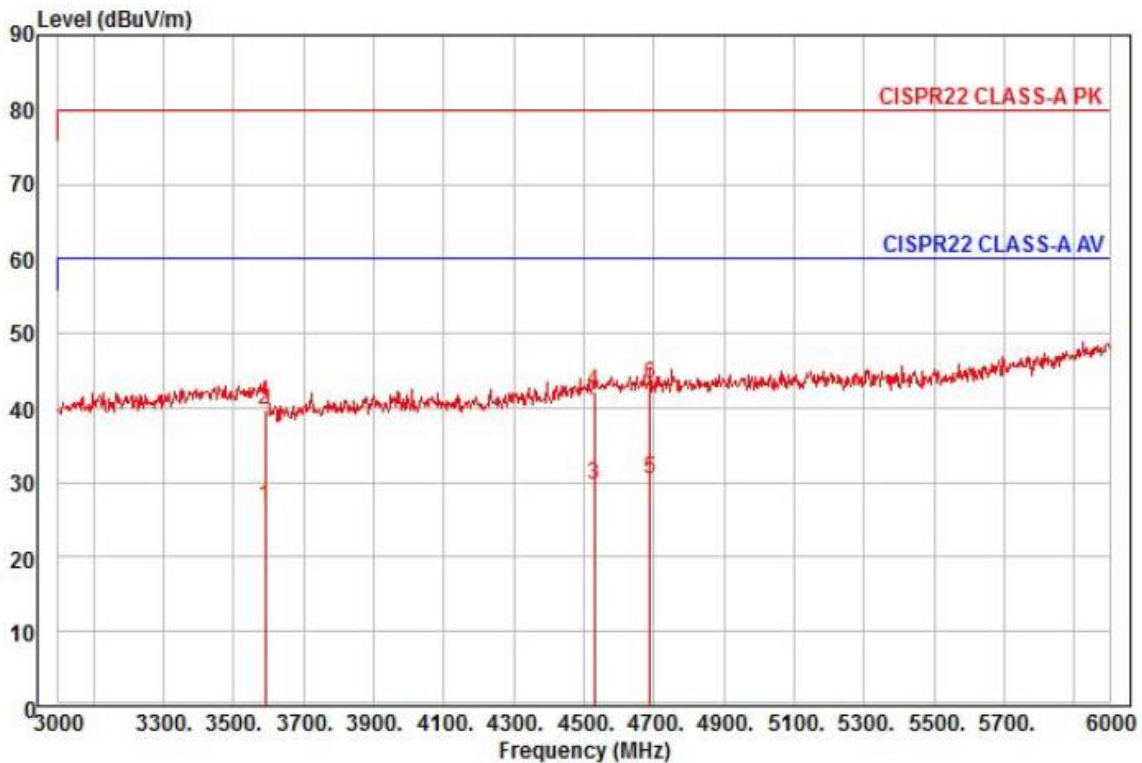

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNV-6120N  
Mode : POE  
Memo : 3 ~ 6 GHz

|      | Freq    | Read Level | Ant Factor | Cable Loss | Preamp Factor | TPos | Limit Line | Over Limit | Pol/Phase | Remark  |
|------|---------|------------|------------|------------|---------------|------|------------|------------|-----------|---------|
|      | MHz     | dBuV       | dB/m       | dB         | dB            | deg  | dBuV/m     | dB         |           |         |
| 1    | 3591.00 | 24.36      | 30.49      | 12.79      | 40.85         | 83   | 60.00      | -33.21     | vertical  | Average |
| 2    | 3591.00 | 37.33      | 30.49      | 12.79      | 40.85         | 83   | 80.00      | -40.24     | vertical  | Peak    |
| 3    | 4530.00 | 23.04      | 32.83      | 14.52      | 40.74         | 235  | 60.00      | -30.35     | vertical  | Average |
| 4    | 4530.00 | 35.46      | 32.83      | 14.52      | 40.74         | 235  | 80.00      | -37.93     | vertical  | Peak    |
| 5 pp | 4689.00 | 23.10      | 32.96      | 14.85      | 40.58         | 27   | 60.00      | -29.67     | vertical  | Average |
| 6 pk | 4689.00 | 36.00      | 32.96      | 14.85      | 40.58         | 27   | 80.00      | -36.77     | vertical  | Peak    |

#### ◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Test Setup Photos and Configuration

### Conducted Voltage Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Conducted Telecommunication Emissions




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [kes@kes.co.kr](mailto:kes@kes.co.kr)

## Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Radiated Electric Field Emissions(Above 1 GHz)

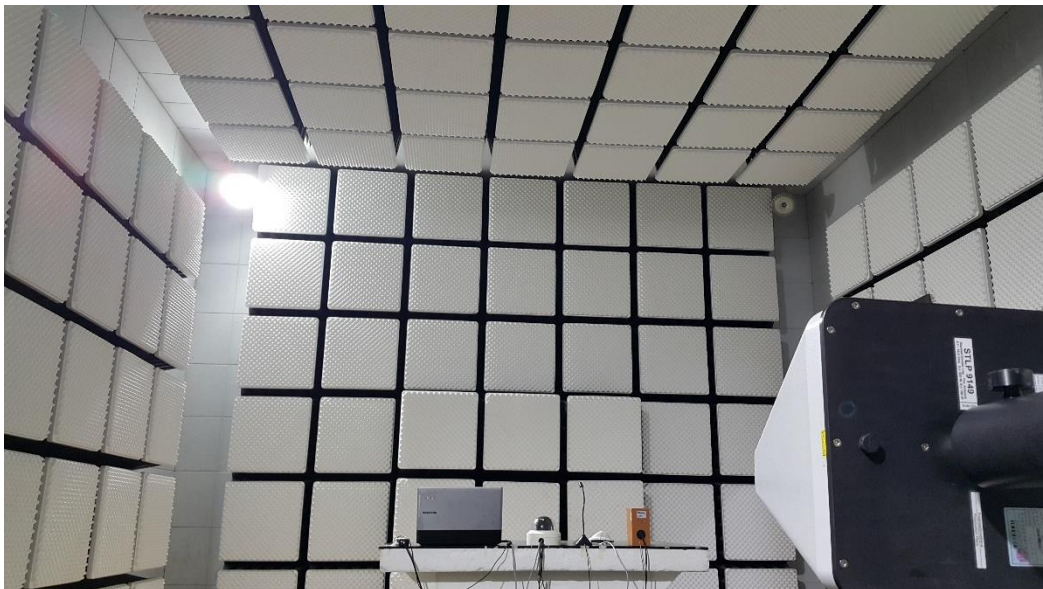


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [kes@kes.co.kr](mailto:kes@kes.co.kr)

## EUT External Photographs

(Top)



(Bottom)

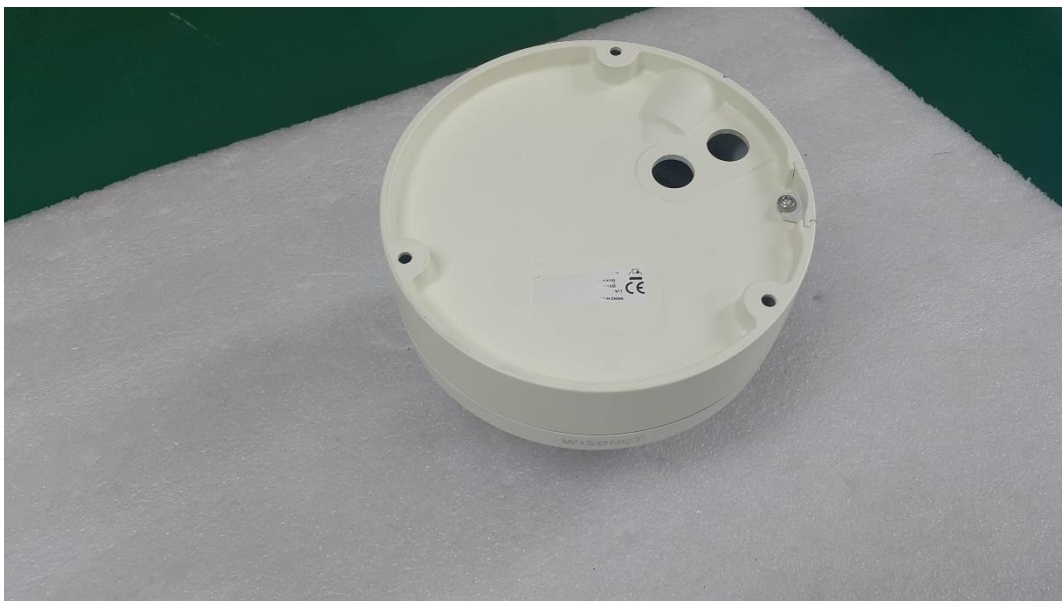

## EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [kes@kes.co.kr](mailto:kes@kes.co.kr)

## EUT Internal View – LED Board

(Top)

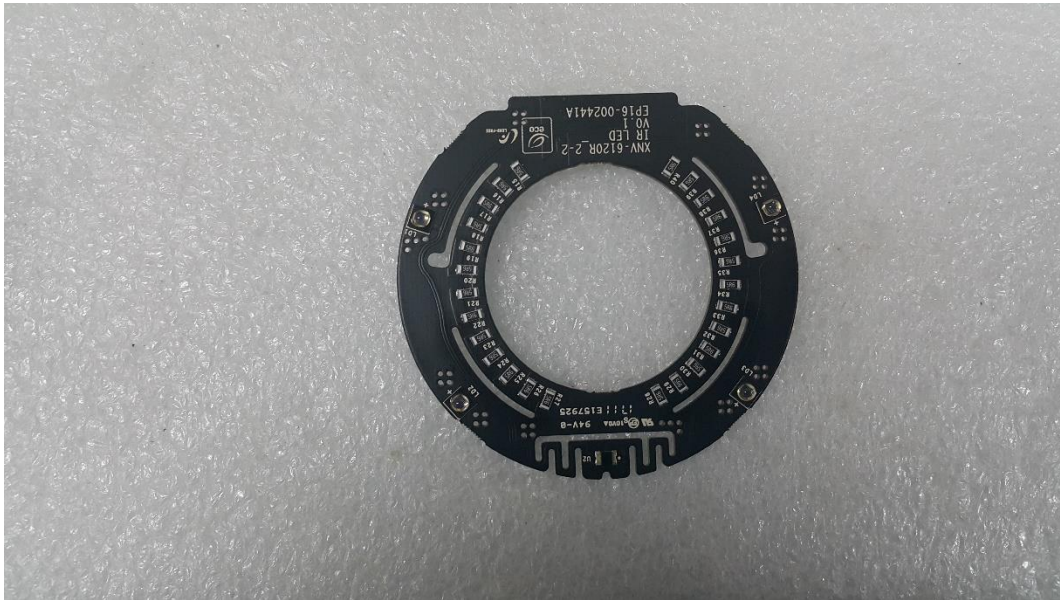


(Bottom)

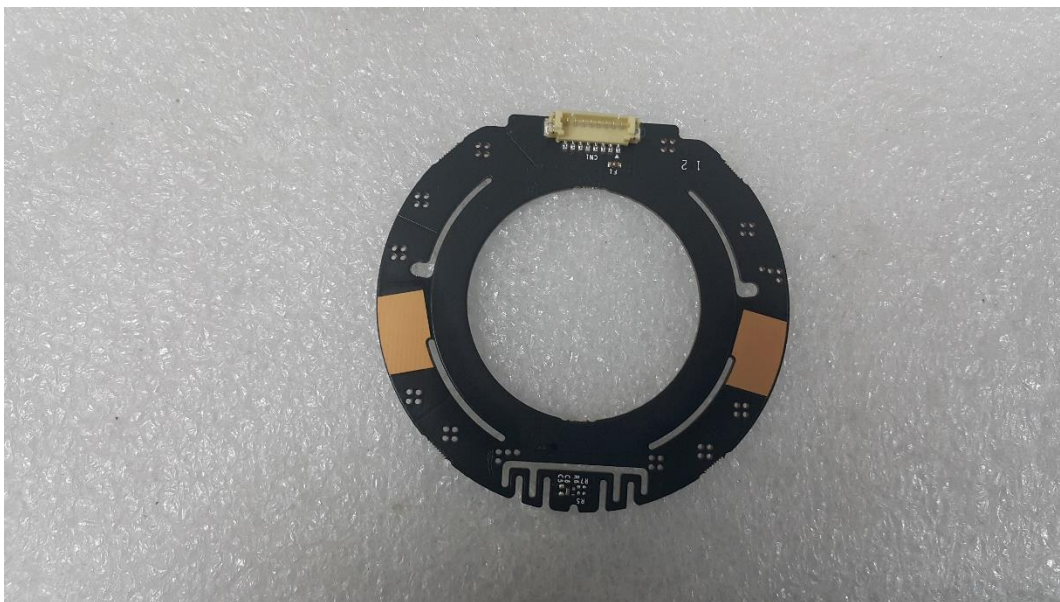


## EUT Internal View – Lens Board

(Top)

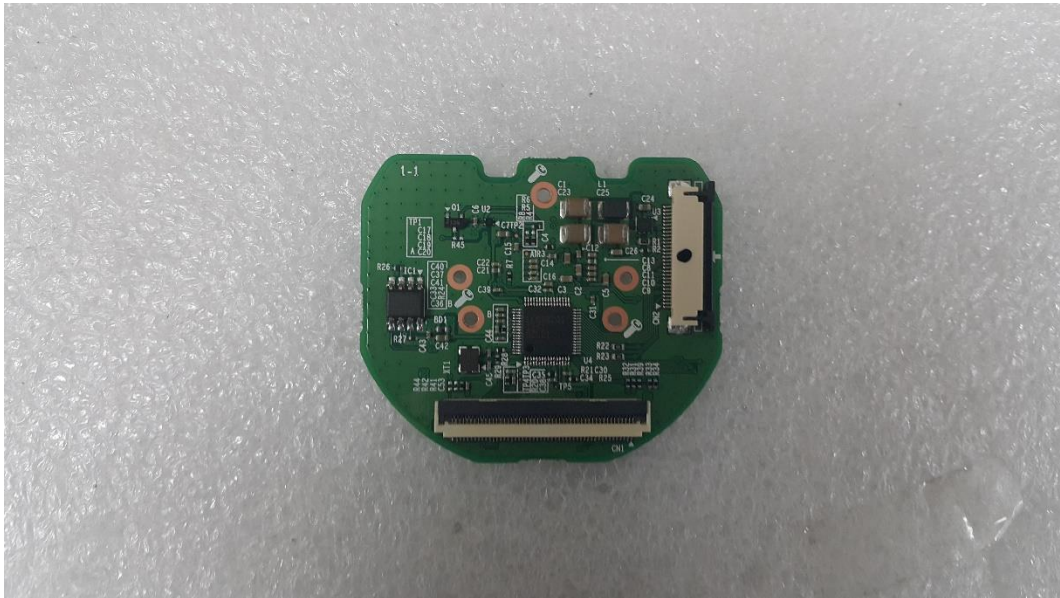


(Bottom)

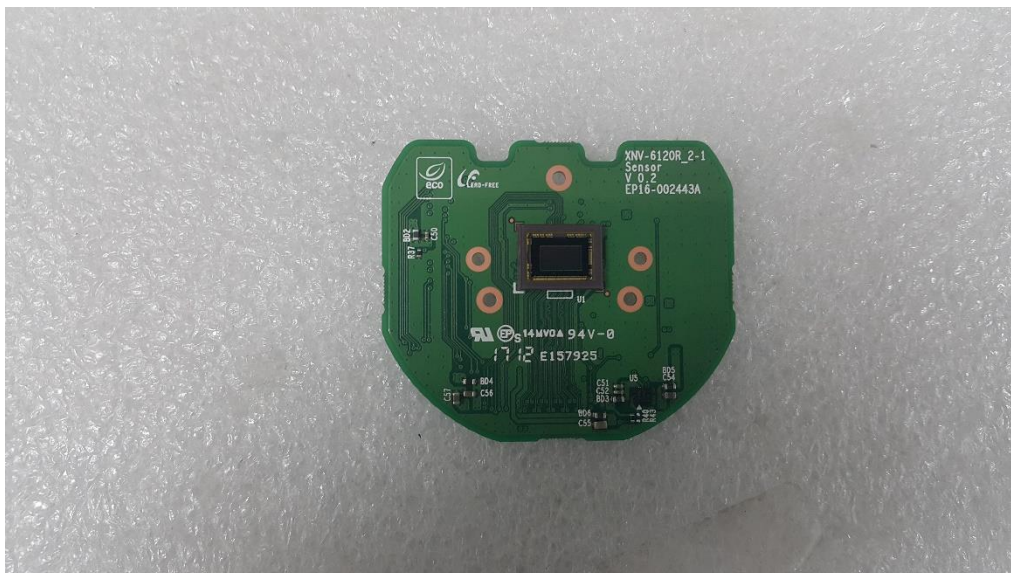

## EUT Internal View –Board

(Top)

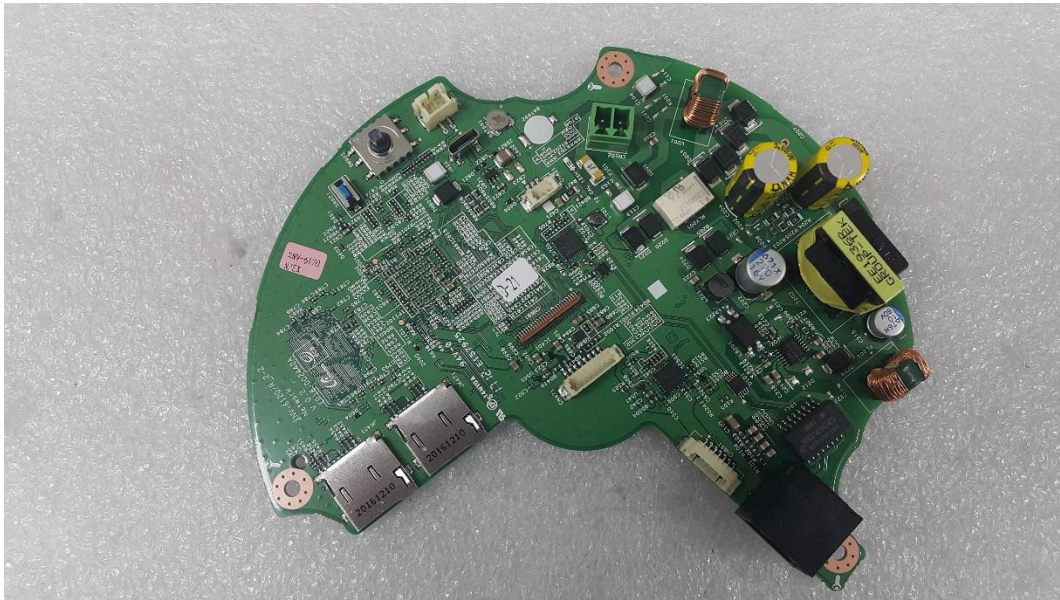

(Bottom)

