



EMC TEST REPORT

Test Report No. : KES-E1-17T0308-R3
Date of Issue : Feb. 24, 2023
Product name : NETWORK CAMERA
Model/Type No. : XNV-6120R
Variant Model : XNV-6120RP
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Apr, 14, 2017
Test date : Apr, 27, 2017 – Apr, 29, 2017
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Sung Keun, Park
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

Tested by Young Suk, Song
(Retired person)
Proxy signature : Sung Keun, Park

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0308-R3

Page (2) of (85)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
May. 02, 2017	KES-E1-17T0308	Issued
May. 15, 2019	KES-E1-17T0308-R1	Changed customer's address, factory addition, variant model addition and application standard due to customer request.
Jun. 08, 2022	KES-E1-17T0308-R2	Factory deletion and Test Regulations update due to customer request.
Feb. 24, 2023	KES-E1-17T0308-R3	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	E.U.T Operating Mode(s)	10
1.8	Configuration	11
1.9	Calibration Details of Equipment Used for Measurement	13
1.10	Test Facility	13
1.11	Laboratory Accreditations and Listings	13
2.0	Test Regulations	14
2.1	Conducted Emissions at Mains Power Ports	15
2.2	Conducted Emissions at Telecommunication Ports	16
2.3	Radiated Electric Field Emissions(Below 1 GHz)	17
2.4	Radiated Electric Field Emissions(Above 1 GHz)	18
2.5	Harmonic Current Emissions	19
2.6	Voltage Fluctuations and Flicker	20
3.0	Criteria for compliance	21
3.1	Electrostatic Discharge	23
3.2	Radiated Electric Field Immunity	27
3.3	Electrical Fast Transients/Bursts	30
3.4	Surge Transients	33
3.5	Conducted Disturbance	37
3.6	Voltage Dips and Short Interruptions	41
APPENDIX A	– TEST DATA	43
	Conducted Emissions at Mains Power Ports	43
	Conducted Emissions at Telecommunication Ports	45
	Radiated Electric Field Emissions(Below 1 GHz)	51
	Radiated Electric Field Emissions(Above 1 GHz)	54
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	66
	Test Setup Photos and Configuration	69
	Conducted Voltage Emissions	69
	Conducted Telecommunication Emissions	70
	Radiated Electric Field Emissions(Below 1 GHz)	71
	Radiated Electric Field Emissions(Above 1 GHz)	72
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	73
	Electrostatic Discharge	74
	Radiated Electric Field Immunity	74
	Electrical Fast Transients/Bursts	75
	Surge Transients	76
	Conducted Disturbance	77
	Voltage Dips and Short Interruptions	78
	EUT External Photographs	79
	EUT Internal Photographs	80



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0308-R3
Page (4) of (85)

1.0 General Product Description

Main Specifications of E.U.T are:

	XNV-6120R
Video	
Imaging Device	1/2.8" 2M CMOS
Total Pixels	1945(H) x 1109(V) 2.16M
Effective Pixels	1945(H) x 1097(V) 2.13M
Scanning System	Progressive
Min. Illumination	Color : 0.03 Lux (1/30sec, F1.6) B/W : 0 Lux (IR LED On)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1280x720, for installation
Lens	
Focal Length (Zoom Ratio)	5.2~62.4mm(Optical 12X)
Max. Aperture Ratio	F1.6 (Wide) ~ F3.0(Tele)
Angular Field of View	W : 54.58(H) X 32.19(V) X 61.40(D) T : 5.30(H) X 3.00(V) X 6.06(D)
Min. Object Distance	2.1m
Focus Control	Auto / Manual / One Push
Lens Type	DC Auto Iris
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan Range	0° ~ +354°
Tilt Range	0° ~ +75°
Rotate Range	0° ~ +355°
Operational	
Viewable Length	70m
Camera Title	Off / On (Displayed up to 85 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR
Wide Dynamic Range	150dB
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Auto / Manual / Off
Motion Detection	Off/ On(8ea, 8point Polygonal zones)
Privacy Masking	Off / On (32ea, Rectangle zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Off / Low / Meddle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor (included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
Digital PTZ	24X
Preset	300 ea
Rotate Image	Flip : On/Off Mirror : On/Off Hallway : 90° /270°
Video&Audio Analytics	Tampering, Loitering, Directional Detection, Defocus Detection, Fog Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection, Motion Detection Sound Classification
Alarm I/O	Input 1ea / Output 1ea

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0308-R3
Page (5) of (85)

Alarm Triggers	Alarm Input, Motion Detection, Video & Audio Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output preset
Audio In	Selectable (Mic IN/Line IN), Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out (3.5mm mono jack), Max output level: 1 Vrms
Pixel Counter	support
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High Motion JPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.264/H.265 : Max 60fps at all resolutions Motion JPEG : Max. 30fps at all resolutions
Smart Codec	Manual Mode (area-based : 5EA)
WiseStream II	support
Video Quality Adjustment	H.264/H.265/MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR Motion JPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Format	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 16KHz
Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode
Edge Storage	SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1st slot to 2nd slot) - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programming Interface	ONVIF Profile S/G SUNAPI 2.0(HTTP API) Wisenet Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Non-plugin Webviewer Supported Browser: Google Chrome 56, MS Edge 39, Mozilla Firefox 49(Window 64bit only) , Apple Safari 10 (Mac OS X only) Plug-in Webviewer Supported Browser : MS Explore 11, Apple Safari 10 (Mac OS X only)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0308-R3
Page (6) of (85)

Central Management Software	SmartViewer
Environmental	
Operating Temperature / Humidity	-40°C ~ +55°C(-40°F ~ +131°F) / Less than 90% RH * Start up should be done at above -35°C
Storage Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP67, IP66, NEMA 4X
Vandal Resistance	IK10
Electrical	
Input Voltage / Current	AC24V, DC12V,PoE(IEEE802.3af,Class3)
Power Consumption	24V AC : Max 14W 12V DC : Max 11.5W PoE : Max 12.95W
Mechanical	
Color / Material	Ivory / Aluminum
Dimension (WxHxD)	Ø160 x H128.5mm
Weight	995g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230Vac ☐ 100 Vac ☒ 24 Vac ☒ 12 Vdc ☒ PoE
Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

- Add derivative model for vendor management

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNV-6120R	-	HANWHA VISION VIETNAM COMPANY LIMITED	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
POE Adaptor	POE36U-1AT-R	-	PHIHONG	-
Notebook	RV518	HTK991NC600187E	Samsung Electronics Co., Ltd	-
Notebook Adaptor	ADP-60ZH	AD-6019R	DELTA ELECTRONICS, INC.	-
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI-TECH GROUP.	-
MIC	CMK-303	-	CAMAC	-
Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-



1.6 External I/O Cabling

- AC 24 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	MIC	3.5 mm	1.7	U
	3 Pin	Alarm	3 Pin	1.7	U

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	MIC	3.5 mm	1.7	U
	3 Pin	Alarm	3 Pin	1.7	U

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0308-R3
Page (9) of (85)

- PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45 (POE)	POE Adaptor	RJ-45 (POE)	3.0	U
	RJ-45	Notebook	RJ-45	3.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	MIC	3.5 mm	1.7	U
	3 Pin	Alarm	3 Pin	1.7	U
Notebook	RJ-45 (DATA)	POE Adaptor	RJ-45 (DATA)	3.0	U

* Unshielded=U, Shielded=S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0308-R3

Page (10) of (85)

1.7 E.U.T Operating Mode(s)

Test mode	operating
AC 24 V Mode	E.U.T Monitoring, Ping test, 1 kHz
DC 12 V Mode	E.U.T Monitoring, Ping test
POE Mode	E.U.T Monitoring, Ping test


E.U.T Test operating S/W		
Name	Version	Manufacture Company
WebViewer	-	Hanwha Vision Co., Ltd

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main


- AC 24 V Mode

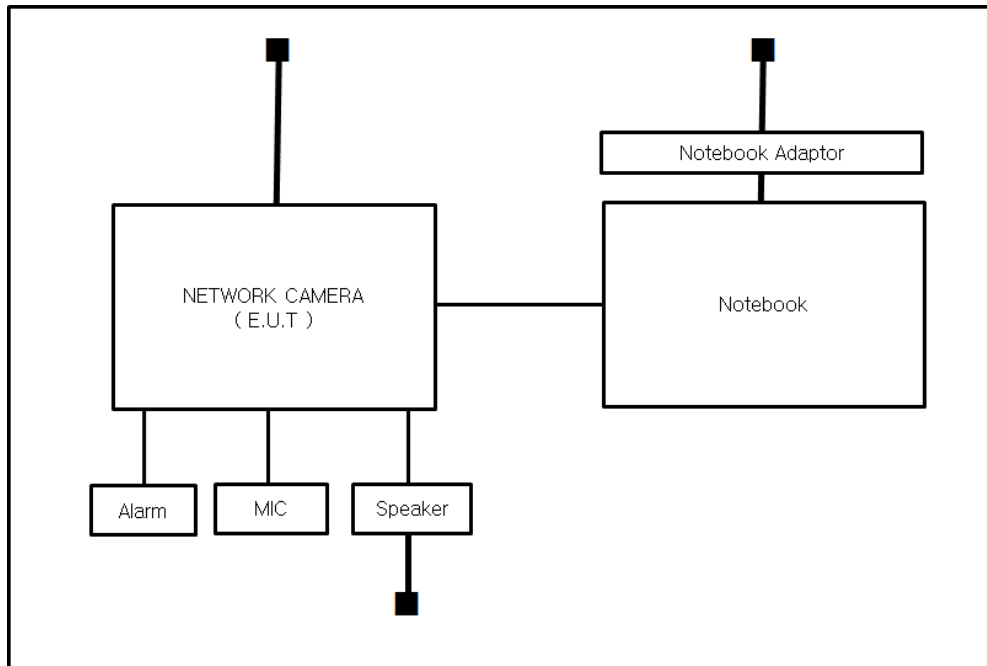

- DC 12 V Mode

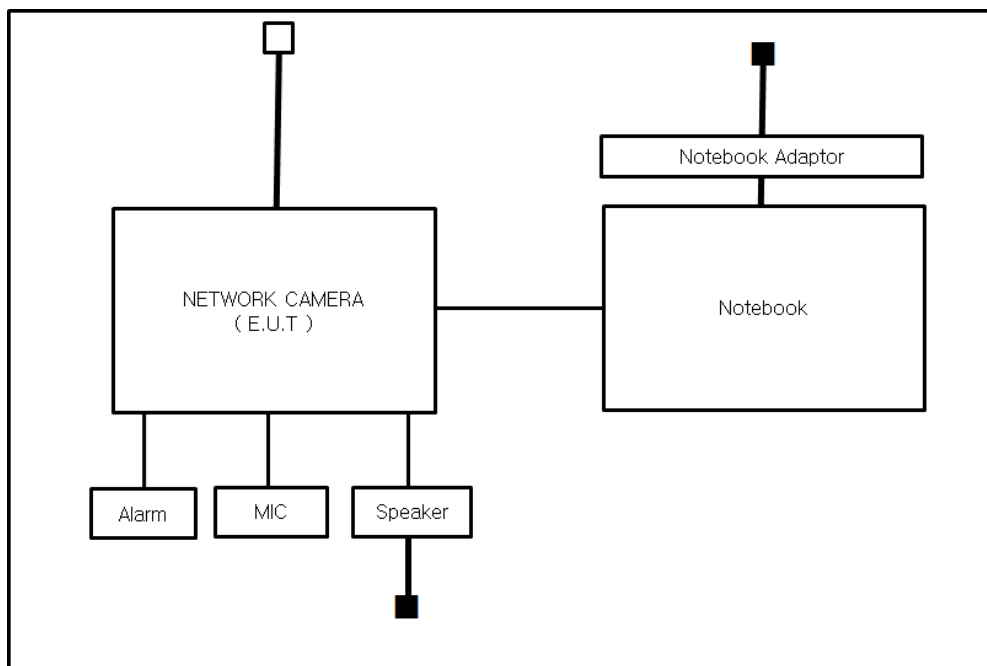

- PoE Mode

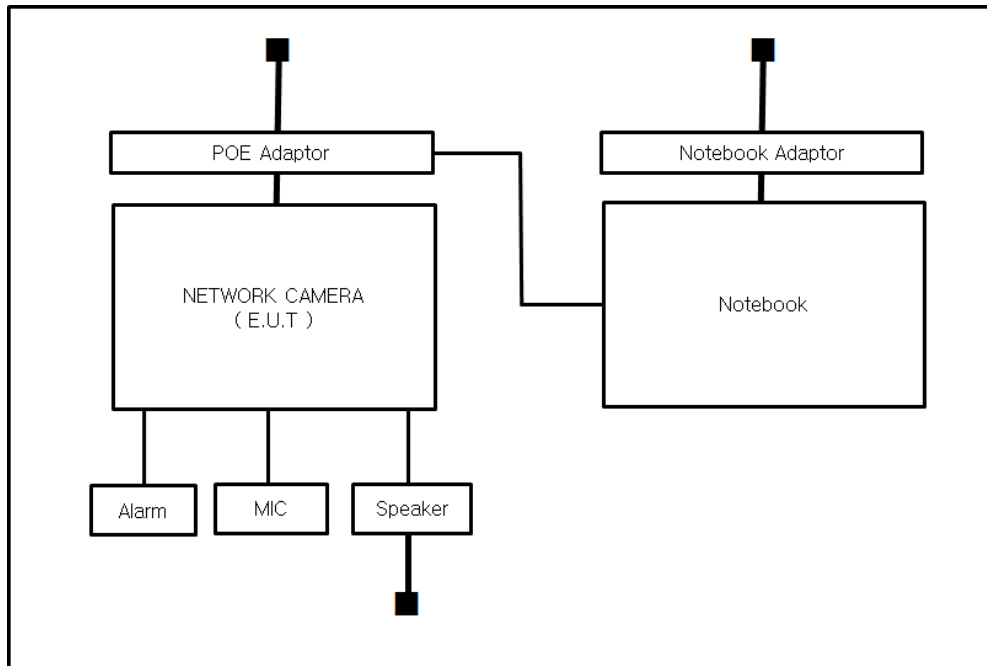

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☒ **EMC – Regulations 2016**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

2.1 Conducted Emissions at Mains Power Ports

Test Date

Apr. 29, 2017

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 27, 2018
☒	LISN	ENV216	R & S	101787	01, 11, 2018
☒	LISN	ESH2-Z5	R & S	100450	04, 27, 2018
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 13, 2017

Test Conditions

Temperature: 21,2 °C

Relative Humidity: 36,3 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Apr. 29, 2017

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 27, 2018
☒	LISN	ENV216	R & S	101787	01, 11, 2018
☒	LISN	ESH2-Z5	R & S	100450	04, 27, 2018
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 13, 2017
☒	8-WIRE ISN CAT3,5	ENY81	Rohde & Schwarz	100174	11, 01, 2018

Test Conditions

Temperature: 21,2 °C

Relative Humidity: 36,3 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Apr. 29, 2017

Test Location

☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	-	-	-	-
☒	EMI TEST RECEIVER	ESVS10	Rohde & Schwarz	826008/014	04, 18, 2018
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	714	11, 28, 2018
☐	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	04, 14, 2018

Test Conditions

Temperature: 23,0 °C
Relative Humidity: 29,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Apr. 29, 2017

Test Location

Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	e3	AUDIX	8.083b	-
☒	EMI TEST RECEIVER	ESU26	R & S	100552	04, 19, 2018
☒	BROADBAND PREAMPLIFIER	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 14, 2017
☒	LOG-PERIODIC ANTENNA	STLP 9149	SCHWARZBECK	9149-255	05, 17, 2018

Test Conditions

Temperature: 19,2 °C

Relative Humidity: 38,2 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

Apr. 29, 2017

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	dpa.control	EM TEST	5.4.8.0	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	08, 08, 2017
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	08, 08, 2017

Test Conditions

Temperature: 19,2 °C
Relative Humidity: 38,2 %

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.6 Voltage Fluctuations and Flicker

Test Date

Apr. 29, 2017

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	dpa.control	EM TEST	5.4.8.0	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	08, 08, 2017
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	08, 08, 2017

Test Conditions

Temperature: 19,2 °C
Relative Humidity: 38,2 %

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family
standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

- (a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used; and
- (c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Mar. 28, 2017

Test Location

EMS-ESD: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	-	-	-	-
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	02, 24, 2018
☒	HCP	-	Noise Ken	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: 23,2 °C
Relative Humidity: 36,8 %
Atmospheric Pressure: 100,1 kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	Air ☒ 2 kV ☒ 4 kV ☐ 6 kV ☒ 8 kV ☐ 15 kV	HCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	VCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV
--------------------	---	---	---	---

Notes: HCP: Horizontal coupling plane

VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Location of Discharge:

Air
Contact



1

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0308-R3
Page (25) of (85)

Test Data**- AC 24 V Mode****Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Screw	Contact Discharge	Complied	-

- DC 12 V Mode**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Screw	Contact Discharge	Complied	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0308-R3
Page (26) of (85)

- PoE Mode**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Screw	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.2 Radiated Electric Field Immunity

Reference Standard

EN IEC 61000-4-3:2020

Test Date

Apr. 27, 2017

Test Location

EMS-RS: ☐ Semi Anechoic Chamber #1 ☒ Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	KTI_RS2012	KOREA TECHNOLOGY INSTITUTE CO., LTD	2.1.1	-
☒	SIGNAL GENERATOR	ESG-3000A	HP	US37040210	11, 01, 2017
☒	AMPLIFIER	ITA0300-200	Infinitech	-	11, 01, 2017
☒	AMPLIFIER	ITA0750-200	Infinitech	-	11, 01, 2017
☒	AMPLIFIER	ITA1500-100	Infinitech	-	11, 01, 2017
☒	AMPLIFIER	ITA2500-100	Infinitech	-	11, 01, 2017
☒	POWER METER	E4419B	Agilent	MY45101506	06, 27, 2017
☒	AVERAGE POWER SENSOR	E9301A	Agilent	-	06, 27, 2017
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY41495698	11, 17, 2017
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 D	SCHWARZBECK	9128D038	-

Test Conditions

Temperature: 23,2 °C
Relative Humidity: 36,8 %
Atmospheric Pressure: 100,1 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0308-R3

Page (28) of (85)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Data

- AC 24 V Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

- DC 12 V Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

- PoE Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Apr. 28, 2017

Test Location

EMS-EFT: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.0.9.0	-
☒	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 27, 2017
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	070925	06, 27, 2017

Test Conditions

Temperature: 22,4 °C
Relative Humidity: 37,5 %
Atmospheric Pressure: 100,2 kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☒ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

Test Data

- AC 24 V Mode

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L – N	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ – 45	Complied	Complied
Alarm (3Pin)	Complied	Complied

- DC 12 V Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L1 – L2	Complied	Complied

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ – 45	Complied	Complied
Alarm (3Pin)	Complied	Complied

- PoE Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ – 45 (PoE)	Complied	Complied
Alarm (3Pin)	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014/A1:2017

Test Date

Apr. 28, 2017

Test Location

EMS-Surge: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.0.9.0	-
☒	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 27, 2017
☒	CDN	CNV 508N1	EM TEST	P1551168979	04, 26, 2018

Test Conditions

Temperature: 22,4 °C
Relative Humidity: 37,5 %
Atmospheric Pressure: 100,2 kPa



Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance: 42 ohm for common mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Test Data

- AC 24 V Mode

☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied
L – PE	-	-
N – PE	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ – 45	Complied	Complied
Alarm (3Pin)	Complied	Complied

- DC 12 V Mode

☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	-	-
L – PE	-	-
N – PE	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ – 45	Complied	Complied
Alarm (3Pin)	Complied	Complied

- PoE Mode

☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	-	-
L – PE	-	-
N – PE	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ – 45 (PoE)	Complied	Complied
Alarm (3Pin)	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Apr. 28, 2017

Test Location

EMS-CS: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.11	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 28, 2017
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 28, 2017
☒	CDN	CDN M016	TESEQ	43694	11, 28, 2017
☐	CDN	CDN M016	TESEQ	43697	11, 28, 2017
☒	CDN	CDN T800	TESEQ	42800	11, 28, 2017
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 30, 2017

Test Conditions

Temperature: 19,7 °C
Relative Humidity: 38,3 %
Atmospheric Pressure: 100,1 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0308-R3

Page (38) of (85)

Test Specifications

- Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz
- Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms
- Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)
- Frequency step: ☒ 1 % step
- Dwell Time: ☒ 1 s ☐ 3 s
- Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Data

- AC 24 V Mode

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N	CDN (☒ M2, ☐ M3)	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ – 45	Complied	Complied
Alarm (3Pin)	Complied	Complied

- DC 12 V Mode

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L1 – L2	CDN (☒ M2, ☐ M3)	Complied

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ – 45	Complied	Complied
Alarm Alarm (3Pin)	Complied	Complied

- PoE Mode☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ - 45 (PoE)	Complied	Complied
Alarm (3Pin)	Complied	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.6 Voltage Dips and Short Interruptions

Reference Standard

EN IEC 61000-4-11:2020

Test Date

Apr. 28, 2017

Test Location

EMS-Voltage dip: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.0.9.0	-
☒	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 27, 2017

Test Conditions

Temperature: 22,4 °C
Relative Humidity: 37,5 %
Atmospheric Pressure: 100,2 kPa



Test Specifications & Observations/Remarks

- AC 24 V Mode

(Test Voltage : 50 Hz)

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5000	<u>Complied</u>

- Voltage variations

☒ Unom + 10 %	☒ 253 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:
Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

PASS Required Performance Criteria.

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

- AC 24 V Mode

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	XNV-6120RP
Mode	AC 24 V_H
Operator Name:	KES

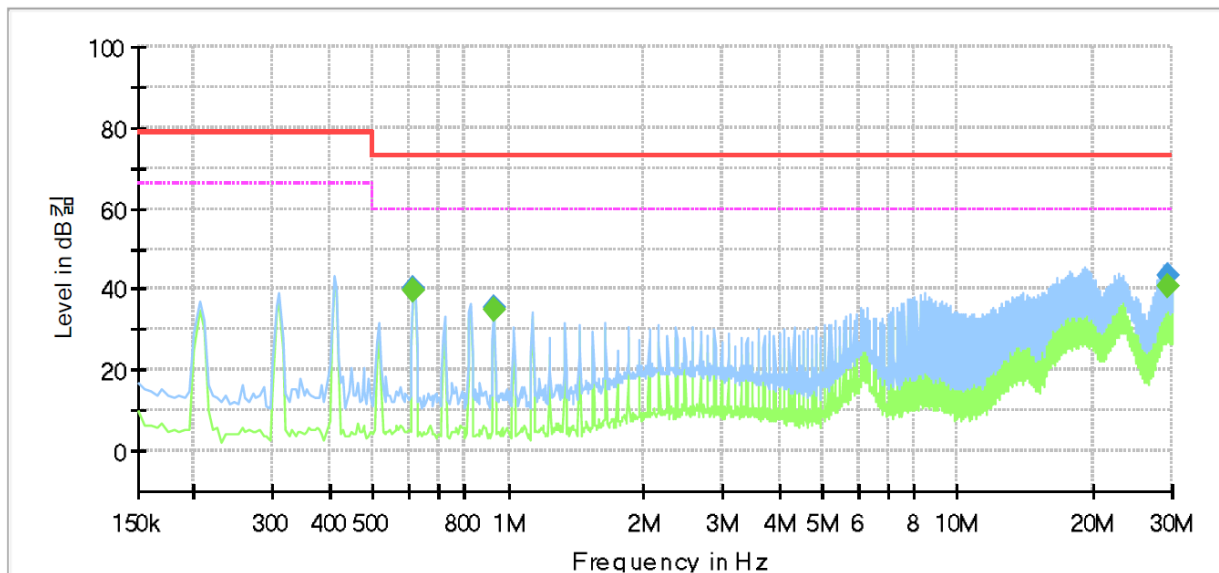

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.615000	---	39.63	60.00	20.37	1000.0	9.000	L1	20.4
0.615000	40.12	---	73.00	32.88	1000.0	9.000	L1	20.4
0.925000	---	34.88	60.00	25.12	1000.0	9.000	L1	20.1
0.925000	35.67	---	73.00	37.33	1000.0	9.000	L1	20.1
29.420000	---	40.84	60.00	19.16	1000.0	9.000	L1	20.5
29.420000	43.51	---	73.00	29.49	1000.0	9.000	L1	20.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	XNV-6120RP
Mode	AC 24 V_N
Operator Name:	KES

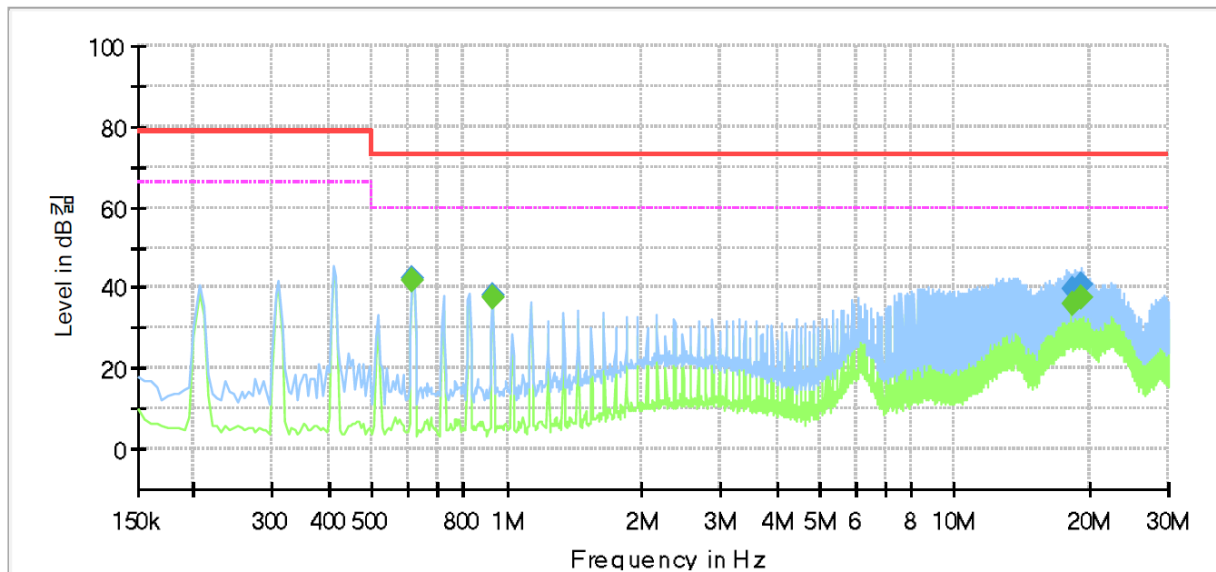

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.615000	---	41.96	60.00	18.04	1000.0	9.000	N	20.4
0.615000	42.48	---	73.00	30.52	1000.0	9.000	N	20.4
0.925000	---	37.49	60.00	22.51	1000.0	9.000	N	20.1
0.925000	38.19	---	73.00	34.81	1000.0	9.000	N	20.1
18.415000	---	35.87	60.00	24.13	1000.0	9.000	N	20.3
18.415000	39.51	---	73.00	33.49	1000.0	9.000	N	20.3
19.240000	---	37.46	60.00	22.54	1000.0	9.000	N	20.4
19.240000	40.76	---	73.00	32.24	1000.0	9.000	N	20.4

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


Conducted Emissions at Telecommunication Ports

[10 Mbps]

- AC 24 V Mode

Common Information

Test Description: Telecommunication Emission
 Model No.: XNV-6120RP
 Mode: AC 24 V_10 Mbps
 Operator Name: KES

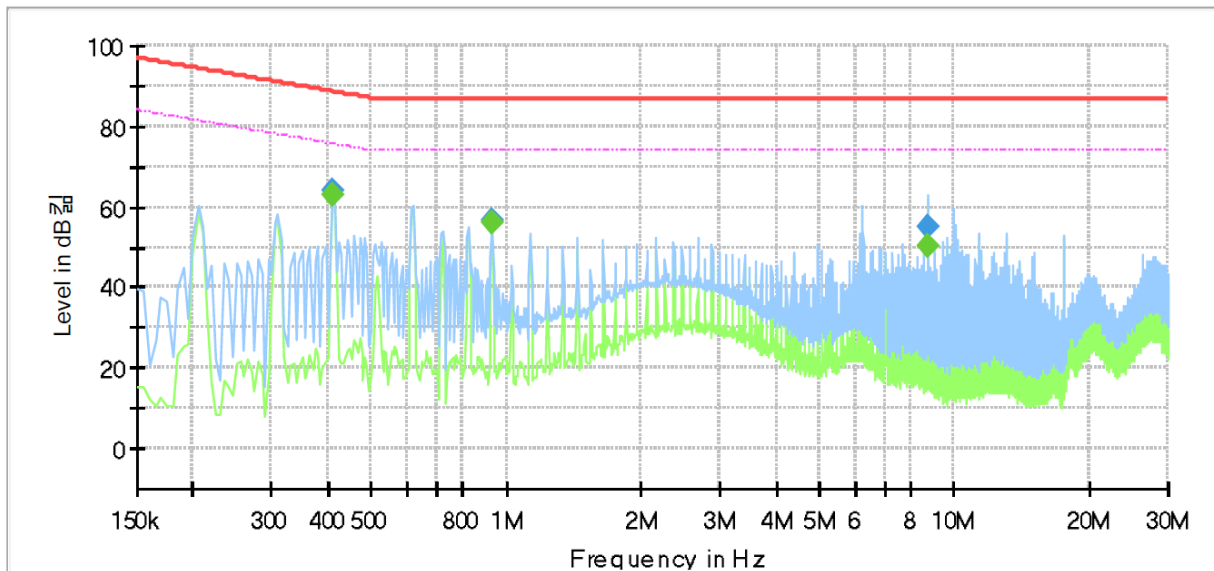

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.410000	---	62.89	75.65	12.76	1000.0	9.000	Single Line	20.5
0.410000	64.04	---	88.65	24.61	1000.0	9.000	Single Line	20.5
0.925000	---	55.97	74.00	18.03	1000.0	9.000	Single Line	20.0
0.925000	56.56	---	87.00	30.44	1000.0	9.000	Single Line	20.0
8.750000	---	50.03	74.00	23.97	1000.0	9.000	Single Line	19.6
8.750000	55.02	---	87.00	31.98	1000.0	9.000	Single Line	19.6

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
 Model No.: XNV-6120RP
 Mode: AC 24 V_100 Mbps
 Operator Name: KES

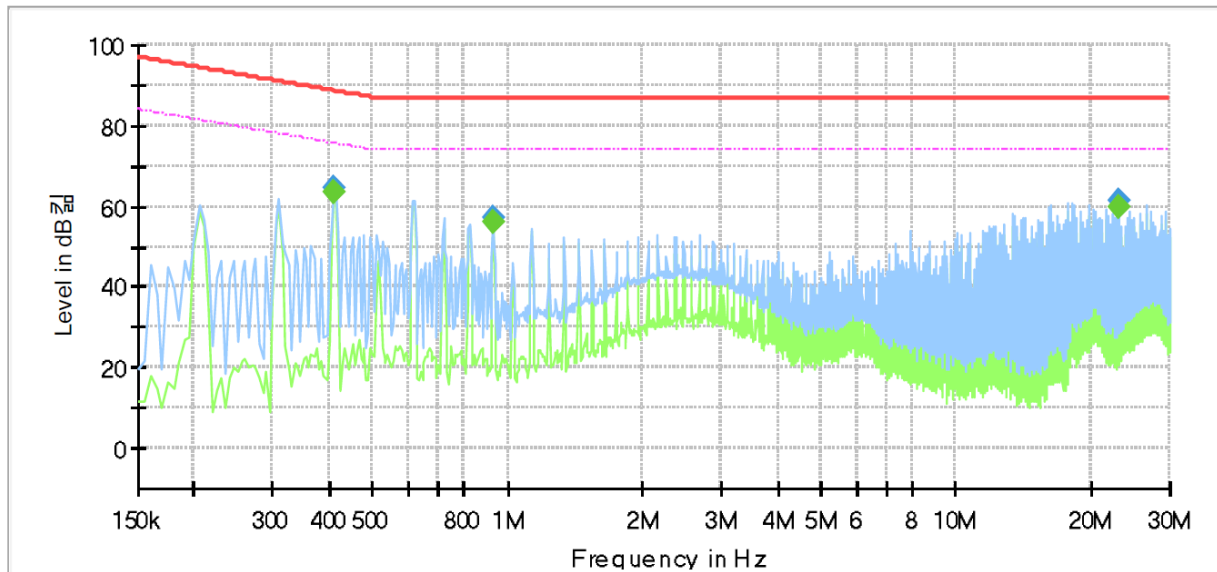

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.410000	---	63.35	75.65	12.30	1000.0	9.000	Single Line	20.8
0.410000	64.49	---	88.65	24.16	1000.0	9.000	Single Line	20.8
0.925000	---	56.37	74.00	17.63	1000.0	9.000	Single Line	20.3
0.925000	56.97	---	87.00	30.03	1000.0	9.000	Single Line	20.3
23.130000	---	59.93	74.00	14.07	1000.0	9.000	Single Line	20.5
23.130000	61.56	---	87.00	25.44	1000.0	9.000	Single Line	20.5

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

[10 Mbps]

- DC 12 V Mode

Common Information

Test Description: Telecommunication Emission
 Model No.: XNV-6120RP
 Mode: DC 12 V_10 Mbps
 Operator Name: KES

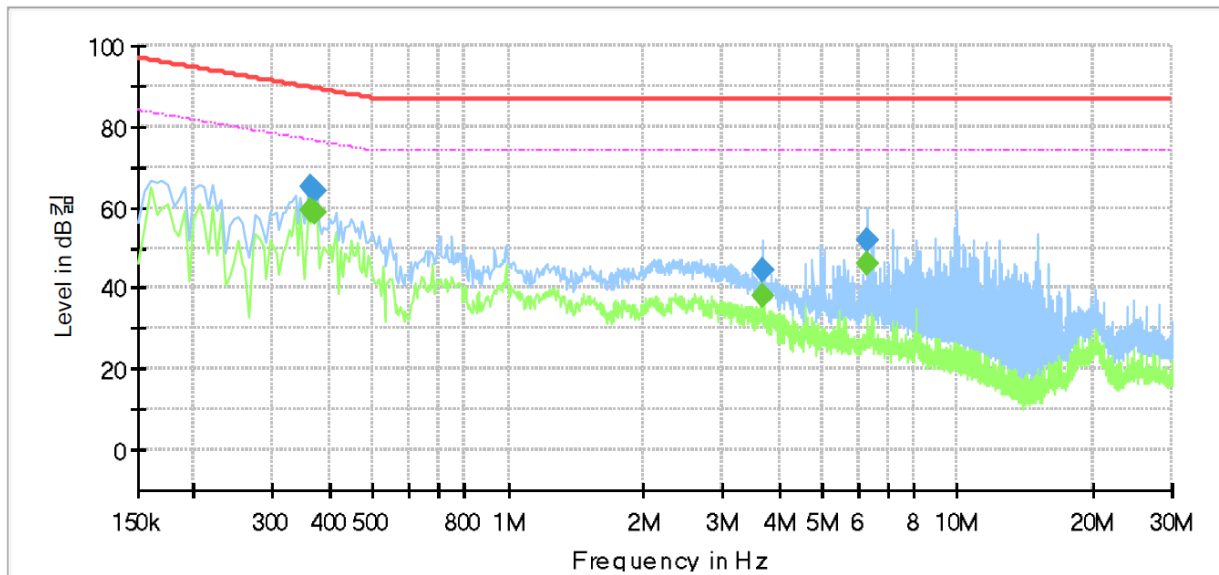

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.365000	---	59.41	76.61	17.20	1000.0	9.000	Single Line	20.6
0.365000	65.36	---	89.61	24.25	1000.0	9.000	Single Line	20.6
0.370000	---	58.97	76.50	17.53	1000.0	9.000	Single Line	20.6
0.370000	64.30	---	89.50	25.20	1000.0	9.000	Single Line	20.6
3.695000	---	38.11	74.00	35.89	1000.0	9.000	Single Line	19.5
3.695000	44.62	---	87.00	42.38	1000.0	9.000	Single Line	19.5
6.305000	---	46.18	74.00	27.82	1000.0	9.000	Single Line	19.5
6.305000	52.04	---	87.00	34.96	1000.0	9.000	Single Line	19.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNV-6120RP
Mode	DC 12 V_100 Mbps
Operator Name:	KES

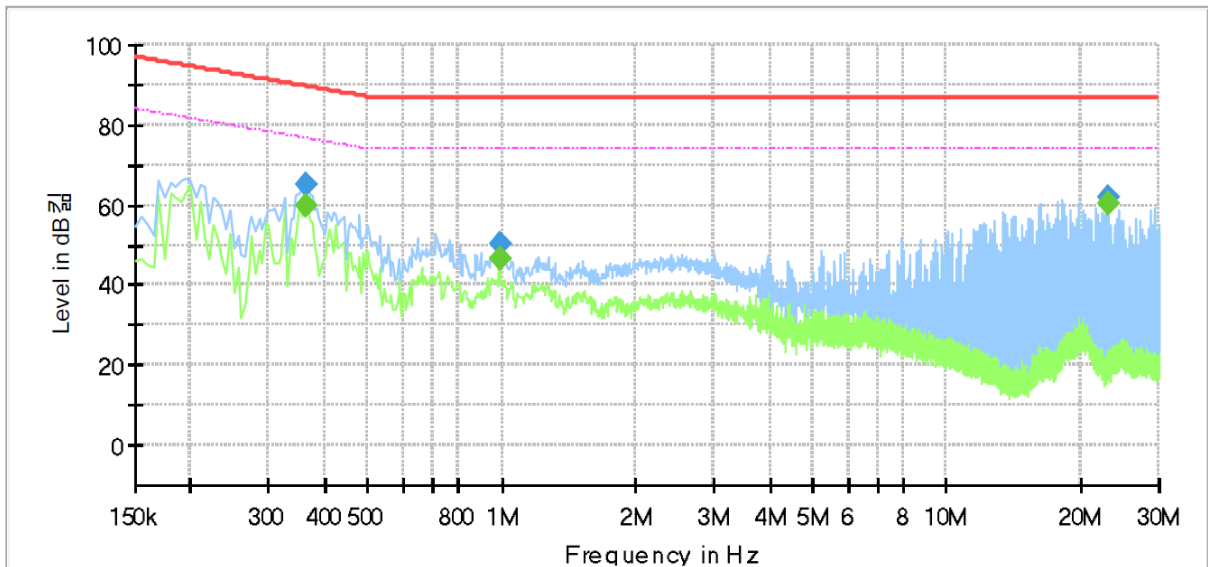

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.365000	---	59.58	76.61	17.03	1000.0	9.000	Single Line	20.9
0.365000	65.24	---	89.61	24.37	1000.0	9.000	Single Line	20.9
0.990000	---	46.65	74.00	27.35	1000.0	9.000	Single Line	20.2
0.990000	50.19	---	87.00	36.81	1000.0	9.000	Single Line	20.2
23.130000	---	60.13	74.00	13.87	1000.0	9.000	Single Line	20.5
23.130000	61.79	---	87.00	25.21	1000.0	9.000	Single Line	20.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

[10 Mbps]

- PoE Mode

Common Information

Test Description: Telecommunication Emission
 Model No.: XNV-6120RP
 Mode: POE_10 Mbps
 Operator Name: KES

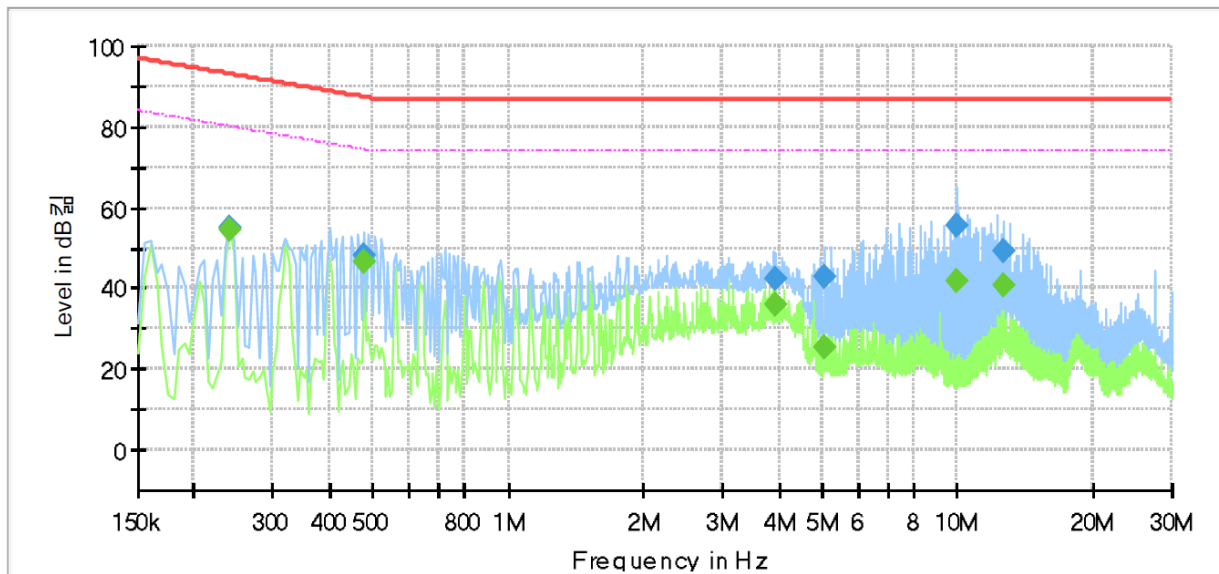

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.240000	---	54.70	80.10	25.40	1000.0	9.000	Single Line	20.8
0.240000	54.93	---	93.10	38.17	1000.0	9.000	Single Line	20.8
0.480000	---	46.41	74.34	27.93	1000.0	9.000	Single Line	20.4
0.480000	48.03	---	87.34	39.31	1000.0	9.000	Single Line	20.4
3.915000	---	36.04	74.00	37.96	1000.0	9.000	Single Line	19.4
3.915000	42.42	---	87.00	44.58	1000.0	9.000	Single Line	19.4
5.065000	---	25.57	74.00	48.43	1000.0	9.000	Single Line	19.5
5.065000	42.74	---	87.00	44.26	1000.0	9.000	Single Line	19.5
10.000000	---	41.78	74.00	32.22	1000.0	9.000	Single Line	19.7
10.000000	55.56	---	87.00	31.44	1000.0	9.000	Single Line	19.7
12.610000	---	40.98	74.00	33.02	1000.0	9.000	Single Line	19.8
12.610000	49.33	---	87.00	37.67	1000.0	9.000	Single Line	19.8

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
 Model No.: XNV-6120RP
 Mode: POE_100 Mbps
 Operator Name: KES

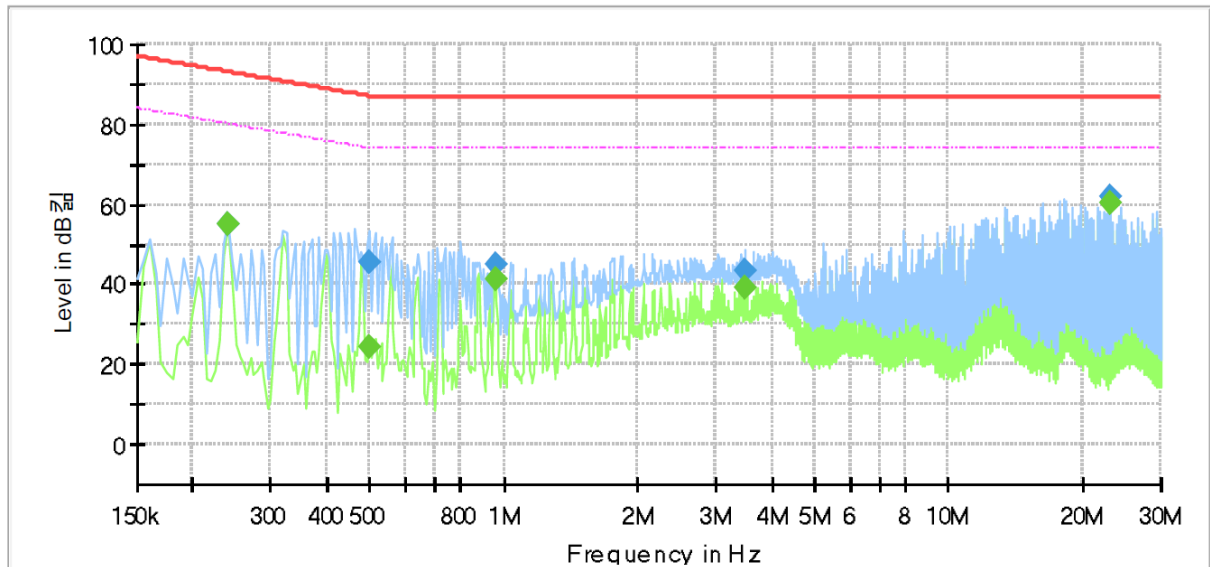

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.240000	---	54.79	80.10	25.31	1000.0	9.000	Single Line	21.1
0.240000	55.14	---	93.10	37.96	1000.0	9.000	Single Line	21.1
0.500000	---	24.35	74.00	49.65	1000.0	9.000	Single Line	20.7
0.500000	45.58	---	87.00	41.42	1000.0	9.000	Single Line	20.7
0.960000	---	41.26	74.00	32.74	1000.0	9.000	Single Line	20.3
0.960000	45.03	---	87.00	41.97	1000.0	9.000	Single Line	20.3
3.495000	---	39.09	74.00	34.91	1000.0	9.000	Single Line	19.7
3.495000	43.65	---	87.00	43.35	1000.0	9.000	Single Line	19.7
23.130000	---	60.55	74.00	13.45	1000.0	9.000	Single Line	20.5
23.130000	62.01	---	87.00	24.99	1000.0	9.000	Single Line	20.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
74.41	19.80	V	1.00	7.85	2.00	29.65	40.00	10.35
250.35	17.40	H	3.99	12.50	3.70	33.60	47.00	13.40
311.99	16.20	V	1.02	13.68	4.14	34.02	47.00	12.98
350.36	17.50	H	4.00	14.52	4.25	36.27	47.00	10.73
400.01	11.70	V	3.98	15.61	4.60	31.91	47.00	15.09
460.83	12.40	H	1.01	16.67	5.13	34.20	47.00	12.80

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0308-R3
Page (52) of (85)

- DC 12 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	[dB]
58.25	15.40	V	1.00	12.07	1.76	29.23	40.00	10.77
250.19	15.60	H	3.98	12.49	3.69	31.78	47.00	15.22
299.64	15.80	H	3.99	13.41	4.10	33.31	47.00	13.69
333.35	16.20	V	1.02	14.15	4.20	34.55	47.00	12.45
375.66	16.40	H	4.00	15.08	4.43	35.91	47.00	11.09
459.58	14.30	V	1.01	16.65	5.13	36.08	47.00	10.92

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dBμV] = Amplitude[dBμV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0308-R3
Page (53) of (85)

- PoE Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	[dB]
35.82	16.90	H	3.99	10.26	1.45	28.61	40.00	11.39
38.33	17.80	V	1.01	11.26	1.51	30.57	40.00	9.43
72.37	21.50	V	1.00	8.27	1.97	31.74	40.00	8.26
250.35	17.40	H	3.98	12.50	3.70	33.60	47.00	13.40
299.68	18.20	H	4.00	13.41	4.10	35.71	47.00	11.29
333.19	17.30	V	1.02	14.15	4.20	35.65	47.00	11.35

* H : Horizontal, V : Vertical

◆ Calculation


Corrected Amplitude [dBμV] = Amplitude[dBμV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

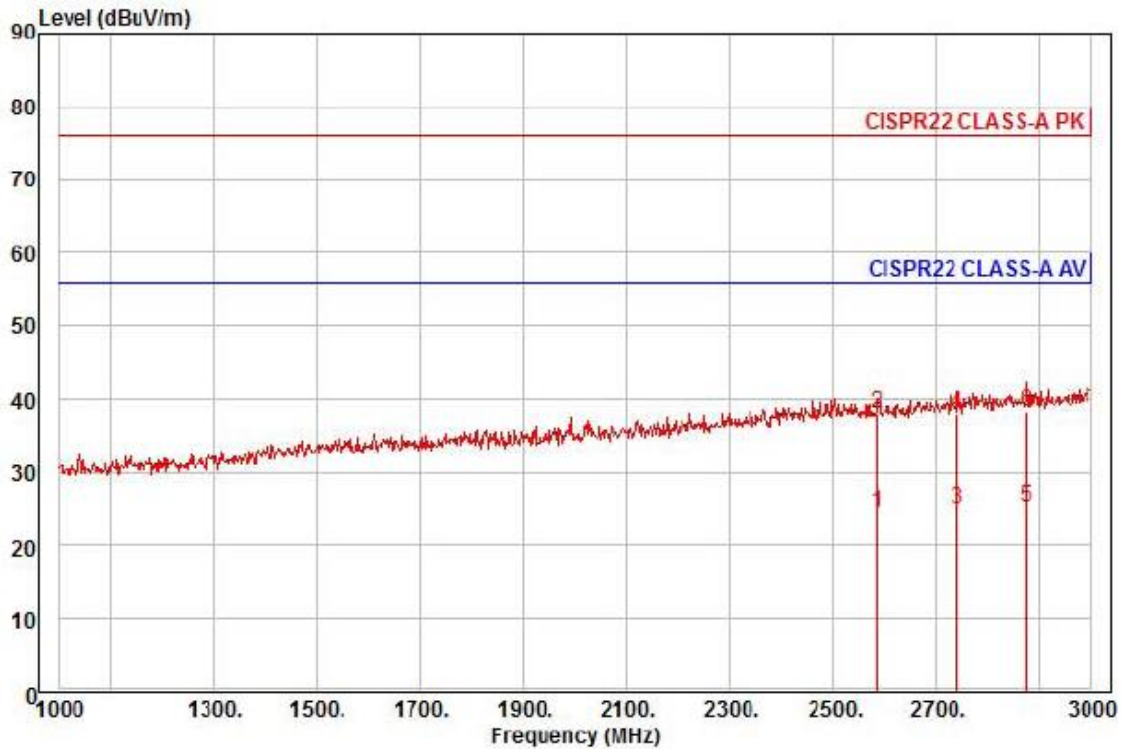

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNV-6120RP
 Mode : AC 24 V
 Memo : 1 ~ 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	2586.00	25.58	27.95	10.71	39.63	302	56.00	-31.39	horizontal	Average
2	2586.00	38.88	27.95	10.71	39.63	302	76.00	-38.09	horizontal	Peak
3	2742.00	25.20	28.64	11.09	39.81	266	56.00	-30.88	horizontal	Average
4	2742.00	38.05	28.64	11.09	39.81	266	76.00	-38.03	horizontal	Peak
5 pp	2878.00	24.66	29.25	11.41	39.97	193	56.00	-30.65	horizontal	Average
6 pk	2878.00	37.57	29.25	11.41	39.97	193	76.00	-37.74	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

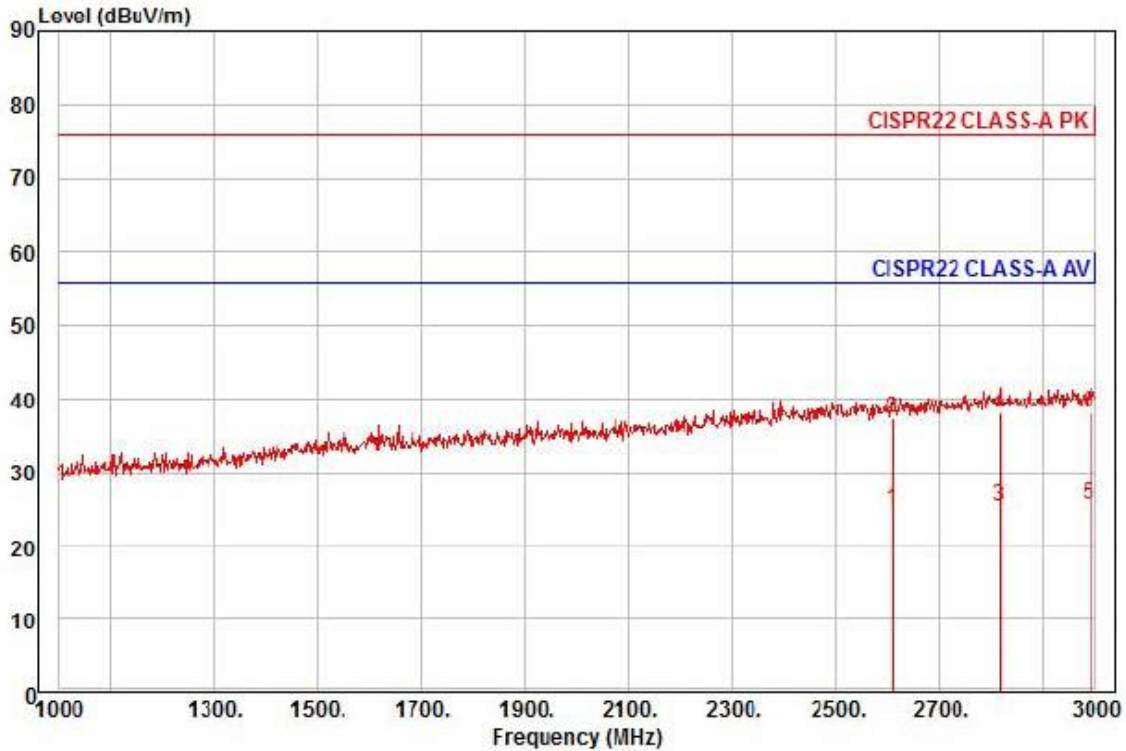


Site : chamber
 Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNV-6120RP
 Mode : AC 24 V
 Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	2612.00	25.47	28.07	10.77	39.66	27	56.00	-31.35	vertical	Average
2	2612.00	38.02	28.07	10.77	39.66	27	76.00	-38.80	vertical	Peak
3	2816.00	24.98	28.97	11.27	39.90	66	56.00	-30.68	vertical	Average
4 pk	2816.00	37.78	28.97	11.27	39.90	66	76.00	-37.88	vertical	Peak
5 pp	2990.00	24.28	29.75	11.67	40.10	115	56.00	-30.40	vertical	Average
6	2990.00	36.76	29.75	11.67	40.10	115	76.00	-37.92	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

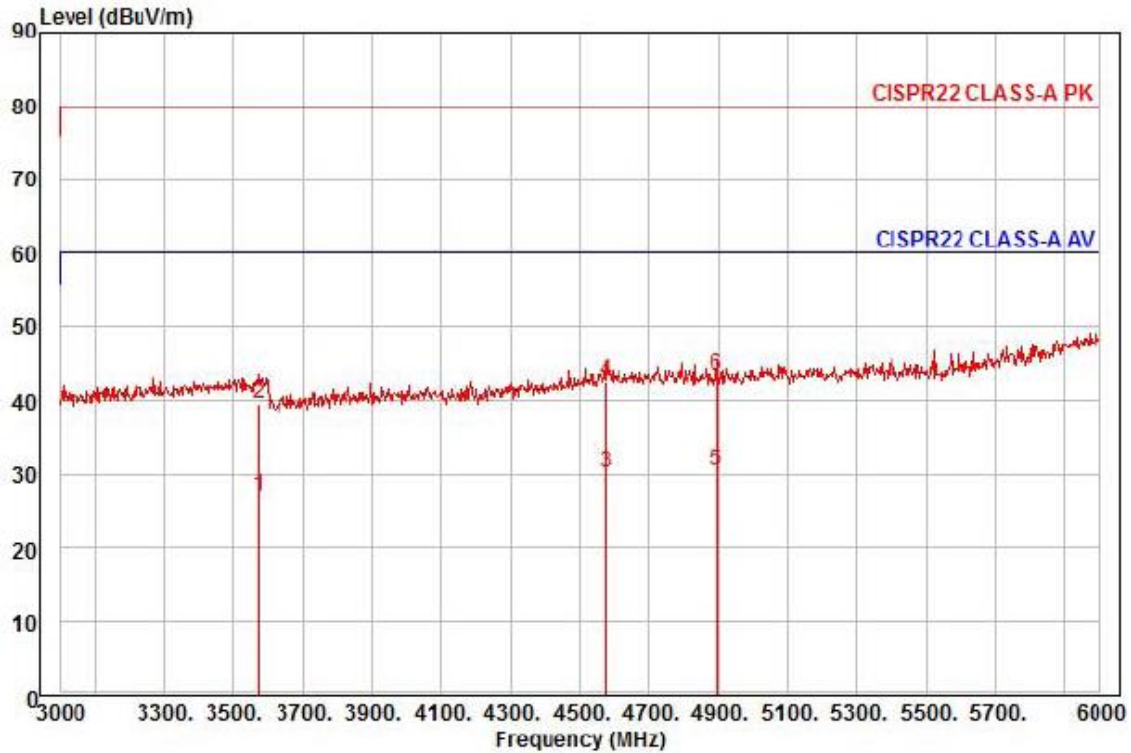


Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-6120RP
Mode : AC 24 V
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3573.00	24.58	30.45	12.76	40.85	299	60.00	-33.06	horizontal	Average
2	3573.00	37.22	30.45	12.76	40.85	299	80.00	-40.42	horizontal	Peak
3	4575.00	23.32	32.86	14.61	40.69	1	60.00	-29.90	horizontal	Average
4	4575.00	35.97	32.86	14.61	40.69	1	80.00	-37.25	horizontal	Peak
5 pp	4896.00	22.52	33.14	15.20	40.37	358	60.00	-29.51	horizontal	Average
6 pk	4896.00	35.40	33.14	15.20	40.37	358	80.00	-36.63	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

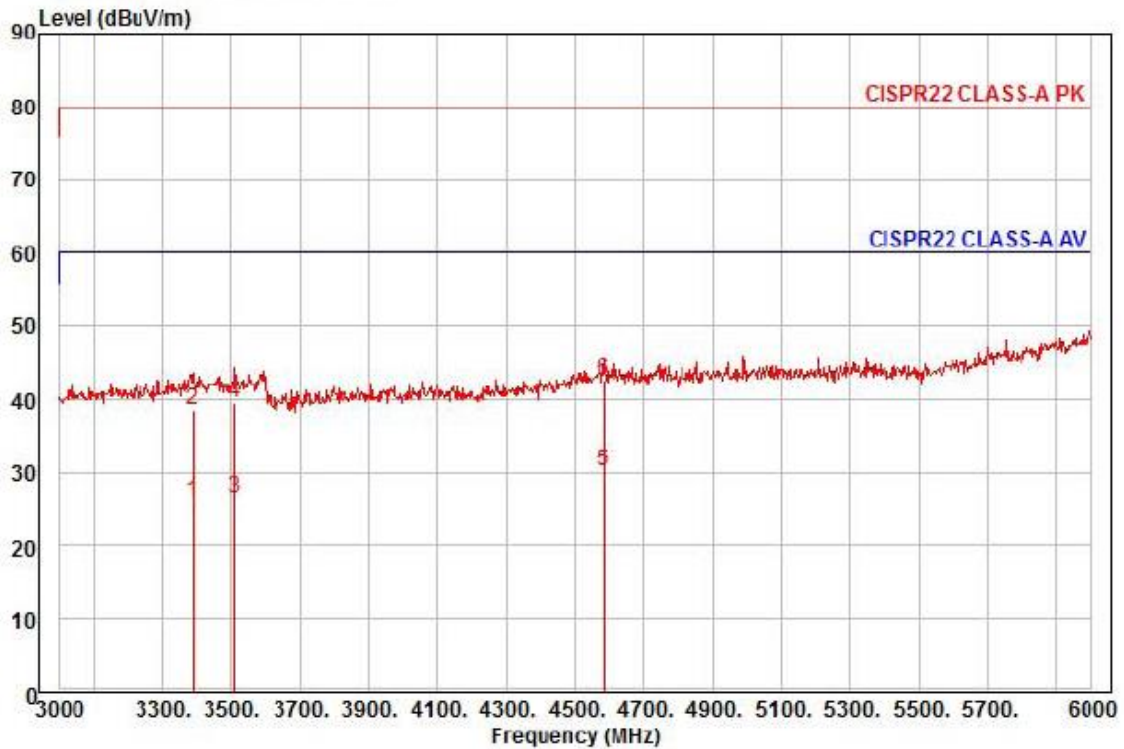

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-6120RP
Mode : AC 24 V
Memo : 3 ~ 6 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3387.00	24.09	30.18	12.42	40.71	104	60.00	-34.02	vertical	Average
2	3387.00	36.58	30.18	12.42	40.71	104	80.00	-41.53	vertical	Peak
3	3510.00	24.42	30.31	12.64	40.88	54	60.00	-33.51	vertical	Average
4	3510.00	37.32	30.31	12.64	40.88	54	80.00	-40.61	vertical	Peak
5 pp	4581.00	23.31	32.87	14.62	40.69	6	60.00	-29.89	vertical	Average
6 pk	4581.00	35.89	32.87	14.62	40.69	6	80.00	-37.31	vertical	Peak

Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

- DC 12 V Mode

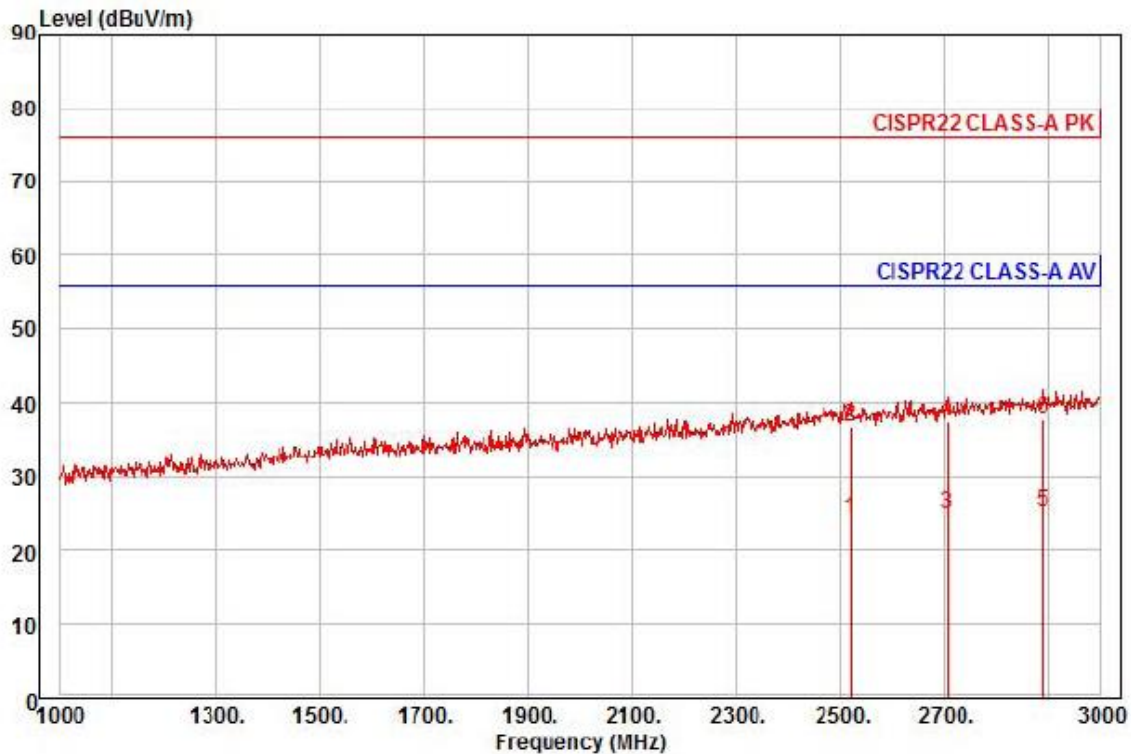

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNV-6120RP
 Mode : DC 12 V
 Memo : 1 ~ 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	2520.00	25.53	27.66	10.57	39.56	124	56.00	-31.80	horizontal	Average
2	2520.00	38.23	27.66	10.57	39.56	124	76.00	-39.10	horizontal	Peak
3	2706.00	25.27	28.48	11.00	39.77	128	56.00	-31.02	horizontal	Average
4	2706.00	37.93	28.48	11.00	39.77	128	76.00	-38.36	horizontal	Peak
5 pp	2892.00	24.54	29.31	11.45	39.99	222	56.00	-30.69	horizontal	Average
6 pk	2892.00	37.08	29.31	11.45	39.99	222	76.00	-38.15	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

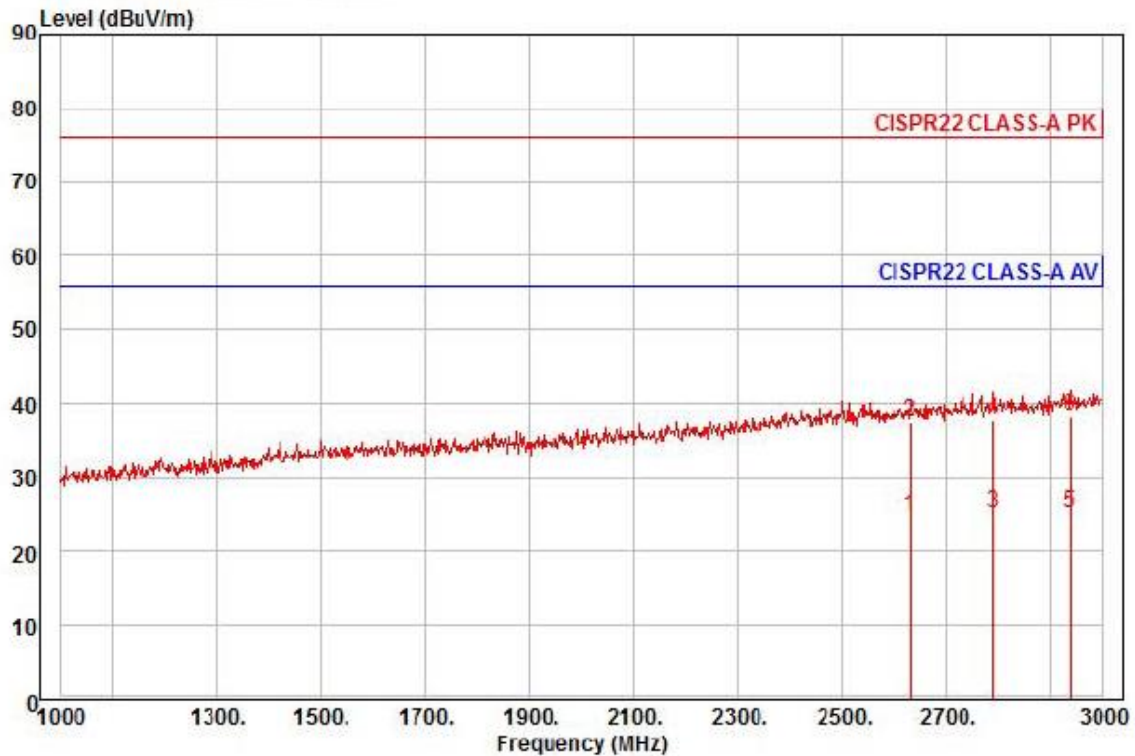

Site : chamber

Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project :

Model : XNV-6120RP

Mode : DC 12 V


Memo : 1 ~ 3 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	2632.00	25.42	28.16	10.82	39.69	5	56.00	-31.29 vertical	Average
2	2632.00	38.17	28.16	10.82	39.69	5	76.00	-38.54 vertical	Peak
3	2790.00	25.09	28.86	11.21	39.87	263	56.00	-30.71 vertical	Average
4	2790.00	37.45	28.86	11.21	39.87	263	76.00	-38.35 vertical	Peak
5 pp	2938.00	24.32	29.51	11.55	40.04	71	56.00	-30.66 vertical	Average
6 pk	2938.00	37.33	29.51	11.55	40.04	71	76.00	-37.65 vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

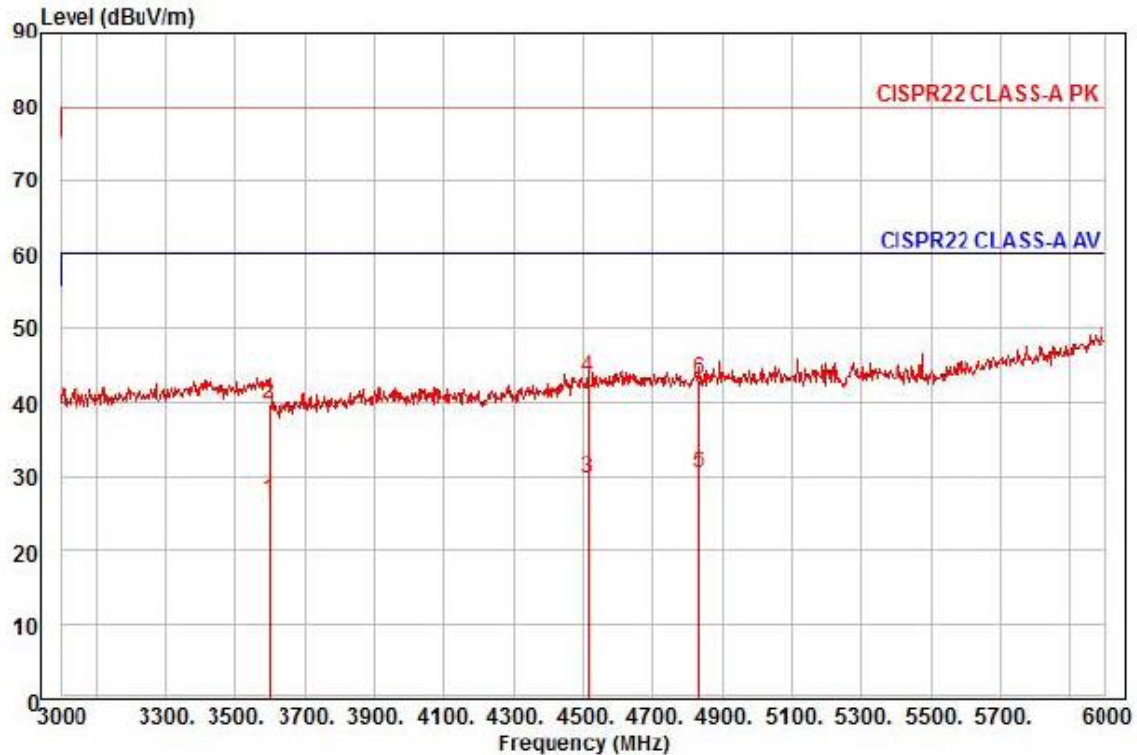


Site : chamber
 Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNV-6120RP
 Mode : DC 12 V
 Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3597.00	24.37	30.50	12.80	40.85	32	60.00	-33.18	horizontal	Average
2	3597.00	37.40	30.50	12.80	40.85	32	80.00	-40.15	horizontal	Peak
3	4515.00	23.13	32.81	14.49	40.76	133	60.00	-30.33	horizontal	Average
4 pk	4515.00	36.75	32.81	14.49	40.76	133	80.00	-36.71	horizontal	Peak
5 pp	4836.00	22.59	33.09	15.14	40.43	49	60.00	-29.61	horizontal	Average
6	4836.00	35.28	33.09	15.14	40.43	49	80.00	-36.92	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

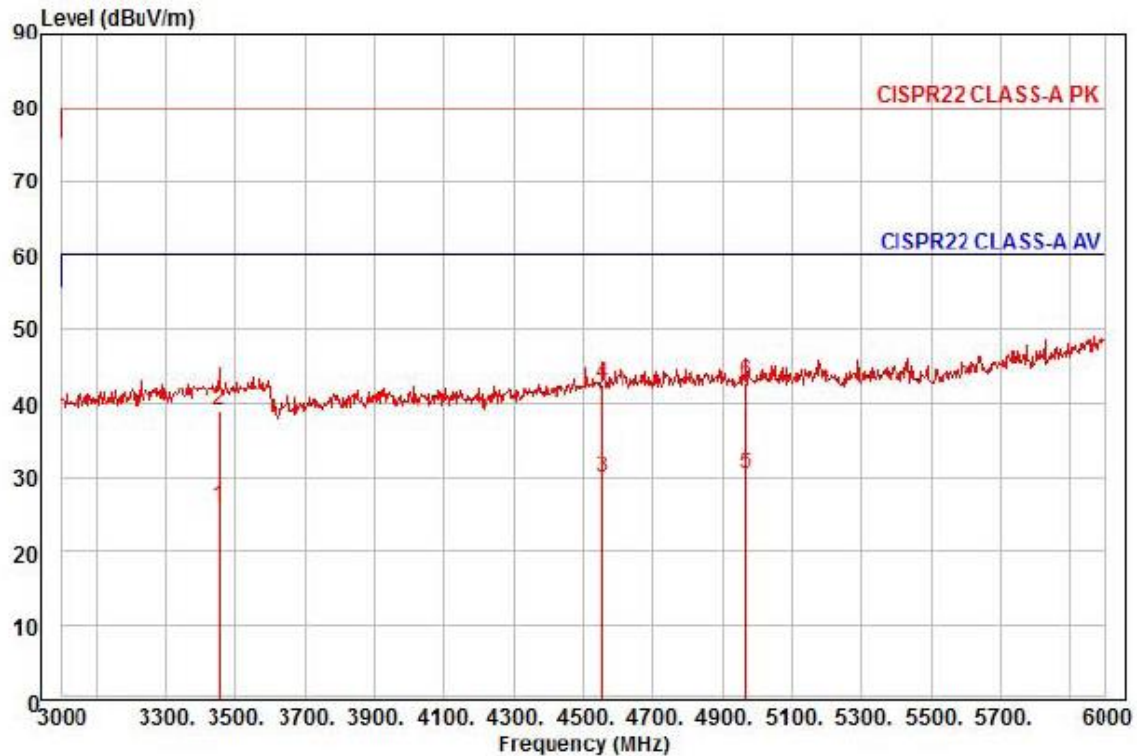

Site : chamber

Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project :

Model : XNV-6120RP

Mode : DC 12 V

Memo : 3 ~ 6 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3456.00	24.06	30.25	12.55	40.81	275	60.00	-33.95	vertical	Average
2	3456.00	36.97	30.25	12.55	40.81	275	80.00	-41.04	vertical	Peak
3	4554.00	23.22	32.85	14.57	40.72	204	60.00	-30.08	vertical	Average
4	4554.00	35.99	32.85	14.57	40.72	204	80.00	-37.31	vertical	Peak
5 pp	4965.00	22.26	33.20	15.28	40.31	247	60.00	-29.57	vertical	Average
6 pk	4965.00	34.70	33.20	15.28	40.31	247	80.00	-37.13	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

- PoE Mode

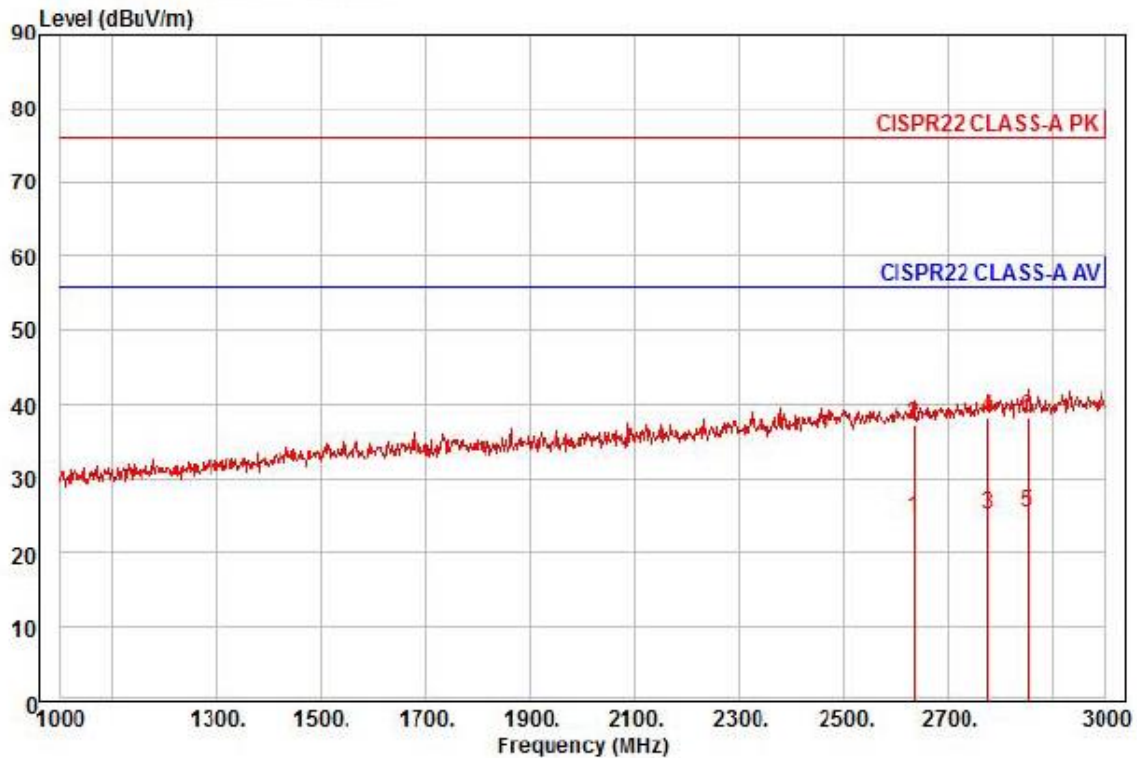

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNV-6120RP
 Mode : P0E
 Memo : 1 ~ 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	2636.00	25.46	28.17	10.83	39.69	133	56.00	-31.23	horizontal	Average
2	2636.00	37.88	28.17	10.83	39.69	133	76.00	-38.81	horizontal	Peak
3	2776.00	25.07	28.80	11.17	39.85	348	56.00	-30.81	horizontal	Average
4 pk	2776.00	38.24	28.80	11.17	39.85	348	76.00	-37.64	horizontal	Peak
5 pp	2852.00	24.84	29.13	11.35	39.94	351	56.00	-30.62	horizontal	Average
6	2852.00	37.66	29.13	11.35	39.94	351	76.00	-37.80	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,

Cable Loss : Cable loss, Preamp Factor : Preamp Factor

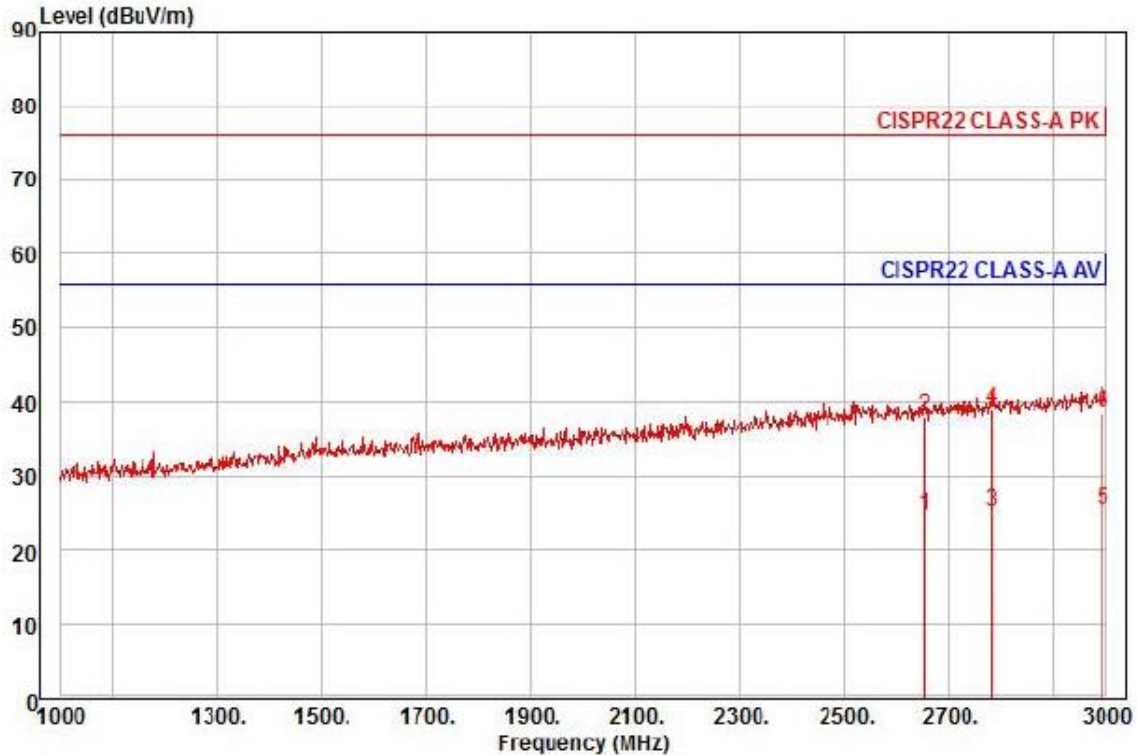

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNV-6120RP
 Mode : POE
 Memo : 1 ~ 3 GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	2654.00	25.39	28.25	10.87	305	56.00	-31.20	vertical	Average
2	2654.00	38.55	28.25	10.87	305	76.00	-38.04	vertical	Peak
3	2784.00	25.09	28.83	11.19	271	56.00	-30.75	vertical	Average
4 pk	2784.00	38.85	28.83	11.19	271	76.00	-36.99	vertical	Peak
5 pp	2996.00	24.20	29.77	11.69	313	56.00	-30.45	vertical	Average
6	2996.00	37.06	29.77	11.69	313	76.00	-37.59	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

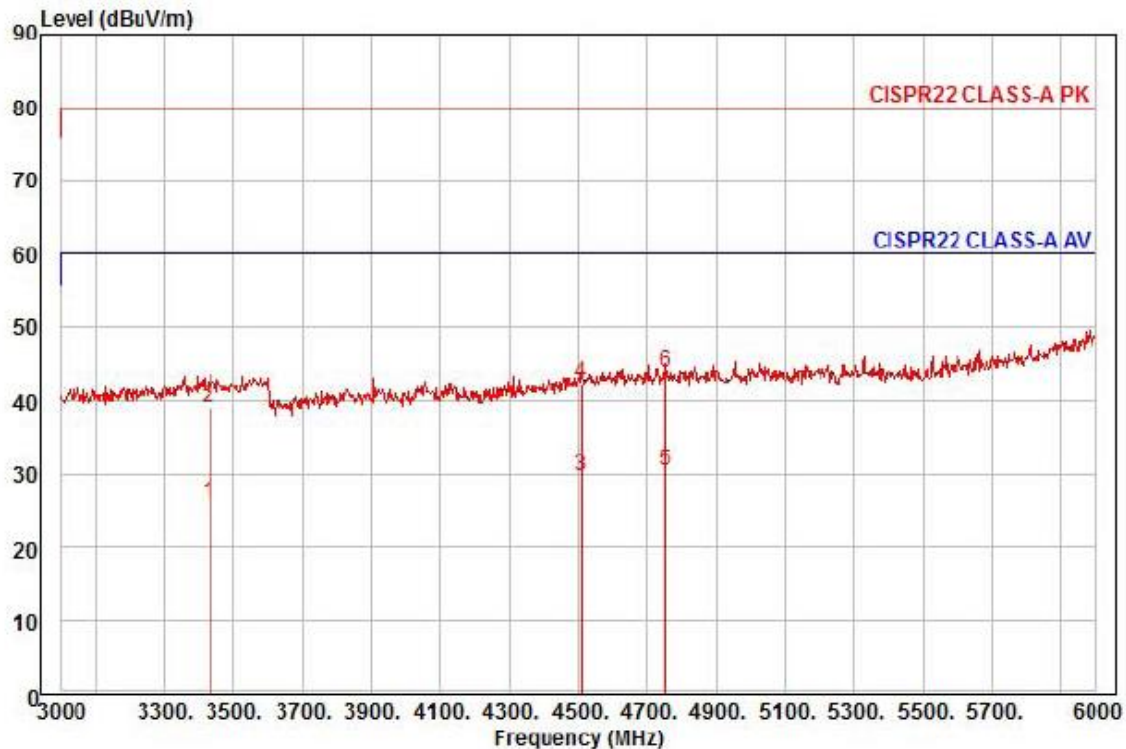


Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-6120RP
Mode : POE
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3429.00	24.09	30.22	12.50	40.77	77	60.00	-33.96	horizontal	Average
2	3429.00	36.95	30.22	12.50	40.77	77	80.00	-41.10	horizontal	Peak
3	4509.00	23.12	32.81	14.48	40.76	147	60.00	-30.35	horizontal	Average
4	4509.00	35.96	32.81	14.48	40.76	147	80.00	-37.51	horizontal	Peak
5 pp	4752.00	23.04	33.02	14.99	40.52	236	60.00	-29.47	horizontal	Average
6 pk	4752.00	36.33	33.02	14.99	40.52	236	80.00	-36.18	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

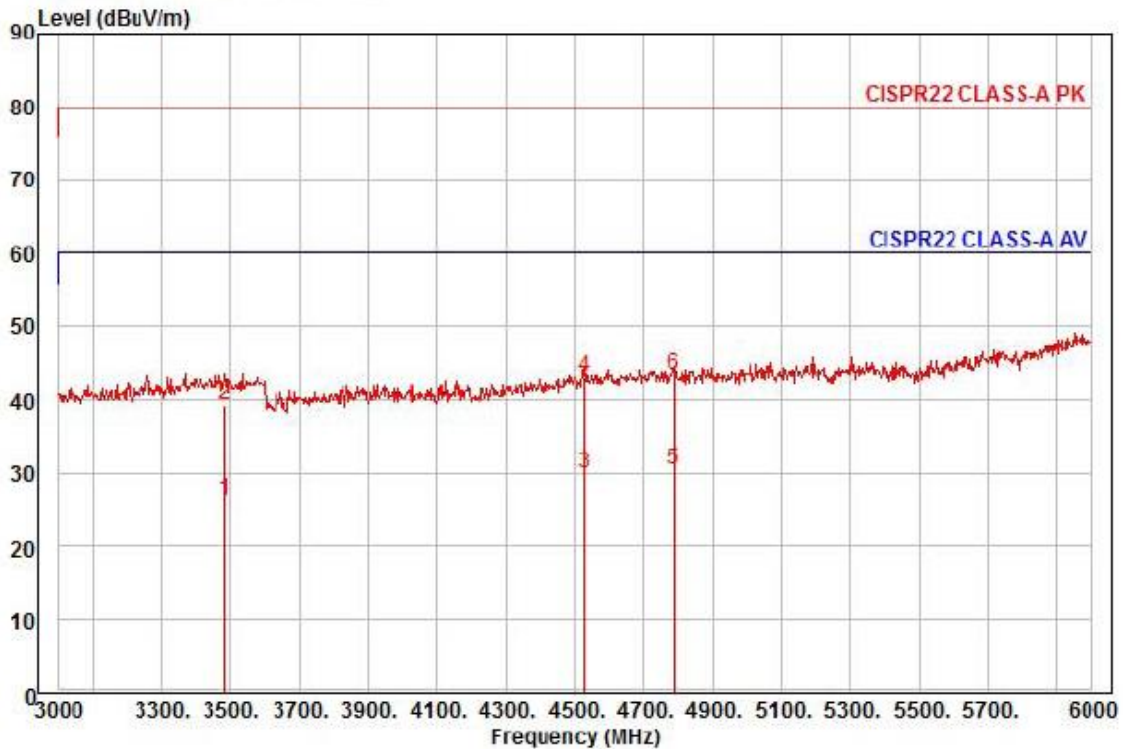

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical
: RBW:1000.000kHz VBN:1000.000kHz SWT:Auto
Project :
Model : XNV-6120RP
Mode : POE
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3483.00	24.12	30.27	12.60	40.85	114	60.00	-33.86	vertical	Average
2	3483.00	37.22	30.27	12.60	40.85	114	80.00	-40.76	vertical	Peak
3	4527.00	23.26	32.82	14.52	40.74	308	60.00	-30.14	vertical	Average
4	4527.00	36.54	32.82	14.52	40.74	308	80.00	-36.86	vertical	Peak
5 pp	4785.00	22.83	33.05	15.06	40.49	122	60.00	-29.55	vertical	Average
6 pk	4785.00	35.82	33.05	15.06	40.49	122	80.00	-36.56	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor



Harmonic Current Emissions and Voltage Fluctuations and Flicker

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	106.171E-3			
2	267.552E-6			PASS
3	38.578E-3	1.677	2.30	PASS
4	262.454E-6			PASS
5	36.686E-3	3.218	1.14	PASS
6	163.479E-6			PASS
7	6.847E-3	0.889	770.00E-3	PASS
8	132.504E-6			PASS
9	4.495E-3			PASS
10	196.384E-6			PASS
11	3.323E-3			PASS
12	126.443E-6			PASS
13	2.561E-3			PASS
14	130.104E-6			PASS
15	1.028E-3			PASS
16	142.591E-6			PASS
17	1.341E-3			PASS
18	131.369E-6			PASS
19	1.247E-3			PASS
20	141.658E-6			PASS
21	297.107E-6			PASS
22	136.080E-6			PASS
23	789.427E-6			PASS
24	133.358E-6			PASS
25	450.232E-6			PASS
26	150.829E-6			PASS
27	463.334E-6			PASS
28	124.182E-6			PASS
29	497.698E-6			PASS
30	132.126E-6			PASS
31	182.915E-6			PASS
32	144.561E-6			PASS
33	344.977E-6			PASS
34	139.020E-6			PASS
35	288.927E-6			PASS
36	156.502E-6			PASS
37	560.113E-6			PASS
38	158.865E-6			PASS
39	414.060E-6			PASS
40	160.836E-6			PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.



Test Data - Harmonics (continued)

Maximum harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	106.333E-3			
2	429.854E-6			PASS
3	38.795E-3	1.124	3.45	PASS
4	407.739E-6			PASS
5	36.870E-3	2.156	1.71	PASS
6	308.097E-6			PASS
7	7.112E-3	0.616	1.15	PASS
8	200.766E-6			PASS
9	4.584E-3			PASS
10	281.438E-6			PASS
11	3.737E-3			PASS
12	210.405E-6			PASS
13	2.671E-3			PASS
14	248.401E-6			PASS
15	1.312E-3			PASS
16	257.980E-6			PASS
17	1.461E-3			PASS
18	298.844E-6			PASS
19	1.412E-3			PASS
20	200.096E-6			PASS
21	783.537E-6			PASS
22	244.144E-6			PASS
23	871.585E-6			PASS
24	239.778E-6			PASS
25	570.310E-6			PASS
26	405.163E-6			PASS
27	739.463E-6			PASS
28	222.094E-6			PASS
29	630.819E-6			PASS
30	217.138E-6			PASS
31	329.091E-6			PASS
32	215.835E-6			PASS
33	727.411E-6			PASS
34	370.759E-6			PASS
35	582.565E-6			PASS
36	238.665E-6			PASS
37	707.628E-6			PASS
38	370.283E-6			PASS
39	508.277E-6			PASS
40	285.208E-6			PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0308-R3
Page (68) of (85)

Test Data - Voltage Fluctuations**Maximum Flicker results**

	EUT values	Limit	Result
Pst	0.028	1.00	PASS
Plt	0.028	0.65	PASS
dc [%]	0.000	3.30	PASS
dmax [%]	0.135	4.00	PASS
Tmax [s]	0.000	0.50	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Voltage Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Telecommunication Emissions





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

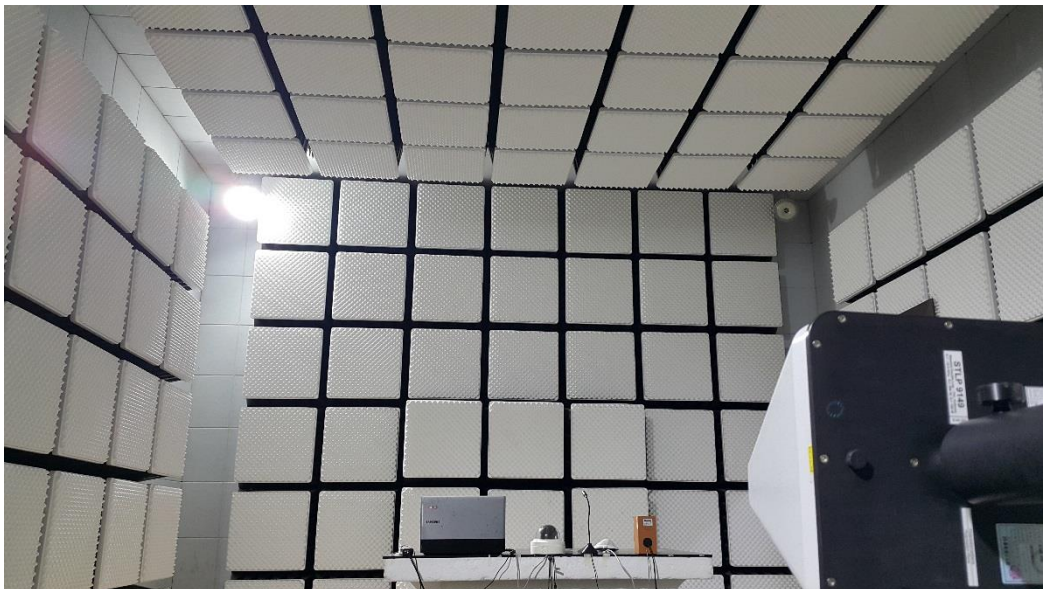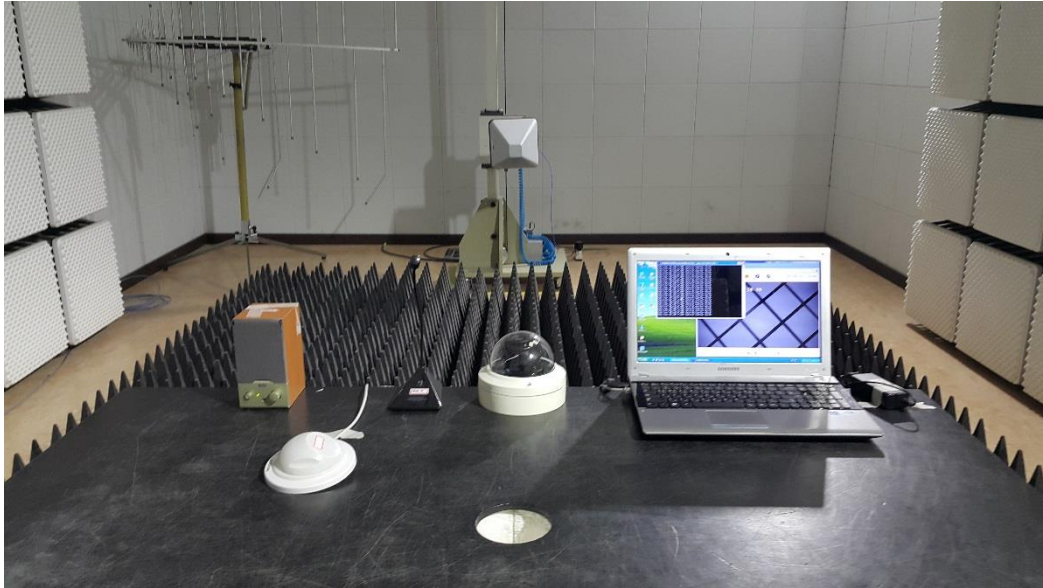

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Harmonic Current Emissions and Voltage Fluctuations and Flicker

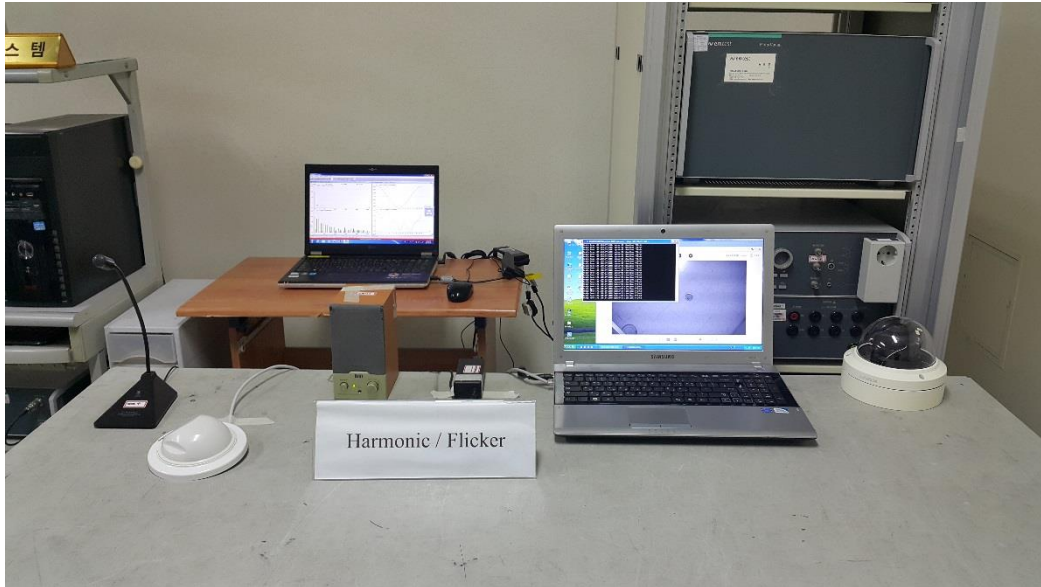


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Electrostatic Discharge





Radiated Electric Field Immunity

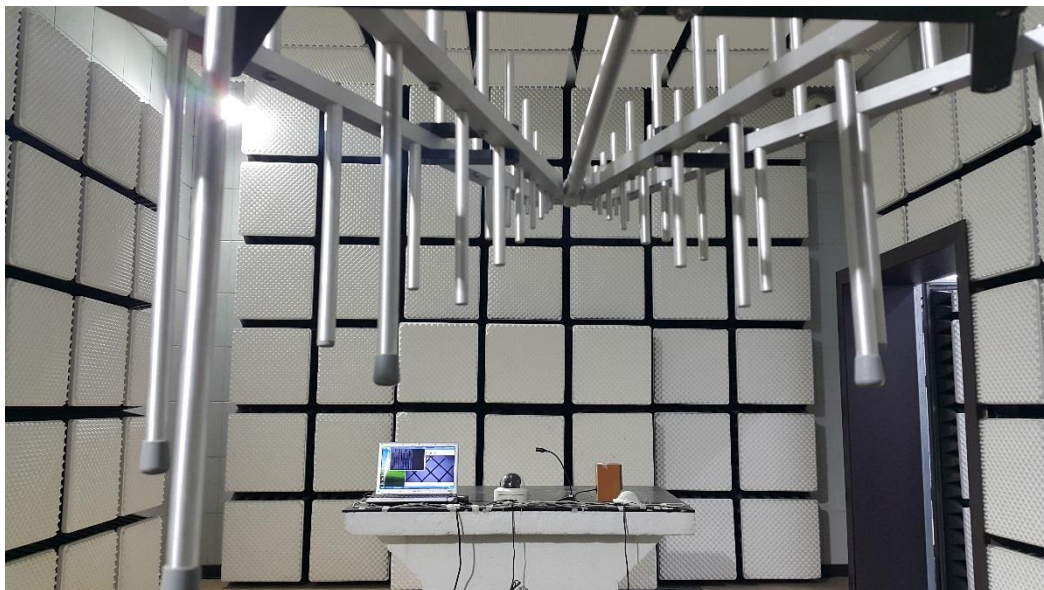


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Electrical Fast Transients/Bursts

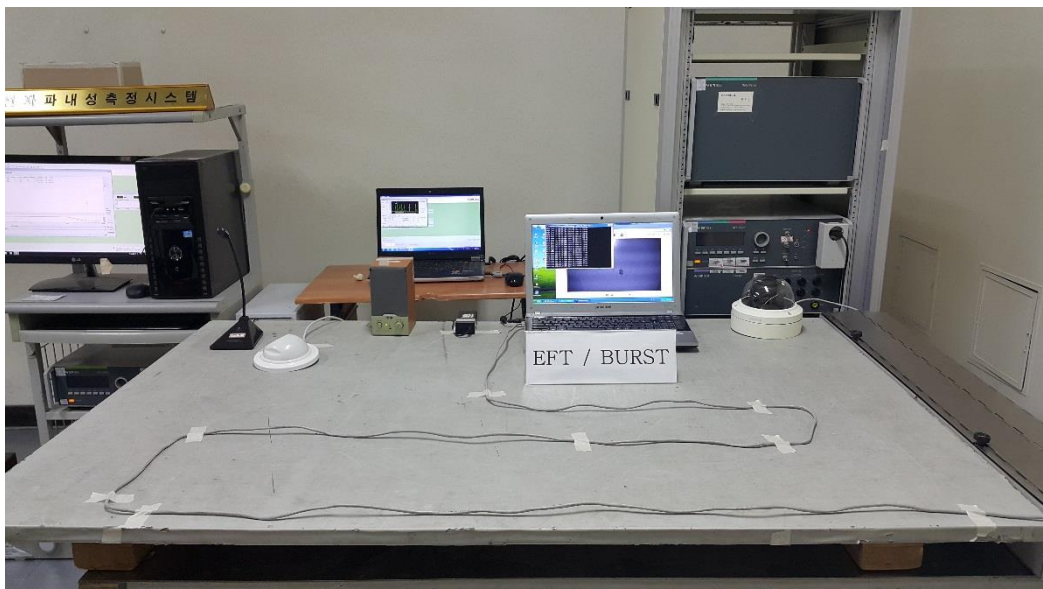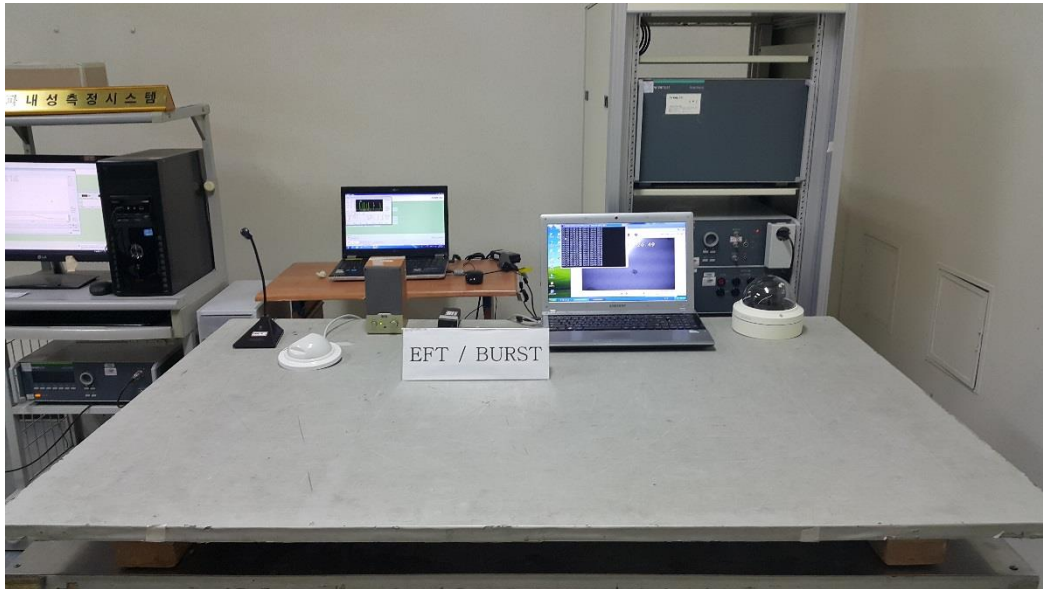



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Surge Transients

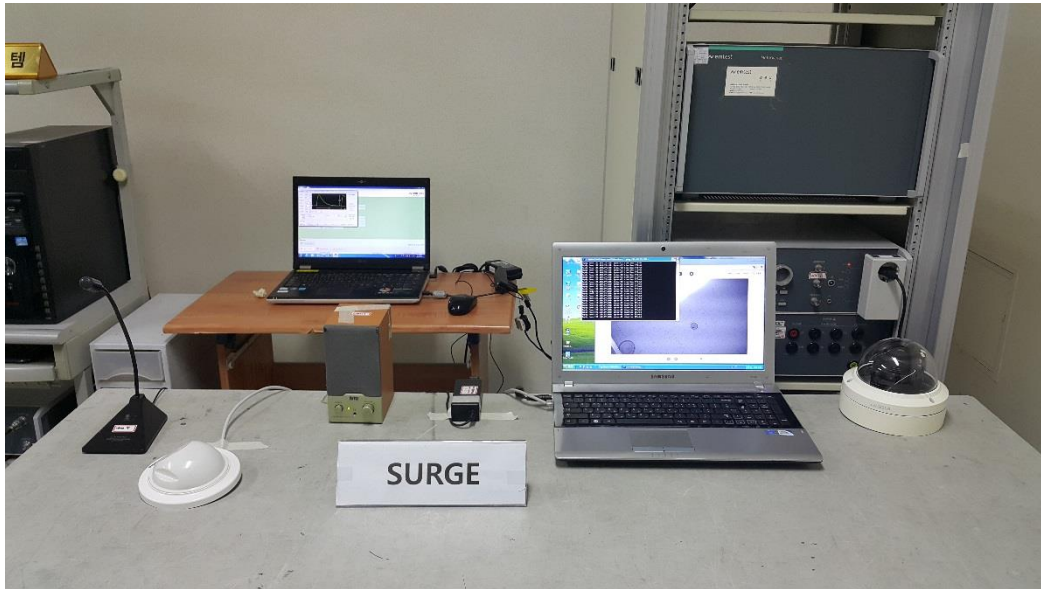


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Disturbance

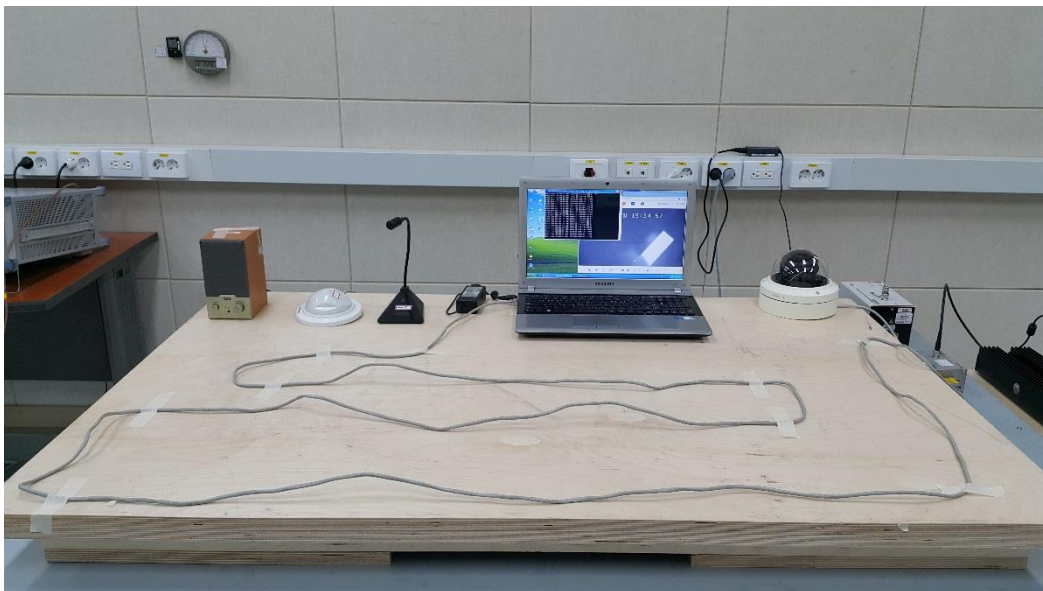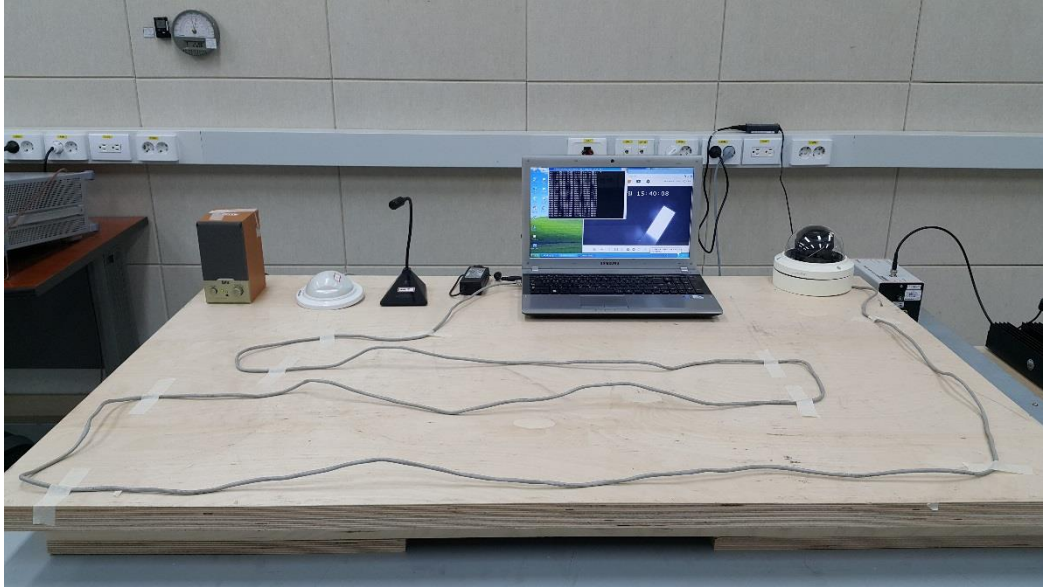

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Voltage Dips and Short Interruptions

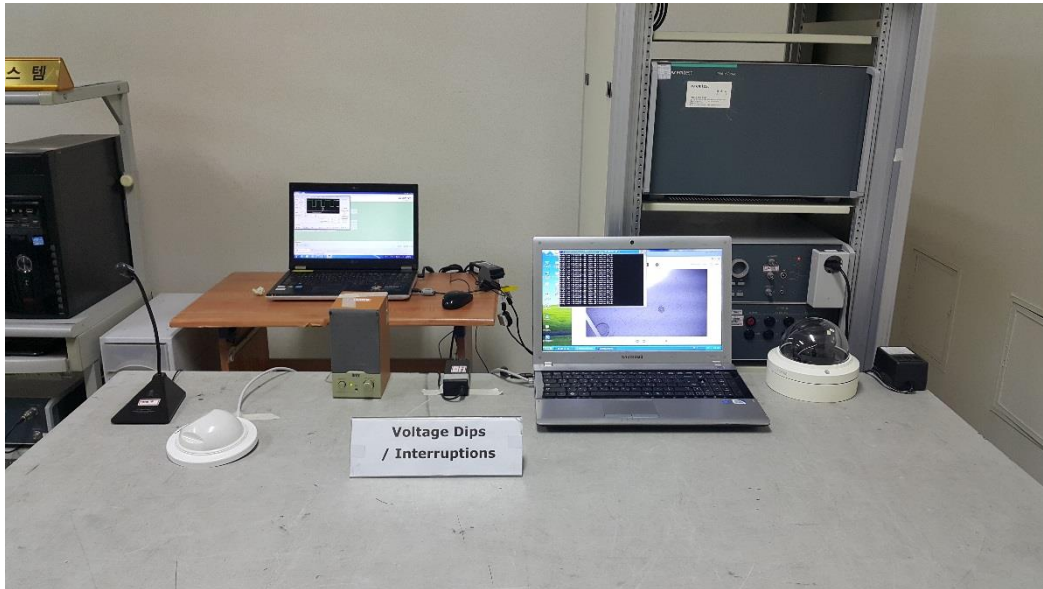

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)




EUT Internal Photographs

(Internal View)




EUT Internal View – Lens Board

(Top)

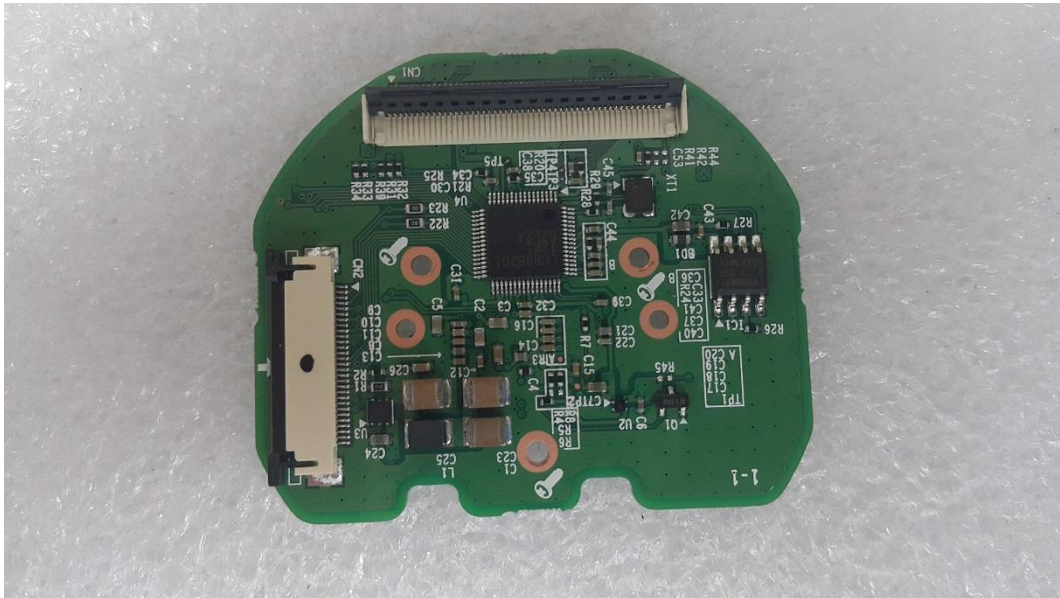


(Bottom)

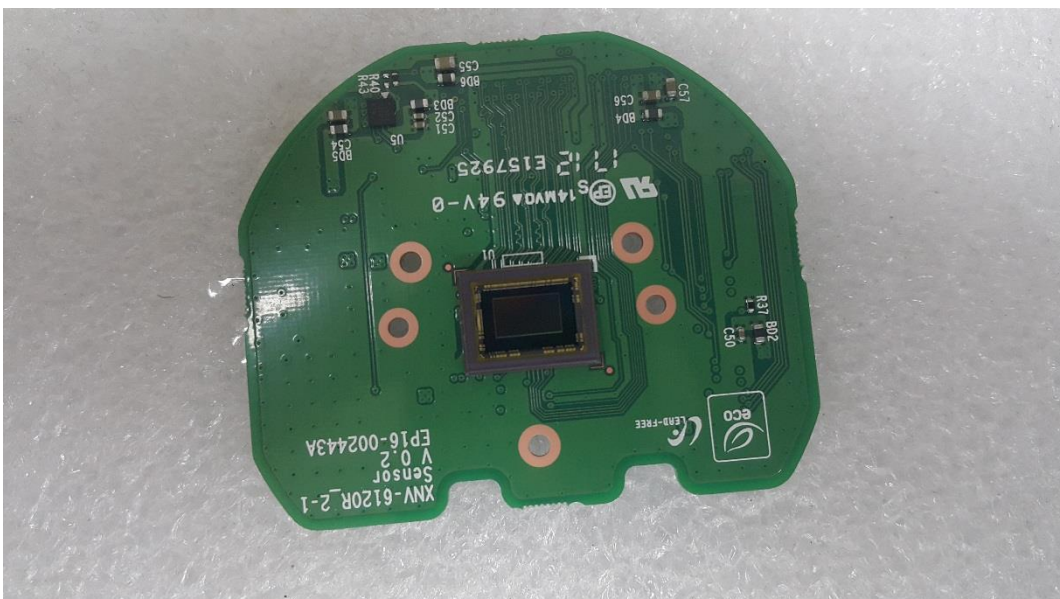


EUT Internal View – Board

(Top)

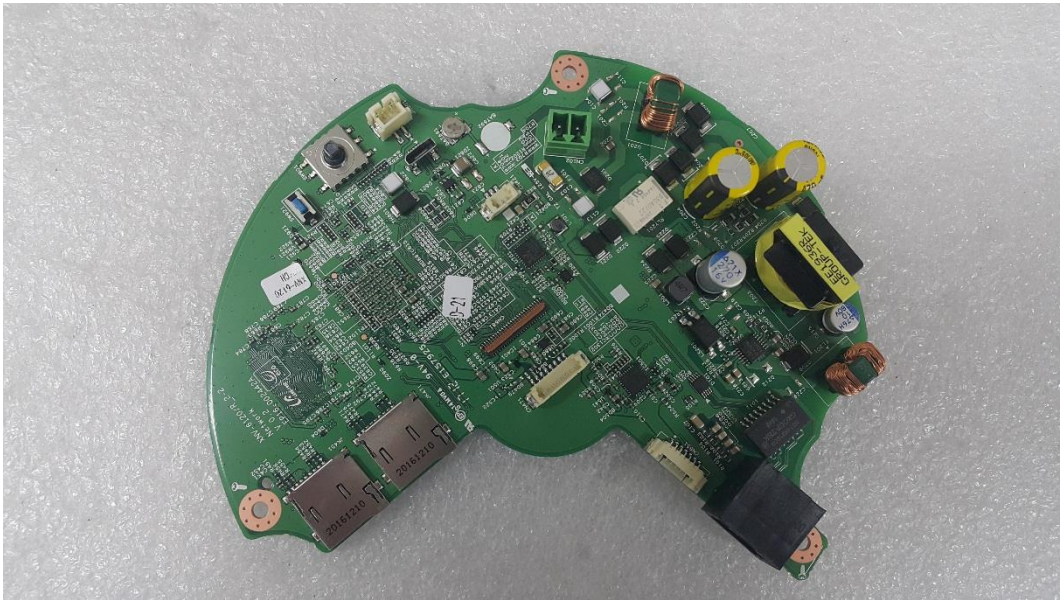


(Bottom)

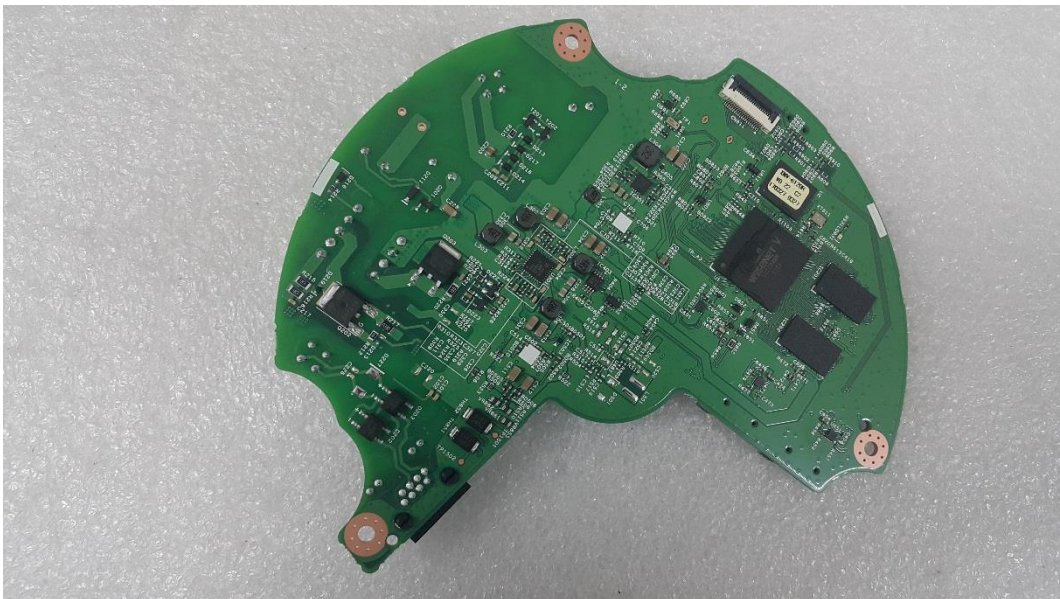

EUT Internal View – LED Board

(Top)

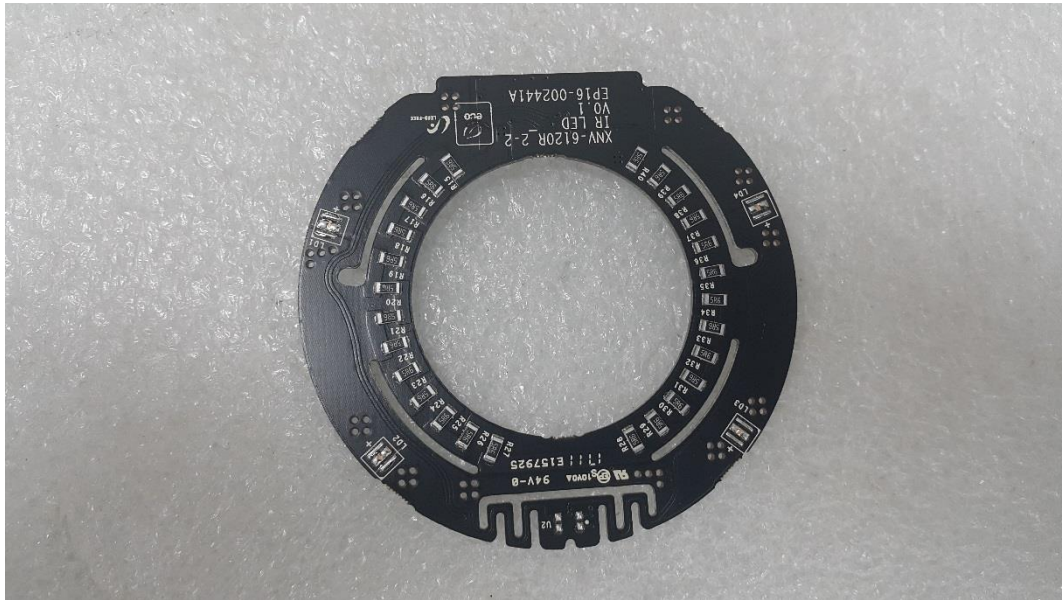

(Bottom)




EUT Internal View – Lens

(Top)



(Bottom)

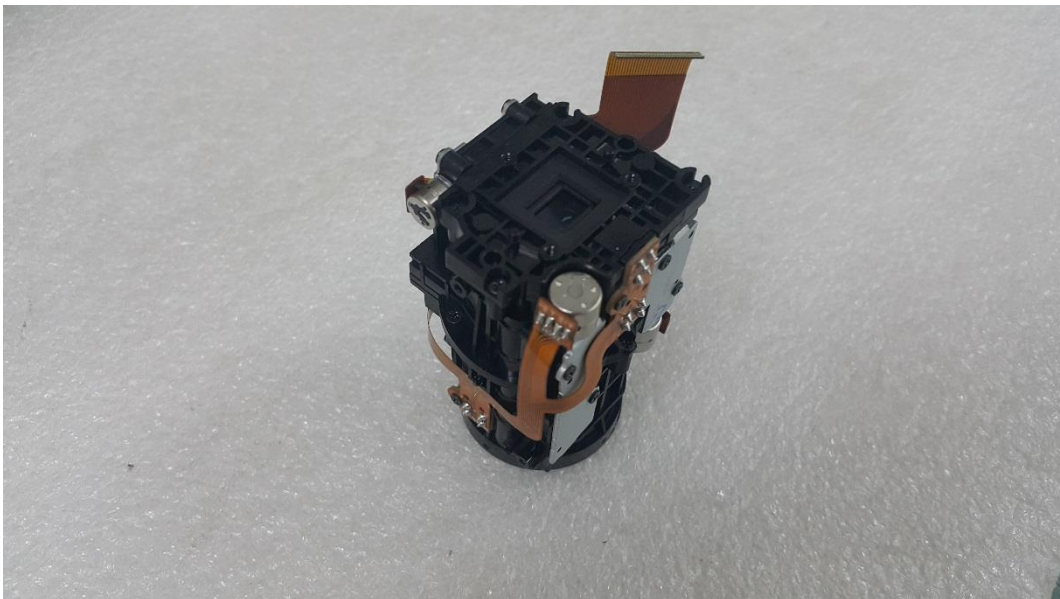

Label and Location

**NETWORK CAMERA**

Model No : XNV-6120R

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

