



EMC TEST REPORT For IC

Test Report No. : KES-E1-17T0312-R2
Date of Issue : Feb. 24, 2023
Product name : NETWORK CAMERA
Model/Type No. : XNV-6120R
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Apr, 14, 2017
Test date : Apr, 29, 2017
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Sung Keun, Park
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

Tested by Young Suk, Song
(Retired person)
Proxy signature : Sung Keun, Park

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0312-R2

Page (2) of (47)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
May. 02, 2017	KES-E1-17T0312	Issued
Nov. 15, 2021	KES-E1-17T0312-R1	- model name, Address, Manufacturer change at customer's request - IC Regulation ICES-003 Issue 7 Update ANSI C63.4-2014 or ANSI C63.4-2014 amended as per ANSI C63.4a-2017
Feb. 24, 2023	KES-E1-17T0312-R2	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0312-R2
Page (3) of (47)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	9
1.8	Configuration	10
1.9	Calibration Details of Equipment Used for Measurement	12
1.10	Test Facility	12
1.11	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions Mains Power Ports.....	14
2.2	Radiated Electric Field Emissions(Below 1 GHz)	15
2.3	Radiated Electric Field Emissions(Above 1 GHz)	16
APPENDIX A – TEST DATA.....		17
Conducted Emissions at Mains Power Ports.....		17
Radiated Electric Field Emissions(Below 1 GHz)		23
Radiated Electric Field Emissions(Above 1 GHz).....		26
Test Setup Photos and Configuration		38
Conducted Voltage Emissions		38
Radiated Electric Field Emissions(Below 1 GHz)		39
Radiated Electric Field Emissions(Above 1 GHz).....		40
EUT External Photographs		41
EUT Internal Photographs		42

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0312-R2
Page (4) of (47)

1.0 General Product Description

Main Specifications of EUT are:

	XNV-6120R
Video	
Imaging Device	1/2.8" 2M CMOS
Total Pixels	1945(H) x 1109(V) 2.16M
Effective Pixels	1945(H) x 1097(V) 2.13M
Scanning System	Progressive
Min. Illumination	Color : 0.03 Lux (1/30sec, F1.6) B/W : 0 Lux (IR LED On)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1280x720, for installation
Lens	
Focal Length (Zoom Ratio)	5.2~62.4mm(Optical 12X)
Max. Aperture Ratio	F1.6 (Wide) ~ F3.0(Tele)
Angular Field of View	W : 54.58(H) X 32.19(V) X 61.40(D) T : 5.30(H) X 3.00(V) X 6.06(D)
Min. Object Distance	2.1m
Focus Control	Auto / Manual / One Push
Lens Type	DC Auto Iris
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan Range	0° ~ +354°
Tilt Range	0° ~ +75°
Rotate Range	0° ~ +355°
Operational	
Viewable Length	70m
Camera Title	Off / On (Displayed up to 85 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR
Wide Dynamic Range	150dB
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Auto / Manual / Off
Motion Detection	Off/ On(8ea, 8point Polygonal zones)
Privacy Masking	Off / On (32ea, Rectangle zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor (included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
Digital PTZ	24X
Preset	300 ea
Rotate Image	Flip : On/Off Mirror : On/Off Hallway : 90° / 270°
Video&Audio Analytics	Tampering, Loitering, Directional Detection, Defocus Detection, Fog Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection, Motion Detection Sound Classification
Alarm I/O	Input 1ea / Output 1ea

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0312-R2

Page (5) of (47)

Alarm Triggers	Alarm Input, Motion Detection, Video & Audio Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output preset
Audio In	Selectable (Mic IN/Line IN), Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out (3.5mm mono jack), Max output level: 1 Vrms
Pixel Counter	support
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High Motion JPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.264/H.265 : Max 60fps at all resolutions Motion JPEG : Max. 30fps at all resolutions
Smart Codec	Manual Mode (area-based : 5EA)
WiseStream II	support
Video Quality Adjustment	H.264/H.265/MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR Motion JPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Format	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 16KHz
Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode
Edge Storage	SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1st slot to 2nd slot) - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programming Interface	ONVIF Profile S/G SUNAPI 2.0(HTTP API) Wisenet Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Non-plugin Webviewer Supported Browser: Google Chrome 56, MS Edge 39, Mozilla Firefox 49(Window 64bit only) , Apple Safari 10 (Mac OS X only) Plug-in Webviewer Supported Browser : MS Explore 11, Apple Safari 10 (Mac OS X only)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0312-R2
Page (6) of (47)

Central Management Software	SmartViewer
Environmental	
Operating Temperature / Humidity	-40°C ~ +55°C (-40°F ~ +131°F) / Less than 90% RH * Start up should be done at above -35°C
Storage Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP67, IP66, NEMA 4X
Vandal Resistance	IK10
Electrical	
Input Voltage / Current	AC24V, DC12V, PoE(IEEE802.3af, Class3)
Power Consumption	24V AC : Max 14W 12V DC : Max 11.5W PoE : Max 12.95W
Mechanical	
Color / Material	Ivory / Aluminum
Dimension (WxHxD)	Ø160 x H128.5mm
Weight	995g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230 Vac ☐ 120 Vac ☒ 24 Vac ☒ 12 Vdc ☒ PoE
Frequency ☐ 50 Hz ☒ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNV-6120R	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
POE Adaptor	POE36U-1AT-R	-	PHIHONG	-
Notebook	RV518	HTK991NC600187E	Samsung Electronics Co., Ltd	-
Notebook Adaptor	ADP-60ZH	AD-6019R	DELTA ELECTRONICS, INC.	-
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI- TECH GROUP.	-
MIC	CMK-303	-	CAMAC	-
Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-



1.6 External I/O Cabling

- AC 24 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	MIC	3.5 mm	1.7	U
	3 Pin	Alarm	3 Pin	1.7	U

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	MIC	3.5 mm	1.7	U
	3 Pin	Alarm	3 Pin	1.7	U



- PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45 (POE)	POE Adaptor	RJ-45 (POE)	3.0	U
	RJ-45	Notebook	RJ-45	3.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	MIC	3.5 mm	1.7	U
	3 Pin	Alarm	3 Pin	1.7	U
Notebook	RJ-45 (DATA)	POE Adaptor	RJ-45 (DATA)	3.0	U

* Unshielded = U, Shielded = S

1.7 EUT Operating Mode(s)


Test mode	operating
AC 24 V Mode	E.U.T Monitoring, Ping test, 1 kHz
DC 12 V Mode	E.U.T Monitoring, Ping test
POE Mode	E.U.T Monitoring, Ping test

E.U.T Test operating S/W		
Name	Version	Manufacture Company
WebViewer	-	Hanwha Vision Co., Ltd


1.8 Configuration

■ AC Main
 □ DC Main

- AC 24 V Mode

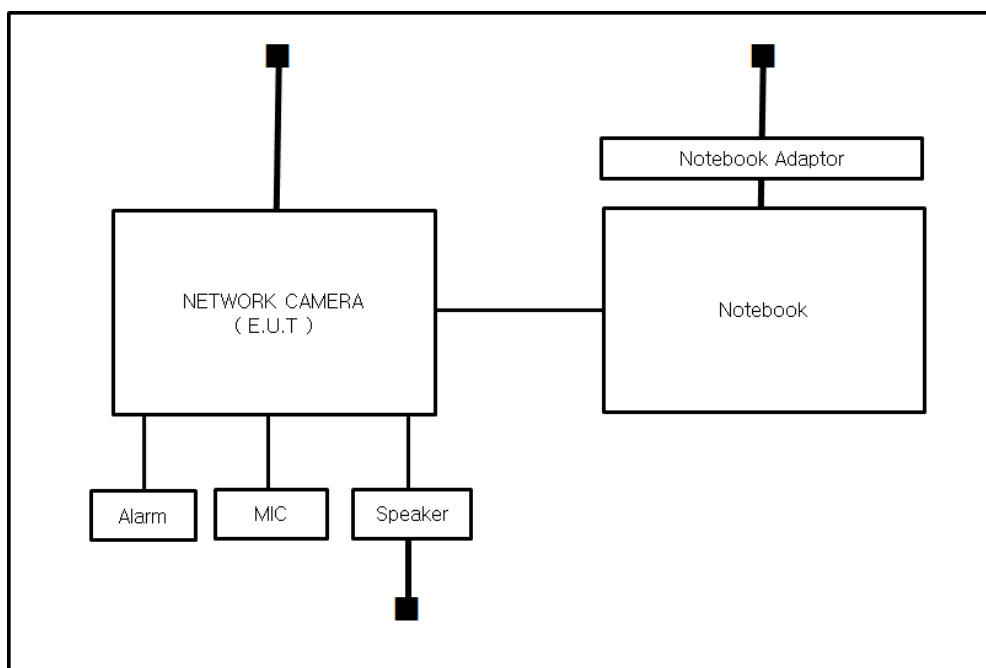


- DC 12 V Mode

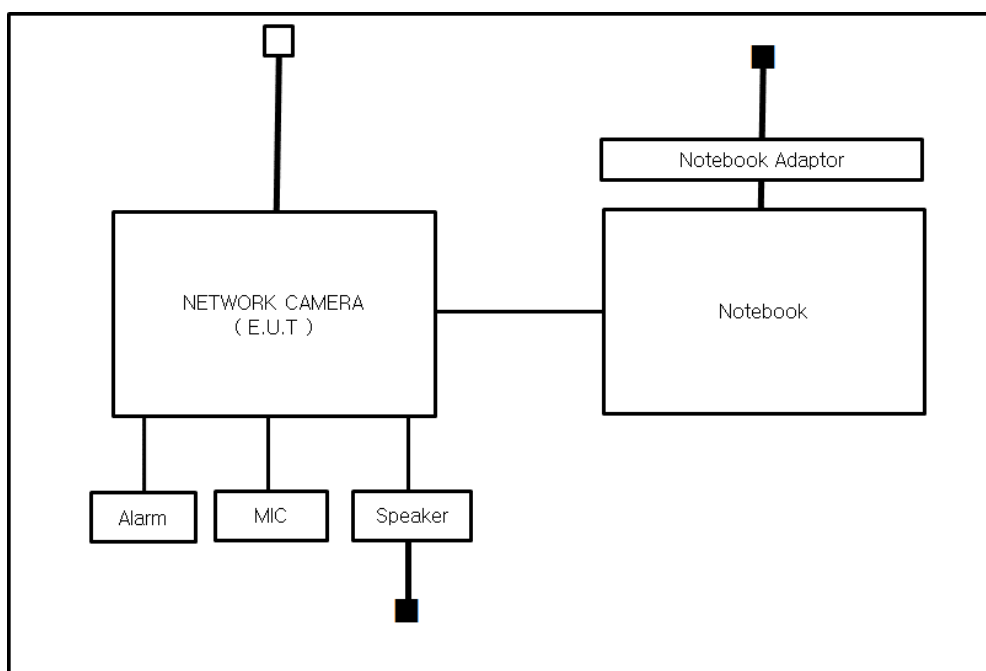

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

- PoE Mode

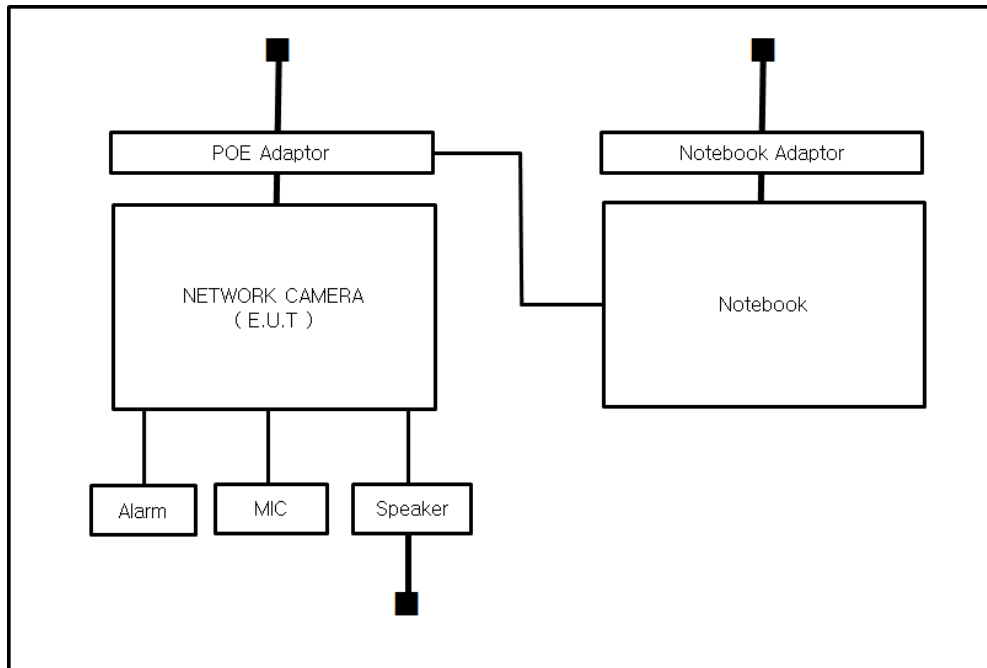

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **IC Regulation ICES-003 Issue 7**

☒ CAN/CSA-CISPR 32:17

☒ Class A

☐ Class B

☐ ANSI C63.4a-2017

☐ Class A

☐ Class B

2.1 Conducted Emissions Mains Power Ports

Test Date

Apr. 29, 2017

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 27, 2018
☒	LISN	ENV216	R & S	101787	01, 11, 2018
☒	LISN	ESH2-Z5	R & S	100450	04, 27, 2018
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 13, 2017

Test Conditions

Temperature: 21,2 °C

Relative Humidity: 36,3 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Apr. 29, 2017

Test Location

☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	-	-	-	-
☒	EMI TEST RECEIVER	ESVS10	Rohde & Schwarz	826008/014	04, 18, 2018
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	714	11, 28, 2018
☐	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	04, 14, 2018

Test Conditions

Temperature: 23,0 °C
Relative Humidity: 29,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Apr. 29, 2017

Test Location

Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	e3	AUDIX	8.083b	-
☒	EMI TEST RECEIVER	ESU26	R & S	100552	04, 19, 2018
☒	BROADBAND PREAMPLIFIER	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 14, 2017
☒	LOG-PERIODIC ANTENNA	STLP 9149	SCHWARZBECK	9149-255	05, 17, 2018

Test Conditions

Temperature: 19,2 °C

Relative Humidity: 38,2 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

- AC 24 V Mode

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	XNV-6120RN
Mode	AC 24 V_H
Operator Name:	KES

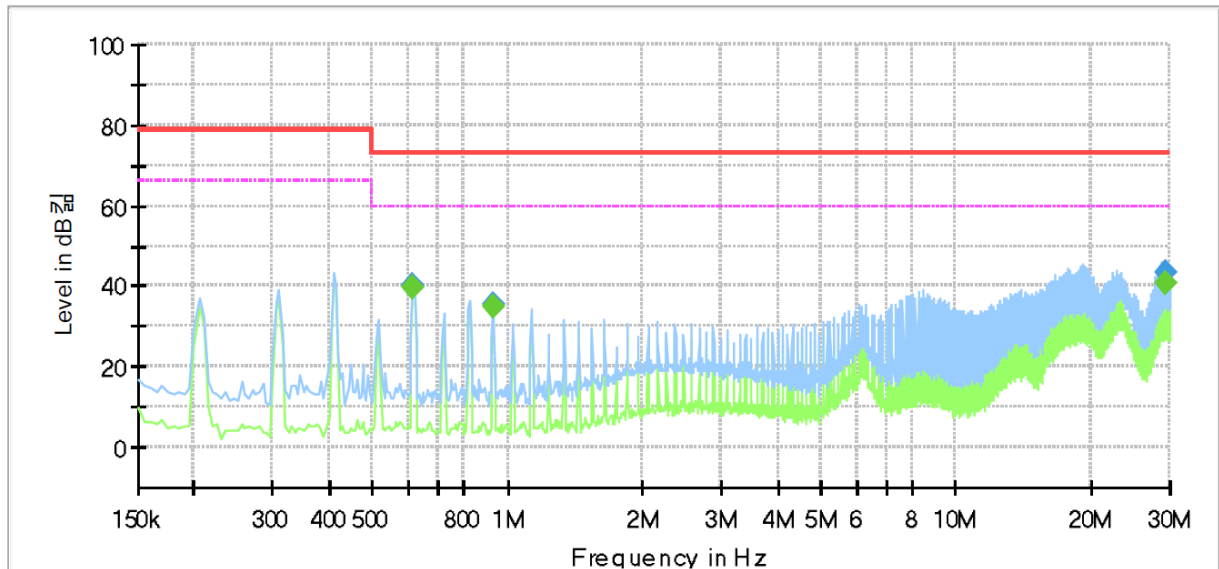

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.615000	---	39.63	60.00	20.37	1000.0	9.000	L1	20.4
0.615000	40.12	---	73.00	32.88	1000.0	9.000	L1	20.4
0.925000	---	34.88	60.00	25.12	1000.0	9.000	L1	20.1
0.925000	35.67	---	73.00	37.33	1000.0	9.000	L1	20.1
29.420000	---	40.84	60.00	19.16	1000.0	9.000	L1	20.5
29.420000	43.51	---	73.00	29.49	1000.0	9.000	L1	20.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	XNV-6120RN
Mode	AC 24 V_N
Operator Name:	KES

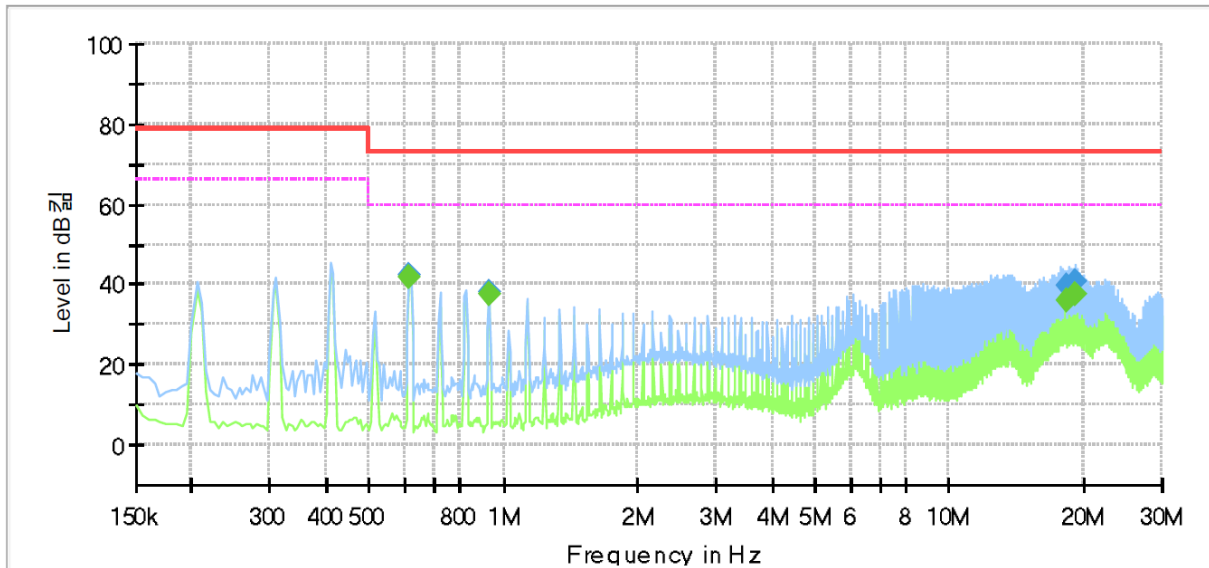

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.615000	---	41.96	60.00	18.04	1000.0	9.000	N	20.4
0.615000	42.48	---	73.00	30.52	1000.0	9.000	N	20.4
0.925000	---	37.49	60.00	22.51	1000.0	9.000	N	20.1
0.925000	38.19	---	73.00	34.81	1000.0	9.000	N	20.1
18.415000	---	35.87	60.00	24.13	1000.0	9.000	N	20.3
18.415000	39.51	---	73.00	33.49	1000.0	9.000	N	20.3
19.240000	---	37.46	60.00	22.54	1000.0	9.000	N	20.4
19.240000	40.76	---	73.00	32.24	1000.0	9.000	N	20.4

◆ Calculation

QuasiPeak [dBuV] / CAverage [dBuV] = Reading Value [dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

- DC 12 V Mode

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	XNV-6120R
Mode	DC 12 V_H
Operator Name:	KES

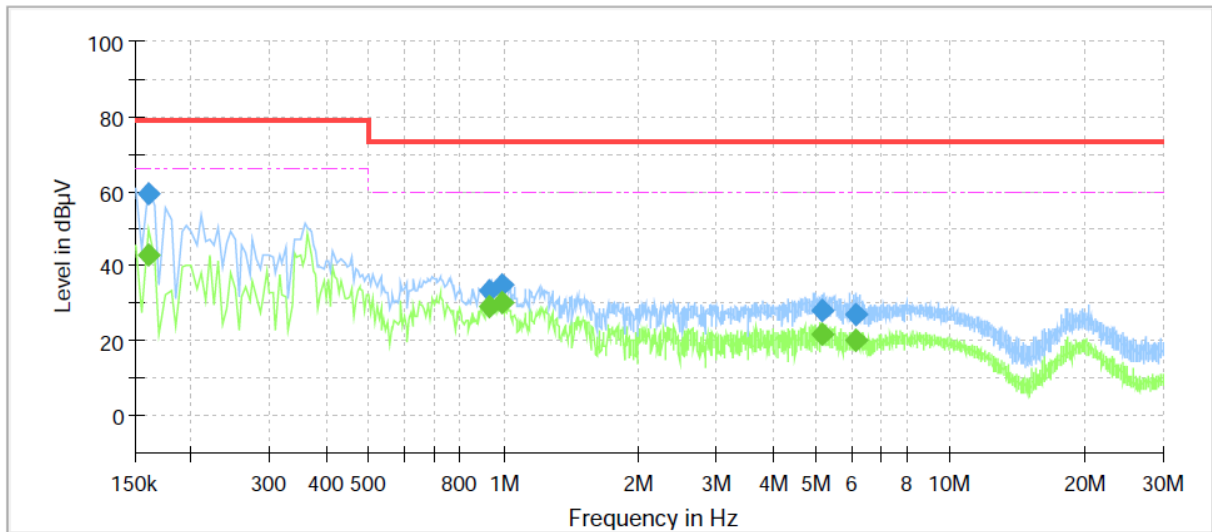

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	42.92	66.00	23.08	1000.0	9.000	L1	20.9
0.160000	59.15	---	79.00	19.85	1000.0	9.000	L1	20.9
0.925000	---	28.98	60.00	31.02	1000.0	9.000	L1	20.1
0.925000	33.14	---	73.00	39.86	1000.0	9.000	L1	20.1
0.990000	---	30.33	60.00	29.67	1000.0	9.000	L1	20.1
0.990000	35.03	---	73.00	37.97	1000.0	9.000	L1	20.1
5.145000	---	21.84	60.00	38.16	1000.0	9.000	L1	19.7
5.145000	28.32	---	73.00	44.68	1000.0	9.000	L1	19.7
6.160000	---	20.40	60.00	39.60	1000.0	9.000	L1	19.8
6.160000	27.28	---	73.00	45.72	1000.0	9.000	L1	19.8

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	XNV-6120R
Mode	DC 12 V_N
Operator Name:	KES

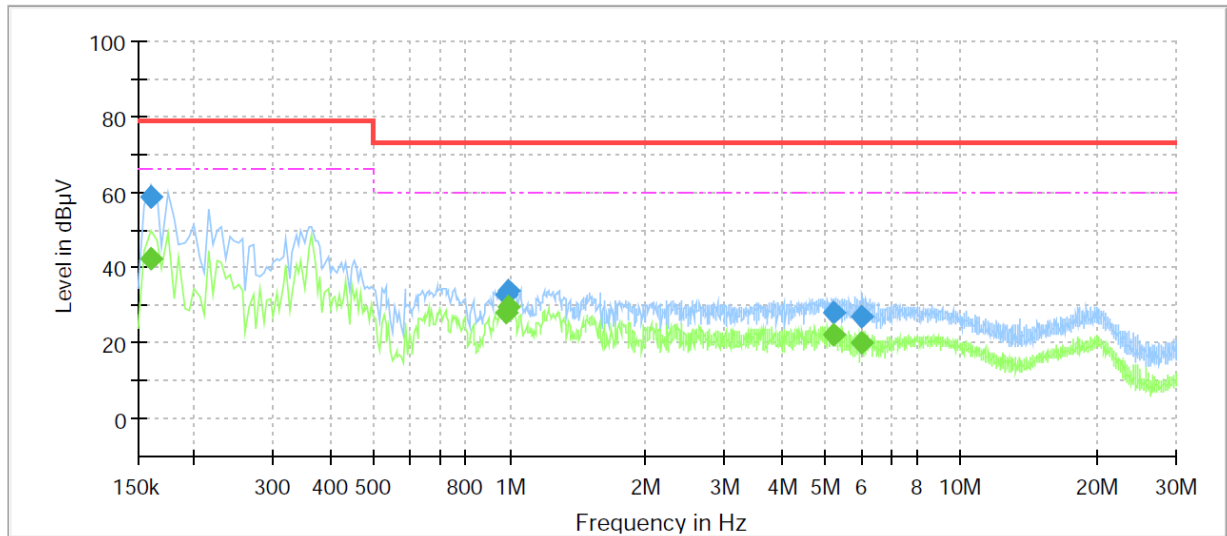

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	42.34	66.00	23.66	1000.0	9.000	N	20.9
0.160000	58.64	---	79.00	20.36	1000.0	9.000	N	20.9
0.985000	---	28.24	60.00	31.76	1000.0	9.000	N	20.1
0.985000	32.82	---	73.00	40.18	1000.0	9.000	N	20.1
0.990000	---	29.41	60.00	30.59	1000.0	9.000	N	20.1
0.990000	34.11	---	73.00	38.89	1000.0	9.000	N	20.1
5.220000	---	22.23	60.00	37.77	1000.0	9.000	N	19.7
5.220000	28.20	---	73.00	44.80	1000.0	9.000	N	19.7
6.050000	---	19.97	60.00	40.03	1000.0	9.000	N	19.8
6.050000	26.98	---	73.00	46.02	1000.0	9.000	N	19.8

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

- PoE Mode

[HOT]

Common Information

Test Description: Conducted Emission
 Model No.: XNV-6120RN
 Phase: L1
 Mode: PoE
 Operator Name: KES

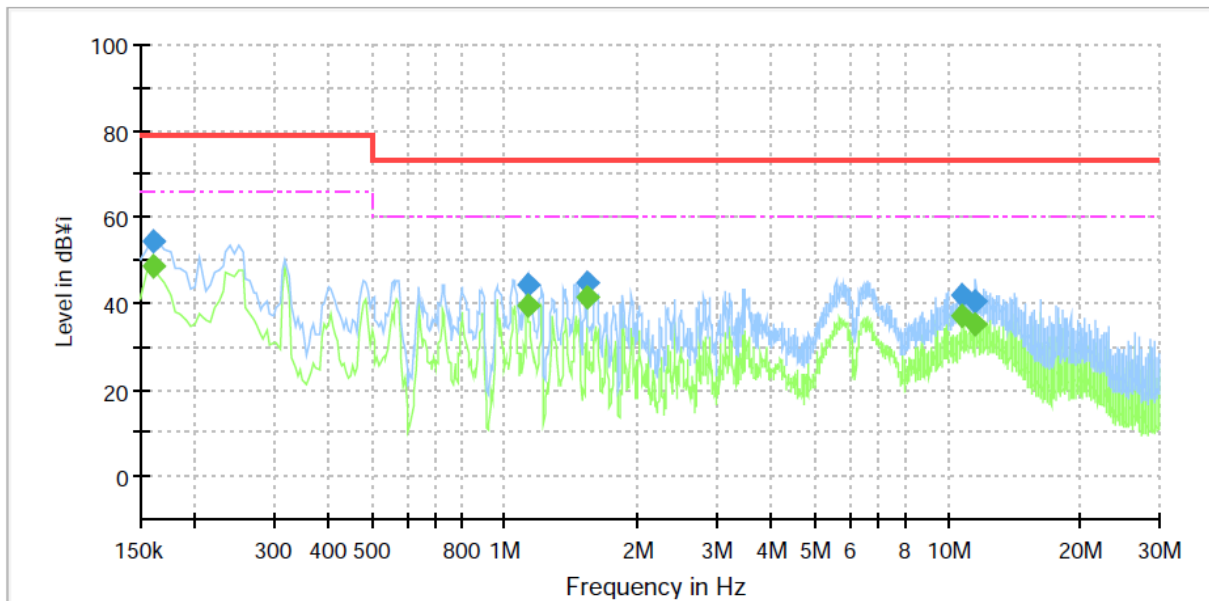

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	48.81	66.00	17.19	1000.0	9.000	L1	20.9
0.160000	54.25	---	79.00	24.75	1000.0	9.000	L1	20.9
1.125000	---	39.24	60.00	20.76	1000.0	9.000	L1	20.1
1.125000	44.05	---	73.00	28.95	1000.0	9.000	L1	20.1
1.530000	---	41.54	60.00	18.46	1000.0	9.000	L1	19.9
1.530000	44.71	---	73.00	28.29	1000.0	9.000	L1	19.9
10.795000	---	37.15	60.00	22.85	1000.0	9.000	L1	20.0
10.795000	42.10	---	73.00	30.90	1000.0	9.000	L1	20.0
11.585000	---	35.34	60.00	24.66	1000.0	9.000	L1	20.0
11.585000	40.38	---	73.00	32.62	1000.0	9.000	L1	20.0

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	XNV-6120RN
Phase:	N
Mode:	PoE
Operator Name:	KES

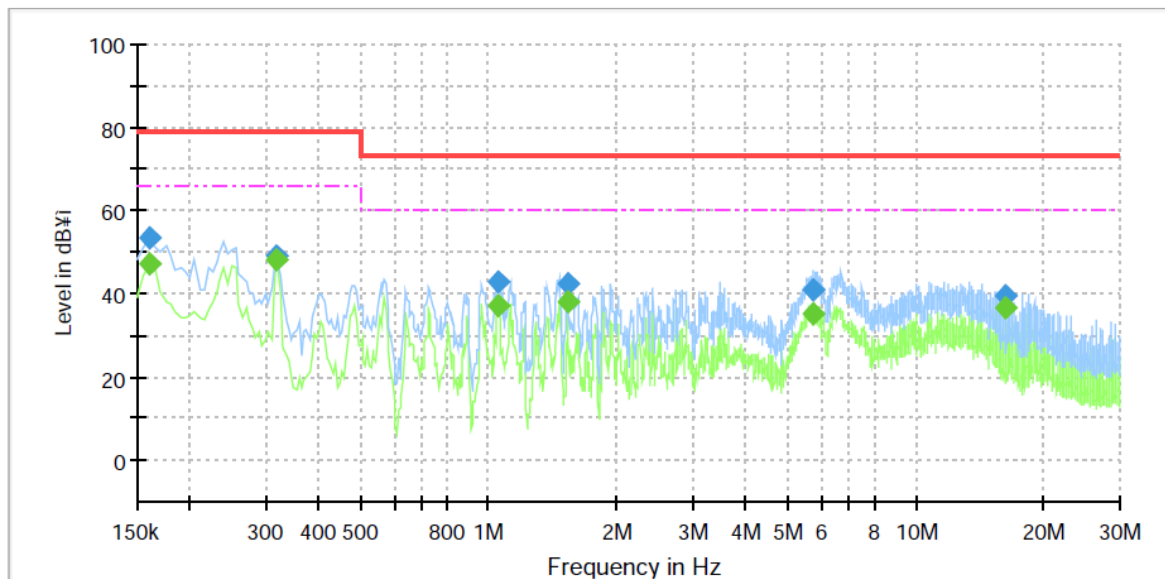

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	47.37	66.00	18.63	1000.0	9.000	N	20.9
0.160000	53.20	---	79.00	25.80	1000.0	9.000	N	20.9
0.320000	---	47.91	66.00	18.09	1000.0	9.000	N	20.7
0.320000	49.04	---	79.00	29.96	1000.0	9.000	N	20.7
1.050000	---	37.04	60.00	22.96	1000.0	9.000	N	20.1
1.050000	42.88	---	73.00	30.12	1000.0	9.000	N	20.1
1.535000	---	37.93	60.00	22.07	1000.0	9.000	N	19.9
1.535000	42.27	---	73.00	30.73	1000.0	9.000	N	19.9
5.765000	---	35.25	60.00	24.75	1000.0	9.000	N	19.8
5.765000	40.81	---	73.00	32.19	1000.0	9.000	N	19.8
16.230000	---	36.72	60.00	23.28	1000.0	9.000	N	20.2
16.230000	39.52	---	73.00	33.48	1000.0	9.000	N	20.2

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin [dB]
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	
74.41	19.80	V	1.00	7.85	2.00	29.65	40.00	10.35
250.35	17.40	H	3.99	12.50	3.70	33.60	47.00	13.40
311.99	16.20	V	1.02	13.68	4.14	34.02	47.00	12.98
350.36	17.50	H	4.00	14.52	4.25	36.27	47.00	10.73
400.01	11.70	V	3.98	15.61	4.60	31.91	47.00	15.09
460.83	12.40	H	1.01	16.67	5.13	34.20	47.00	12.80

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0312-R2
Page (24) of (47)

- DC 12 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin [dB]
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	
58.25	15.40	V	1.00	12.07	1.76	29.23	40.00	10.77
250.19	15.60	H	3.98	12.49	3.69	31.78	47.00	15.22
299.64	15.80	H	3.99	13.41	4.10	33.31	47.00	13.69
333.35	16.20	V	1.02	14.15	4.20	34.55	47.00	12.45
375.66	16.40	H	4.00	15.08	4.43	35.91	47.00	11.09
459.58	14.30	V	1.01	16.65	5.13	36.08	47.00	10.92

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dBμV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0312-R2
Page (25) of (47)

- PoE Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin [dB]
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	
35.82	16.90	H	3.99	10.26	1.45	28.61	40.00	11.39
38.33	17.80	V	1.01	11.26	1.51	30.57	40.00	9.43
72.37	21.50	V	1.00	8.27	1.97	31.74	40.00	8.26
250.35	17.40	H	3.98	12.50	3.70	33.60	47.00	13.40
299.68	18.20	H	4.00	13.41	4.10	35.71	47.00	11.29
333.19	17.30	V	1.02	14.15	4.20	35.65	47.00	11.35

* H : Horizontal, V : Vertical

◆ Calculation


Corrected Amplitude [dBμV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

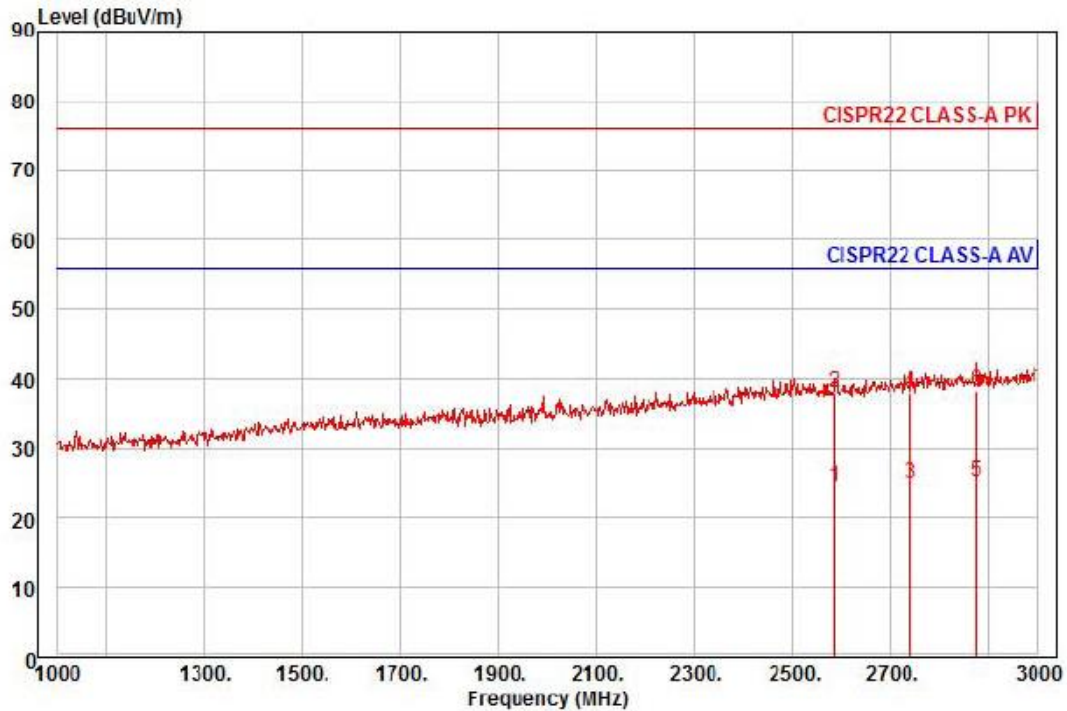


Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-6120RN
Mode : AC 24 V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	2586.00	25.58	27.95	10.71	39.63	302	56.00	-31.39	horizontal	Average
2	2586.00	38.88	27.95	10.71	39.63	302	76.00	-38.09	horizontal	Peak
3	2742.00	25.20	28.64	11.09	39.81	266	56.00	-30.88	horizontal	Average
4	2742.00	38.05	28.64	11.09	39.81	266	76.00	-38.03	horizontal	Peak
5 pp	2878.00	24.66	29.25	11.41	39.97	193	56.00	-30.65	horizontal	Average
6 pk	2878.00	37.57	29.25	11.41	39.97	193	76.00	-37.74	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

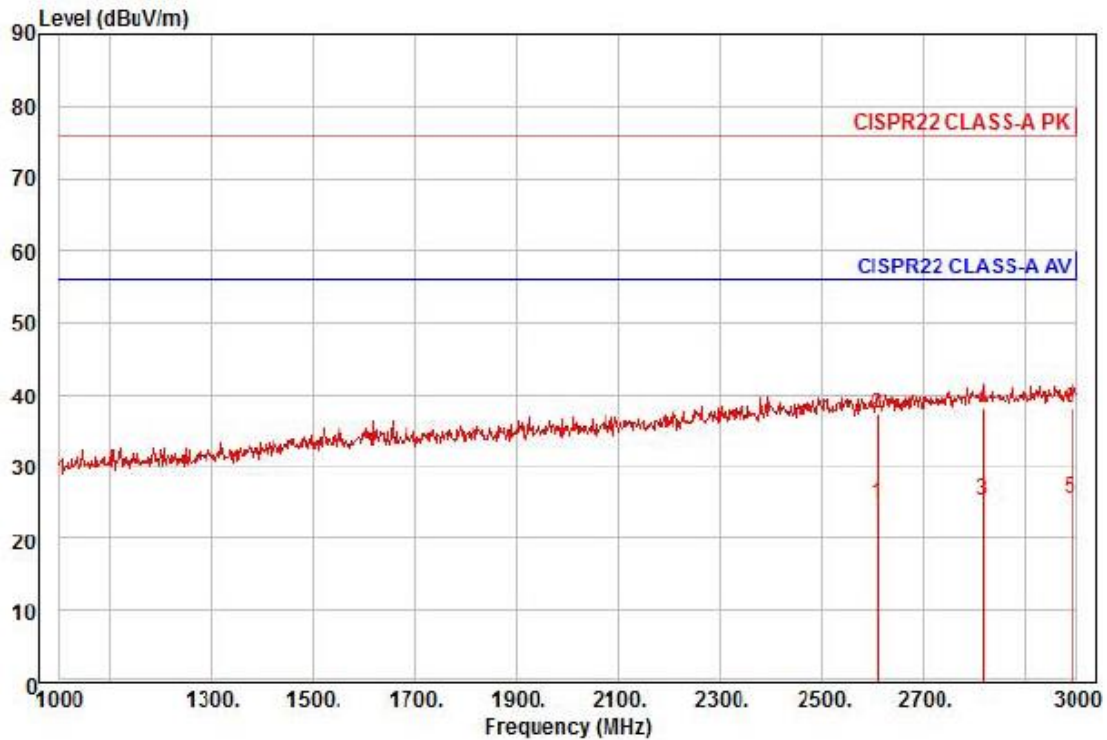


Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-6120RN
Mode : AC 24 V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	2612.00	25.47	28.07	10.77	39.66	27	56.00	-31.35	vertical	Average
2	2612.00	38.02	28.07	10.77	39.66	27	76.00	-38.80	vertical	Peak
3	2816.00	24.98	28.97	11.27	39.90	66	56.00	-30.68	vertical	Average
4 pk	2816.00	37.78	28.97	11.27	39.90	66	76.00	-37.88	vertical	Peak
5 pp	2990.00	24.28	29.75	11.67	40.10	115	56.00	-30.40	vertical	Average
6	2990.00	36.76	29.75	11.67	40.10	115	76.00	-37.92	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

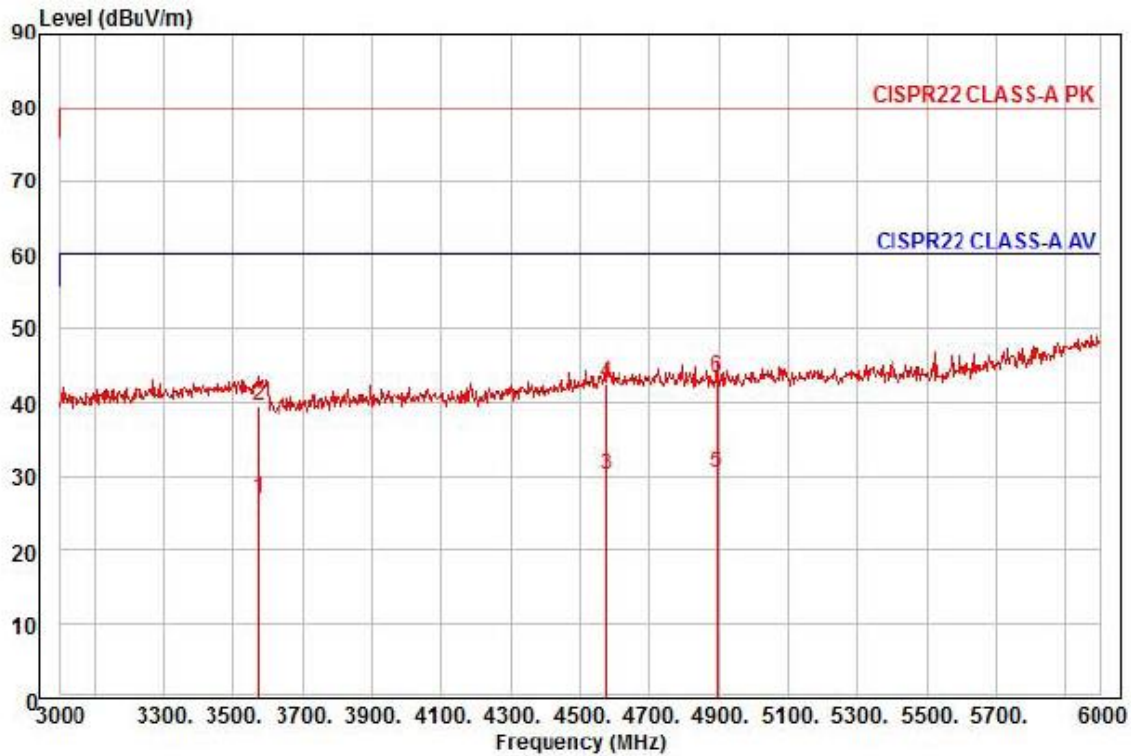

Site : chamber

Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal

: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project :

Model : XNV-6120RN

Mode : AC 24 V


Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3573.00	24.58	30.45	12.76	40.85	299	60.00	-33.06	horizontal	Average
2	3573.00	37.22	30.45	12.76	40.85	299	80.00	-40.42	horizontal	Peak
3	4575.00	23.32	32.86	14.61	40.69	1	60.00	-29.90	horizontal	Average
4	4575.00	35.97	32.86	14.61	40.69	1	80.00	-37.25	horizontal	Peak
5 pp	4896.00	22.52	33.14	15.20	40.37	358	60.00	-29.51	horizontal	Average
6 pk	4896.00	35.40	33.14	15.20	40.37	358	80.00	-36.63	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

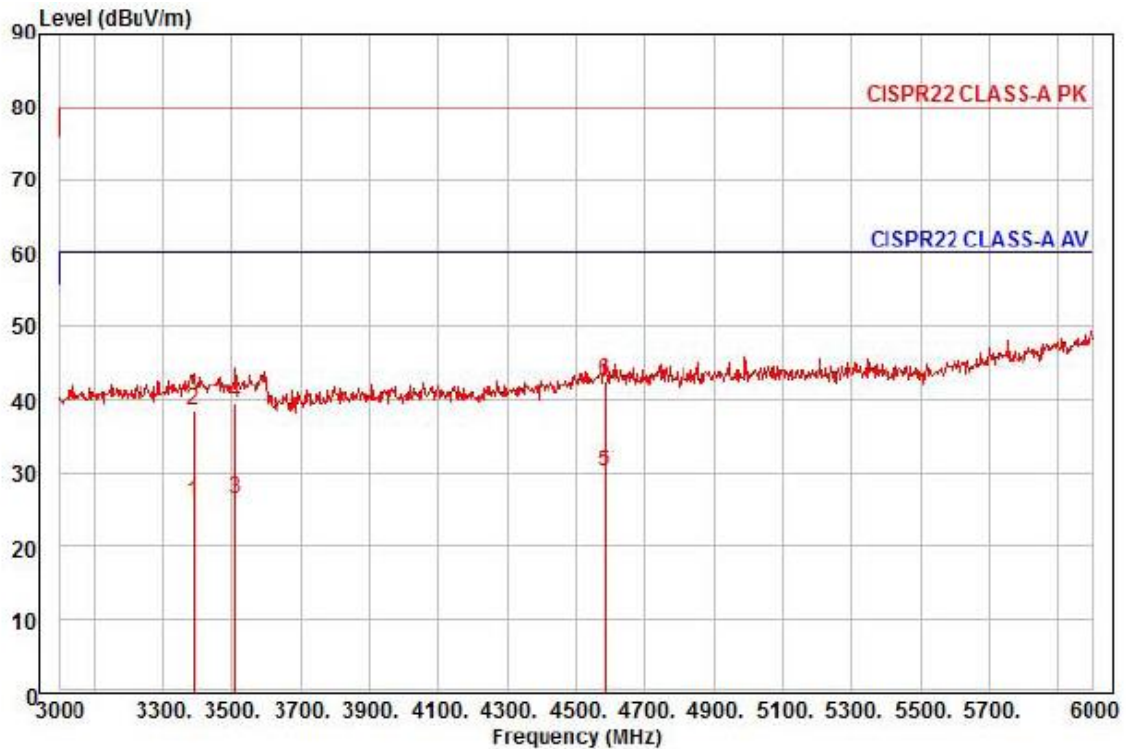

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-6120RN
Mode : AC 24 V
Memo : 3 ~ 6 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3387.00	24.09	30.18	12.42	40.71	104	60.00	-34.02	vertical	Average
2	3387.00	36.58	30.18	12.42	40.71	104	80.00	-41.53	vertical	Peak
3	3510.00	24.42	30.31	12.64	40.88	54	60.00	-33.51	vertical	Average
4	3510.00	37.32	30.31	12.64	40.88	54	80.00	-40.61	vertical	Peak
5 pp	4581.00	23.31	32.87	14.62	40.69	6	60.00	-29.89	vertical	Average
6 pk	4581.00	35.89	32.87	14.62	40.69	6	80.00	-37.31	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

- DC 12 V Mode

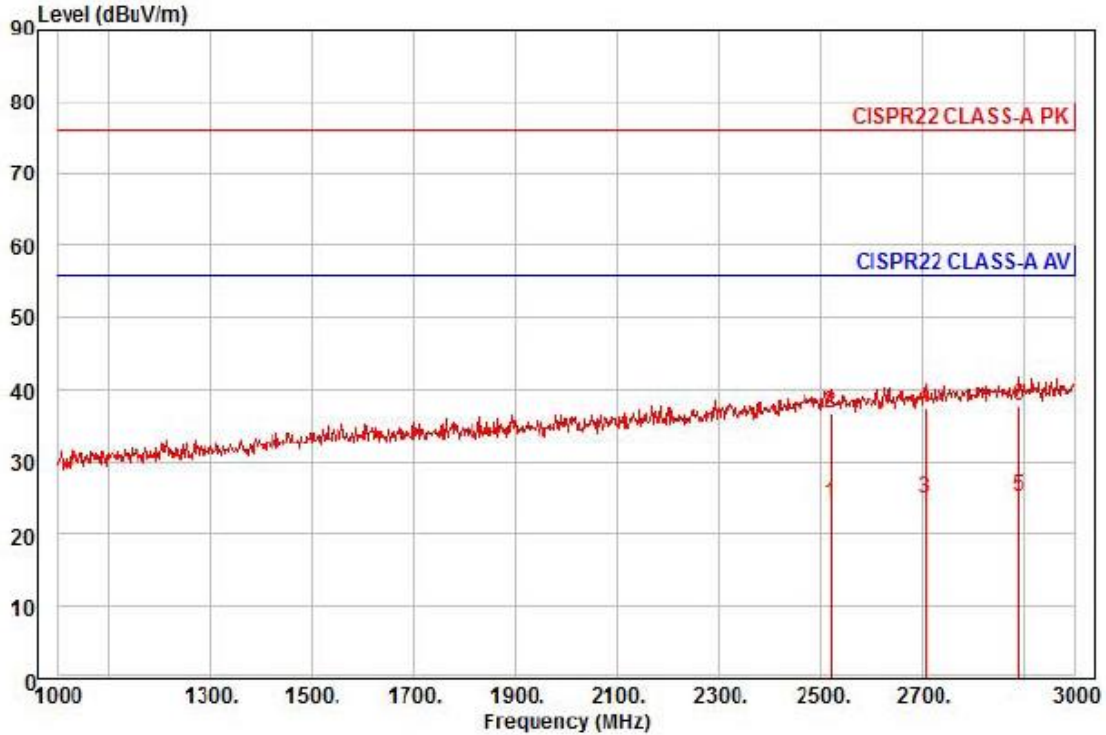

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-6120RN
Mode : DC 12 V
Memo : 1 ~ 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	2520.00	25.53	27.66	10.57	39.56	124	56.00	-31.80	horizontal	Average
2	2520.00	38.23	27.66	10.57	39.56	124	76.00	-39.10	horizontal	Peak
3	2706.00	25.27	28.48	11.00	39.77	128	56.00	-31.02	horizontal	Average
4	2706.00	37.93	28.48	11.00	39.77	128	76.00	-38.36	horizontal	Peak
5 pp	2892.00	24.54	29.31	11.45	39.99	222	56.00	-30.69	horizontal	Average
6 pk	2892.00	37.08	29.31	11.45	39.99	222	76.00	-38.15	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

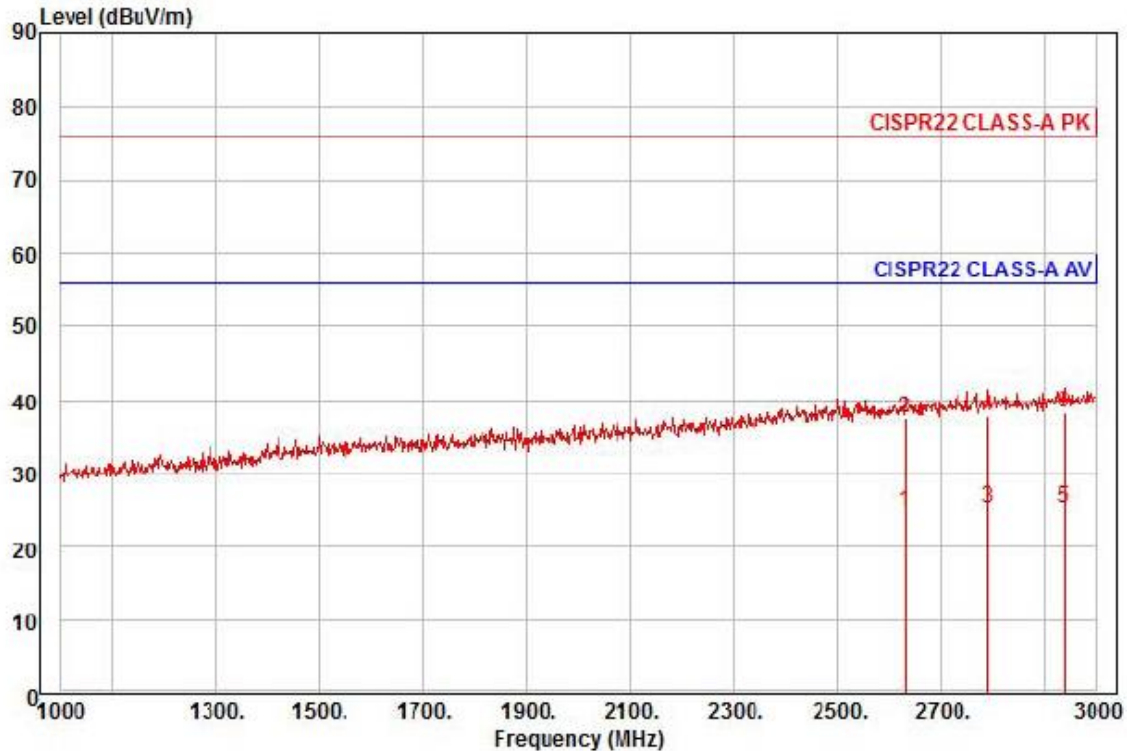

Site : chamber

Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project :

Model : XNV-6120RN

Mode : DC 12 V

Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	2632.00	25.42	28.16	10.82	39.69	5	56.00	-31.29	vertical	Average
2	2632.00	38.17	28.16	10.82	39.69	5	76.00	-38.54	vertical	Peak
3	2790.00	25.09	28.86	11.21	39.87	263	56.00	-30.71	vertical	Average
4	2790.00	37.45	28.86	11.21	39.87	263	76.00	-38.35	vertical	Peak
5 pp	2938.00	24.32	29.51	11.55	40.04	71	56.00	-30.66	vertical	Average
6 pk	2938.00	37.33	29.51	11.55	40.04	71	76.00	-37.65	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]


Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,

Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

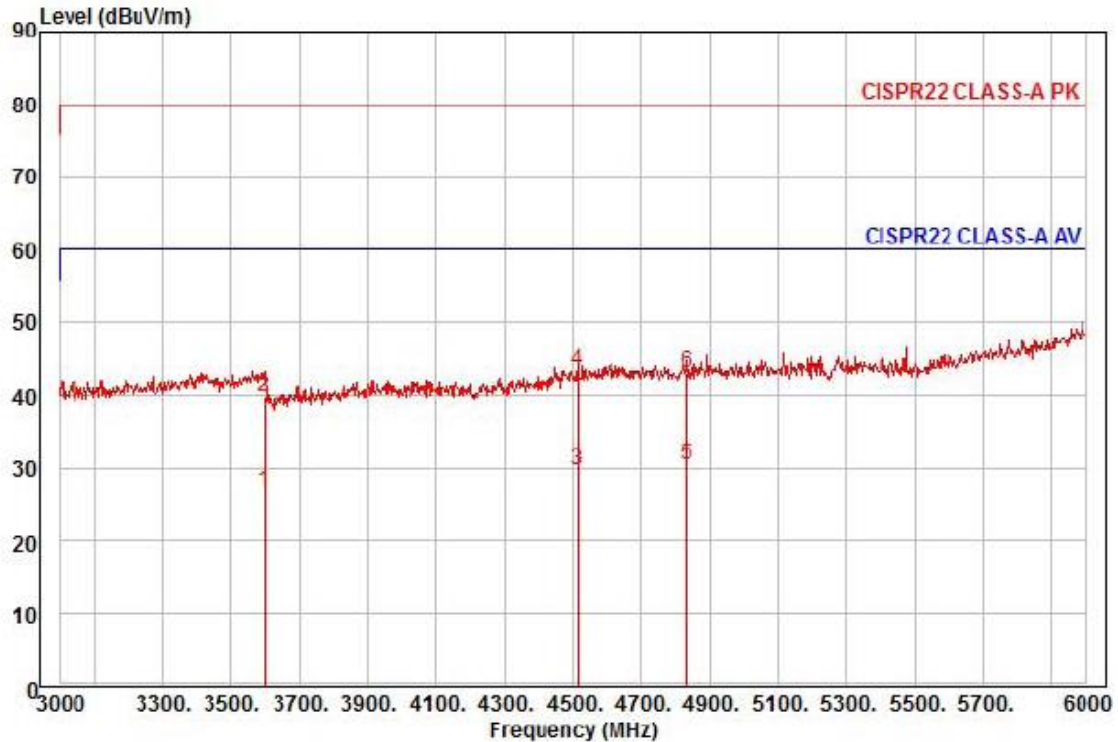


Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-6120RN
Mode : DC 12 V
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3597.00	24.37	30.50	12.80	40.85	32	60.00	-33.18	horizontal	Average
2	3597.00	37.40	30.50	12.80	40.85	32	80.00	-40.15	horizontal	Peak
3	4515.00	23.13	32.81	14.49	40.76	133	60.00	-30.33	horizontal	Average
4 pk	4515.00	36.75	32.81	14.49	40.76	133	80.00	-36.71	horizontal	Peak
5 pp	4836.00	22.59	33.09	15.14	40.43	49	60.00	-29.61	horizontal	Average
6	4836.00	35.28	33.09	15.14	40.43	49	80.00	-36.92	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

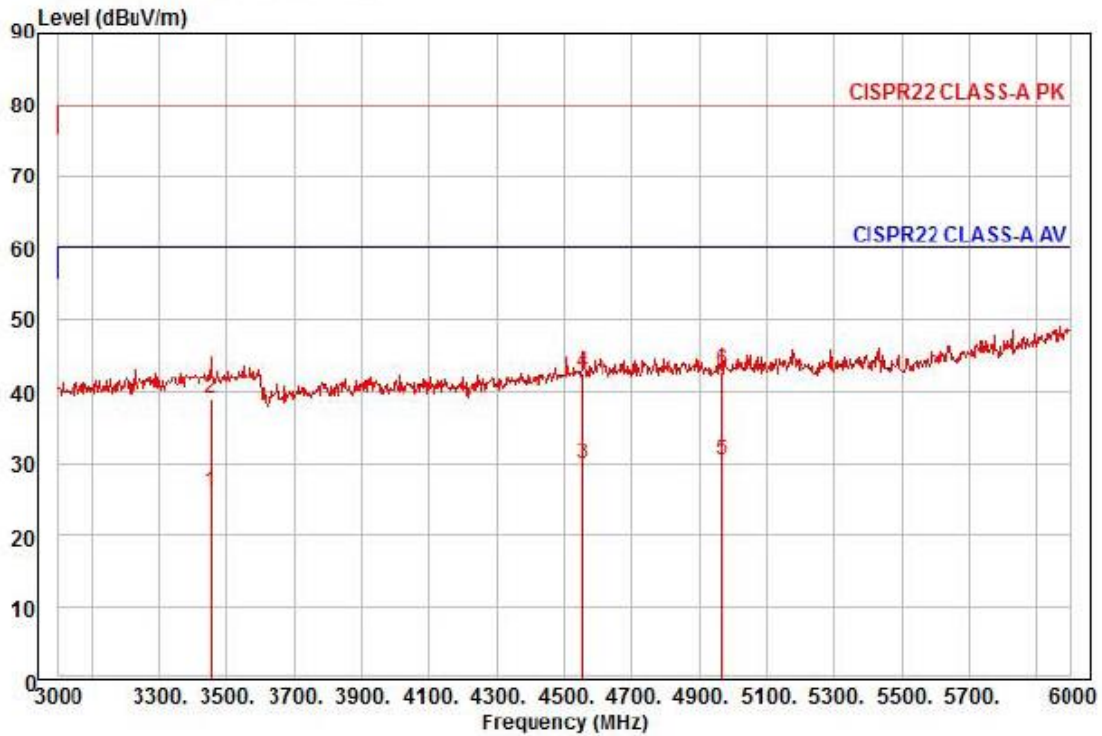

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-6120RN
Mode : DC 12 V
Memo : 3 ~ 6 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3456.00	24.06	30.25	12.55	40.81	275	60.00	-33.95	vertical
2	3456.00	36.97	30.25	12.55	40.81	275	80.00	-41.04	vertical
3	4554.00	23.22	32.85	14.57	40.72	204	60.00	-30.08	vertical
4	4554.00	35.99	32.85	14.57	40.72	204	80.00	-37.31	vertical
5 pp	4965.00	22.26	33.20	15.28	40.31	247	60.00	-29.57	vertical
6 pk	4965.00	34.70	33.20	15.28	40.31	247	80.00	-37.13	vertical


◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,

Cable Loss : Cable loss, Preamp Factor : Preamp Factor

- PoE Mode

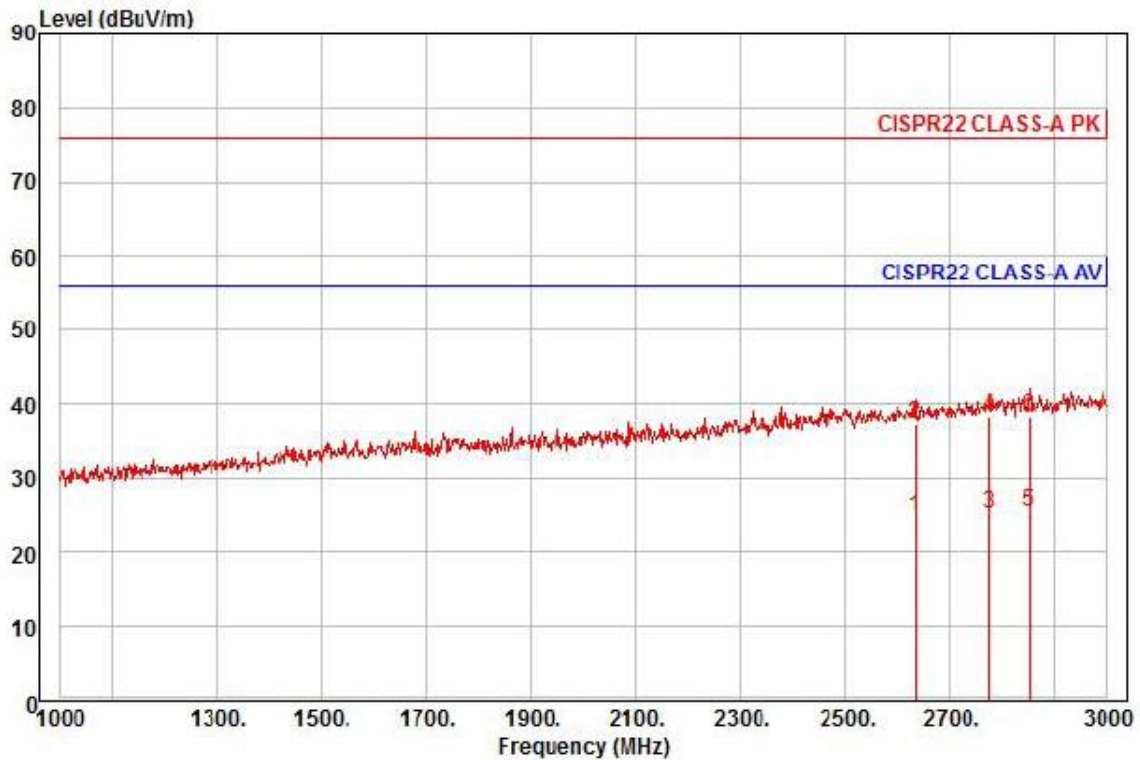


Site : chamber
 Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNV-6120RN
 Mode : POE
 Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	2636.00	25.46	28.17	10.83	39.69	133	56.00	-31.23	horizontal	Average
2	2636.00	37.88	28.17	10.83	39.69	133	76.00	-38.81	horizontal	Peak
3	2776.00	25.07	28.80	11.17	39.85	348	56.00	-30.81	horizontal	Average
4 pk	2776.00	38.24	28.80	11.17	39.85	348	76.00	-37.64	horizontal	Peak
5 pp	2852.00	24.84	29.13	11.35	39.94	351	56.00	-30.62	horizontal	Average
6	2852.00	37.66	29.13	11.35	39.94	351	76.00	-37.80	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

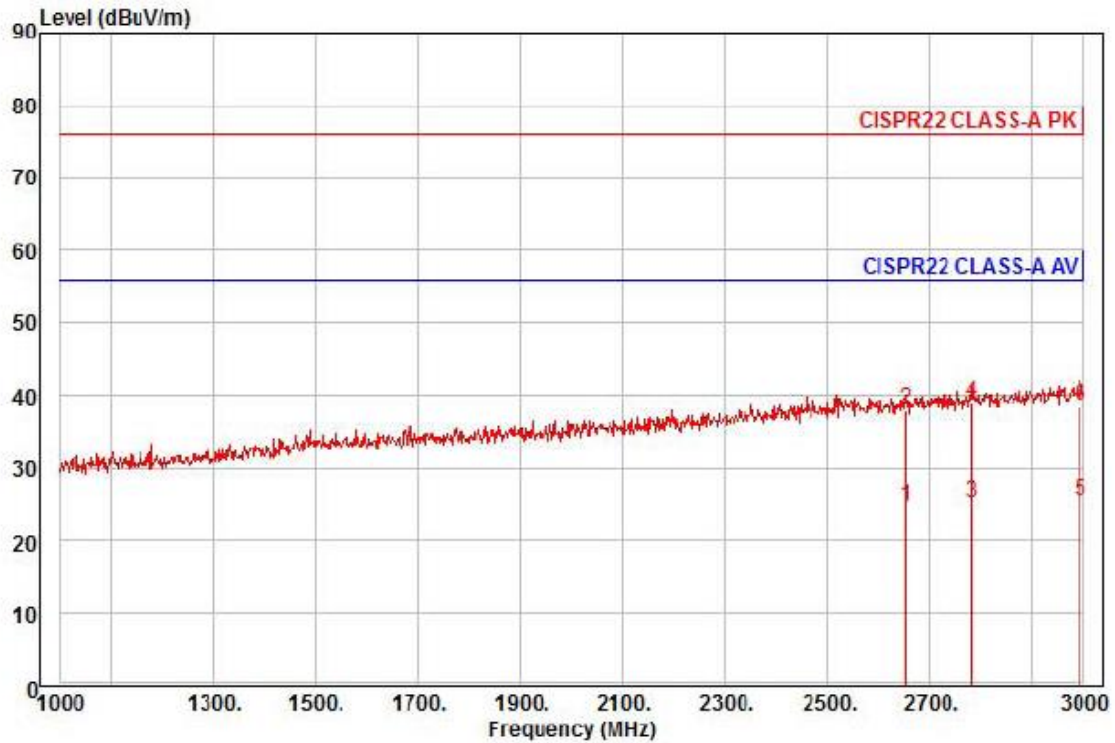


Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-6120RN
Mode : P0E
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	2654.00	25.39	28.25	10.87	39.71	305	56.00	-31.20	vertical	Average
2	2654.00	38.55	28.25	10.87	39.71	305	76.00	-38.04	vertical	Peak
3	2784.00	25.09	28.83	11.19	39.86	271	56.00	-30.75	vertical	Average
4 pk	2784.00	38.85	28.83	11.19	39.86	271	76.00	-36.99	vertical	Peak
5 pp	2996.00	24.20	29.77	11.69	40.11	313	56.00	-30.45	vertical	Average
6	2996.00	37.06	29.77	11.69	40.11	313	76.00	-37.59	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

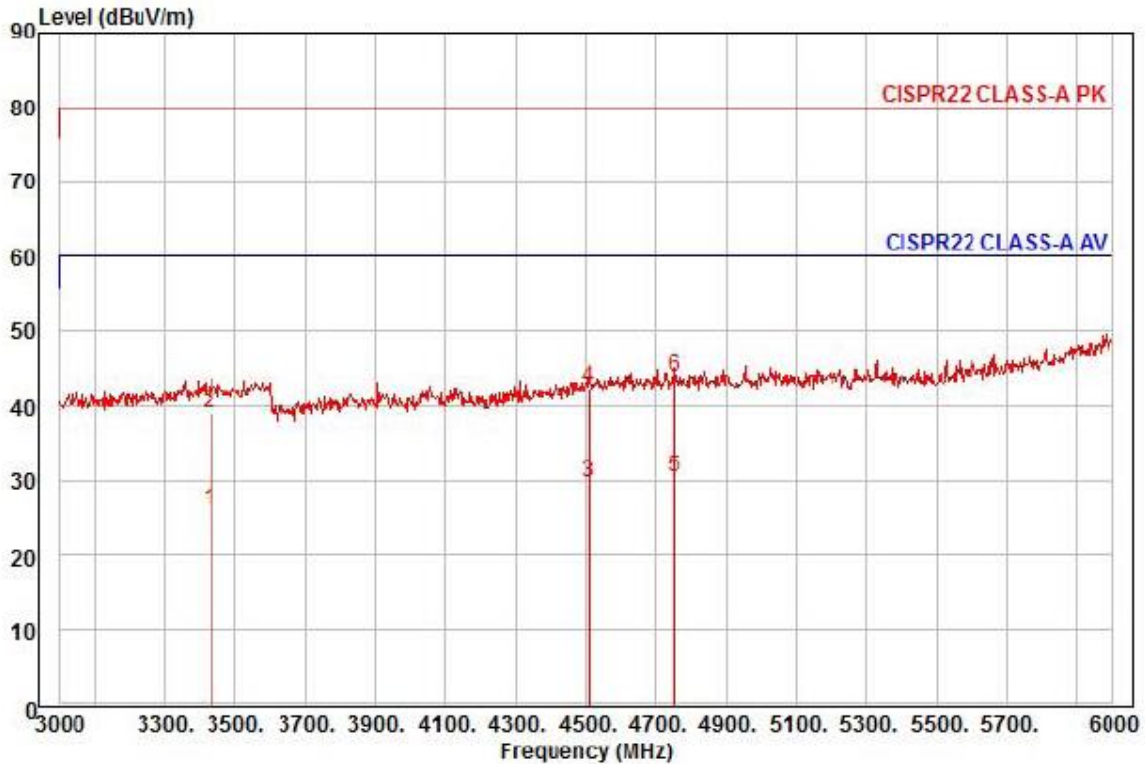

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-6120RN
Mode : POE
Memo : 3 ~ 6 GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3429.00	24.09	30.22	12.50	40.77	77	60.00	-33.96	horizontal Average
2	3429.00	36.95	30.22	12.50	40.77	77	80.00	-41.10	horizontal Peak
3	4509.00	23.12	32.81	14.48	40.76	147	60.00	-30.35	horizontal Average
4	4509.00	35.96	32.81	14.48	40.76	147	80.00	-37.51	horizontal Peak
5 pp	4752.00	23.04	33.02	14.99	40.52	236	60.00	-29.47	horizontal Average
6 pk	4752.00	36.33	33.02	14.99	40.52	236	80.00	-36.18	horizontal Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,

Cable Loss : Cable loss, Preamp Factor : Preamp Factor

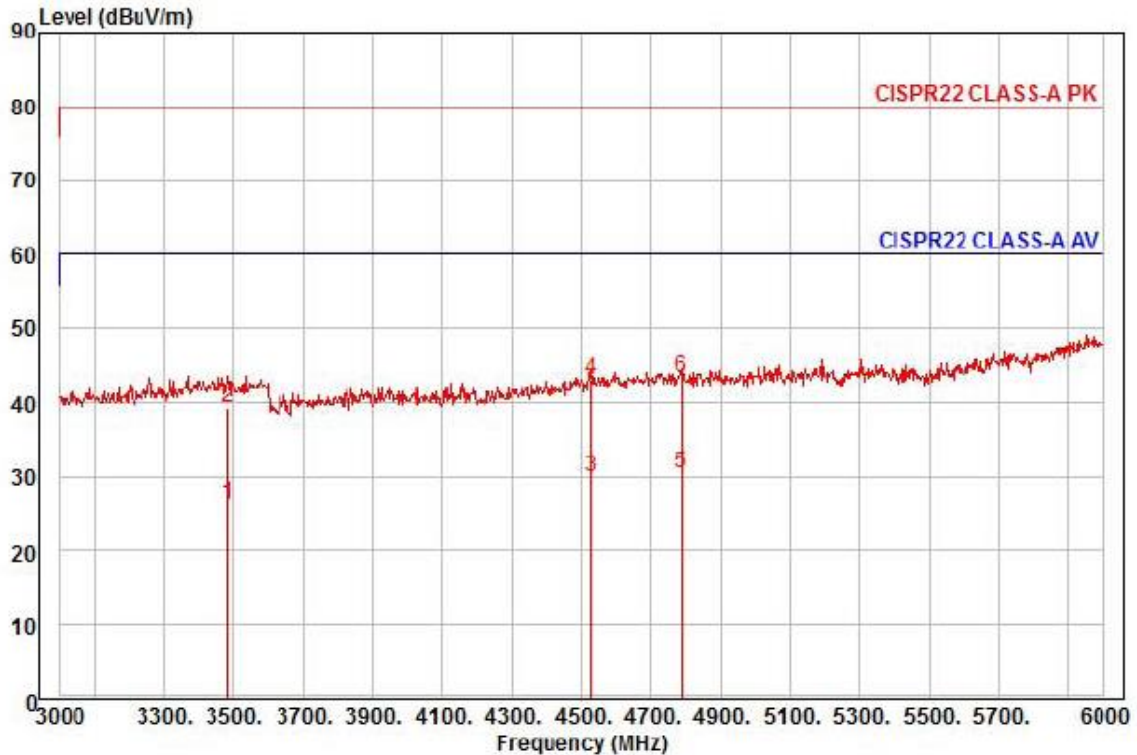

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-6120RN
Mode : POE
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3483.00	24.12	30.27	12.60	40.85	114	60.00	-33.86	vertical	Average
2	3483.00	37.22	30.27	12.60	40.85	114	80.00	-40.76	vertical	Peak
3	4527.00	23.26	32.82	14.52	40.74	308	60.00	-30.14	vertical	Average
4	4527.00	36.54	32.82	14.52	40.74	308	80.00	-36.86	vertical	Peak
5 pp	4785.00	22.83	33.05	15.06	40.49	122	60.00	-29.55	vertical	Average
6 pk	4785.00	35.82	33.05	15.06	40.49	122	80.00	-36.56	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

Test Setup Photos and Configuration Conducted Voltage Emissions





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

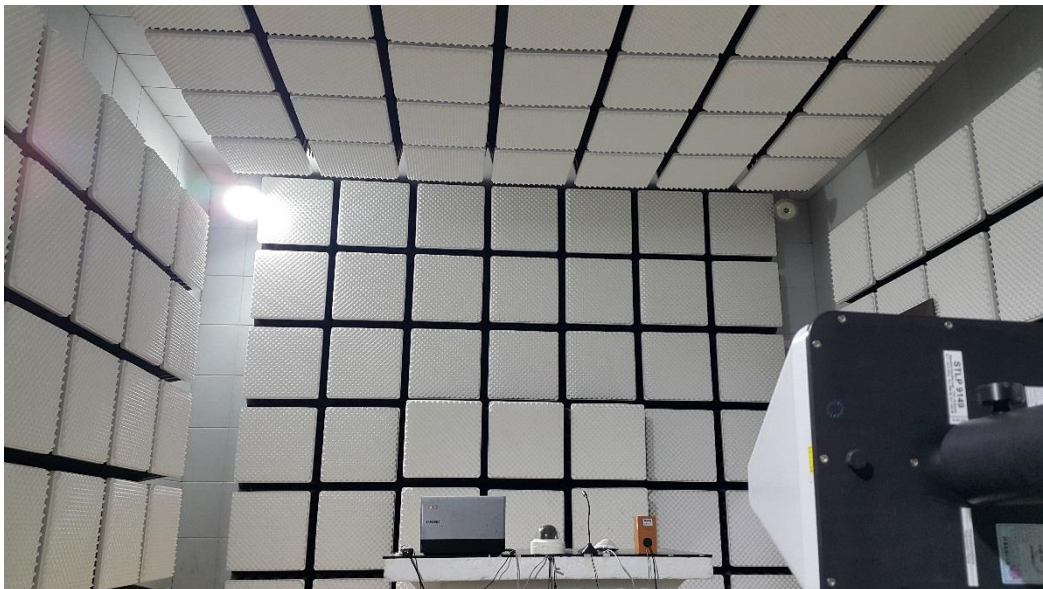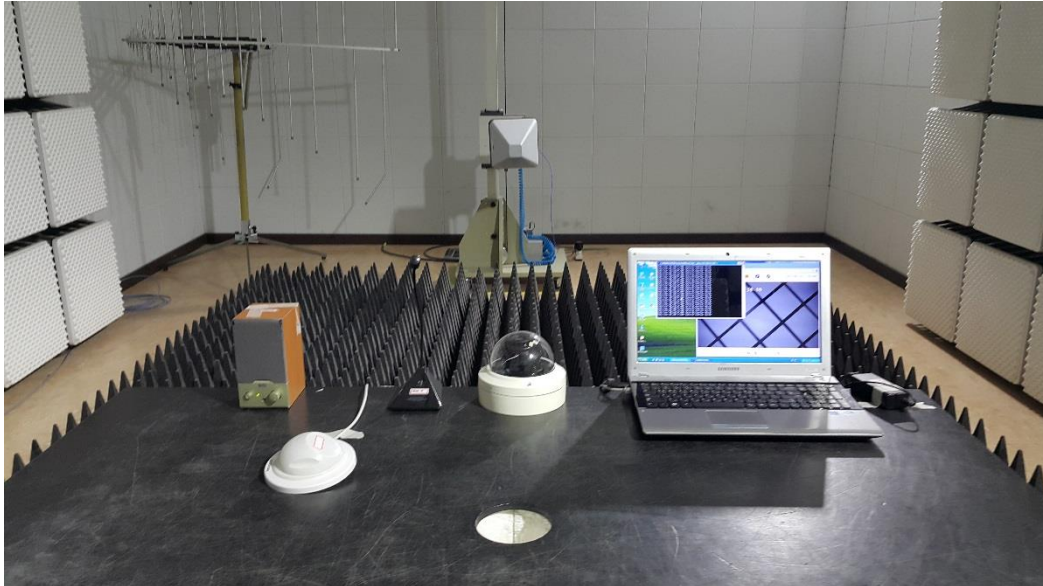

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EUT Internal Photographs

(Internal View)




EUT Internal View – Board

(Top)

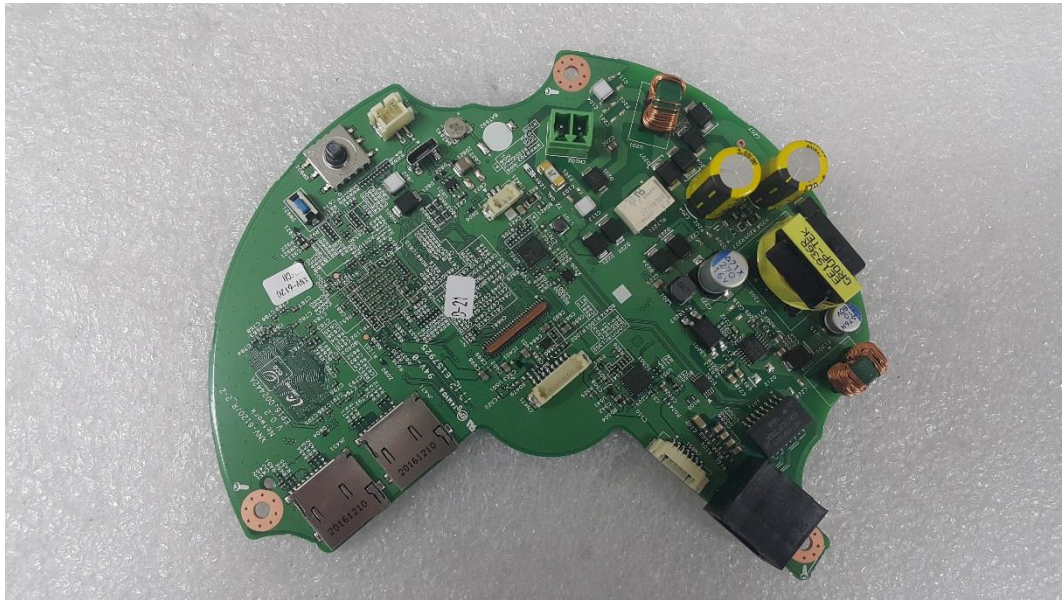

(Bottom)

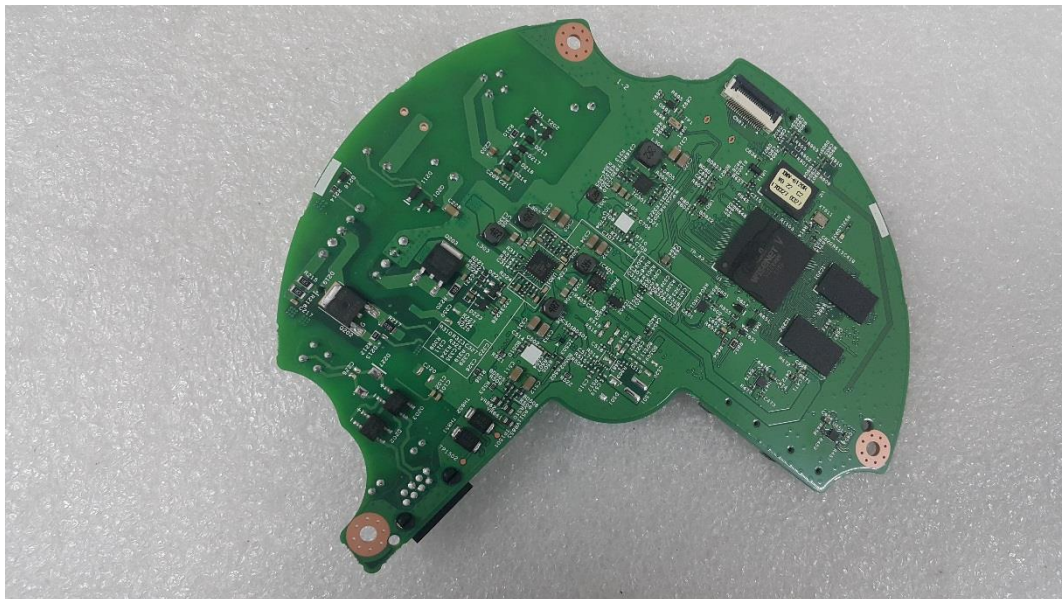


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Lens

(Top)




(Bottom)

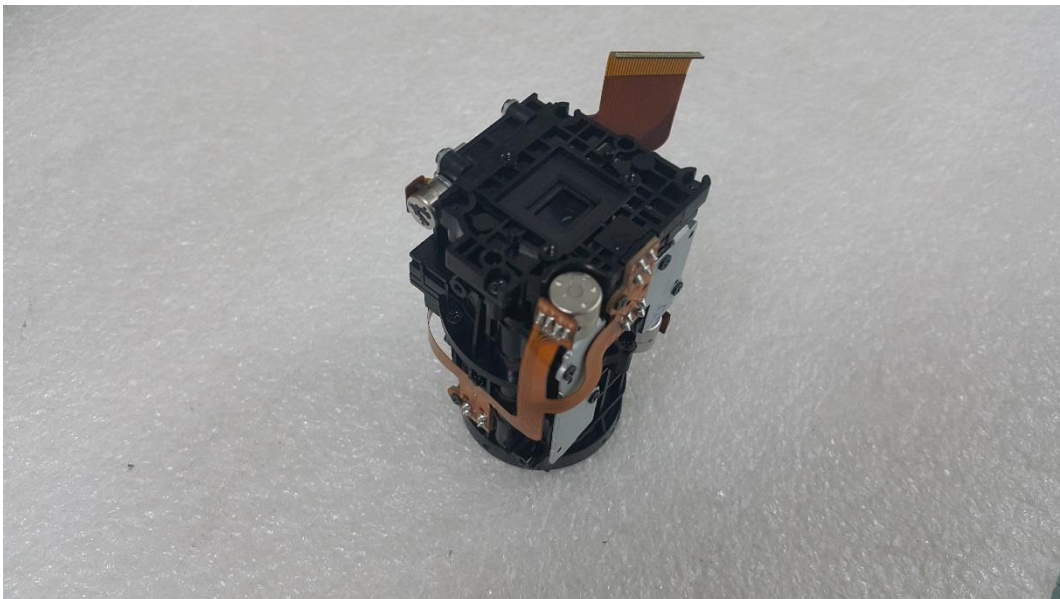


EUT Internal View – Lens Board

(Top)

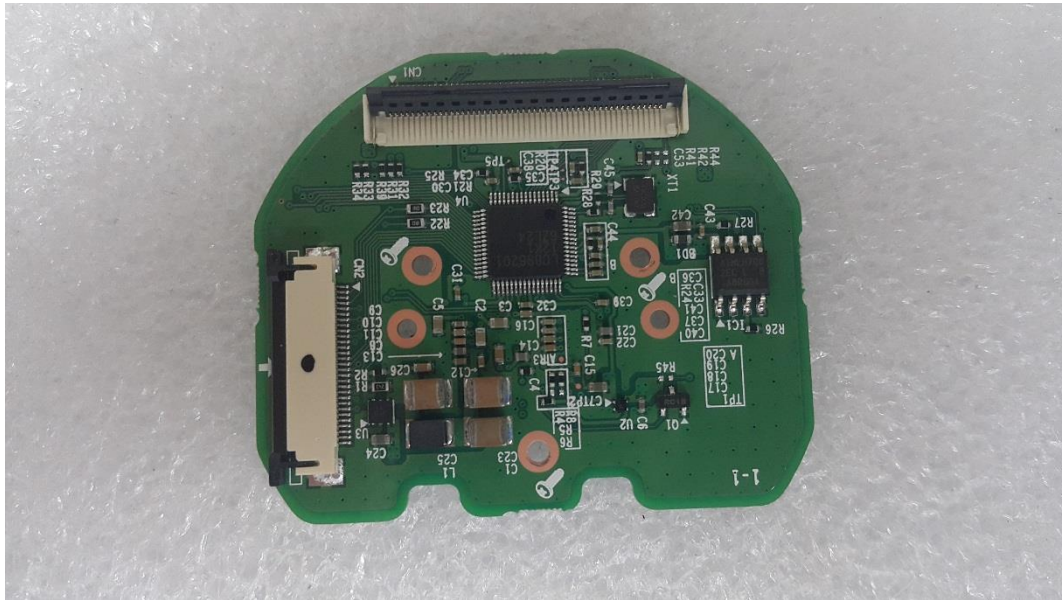


(Bottom)

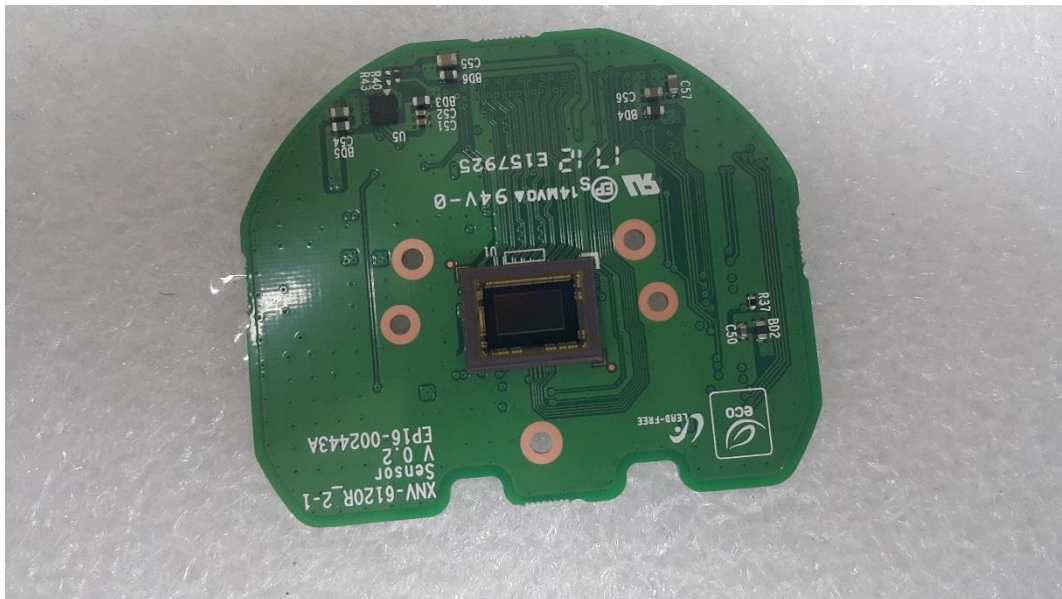

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – LED Board

(Top)

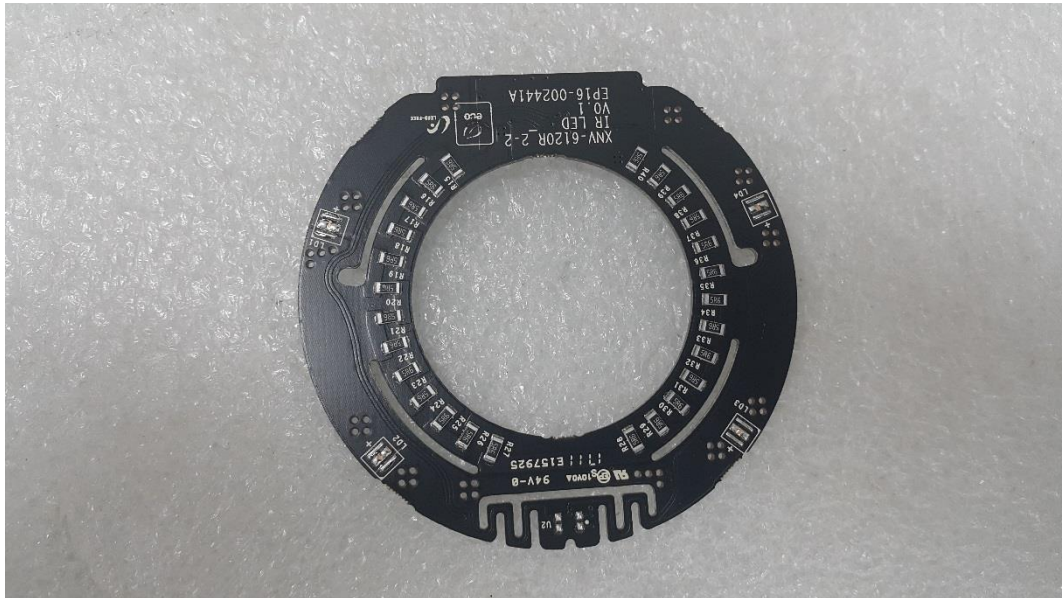

(Bottom)



Label Photographs



CAN ICES-3 (A)/NMB-3(A)

[LABEL VIEW]