

TEST REPORT

 CTK Co., Ltd. The Power Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	REPORT No.: CTK-2021-04254 Page (1) / (10) pages	
---	--	--	--

1. Applicant

- Name : Hanwha Techwin Co., Ltd.
- Address : Hanwha Techwin R&D center, 6 Pangyo-ro 319Beon-gil,
Bundang-gu, Seongnam-si, Gyeonggi-do, 13488 KOREA
- Date of Receipt..... : 2021-10-21

2. Manufacturer

- Name : Hanwha Techwin Co., Ltd.

3. Use of Report : Quality control

4. Test sample / Model..... : Network Camera / XNV-6123R

5. Date(s) of test : 2021-11-17

6. Test Standard (Method) used .. : KS C IEC 62262: 2005

7. Testing Environment : Temperature : (25.0 ± 10.0) °C, Humidity : (50 ± 25) %R.H. Air Pressure: (96.0 ± 10.0) kPa

8. Results : Reference test results

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
This report shall not be reproduced except in full without the written approval of CTK

Approval	Tested by: Min-Gi Mun  (Signature)	Technical Manager: WonHyeon Choi  (Signature)
----------	---	--

2021-11-24


CTK Co., Ltd.



1. Degrees of protection provided by enclosures for electrical equipment against external mechanical impacts (IK code)

1.1 Test standard: KS C IEC 62262: 2005

1.2 Arrangement of the IK code

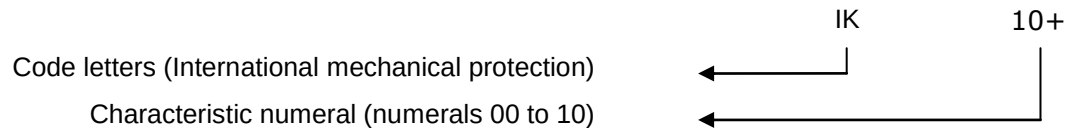

1.3 Vertical Hammer

1.3.1 Test equipment

Equipment	Model	Manufacturer	Serial	Application
Spring impact hammer	Spring impact hammer (IEC 60068-2-75)	Kingpo Technology Development Limited	KP-SH05	☐
Vertical Hammer Tester	Vertical Hammer	Kingpo technology Development Limited	0190605A01002	☒
Vertical Hammer	50J	Kingpo	TX028-4	☒

1.3.2 Test condition

IK code	Impact Energy (J)	Equivalent mass (kg)	Drop height (mm ± 1%)	Application
00	Non-protected	-	-	☐
01	0.14	0.25	56	☐
02	0.20	0.25	80	☐
03	0.35	0.25	140	☐
04	0.50	0.25	200	☐
05	0.70	0.25	280	☐
06	1.00	0.25	400	☐
07	2.00	0.50	400	☐
08	5.00	1.70	300	☐
09	10.00	5.00	200	☐
10	20.00	5.00	400	☐
10+	50.00	10.00	500	☒
- Impact times: five times for each of the exposed surface. (Do not impact more than 3 times in the same spot) - Test conducted with a higher impact energy of 50 J as requested by the customer				

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	REPORT No.: CTK-2021-04254 Page (3) / (10) pages	
---	---	---	--

1.3.3 Check Item

- External protection Enclosure damage check (except accessories not related to outer protection function)

1.3.4 Test Result

Item	Contents	Result
External protection Enclosure	No damage	Pass
Comment Some scratches were generated on the outside of the product.		


 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	REPORT No.: CTK-2021-04254 Page (4) / (10) pages	
---	---	---	--

2. Attachment


2.1 Products



2.2 Test photos

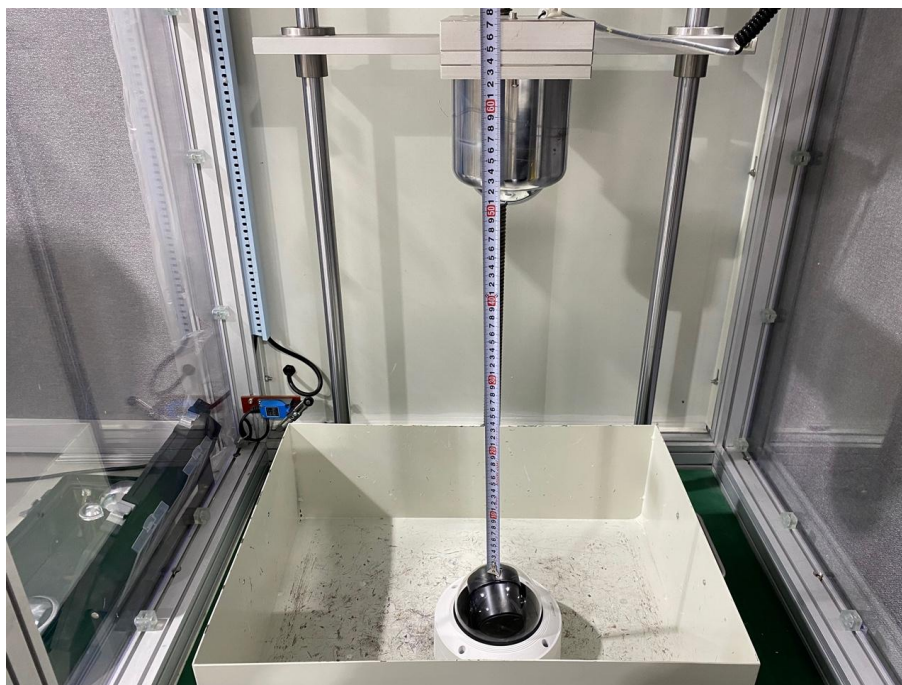

2.3 Photos after test

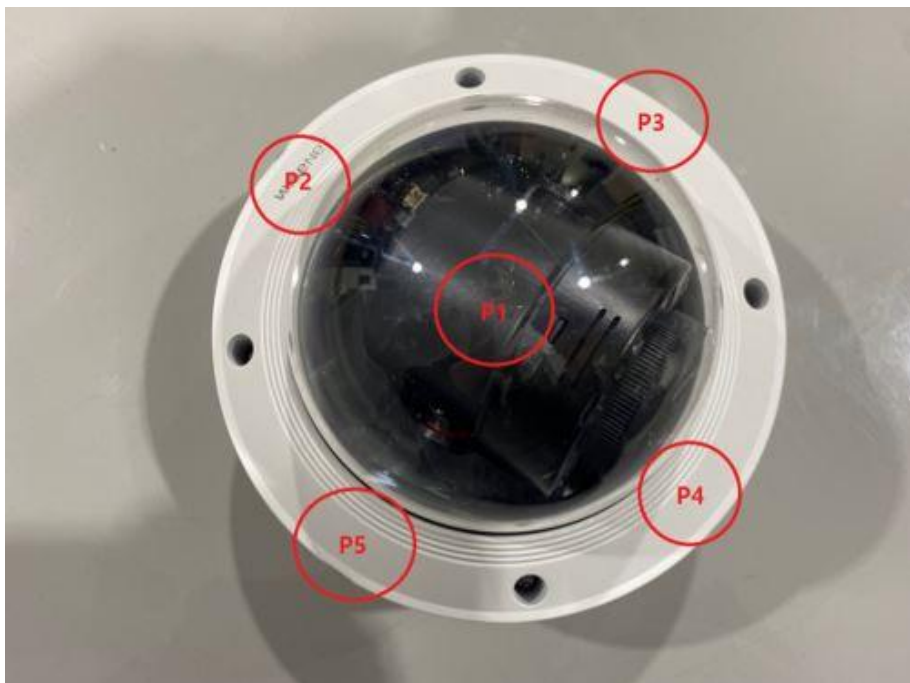



2.4 Enclosure Dimensions or Impact point (Unit: mm)

