



EMC TEST REPORT For FCC

Test Report No. : KES-E1-17T0101-R2
Date of Issue : Feb. 24, 2023
Product name : NETWORK CAMERA
Model/Type No. : XNV-8020R
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Equipment authorization : **Supplier's Declaration of Conformity**
Date of Receipt : Jan, 10, 2017
Test date : Jan. 31, 2017
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Sung Keun, Park
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

Tested by Young Suk, Song
(Retired person)
Proxy signature : Sung Keun, Park

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0101-R2

Page (2) of (36)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Feb. 08, 2017	KES-E1-17T0101	Issued
Aug. 05, 2022	KES-E1-17T0101-R1	Due to customer request - Change model name - Change applicant Address - Manufacturer change, addition
Feb. 24, 2023	KES-E1-17T0101-R2	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0101-R2
Page (3) of (36)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s)	8
1.8	Configuration	9
1.9	Calibration Details of Equipment Used for Measurement	10
1.10	Test Facility	10
1.11	Laboratory Accreditations and Listings	10
2.0	Test Regulations.....	11
2.1	Conducted Emissions at Mains Power Ports	13
2.2	Radiated Electric Field Emissions(Below 1 GHz)	14
2.3	Radiated Electric Field Emissions(Above 1 GHz)	15
APPENDIX A – TEST DATA.....		16
Conducted Emissions at Mains Power Ports.....		16
Radiated Electric Field Emissions(Below 1 GHz)		20
Radiated Electric Field Emissions(Above 1 GHz)		22
Test Setup Photos and Configuration		24
Conducted Voltage Emissions		24
Radiated Electric Field Emissions(Below 1 GHz)		26
Radiated Electric Field Emissions(Above 1 GHz)		28
EUT External Photographs		30
EUT Internal Photographs		31

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0101-R2
Page (4) of (36)

1.0 General Product Description

Main Specifications of EUT are:

	XNV-8020R
Video	
Imaging Device	1/1.8" 6M CMOS
Total Pixels	3096(H) x 2094(V)
Effective Pixels	2616(H) x 1976(V)
Scanning System	Progressive Scan
Min. Illumination	Color : 0.2 lux(F1.6, 1/30sec) B/W : 0 Lux (IR LED On)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1280x720, for installation
Lens	
Focal Length (Zoom Ratio)	3.7mm Fixed
Max. Aperture Ratio	F1.6
Angular Field of View	H: 97.5°, V:71.9°, D: 126.2°
Min. Object Distance	0.4m
Focus Control	Manual
Lens Type	Fixed
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan / Tilt / Rotate range	0° ~ 354° / 0° ~ 67° / 0° ~ 355°
Operational	
IR Viewable Length	30m(98.43ft)
Camera Title	Off / On (Displayed up to 85 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR
Wide Dynamic Range	120dB
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Auto(input from fog detection) / Manual / Off
Motion Detection	Off/ On(8ea, 8point Polygonal zones), Handover
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
Digital PTZ	24X, Digital PTZ(Preset, Group)
Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Video & Audio Analytics	Tampering, Loitering, Directional Detection, Defocus Detection, Fog&Dust Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection, Motion Detection, Digital Auto Tracking, Sound Classification, People counting, Heat map, Queue management
Alarm I/O	Input 1ea / Output 1ea
Alarm Triggers	Alarm Input, Motion Detection, Video & Audio Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output DPTZ preset
Audio In	Selectable (Mic IN/Line IN) Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out, Max output level: 1 Vrms

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0101-R2
Page (5) of (36)

Pixel Counter	Support
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	2560 x 1920, 2560 x 1440, 1920 x 1080, 1600 x 1200, 1280 x 1024, 1280 x 960 1280 x 720, 1024 x 768, 800 x 600, 800 x 448, 720 x 576, 720 x 480, 640 x 480, 640 x 360, 320 x 240
Max. Framerate	H.265/H.264 : Max. 30fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
WiseStream II	Support
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Format	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 8/16/32/48KHz
Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode
Edge Storage	SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programming	ONVIF Profile S/G SUNAPI(HTTP API) Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Non-plugin Webviewer Supported Browser: Google Chrome 54, MS Edge 38, Mozilla Firefox 49(Window 64bit only) , Apple Safari 9 (Mac OS X only) Plug-in Webviewer Supported Browser : MS Explore 11, Apple Safari 9 (Mac OS X only)
Central Management Soft	SmartViewer, SSM
Environmental	
Operating Temperature / Humidity	-30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH *Start up should be done at above -20°C
Storage Temperature / Humidity	-50°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP67, IP66
Vandal Resistance	IK10
Electrical	
Input Voltage / Current	DC12V,PoE(IEEE802.3af,Class3)
Power Consumption	Max. 8W(12VDC), Max. 9W(PoE)
Mechanical	
Color / Material	Ivory / Metal
Dimension (WxHxD)	Ø120xH97.5mm(Ø4.72" x 3.84")
Weight	625g (1.37lb)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 100 Vac ☐ 120 Vac ☐ 24 Vac ☒ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNV-8020R	-	HANWHA VISION VIETNAM COMPANY LIMITED	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
POE Adapter	PD-3001GC/AC	RD9356082016964200	Power Dsine	-
Notebook	X56K	HN11N5151FJ0045W	HANSUNG	CE, RE
Notebook Adapter	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	CE, RE
Notebook	LG15N54	506NZGK000615	LG	POE CE
Notebook Adapter	PA-1650-43(65W)	OF58U63849302Y609	LG	POE CE
Phone	A1530	-	APPLE	-
MIC	CMK-303	-	CAMAC	-
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI-TECH GROUP.	-
Alarm	-	-	-	-
SD card	-	-	SanDisk	-

1.6 External I/O Cabling

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	2 pin	3.0	U
	Slot	SD card	Slot	-	-
Notebook	Audio in	Phone	Audio out	1.7	U

- PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45 (POE)	POE Adapter	RJ-45 (POE)	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	2 pin	3.0	U
	Slot	SD card	Slot	-	-
Notebook	Audio in	Phone	Audio out	1.7	U
	RJ-45 (DATA)	POE Adapter	RJ-45 (DATA)	3.0	U

* Unshielded = U, Shielded = S

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0101-R2

Page (8) of (36)

1.7 EUT Operating Mode(s)

Test mode	operating
DC, POE	E.U.T Monitoring, 1 kHz, Ping Test


E.U.T Test operating S/W		
Name	Version	Manufacture Company
SmartViewer	-	Hanwha Vision Co., Ltd

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main

- DC 12 V Mode

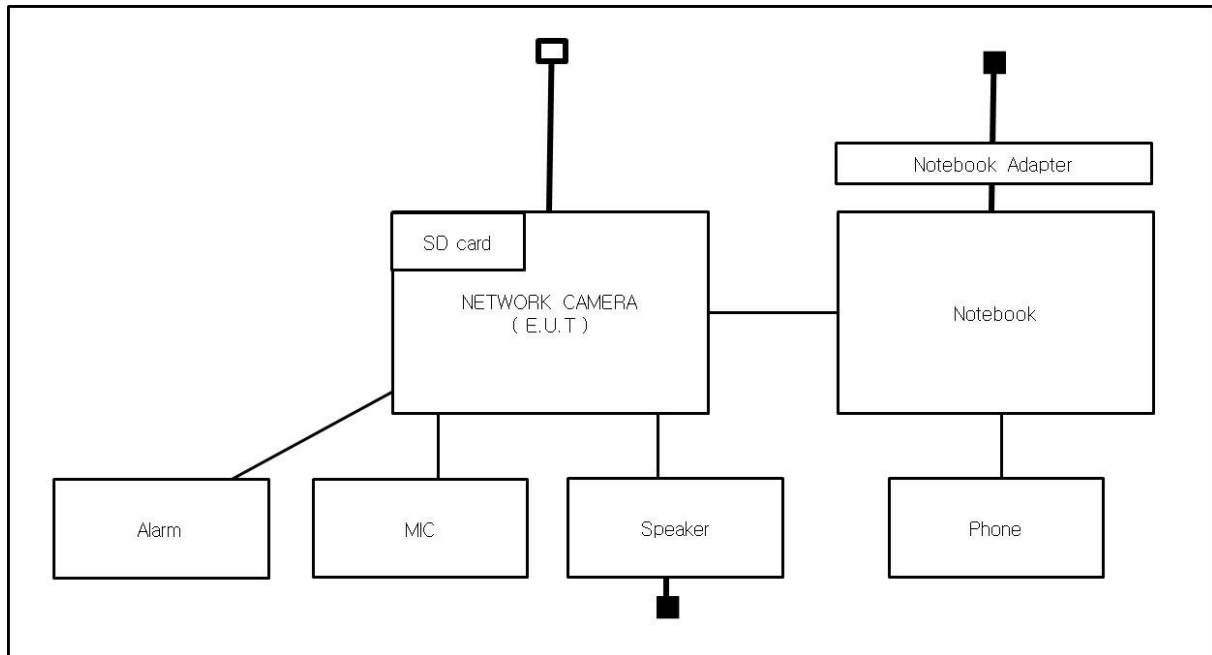

- PoE Mode

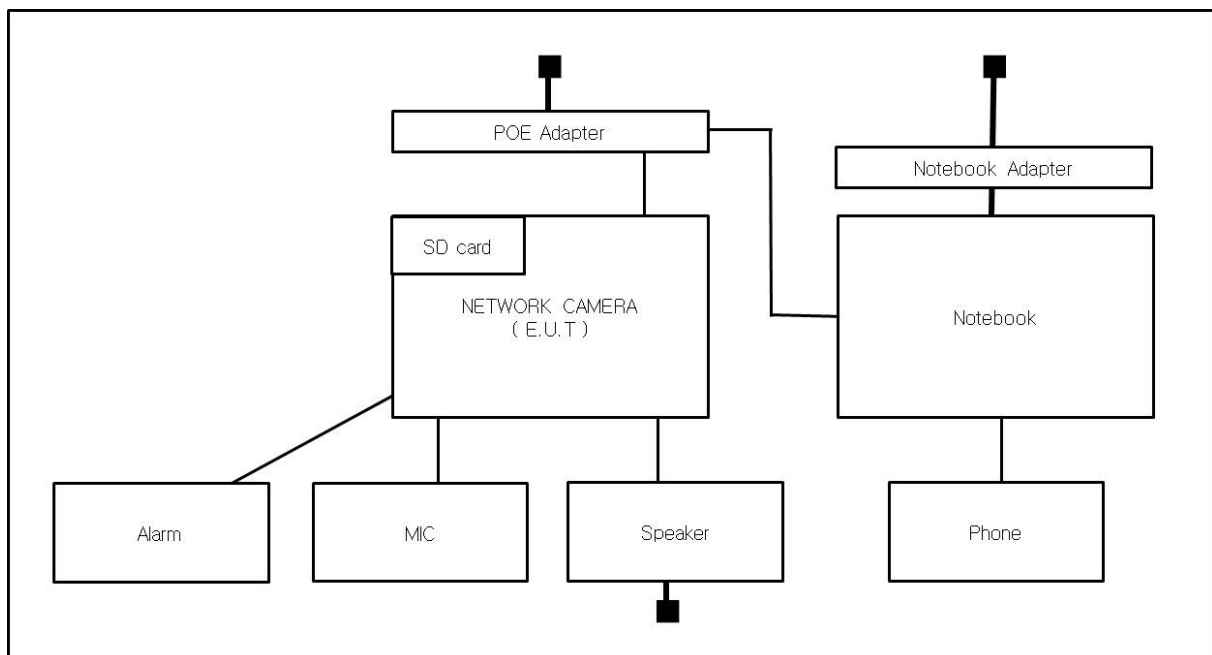

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55022:2010

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0101-R2

Page (12) of (36)

- | | | |
|--|---|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☒ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☒ ANSI C63.4-2014 | ☒ Class A | ☐ Class B |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
| ☐ MEDICAL – Directive 93/42/EEC | | |
| ☐ EN 60601-1-2 :2007 | | |
| ☐ RE– Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.1 Conducted Emissions at Mains Power Ports

Test Date

Jan, 31, 2017

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02, 03, 2018
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	Electro wave Shieldroom	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R & S	9.12.00	-

Test Conditions

Temperature: 26,6 °C

Relative Humidity: 38,5 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jan, 31, 2017

Test Location

☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI TEST Receiver	ESR3	R & S	101781	05, 03, 2017
☒	Trilog-Broadband Antenna	VULB9163	Schwarzbeck	714	11, 28, 2018
☒	OATS	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-
☒	EMI Test S/W	-	-	-	-

Test Conditions

Temperature: -1,9 °C
Relative Humidity: 50,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jan, 31, 2017

Test Location

Semi Anechoic Chamber #1

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Log-Periodic Antenna	STLP 9149	SCHWARZBECK	9149-255	05, 17, 2018
☒	EMI TEST Receiver	ESU26	R & S	100551	04, 18, 2017
☒	Preamplifier	SCU 18	R & S	102232	06, 29, 2017
☒	Semi Anechoic Chamber #1	-	KES	-	-
☒	Tilt Antenna Mast	TAM 4.0-E	maturro	18100116	-
☒	Turn Table	DT 2000-1,5T	INN-CO	-	-
☒	EMI Test S/W	N/A	N/A	N/A	N/A

Test Conditions

Temperature: 23,8 °C

Relative Humidity: 41,1 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

- DC 12 V Mode

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	XNV-8020R
Mode	DC 12V
Operator Name:	KES

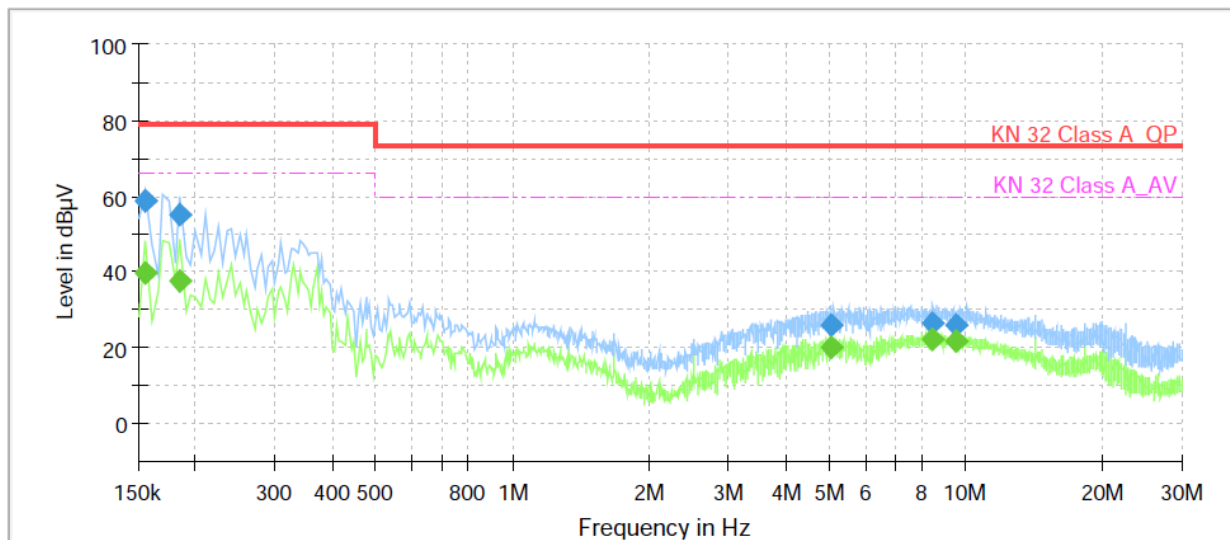

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	39.91	66.00	26.09	1000.0	9.000	L1	21.1
0.155000	58.94	---	79.00	20.06	1000.0	9.000	L1	21.1
0.185000	---	37.38	66.00	28.62	1000.0	9.000	L1	21.0
0.185000	55.12	---	79.00	23.88	1000.0	9.000	L1	21.0
5.035000	---	20.36	60.00	39.64	1000.0	9.000	L1	19.8
5.035000	25.88	---	73.00	47.12	1000.0	9.000	L1	19.8
8.490000	---	22.09	60.00	37.91	1000.0	9.000	L1	19.8
8.490000	26.47	---	73.00	46.53	1000.0	9.000	L1	19.8
9.485000	---	21.91	60.00	38.09	1000.0	9.000	L1	19.8
9.485000	26.21	---	73.00	46.79	1000.0	9.000	L1	19.8

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

[NEUTRAL] Common Information

Test Description:	Conducted Emission
Model No.:	XNV-8020R
Mode	DC 12V
Operator Name:	KES

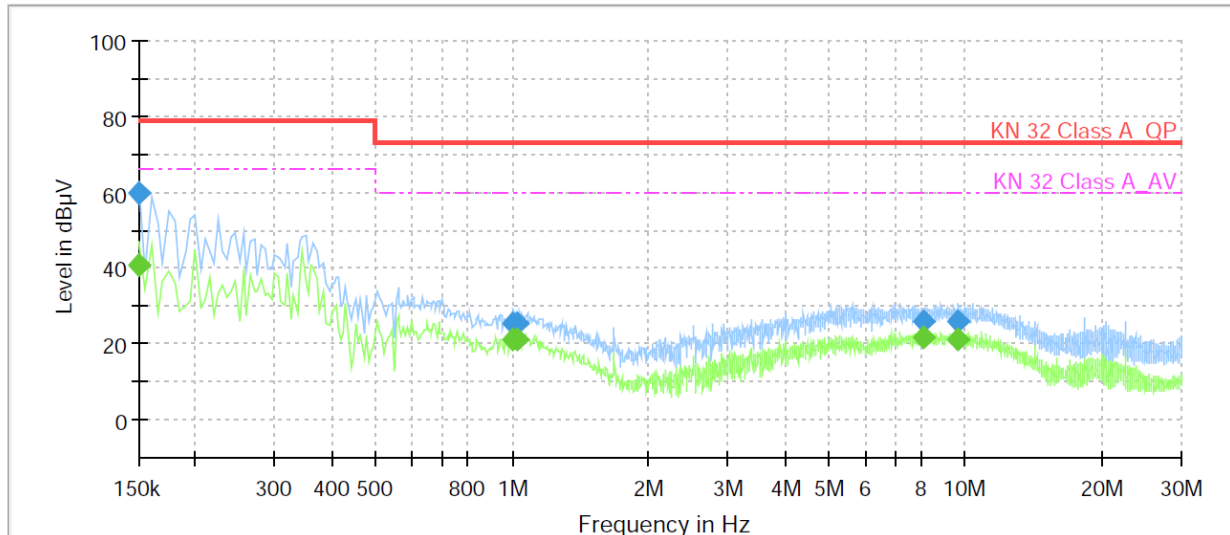

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	40.95	66.00	25.05	1000.0	9.000	N	21.1
0.150000	59.91	---	79.00	19.09	1000.0	9.000	N	21.1
1.005000	---	21.15	60.00	38.85	1000.0	9.000	N	20.2
1.005000	25.49	---	73.00	47.51	1000.0	9.000	N	20.2
1.030000	---	21.35	60.00	38.65	1000.0	9.000	N	20.1
1.030000	25.51	---	73.00	47.49	1000.0	9.000	N	20.1
8.085000	---	21.48	60.00	38.52	1000.0	9.000	N	19.8
8.085000	25.87	---	73.00	47.13	1000.0	9.000	N	19.8
9.630000	---	21.35	60.00	38.65	1000.0	9.000	N	19.9
9.630000	25.84	---	73.00	47.16	1000.0	9.000	N	19.9

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

- PoE Mode

[HOT]

Common Information

Test Description:

Model No.:

Mode


Operator Name:

Conducted Emission

XNV-8020RN

PoE L1

KES

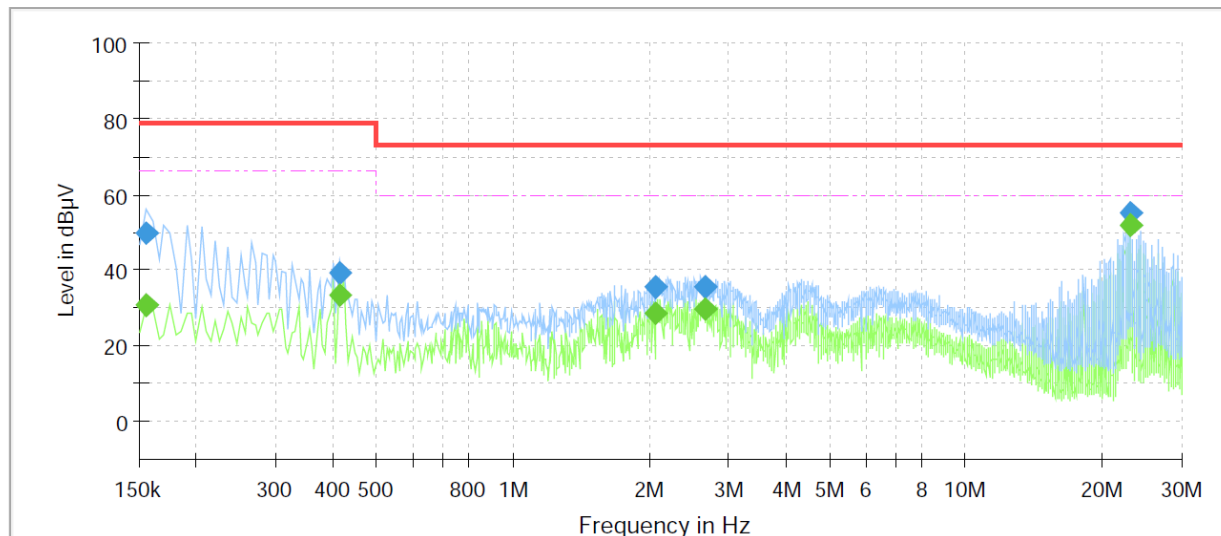

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	30.85	66.00	35.15	1000.0	9.000	L1	21.0
0.155000	49.57	---	79.00	29.43	1000.0	9.000	L1	21.0
0.415000	---	33.20	66.00	32.80	1000.0	9.000	L1	20.6
0.415000	39.39	---	79.00	39.61	1000.0	9.000	L1	20.6
2.065000	---	28.64	60.00	31.36	1000.0	9.000	L1	19.8
2.065000	35.25	---	73.00	37.75	1000.0	9.000	L1	19.8
2.640000	---	29.86	60.00	30.14	1000.0	9.000	L1	19.8
2.640000	35.29	---	73.00	37.71	1000.0	9.000	L1	19.8
23.130000	---	51.73	60.00	8.27	1000.0	9.000	L1	20.4
23.130000	54.80	---	73.00	18.20	1000.0	9.000	L1	20.4

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]


QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

[NEUTRAL] Common Information

Test Description: Conducted Emission
Model No.: XNV-8020RN
Mode: PoE N
Operator Name: KES

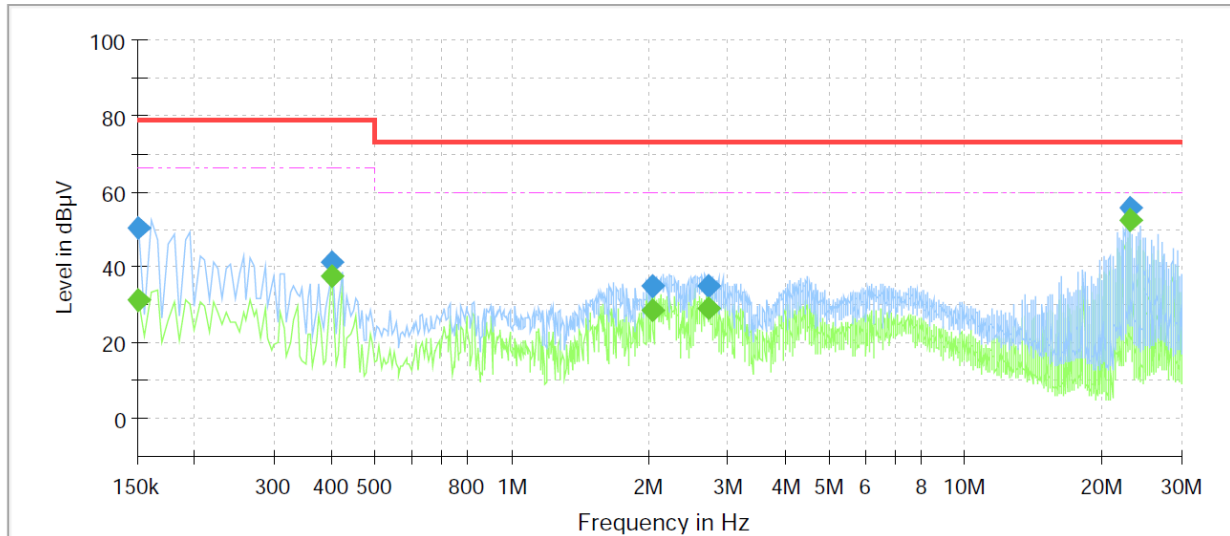

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	31.14	66.00	34.86	1000.0	9.000	N	21.1
0.150000	50.21	---	79.00	28.79	1000.0	9.000	N	21.1
0.400000	---	37.73	66.00	28.27	1000.0	9.000	N	20.7
0.400000	41.11	---	79.00	37.89	1000.0	9.000	N	20.7
2.035000	---	28.42	60.00	31.58	1000.0	9.000	N	19.8
2.035000	35.18	---	73.00	37.82	1000.0	9.000	N	19.8
2.705000	---	29.28	60.00	30.72	1000.0	9.000	N	19.8
2.705000	35.03	---	73.00	37.97	1000.0	9.000	N	19.8
23.130000	---	52.40	60.00	7.60	1000.0	9.000	N	20.2
23.130000	55.45	---	73.00	17.55	1000.0	9.000	N	20.2

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0101-R2
Page (20) of (36)

Radiated Electric Field Emissions(Below 1 GHz)

- DC 12 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
250.06	15.32	H	2.63	12.49	4.72	32.53	46.40	13.87
250.17	11.58	V	1.22	12.49	4.72	28.79	46.40	17.61
350.13	15.33	H	2.31	14.52	5.64	35.49	46.40	10.91
350.14	13.95	V	1.58	14.52	5.64	34.11	46.40	12.29
512.94	16.32	H	2.33	17.60	7.11	41.03	46.40	5.37
591.63	14.10	V	3.01	19.16	7.76	41.02	46.40	5.38
650.08	14.43	V	1.02	19.49	8.15	42.07	46.40	4.33
650.82	12.87	H	1.95	19.49	8.16	40.52	46.40	5.88

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dB μ V] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0101-R2
Page (21) of (36)

- PoE Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	[dB]
225.91	12.93	V	2.31	12.16	4.43	29.52	46.40	16.88
225.92	11.52	H	2.22	12.16	4.43	28.11	46.40	18.29
350.07	13.58	H	1.58	14.52	5.64	33.74	46.40	12.66
350.08	11.25	V	1.36	14.52	5.64	31.41	46.40	14.99
400.47	13.35	V	3.21	15.62	6.18	35.15	46.40	11.25
459.70	14.58	H	1.25	16.65	6.84	38.07	46.40	8.33
512.98	13.90	H	1.00	17.61	7.11	38.62	46.40	7.78
650.03	14.43	V	1.98	19.49	8.15	42.07	46.40	4.33

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dBμV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0101-R2
Page (22) of (36)

Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode

- PK

Frequency	Amplitude	ANT Polar.	ANT. Height	Correction Factor			Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	(H/V)	[m]	ANT. [dB /m]	Cable [dB]	AMP [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
1 137.000	84.630	H	1.250	21.190	3.290	43.640	65.470	80.000	14.530
1 200.000	86.600	V	2.310	21.510	3.380	43.640	67.850	80.000	12.150
1 834.000	63.200	H	2.550	24.750	4.320	43.730	48.540	80.000	31.460
1 991.000	68.710	V	1.950	25.550	4.400	43.780	54.880	80.000	25.120
3 574.000	41.940	V	3.010	30.710	6.170	44.240	34.580	80.000	45.420
3 580.000	46.330	H	1.250	30.720	6.180	44.240	38.990	80.000	41.010
4 996.000	40.080	H	2.140	33.220	6.990	44.330	35.960	80.000	44.040
4 996.000	40.990	V	1.230	33.220	6.990	44.330	36.870	80.000	43.130

- AV

Frequency	Amplitude	ANT Polar.	ANT. Height	Correction Factor			Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	(H/V)	[m]	ANT. [dB /m]	Cable [dB]	AMP [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
1 137.000	59.240	H	1.260	21.190	3.290	43.640	40.080	60.000	19.920
1 201.000	74.150	V	2.300	21.520	3.380	43.640	55.410	60.000	4.590
1 835.000	43.390	H	2.580	24.760	4.320	43.730	28.740	60.000	31.260
1 995.000	41.760	V	1.990	25.570	4.400	43.780	27.950	60.000	32.050
3 571.000	32.990	V	2.950	30.700	6.160	44.240	25.610	60.000	34.390
3 581.000	33.620	H	1.030	30.720	6.180	44.240	26.280	60.000	33.720
4 995.000	28.860	V	2.110	33.220	6.990	44.330	24.740	60.000	35.260
4 997.000	28.640	H	1.390	33.220	6.990	44.330	24.520	60.000	35.480

◆ Calculation

Correction Factor [dB] = Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]

Corrected Amplitude [dB μ V] = Amplitude[dB μ V] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0101-R2
Page (23) of (36)

- PoE Mode

- PK

Frequency	Amplitude	ANT Polar.	ANT. Height	Correction Factor			Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	(H/V)	[m]	ANT. [dB /m]	Cable [dB]	AMP [dB]	[dBμV/m]	[dBμV/m]	[dB]
1 147.000	79.140	H	2.310	21.240	3.310	43.640	60.050	80.000	19.950
1 200.000	87.950	V	2.220	21.510	3.380	43.640	69.200	80.000	10.800
1 601.000	74.980	H	1.840	23.560	3.860	43.660	58.740	80.000	21.260
1 755.000	58.410	V	3.010	24.350	4.200	43.710	43.250	80.000	36.750
2 407.000	58.700	H	1.630	27.310	4.910	43.970	46.950	80.000	33.050
2 408.000	63.700	V	2.140	27.310	4.910	43.970	51.950	80.000	28.050
3 560.000	44.940	H	2.240	30.690	6.140	44.250	37.520	80.000	42.480
3 584.000	46.080	V	1.280	30.720	6.180	44.240	38.740	80.000	41.260
4 387.000	41.650	H	2.140	32.100	6.710	44.250	36.210	80.000	43.790
4 901.000	40.820	V	1.030	33.050	6.990	44.320	36.540	80.000	43.460

- AV

Frequency	Amplitude	ANT Polar.	ANT. Height	Correction Factor			Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	(H/V)	[m]	ANT. [dB /m]	Cable [dB]	AMP [dB]	[dBμV/m]	[dBμV/m]	[dB]
1 148.000	54.700	H	2.360	21.250	3.310	43.640	35.620	60.000	24.380
1 196.000	68.630	V	2.140	21.490	3.370	43.640	49.850	60.000	10.150
1 602.000	61.520	H	1.950	23.570	3.860	43.660	45.290	60.000	14.710
1 758.000	44.390	V	3.000	24.360	4.210	43.710	29.250	60.000	30.750
2 401.000	49.520	H	1.520	27.280	4.900	43.960	37.740	60.000	22.260
2 401.000	53.370	V	2.340	27.280	4.900	43.960	41.590	60.000	18.410
3 568.000	30.520	H	2.440	30.700	6.160	44.240	23.140	60.000	36.860
3 580.000	30.990	V	1.390	30.720	6.180	44.240	23.650	60.000	36.350
4 388.000	30.270	H	2.310	32.100	6.710	44.250	24.830	60.000	35.170
4 897.000	28.460	V	1.280	33.040	7.000	44.320	24.180	60.000	35.820

◆ Calculation

Correction Factor [dB] = Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration


Conducted Voltage Emissions

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- PoE Mode

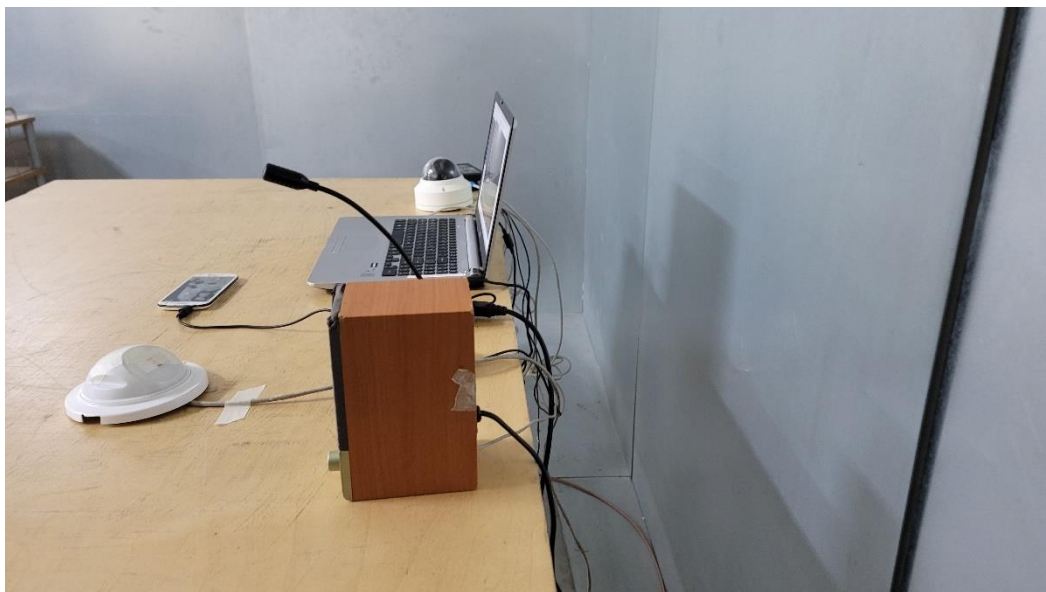

Radiated Electric Field Emissions(Below 1 GHz)

- DC 12 V Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- PoE Mode



Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode

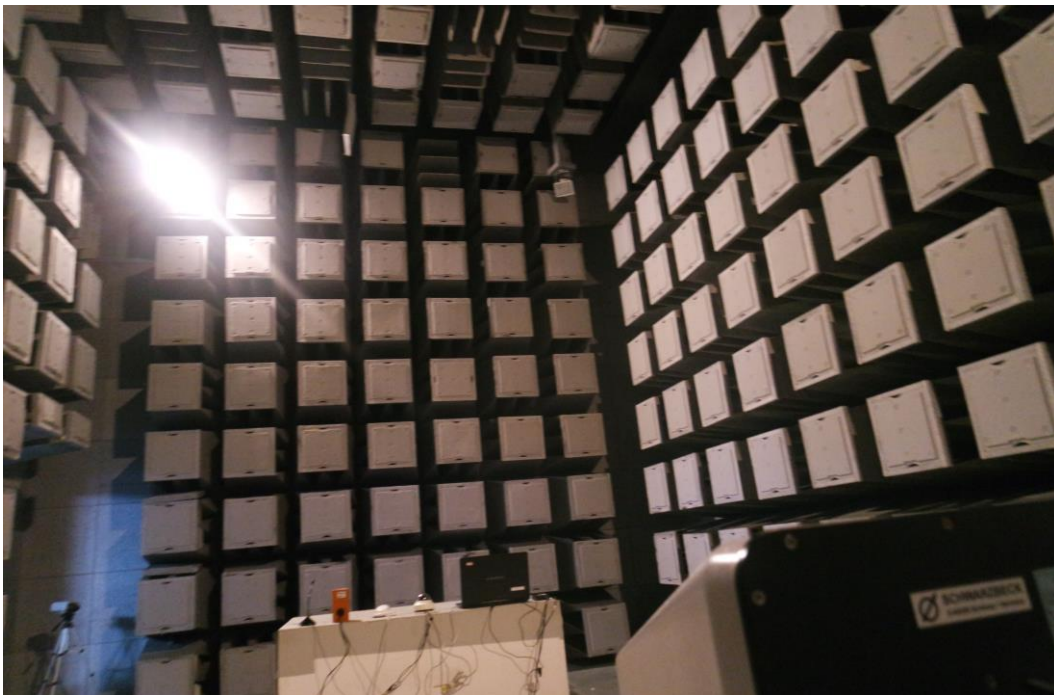

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EUT Internal Photographs

(Internal View)




EUT Internal View – Main Board

(Top)

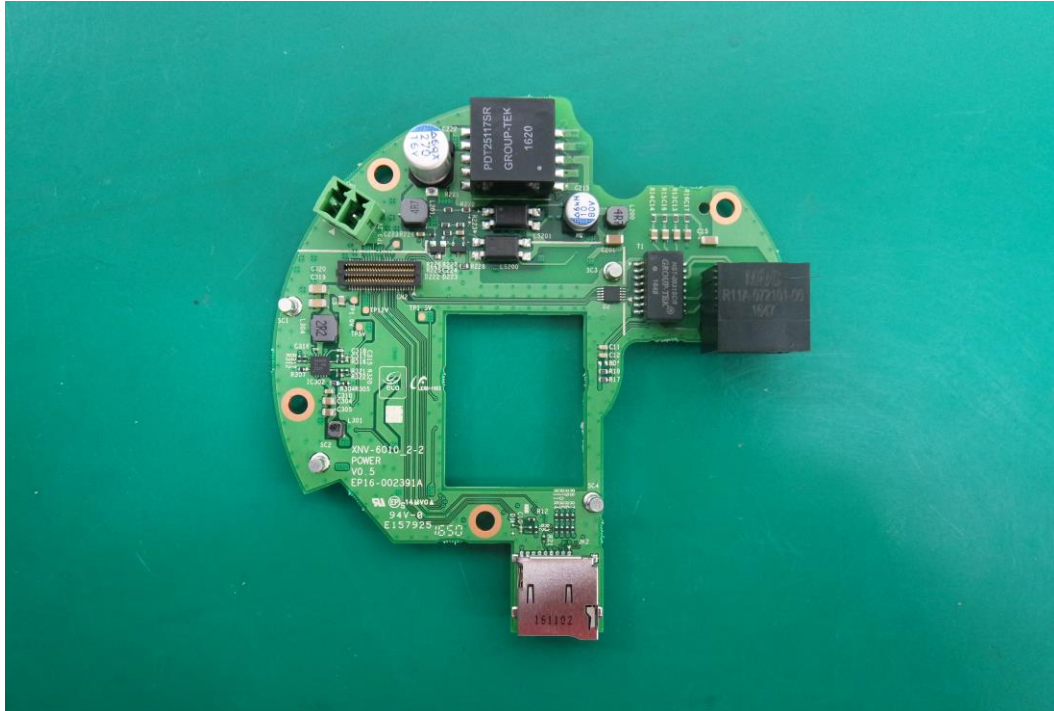


(Bottom)

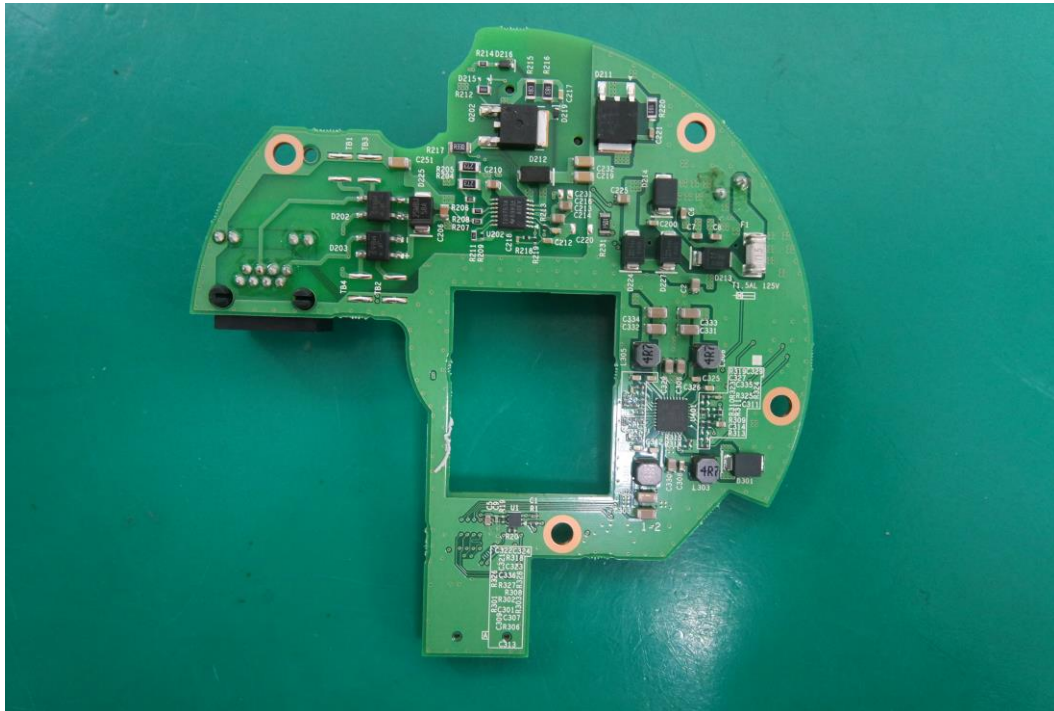


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub Board

(Top)

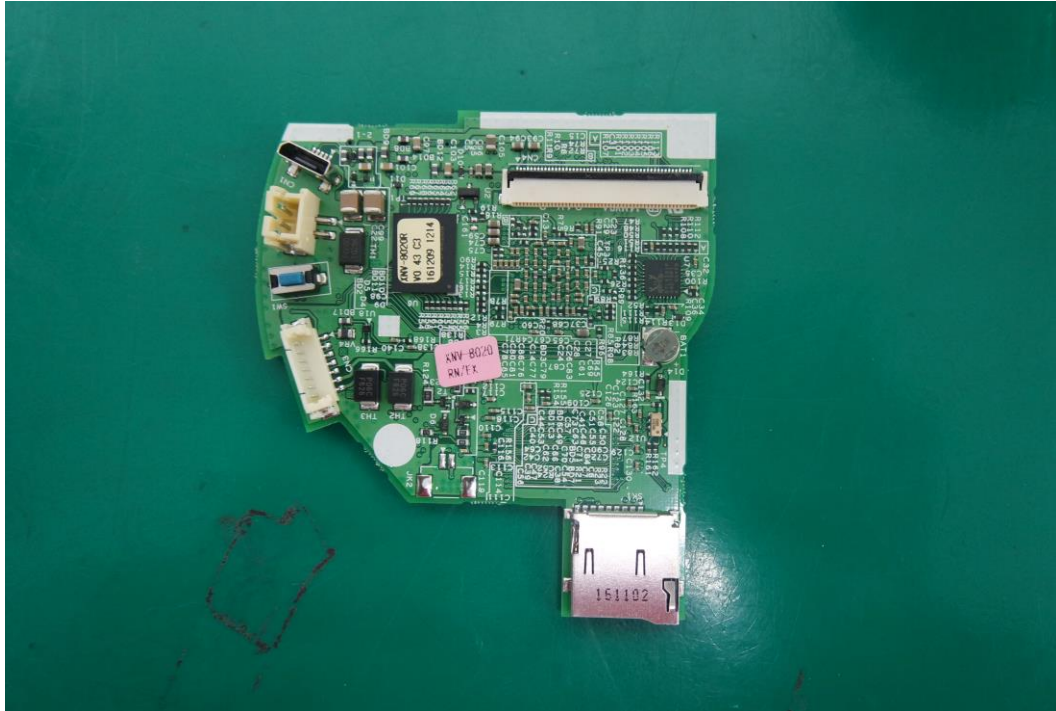


(Bottom)

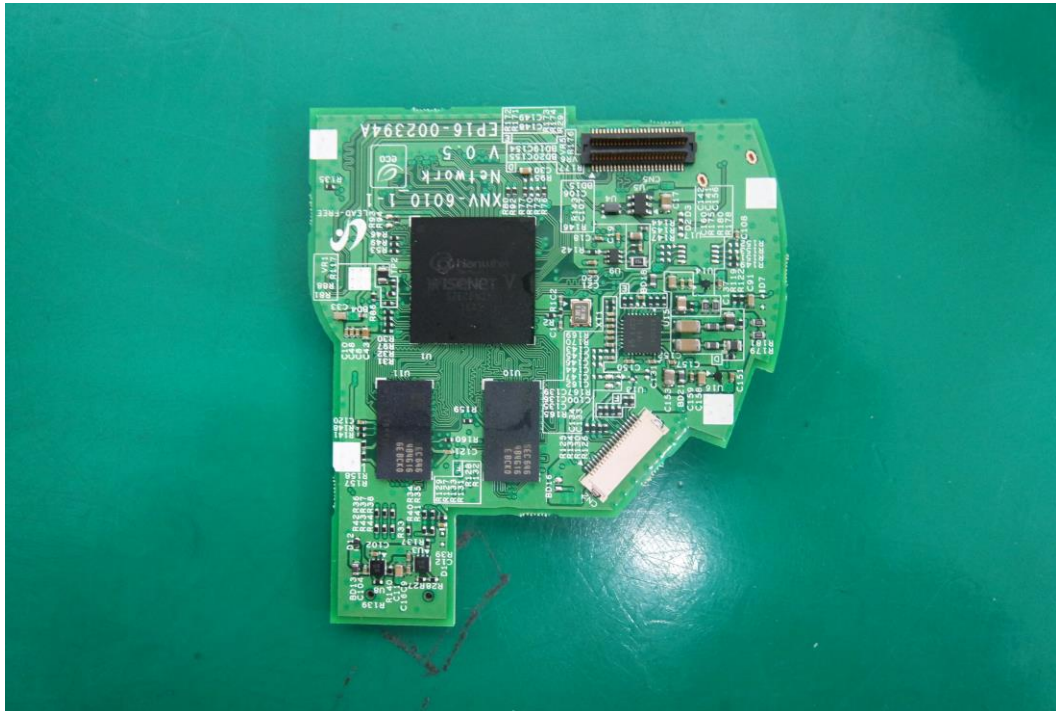


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Lens Board

(Top)

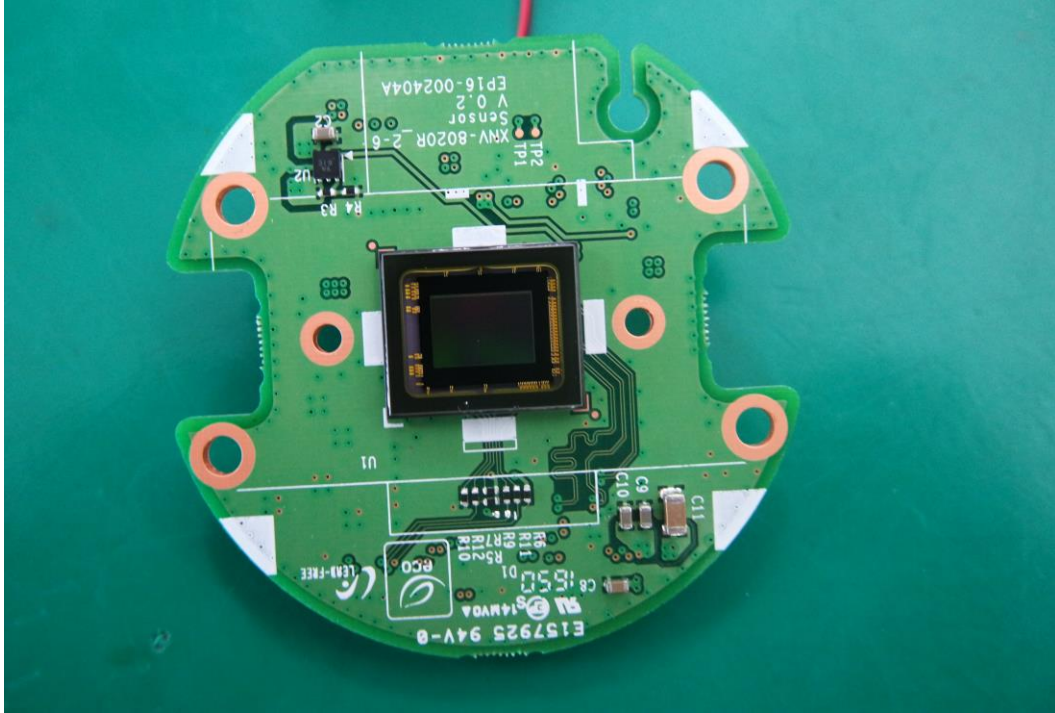


(Bottom)

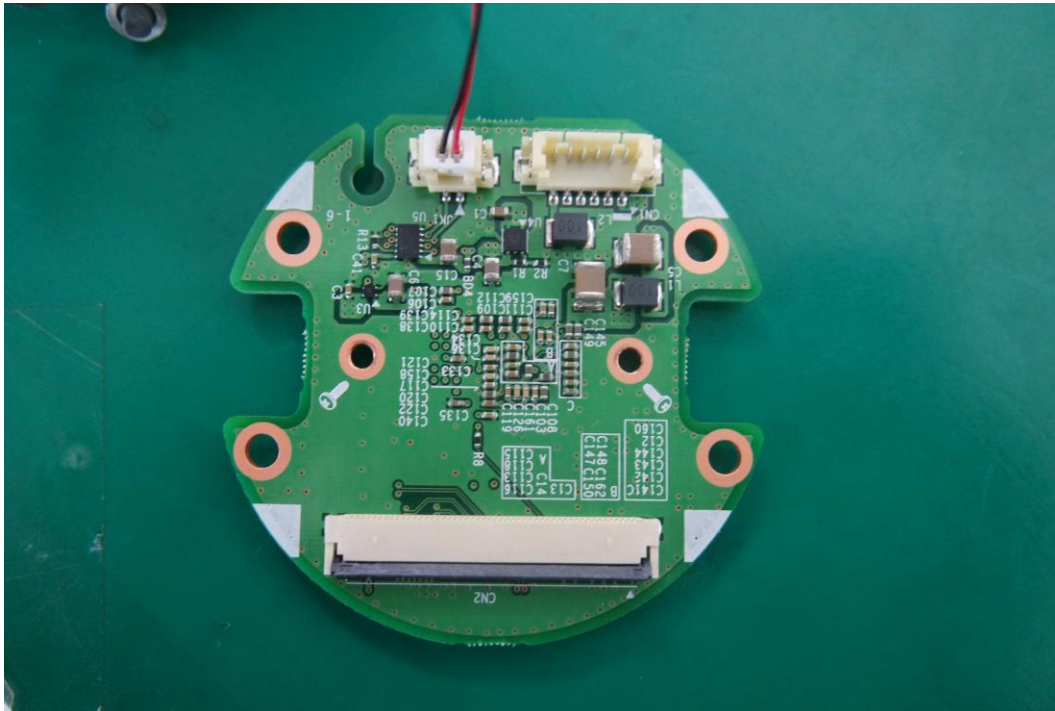


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – LED Board


(Top)

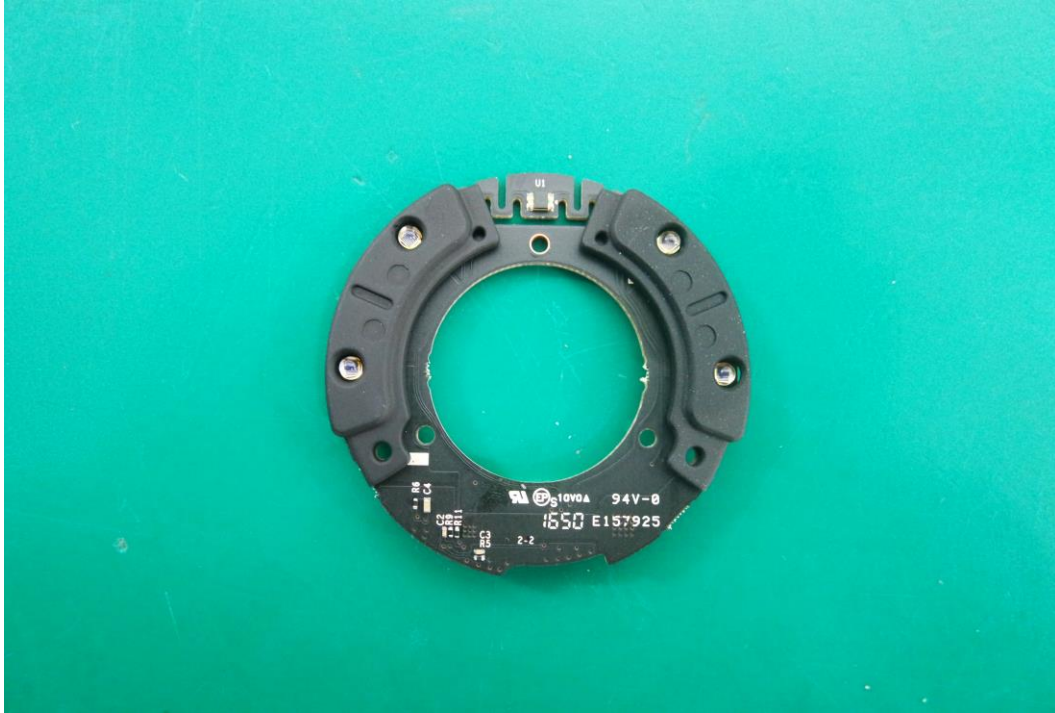

(Bottom)

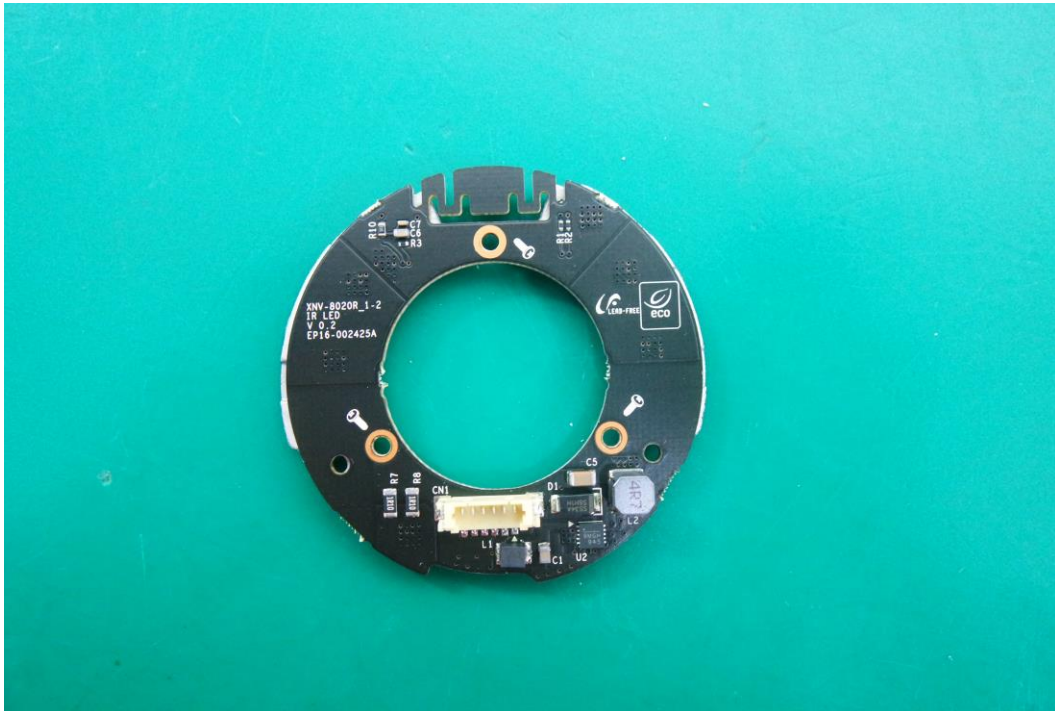

Label Photographs

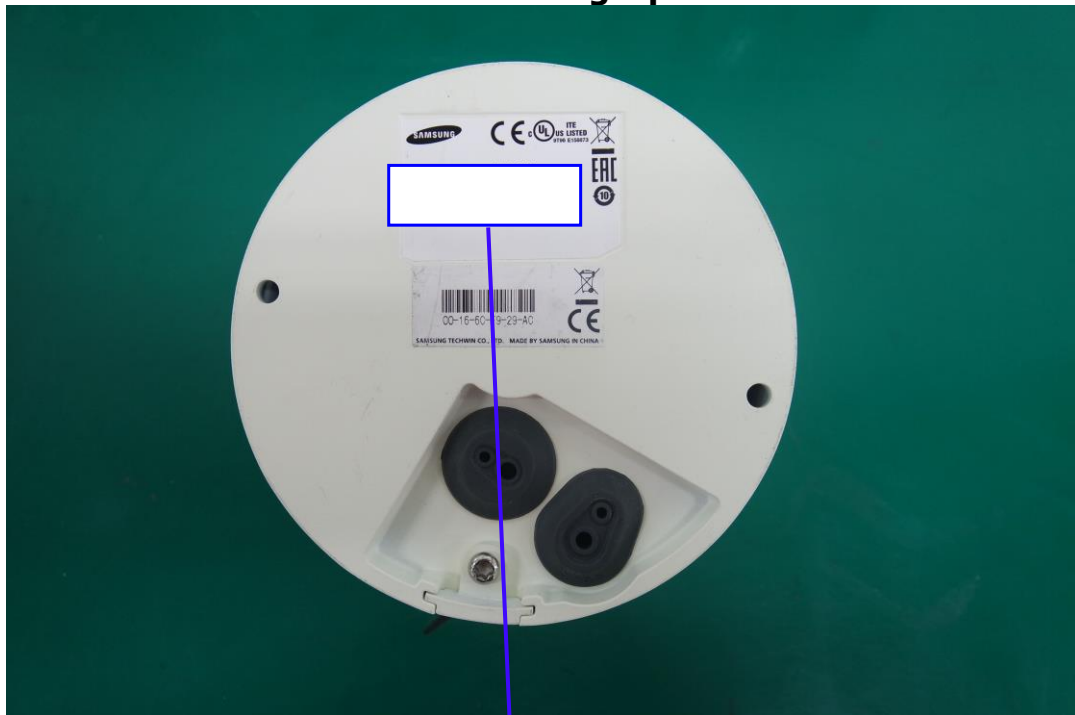

This device complies with part 15 of the FCC Rules. Operation in subject to the following two conditions: (1) This device Sep not cause harmful interference, and (2) this device must accept any interference received, including interference that Sep cause undesired operation.