

DECLARATION OF CONFORMITY

We; Hanwha Techwin Co., Ltd.
DECLARE UNDER OUR SOLE RESPONSIBILITY THAT THE PRODUCT;

Report No:	KES-E1-16T0153-R1
Type of equipment:	NETWORK VIDEO RECORDER
Model Name:	XRN-2010P
Variant Model:	XRN-3010P
Applicant:	Hanwha Techwin Co., Ltd.
Address:	1204,Changwon-daero, Seongsan-gu, Chang-won-si, Gyeongsangnam-do,Korea
Manufacturer :	Tianjin Samsung Techwin Opto-Electronic Co.,Ltd.
Address:	No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin, 300385, People's Republic of China
Test standards :	AS/NZS CISPR22:2009+A1:2010
Classification:	C-Tick

The above equipment was tested by EMC compliance Testing Laboratory for with the requirements of C-tick Rules and Regulations. The results of testing in this report apply to the product / system which was tested only.

Dec. 13. 2016
(Date of issue)

(Name and signature of authorized person)



EMC TEST REPORT For C-TICK

Test Report No. : KES-E1-16T0153-R1

Date of Issue : Dec. 13, 2016

Product name : NETWORK VIDEO RECORDER

Model/Type No. : XRN-2010P

Variant Model : XRN-3010P

Applicant : Hanwha Techwin Co., Ltd.

Applicant Address : 1204, Changwon-daero, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, korea

Manufacturer : Tianjin Samsung Techwin Opto-Electronic Co.,Ltd.

Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China

Date of Receipt : Mar. 25, 2016

Test date : Mar. 31, 2016 ~ Apr. 04, 2016

Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Dae Hyun, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0153-R1

Page (2) of (38)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Apr. 07, 2016	KES-E1-16T0153	Issued
Dec. 13, 2016	KES-E1-16T0153-R1	Adding Variant model

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	8
1.8	Configuration	9
1.9	Calibration Details of Equipment Used for Measurement.....	10
1.10	Test Facility	10
1.11	Laboratory Accreditations and Listings	10
2.0	Test Regulations	11
2.1	Conducted Emissions at Mains Power Ports	13
2.2	Conducted Emissions at Telecommunication Ports	14
2.3	Radiated Electric Field Emissions(Below 1 GHz)	15
2.4	Radiated Electric Field Emissions(Above 1 GHz)	16
APPENDIX A – TEST DATA		17
Conducted Emissions at Mains Power Ports		17
Conducted Emissions at Telecommunication Ports.....		19
Radiated Electric Field Emissions(Below 1 GHz)		22
Radiated Electric Field Emissions(Above 1 GHz)		23
Test Setup Photos and Configuration.....		27
Conducted Voltage Emissions		27
Conducted Telecommunication Emissions		28
Radiated Electric Field Emissions(Below 1 GHz)		29
Radiated Electric Field Emissions(Above 1 GHz)		30
EUT External Photographs.....		31
EUT Internal Photographs		32



1.0 General Product Description

Main Specifications of EUT are:

단계		DVR
Model		XRN-2010
Display		
Network Camera	Inputs	Max. 32CH
	Resolution	CIF ~ 12MP
	Protocols	Samsung, ONVIF
Live	Local Display	1x HDMI / 1x VGA
	Multi-Channel Display	[Local Monitor] 1 / 2V / 3V / 4 / 6 / 8 / 9 / 13 / 16 / 25 / 36 / Sequence [Web] 1 / 2V / 3V / 4 / 6 / 9 / 16 / 25 / 36 / Sequenc
	Performance	[Local Monitor] - 12M (30fps) - 8.3M (120fps) - 720P (960fps) - D1 (1920fps) [Web] TBD
Performance		
Operating System	Embedded	Linux
Record	Compression	H.26S, H.264, MJPEG
	Recording Bandwidth	Max. 250Mbps(2MP 32camera real-time recording)
	Resolution	CIF ~ 12MP
	Type	Manual, Schedule(Continuous/Event), Event (Pre/Post)
	Event Trigger	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics)
	Event Action	e-Mail, PTZ Preset, Alarm Out, Buzzer, Monitor Out
Search & Play	Playback Bandwidth	32Mbps (16CH simultaneously)
	Performance	Max. 4 Users (Local 1, Remote 3)
	Mode	Date & Time(Calendar)/Event Log list / Text Search
	Simultaneous playback	Max. 16CH(Local Monitor, CMS)
	Resolution	CIF ~ 12MP
	Fisheye Dewarping	Remote Viewer(CMS,WEB)
Storage	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down
	Built-In	0TB ~ 8TB
	Internal HDD	8 (Max 48TB)
	External	iSCSI storage(Max. 384TB) ① Promise VessRaid R2600
Backup	RAID	N/A
	File backup(Via Web)	BU/Exe(GUI), JPG/AVI(Network)
Sensor	Function	Multi channel(Upto 16CH) Play, Date-Time/Title display
	I/O	8/4 (NO/NC Selectable)
Audio	Input	32 CH (network)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way
Network		
Interface		RJ-45, Gigabit Ethernet x2
Protocol		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS		Samsung IPollis DDNS
Transmission Bandwidth		~ 512Mbps(iSCSI Off), 256Mbps(iSCSI On)
Max Remote Users		Search (3), Live Unicast (10), Multicast (20)
IP Version		IPv4/v6
Security		User access Log, IP Filtering, 802.1x, Encryption
Language(24)		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai
OS		Supported OS : Vista, 7, 8, 10, Mac OS X(10.7 or above)
Web Browser		MS IE, Google Chrome, Mac Safari, Firefox

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0153-R1

Page (5) of (38)

단계		DVR
Model		XRN-2010
Viewer Software	Type	SSM, Webviewer, Smart Viewer, iPolis Mobile
	CMS Support	Support SDK/CGI
Smart phone	Support Model	I-Phone, Android
	Protocol Support	RTP, RTSP, HTTP, CGI
	Control	Live(16ch) : Multi-Profile Support Playback(1ch)
	Max. Remote Users	Search (3), Live Unicast (10), Multicast (20)
Functions		
Camera Setup	Register	Auto, Manual
	Setup Items	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS), Fisheye Dewarping, Hallway View Setup, Camera Web
	PoE Power Control	N/A
PTZ	Control	Via GUI, Webviewer, SPC-2000
	Preset	255 Presets
Redundancy	Fallover	N+1
	ARB	Yes
System Control		Mouse, Web, SPC-2000 (Controller)
Indicator/Interface		
Front	Indicator	LED(Status indicator) : - SRN-2000 (6개) ① HDD Action(1), ② Alarm(1), ③ Power(1), ④ Record(1), ⑤ Backup(1), ⑥ Network(1)
	Switch	N/A
Connectors	VGA	1 EA (Support Live screen upto 16 div. mode)
	HDMI	1 EA (Both Support Live / PB / Setup) - Support upto 4K (3840 x 2160)
	Audio	Out(1EA, RCA, Line)
	Ethernet	RJ-45 2ea (LAN/WAN, 1Gbps)
	Alarm	(1) In(8EA, Terminal Block) (2) Alarm Reset(1EA) (3) Out(4EA, Terminal Block) - Relay Out1(NO/NC/COM) - Relay Out2~4(NO/COM)
	USB	2EA(Front 1, Rear 1(USB3.0))
	Storage	1 e-SATA
	Serial	RS-232C
	Reset	Switch(1EA)
	Power Cord	1EA AC Inlet
System		
Log	Log List	Max. 20000 (System Log, Event Log each)
Environmental		
Operating Temperature / Humidity		+0°C to +40°C(+32°F to +104°F)
Humidity		20% ~ 85% RH
Electrical		
Power		100 to 240 VAC ±10%; 50/60 Hz, 4~1.5A
Power Consumption		Normal 90W, MAX200W
PoE Budget		N/A
Mechanical		
Color / Material		Black / Metal
Dimension (WxHxD)		440*88*384.8
Weight		5.38kg
Standards		
Approvals	Safety	UL, KC
	EMC	CE, FCC, CCC, Gost-R, KC

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 100 Vac ☐ 110 Vac ☒ 230 Vac ☐ 24 Vac ☐ 12 Vdc

Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Variant Model	Difference
XRN-3010P	That by distribution channel management model.

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK VIDEO RECORDER	XRN-2010P	-	Tianjin Samsung Techwin Opto-Electronic Co., Ltd.	E.U.T
HDD	ST1000VM002	-	Seagate	1 TB
Switching Power Supply	FSP250-50GUB	-	FSP GROUP INC.	-

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0153-R1

Page (7) of (38)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook	NT63025J	JK9091EF400142M	Samsung Electronics Co., Ltd	-
Notebook Adapter	A13-040N2A	CN60BA4400313AD0N843 KO2OO	Chicony Power Technology (suzhou)Co., Ltd.	-
Mouse 1	SMB-400	0DJM010118	SEJIN ELECTRON INC.	-
Monitor 1	SMT-2232	C95V67VF900038B	Weihai Daewoo Electronics Co., Ltd.	-
Monitor 2	HSTND-7041-L	6CM6020YQQ	HP Inc.	-
NETWORK CAMERA	SND-E5031RP	ZBUM67ZG101007H	Hanwha Techwin Co., Ltd.	-
Adapter 1	PA-1041-0	-	DONGGUANG LITE POWER 2ND PLANT	-
Speaker	MS-760	-	MASS	-
Mouse	YTOP-589	-	Hanwha Techwin Co., Ltd.	-
External Hard drive	NEXT-652DC	1207230749	YCN	-
Adapter 2	GT-41062-1805-T3	-	GlobTek, Inc.	-
HDD	Diamond Max Plus9	Y41P45KE	Maxtor	-
USB 3.0 Memoery	-	-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.6 External I / O Cabling

Start		END		Cable Spec.	
Description	I / O Port	Description	I / O Port	Length	Shield
NETWORK VIDEO RECORDER (E.U.T)	HDMI	Monitor 1	HDMI	1.5	S
	D-SUB	Monitor 2	D-SUB	1.4	S
	RJ-45(LAN) (Notebook	Notebook	RJ-45(LAN)	3.0	U
	RJ-45(LAN) (NETWORK CAMERA)	NETWORK CAMERA	RJ-45(LAN)	3.0	U
	RS-232	Mouse 1	RS-232	2.2	U
	USB 3.0	USB 3.0 Memoery	USB 3.0	-	-
	USB	Mouse 2	USB	1.3	U
	ALARM	Impedance Terminating	-	-	-
	eSATA	External Hard drive	eSATA	1.1	U

* Unshielded=U, Shielded=S


1.7 EUT Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:

Test mode	Normal operating
OP	MONITORING Network ping test

1.8 Configuration

■ AC Main
□ DC Main

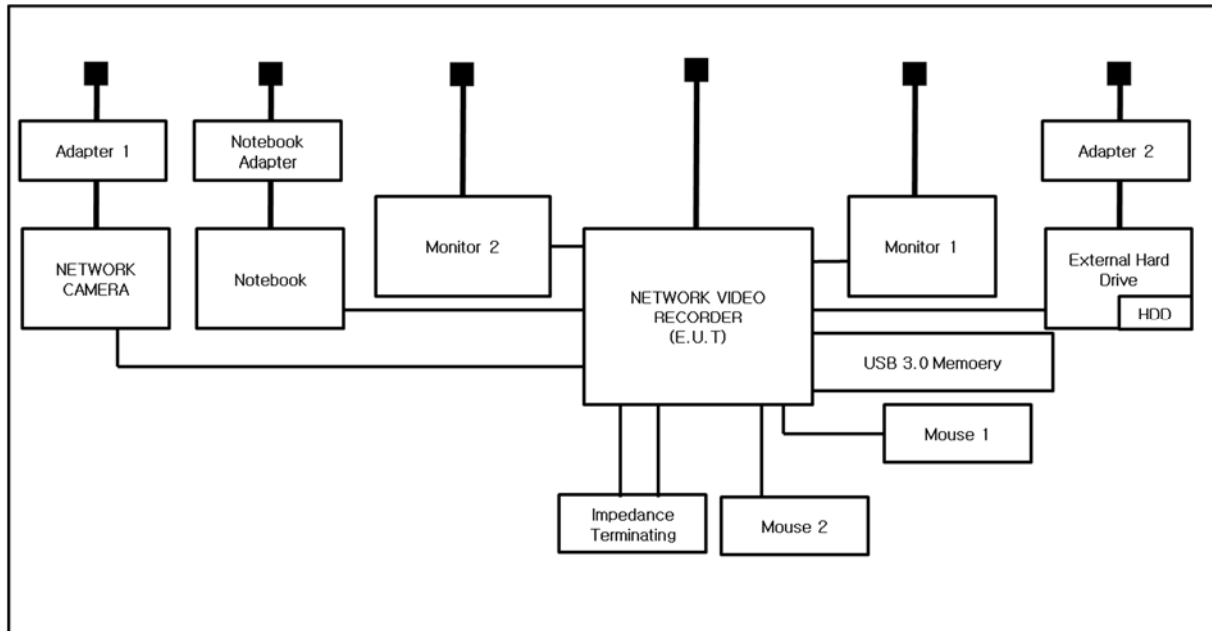

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-29 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2004/108/EC**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55022:2010

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013

☐ VCCI V-3/2013.04

☐ Class A

☐ Class B

☒ AS/NZS CISPR22:2009 +A1:2010

☒ Class A

☐ Class B

☐ 47 CFR Part 15, Subpart B / ANSI C63.4-2009

☐ Class A

☐ Class B

☐ IC Regulation ICES-003 : 2012
/ ANSI C63.4-2014

☐ Class A

☐ Class B

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B



☐ **R&TTE- Directive 1999 / 5 / EC**

☐ EN 301 489-1 V1.9.2

- ☐ Equipment for fixed use
- ☐ Equipment for vehicular use
- ☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002



2.1 Conducted Emissions at Mains Power Ports

Test Date

Apr. 04, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 06, 2016
☒	LISN	ENV216	R & S	101137	02, 04, 2017
☒	LISN	ENV216	R & S	101786	05, 06, 2016
☒	Electro wave Shieldroom	-	AONE SHIELD	-	-

Test Conditions

Temperature: 24.1 °C

Relative Humidity: 39.2 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Conducted Emissions at Telecommunication Ports

Test Date

Apr. 04, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Tesr Receiver	ESR3	R & S	101783	05. 06. 2016
☒	LISN	ENV216	R & S	101137	02. 04. 2017
☒	LISN	ENV216	R & S	101786	05. 06. 2016
☒	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04. 01. 2017
☒	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04. 01. 2016
☒	8-Wire ISN CAT6	NTFM 8158	Schwarzbeck Mess	8158-0029	08. 14. 2016
☒	Electro wave Shieldroom	-	SEMITEC	-	-

Test Conditions

Temperature: 24.1 °C

Relative Humidity: 39.2 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Mar. 31, 2016

Test Location

☐ Open Area Test Site #1

☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R&S	101781	05, 06, 2016
☒	Trilog-Broadband Antenna	VULB 9163	SCHWARZBECK	9168-713	05, 15, 2017
☒	Open Area Test Site	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-

Test Conditions

Temperature: 19.2 °C

Relative Humidity: 32.0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS

☐ NOT PASS

☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Mar. 31, 2016

Test Location

Semi Anchoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESU26	R&S	100552	05. 06. 2016
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10. 23. 2016
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05. 07. 2017
☒	Semi Anchoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-

Test Conditions

Temperature: 25.3 °C

Relative Humidity: 42.1 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

Common Information

Test Description: Conducted Emission
Model No.: XRN-2010P
Mode
Operator Name: KES

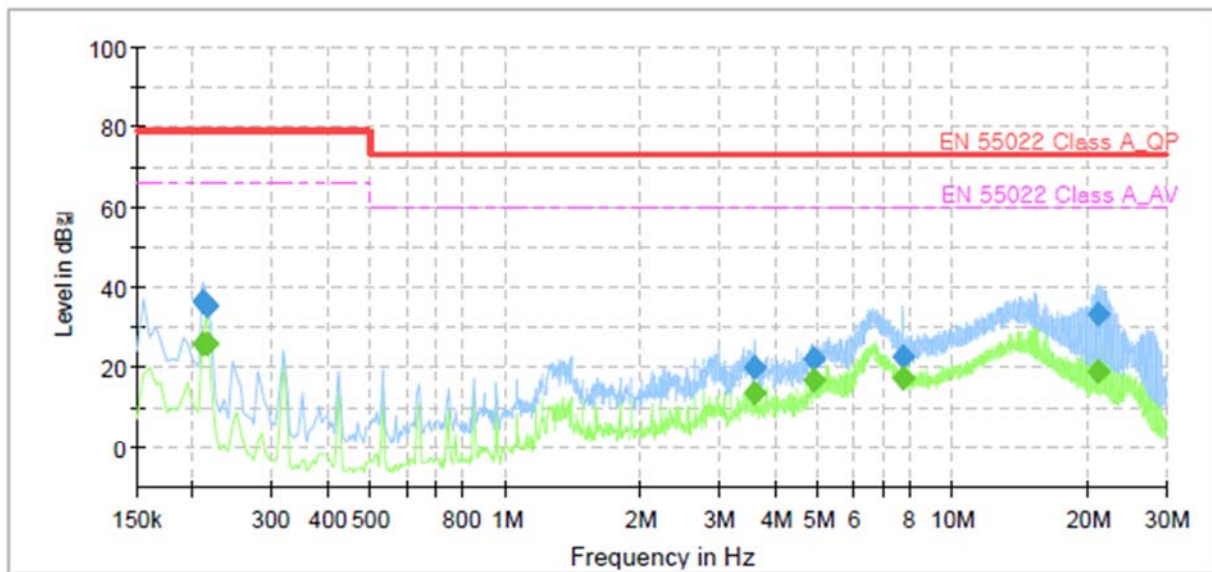

Final_Result

Frequency (MHz)	QuasiPeak (dBμ)	CAverage (dBμ)	Limit (dBμ)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.210000	---	25.75	66.00	40.25	1000.0	9.000	L1	9.7
0.210000	36.47	---	79.00	42.53	1000.0	9.000	L1	9.7
0.215000	---	25.87	66.00	40.13	1000.0	9.000	L1	9.7
0.215000	35.72	---	79.00	43.28	1000.0	9.000	L1	9.7
3.620000	---	13.54	60.00	46.46	1000.0	9.000	L1	9.8
3.620000	20.40	---	73.00	52.60	1000.0	9.000	L1	9.8
4.870000	---	16.71	60.00	43.29	1000.0	9.000	L1	9.8
4.870000	22.17	---	73.00	50.83	1000.0	9.000	L1	9.8
7.150000	---	17.28	60.00	42.72	1000.0	9.000	L1	9.9
7.150000	23.02	---	73.00	49.98	1000.0	9.000	L1	9.9
21.155000	---	18.97	60.00	41.03	1000.0	9.000	L1	10.2
21.155000	33.12	---	73.00	39.88	1000.0	9.000	L1	10.2



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0153-R1

Page (18) of (38)

[NEUTRAL]

Common Information

Test Description:

Conducted Emission


Model No.:

XRN-2010P

Mode

Operator Name:

KES

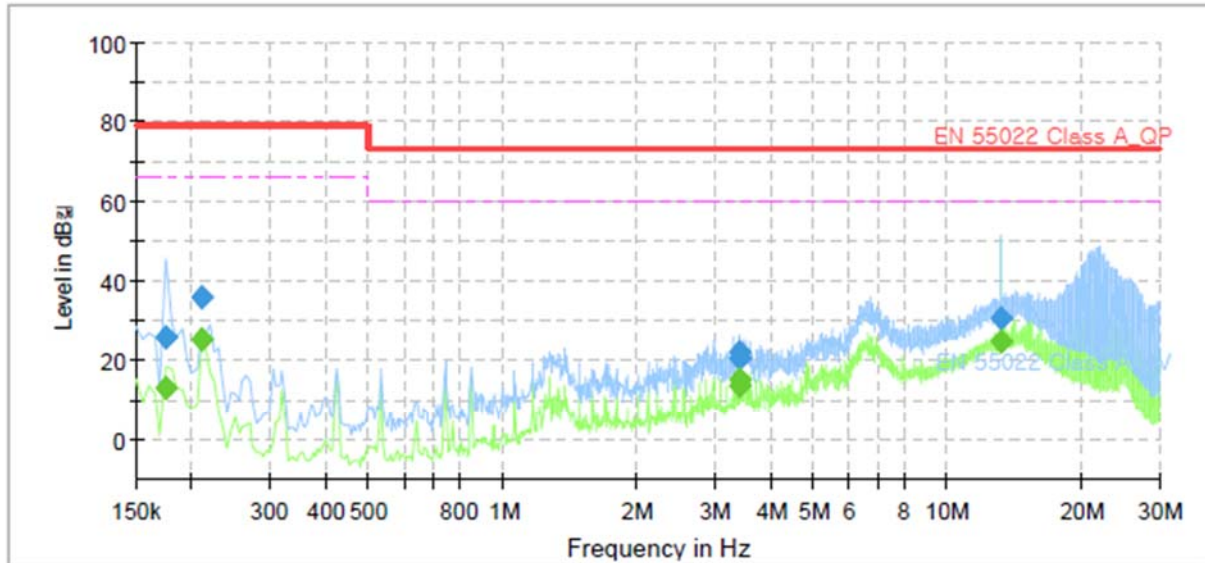

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.175000	---	13.53	66.00	52.47	1000.0	9.000	N	9.6
0.175000	25.85	---	79.00	53.15	1000.0	9.000	N	9.6
0.210000	---	25.23	66.00	40.77	1000.0	9.000	N	9.6
0.210000	35.85	---	79.00	43.15	1000.0	9.000	N	9.6
3.400000	---	13.84	60.00	46.16	1000.0	9.000	N	9.7
3.400000	20.80	---	73.00	52.20	1000.0	9.000	N	9.7
3.405000	---	15.54	60.00	44.46	1000.0	9.000	N	9.7
3.405000	22.34	---	73.00	50.66	1000.0	9.000	N	9.7
13.210000	---	24.98	60.00	35.02	1000.0	9.000	N	10.1
13.210000	30.72	---	73.00	42.28	1000.0	9.000	N	10.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0153-R1


Page (19) of (38)

Conducted Emissions at Telecommunication Ports

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XRN-2010P
Mode	10 Mbps
Operator Name:	KES

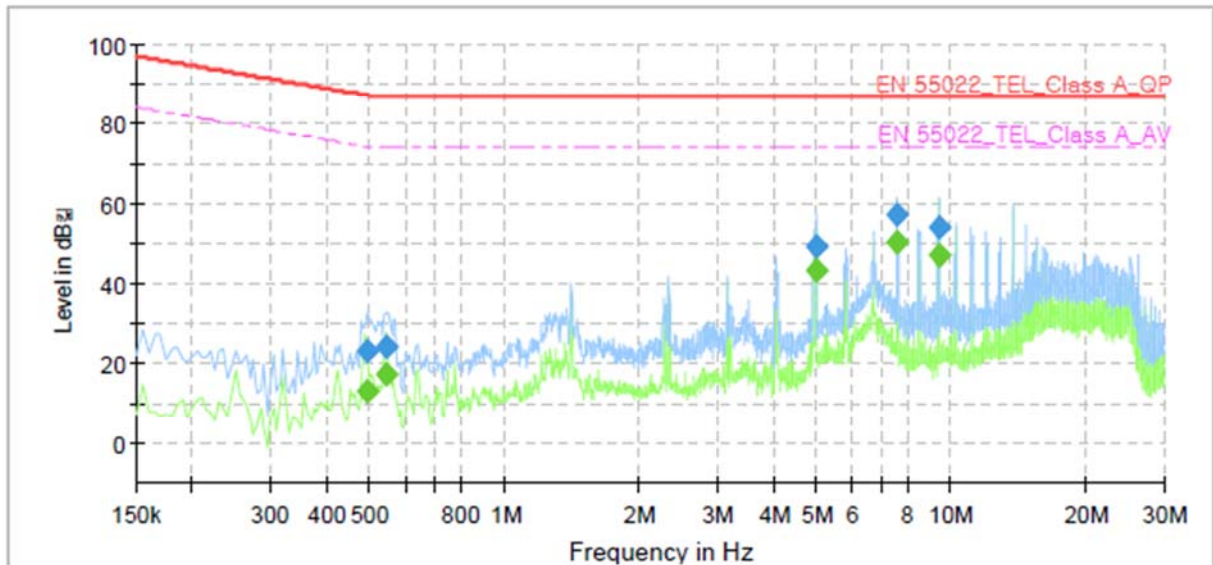

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.495000	---	13.08	74.08	61.00	1000.0	9.000	Single Line	10.0
0.495000	23.28	---	87.08	63.80	1000.0	9.000	Single Line	10.0
0.545000	---	17.33	74.00	56.67	1000.0	9.000	Single Line	9.9
0.545000	24.34	---	87.00	62.66	1000.0	9.000	Single Line	9.9
5.000000	---	43.16	74.00	30.84	1000.0	9.000	Single Line	9.9
5.000000	49.41	---	87.00	37.59	1000.0	9.000	Single Line	9.9
7.555000	---	50.34	74.00	23.66	1000.0	9.000	Single Line	10.0
7.555000	57.05	---	87.00	29.95	1000.0	9.000	Single Line	10.0
9.400000	---	47.34	74.00	26.66	1000.0	9.000	Single Line	10.1
9.400000	54.25	---	87.00	32.75	1000.0	9.000	Single Line	10.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0153-R1

Page (20) of (38)

[100 Mbps]

Common Information

Test Description:

Model No.:

Mode


Operator Name:

Telecommunication Emission

XRN-2010P

100 Mbps

KES

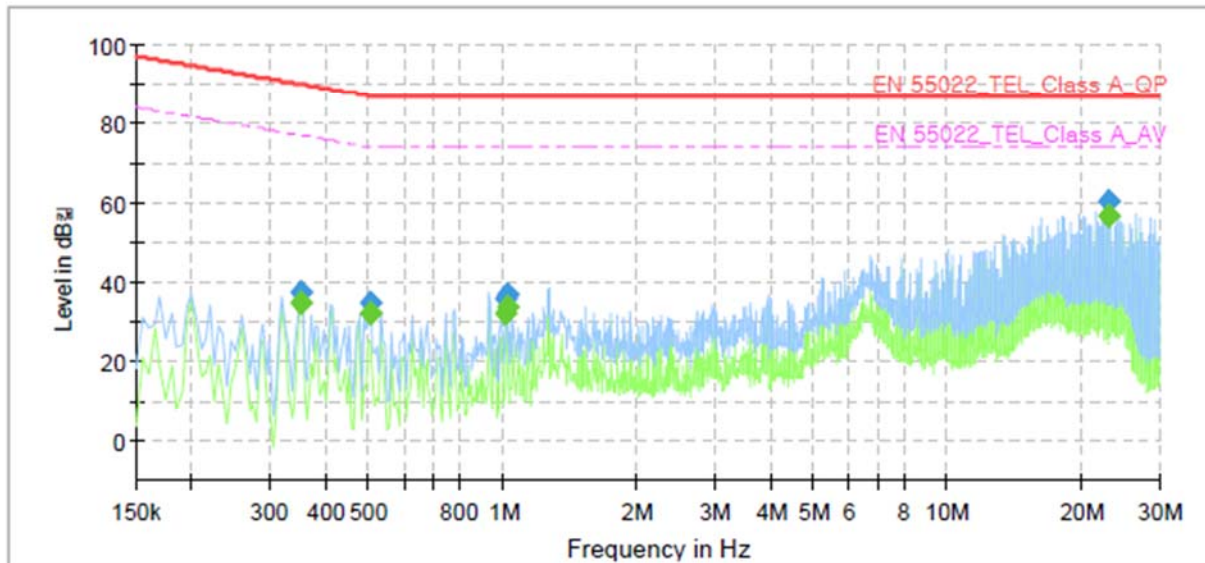

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.350000	---	35.16	76.96	41.80	1000.0	9.000	Single Line	9.5
0.350000	37.43	---	89.96	52.53	1000.0	9.000	Single Line	9.5
0.505000	---	32.36	74.00	41.64	1000.0	9.000	Single Line	9.5
0.505000	34.93	---	87.00	52.07	1000.0	9.000	Single Line	9.5
1.020000	---	32.37	74.00	41.63	1000.0	9.000	Single Line	9.4
1.020000	35.93	---	87.00	51.07	1000.0	9.000	Single Line	9.4
1.025000	---	33.69	74.00	40.31	1000.0	9.000	Single Line	9.4
1.025000	37.07	---	87.00	49.93	1000.0	9.000	Single Line	9.4
23.130000	---	56.73	74.00	17.27	1000.0	9.000	Single Line	9.5
23.130000	60.54	---	87.00	26.46	1000.0	9.000	Single Line	9.5

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0153-R1

Page (21) of (38)

[1 000 Mbps]

Common Information

Test Description:

Model No.:

Mode


Operator Name:

Telecommunication Emission

XRN-2010P

1 000 Mbps

KES

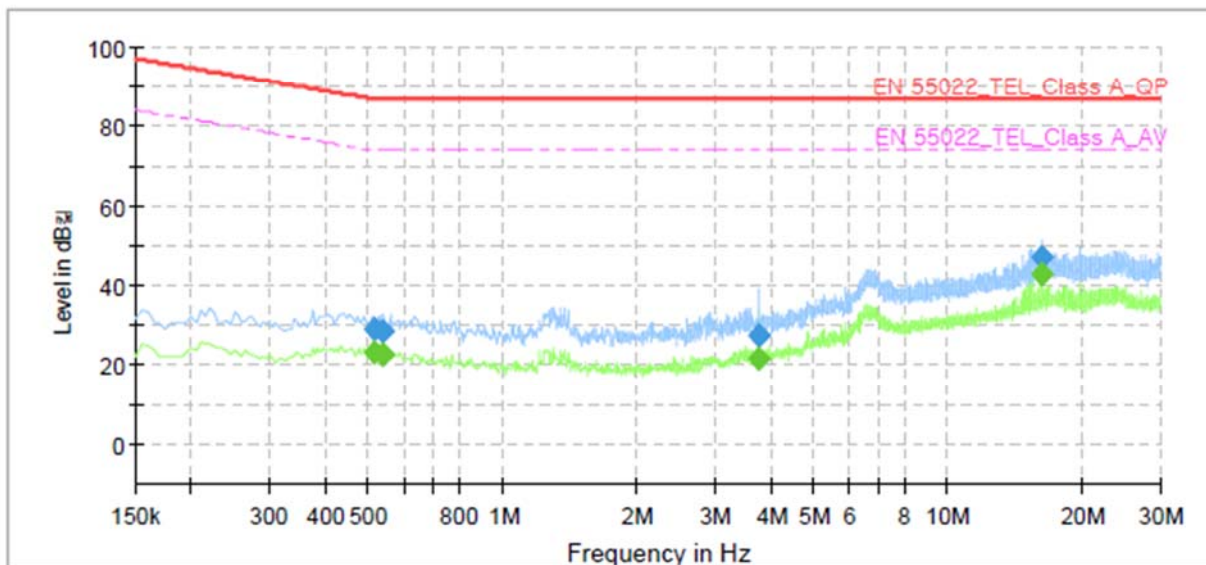

Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.515000	---	23.35	74.00	50.65	1000.0	9.000	Single Line	9.4
0.515000	29.14	---	87.00	57.86	1000.0	9.000	Single Line	9.4
0.540000	---	23.02	74.00	50.98	1000.0	9.000	Single Line	9.3
0.540000	28.66	---	87.00	58.34	1000.0	9.000	Single Line	9.3
3.770000	---	21.74	74.00	52.26	1000.0	9.000	Single Line	9.2
3.770000	27.50	---	87.00	59.50	1000.0	9.000	Single Line	9.2
16.225000	---	42.73	74.00	31.27	1000.0	9.000	Single Line	9.5
16.225000	46.89	---	87.00	40.11	1000.0	9.000	Single Line	9.5

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0153-R1

Page (22) of (38)

Radiated Electric Field Emissions(Below 1 GHz)


Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
48.32	16.38	V	1.00	13.87	1.43	31.68	40.00	8.32
148.26	18.76	V	1.10	8.14	2.76	29.66	40.00	10.34
248.11	21.22	H	4.00	12.37	3.78	37.37	47.00	9.63
392.54	11.72	V	1.00	15.53	4.98	32.23	47.00	14.77
400.36	19.63	V	1.00	15.71	5.04	40.38	47.00	6.62
600.05	16.53	H	3.00	19.30	6.32	42.15	47.00	4.85

* H : Horizontal, V : Vertical

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Radiated Electric Field Emissions(Above 1 GHz)

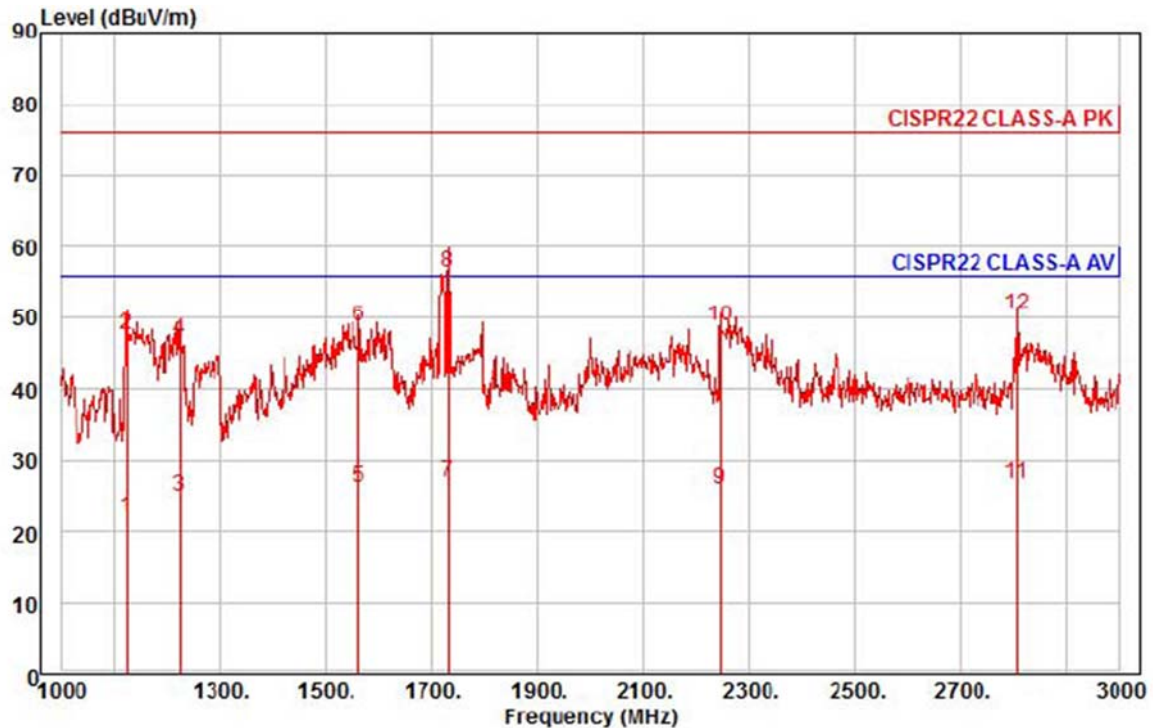

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK VIDEO RECORDER
Model : XRN-2010P
Mode :
Memo : 1 ~ 3 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1122.00	30.86	24.39	6.86	40.06	8	56.00	-33.95	horizontal	Average
2	1122.00	56.33	24.39	6.86	40.06	8	76.00	-28.48	horizontal	Peak
3	1224.00	32.99	24.80	7.16	40.01	8	56.00	-31.06	horizontal	Average
4	1224.00	54.89	24.80	7.16	40.01	8	76.00	-29.16	horizontal	Peak
5	1562.00	31.74	26.14	8.14	39.84	48	56.00	-29.82	horizontal	Average
6	1562.00	54.29	26.14	8.14	39.84	48	76.00	-27.27	horizontal	Peak
7 av	1732.00	31.38	26.82	8.61	39.76	83	56.00	-28.95	horizontal	Average
8 pp	1732.00	60.83	26.82	8.61	39.76	83	76.00	-19.50	horizontal	Peak
9	2246.00	27.47	28.48	9.73	39.77	83	56.00	-30.09	horizontal	Average
10	2246.00	50.42	28.48	9.73	39.77	83	76.00	-27.14	horizontal	Peak
11	2806.00	26.10	29.85	10.76	40.10	63	56.00	-29.39	horizontal	Average
12	2806.00	49.95	29.85	10.76	40.10	63	76.00	-25.54	horizontal	Peak




KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0153-R1

Page (24) of (38)

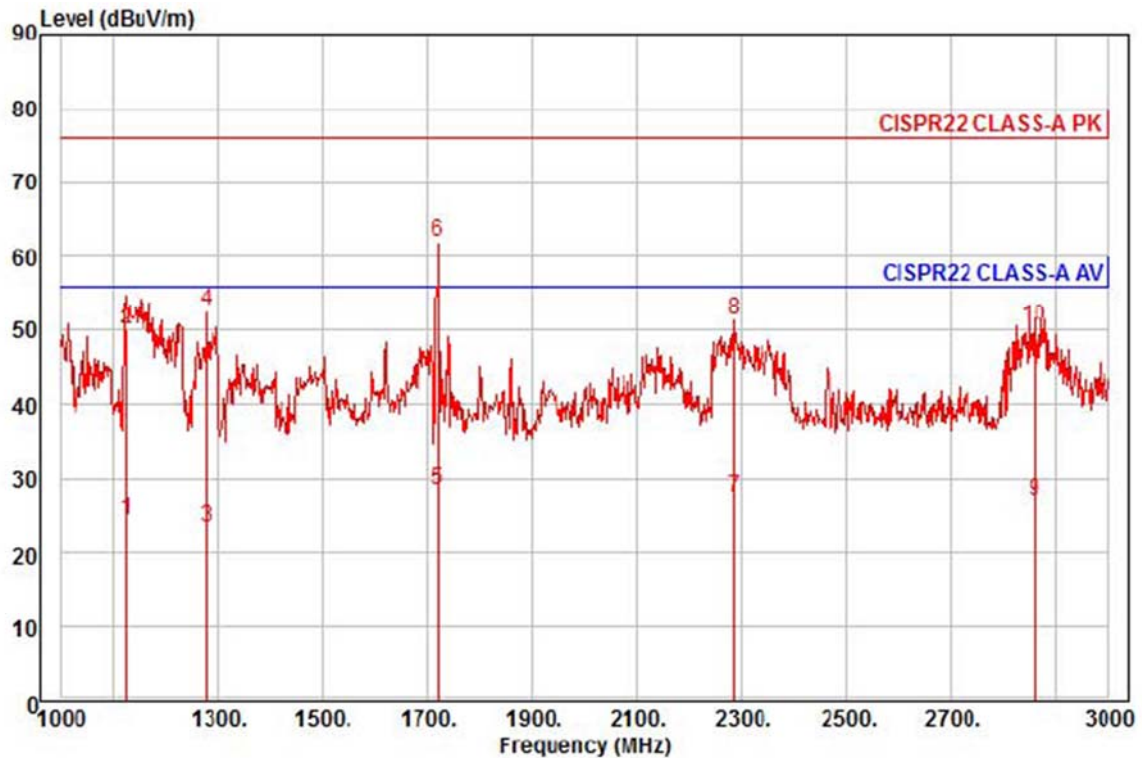

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK VIDEO RECORDER
Model : XRN-2010P
Mode :
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1124.00	33.41	24.40	6.87	40.06	1	56.00	-31.38	vertical	Average
2	1124.00	58.94	24.40	6.87	40.06	1	76.00	-25.85	vertical	Peak
3	1278.00	31.16	25.01	7.32	39.98	27	56.00	-32.49	vertical	Average
4	1278.00	60.47	25.01	7.32	39.98	27	76.00	-23.18	vertical	Peak
5 av	1720.00	32.98	26.77	8.58	39.77	198	56.00	-27.44	vertical	Average
6 pp	1720.00	66.46	26.77	8.58	39.77	198	76.00	-13.96	vertical	Peak
7	2286.00	29.02	28.58	9.79	39.80	18	56.00	-28.41	vertical	Average
8	2286.00	52.96	28.58	9.79	39.80	18	76.00	-24.47	vertical	Peak
9	2860.00	26.11	29.99	10.89	40.13	32	56.00	-29.14	vertical	Average
10	2860.00	49.83	29.99	10.89	40.13	32	76.00	-25.42	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.




KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0153-R1

Page (25) of (38)

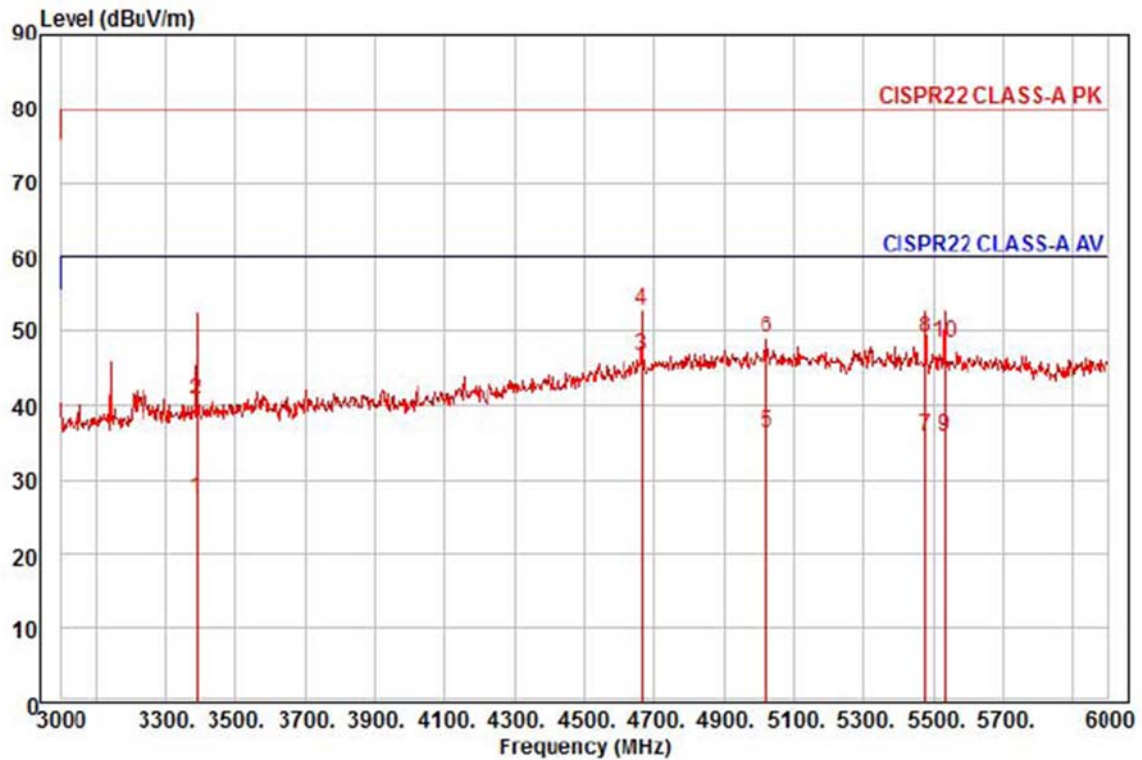

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBN:1000.000kHz SWT:Auto
Project : NETWORK VIDEO RECORDER
Model : XRN-2010P
Mode :
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3387.00	24.58	30.98	12.22	40.29	270	60.00	-32.51	horizontal	Average
2	3387.00	37.68	30.98	12.22	40.29	270	80.00	-39.41	horizontal	Peak
3 pp	4665.00	36.38	35.81	14.73	40.41	308	60.00	-13.49	horizontal	Average
4 pk	4665.00	42.75	35.81	14.73	40.41	308	80.00	-27.12	horizontal	Peak
5	5022.00	23.67	37.68	15.36	40.41	216	60.00	-23.70	horizontal	Average
6	5022.00	36.41	37.68	15.36	40.41	216	80.00	-30.96	horizontal	Peak
7	5478.00	23.47	36.75	15.89	40.34	150	60.00	-24.23	horizontal	Average
8	5478.00	36.82	36.75	15.89	40.34	150	80.00	-30.88	horizontal	Peak
9	5532.00	23.44	36.65	15.98	40.34	150	60.00	-24.27	horizontal	Average
10	5532.00	36.09	36.65	15.98	40.34	150	80.00	-31.62	horizontal	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.




KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0153-R1

Page (26) of (38)

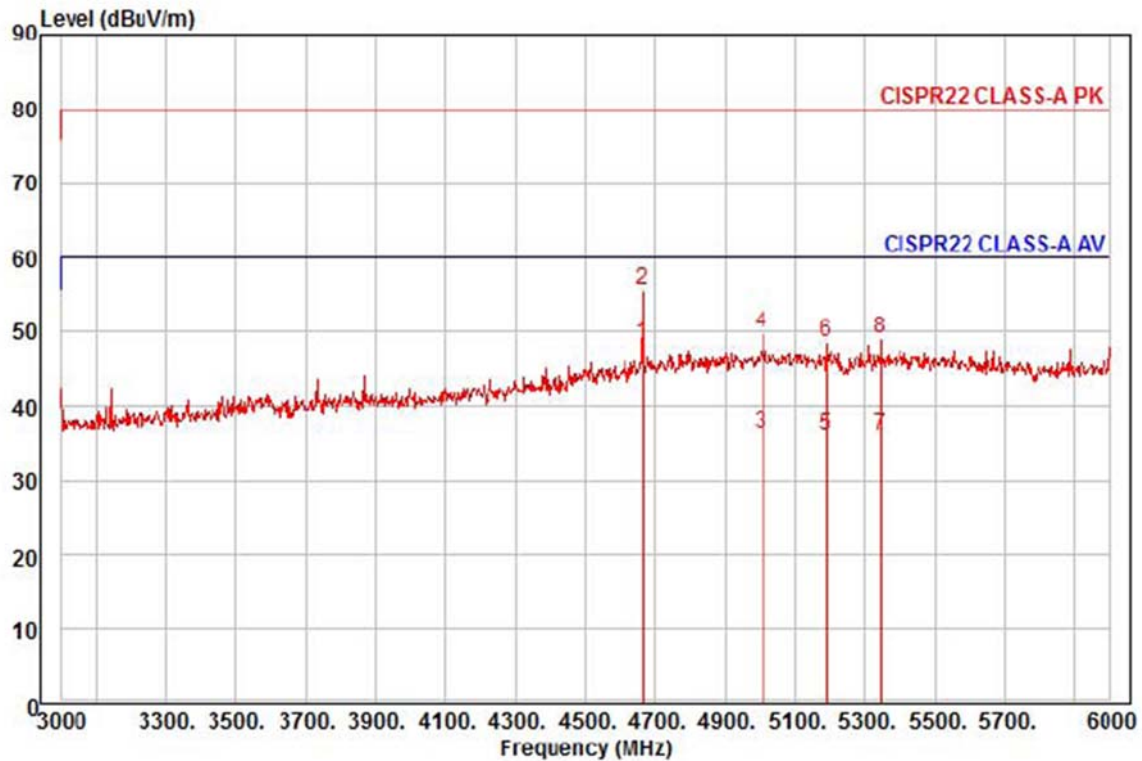

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK VIDEO RECORDER
Model : XRN-2010P
Mode :
Memo : 3 ~ 6 GHz

		Read Freq	Ant Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	pp	4665.00	38.22	35.81	14.73	40.41	360	60.00	-11.65	vertical	Average
2	pk	4665.00	45.53	35.81	14.73	40.41	360	80.00	-24.34	vertical	Peak
3		5004.00	23.66	37.71	15.33	40.41	358	60.00	-23.71	vertical	Average
4		5004.00	37.06	37.71	15.33	40.41	358	80.00	-30.31	vertical	Peak
5		5187.00	23.53	37.34	15.55	40.38	140	60.00	-23.96	vertical	Average
6		5187.00	36.12	37.34	15.55	40.38	140	80.00	-31.37	vertical	Peak
7		5343.00	23.63	37.03	15.73	40.36	78	60.00	-23.97	vertical	Average
8		5343.00	36.63	37.03	15.73	40.36	78	80.00	-30.97	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Setup Photos and Configuration

Conducted Voltage Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Conducted Telecommunication Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs

(Internal View)

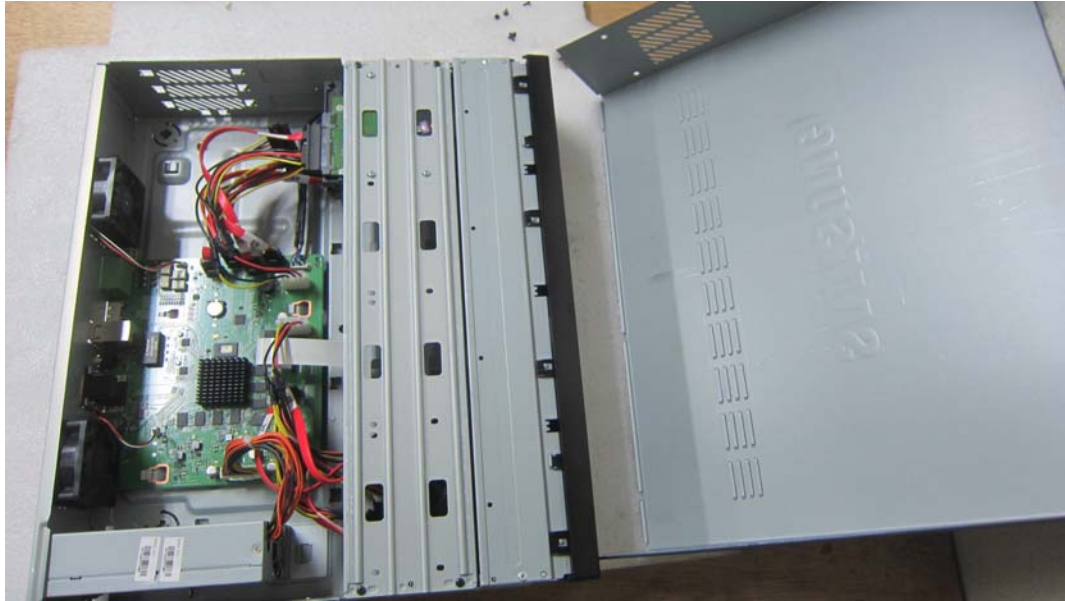


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Main Board

(Top)



(Bottom)

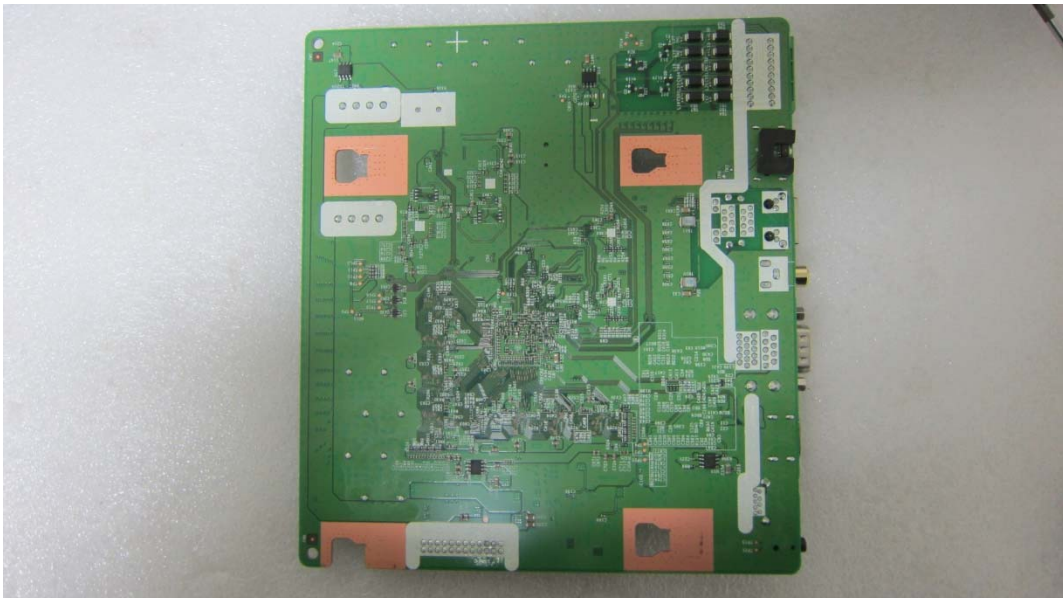

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Sub Board

(Top)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – USB Board

(Top)




(Bottom)

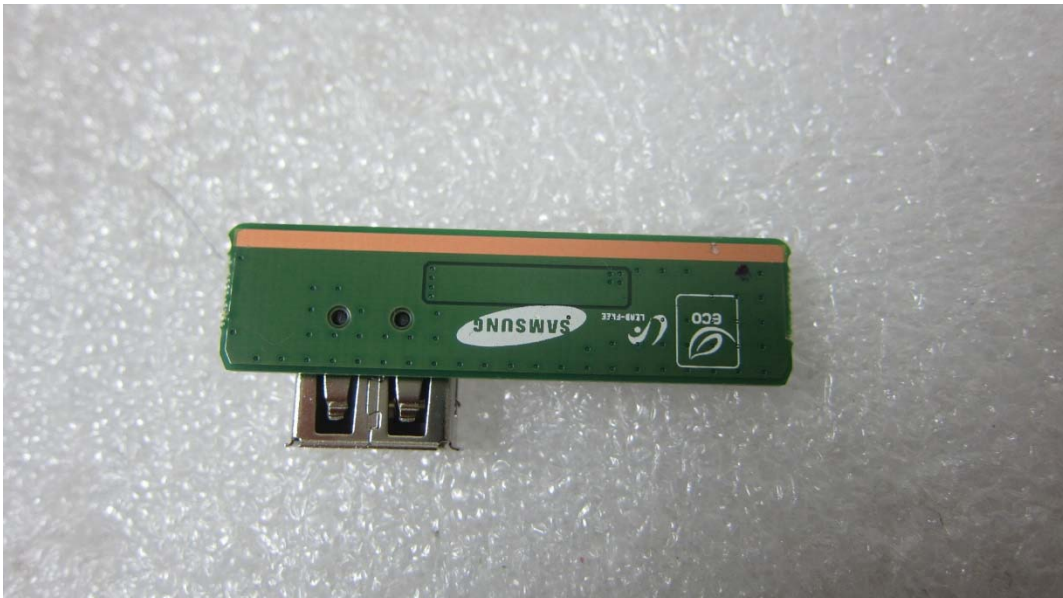

Main Board EUT Internal View – Power Main Board

(Top)

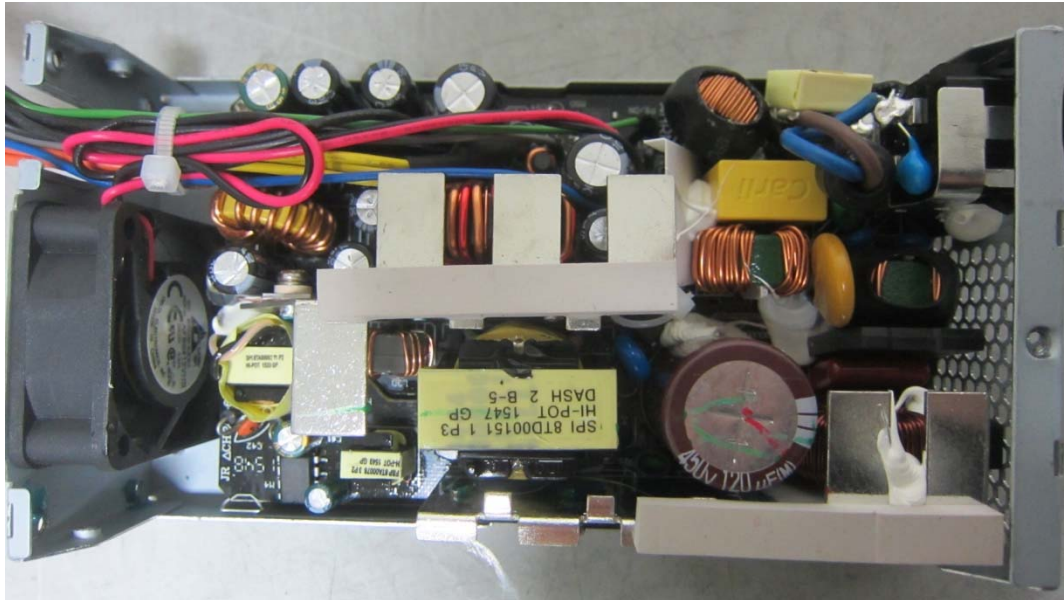

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – HDD

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – POWER

(Top)



(Bottom)

