

VERIFICATION OF FCC PART 15 COMPLIANCE

*KES hereby verify that the subject product complies with all the
electromagnetic emission specified in the FCC Rule Part 15*

Product Description:	NETWORK VIDEO RECORDER
Model/Brand Name:	XRN-2010N
Variant Model:	XRN-3010N
FCC Rule Part(s):	FCC 47CFR Part 15 Subpart B Class A Part 15.107(b) & Part 15.109(b)
FCC Procedure:	Verification
Applicant Name:	Hanwha Techwin Co., Ltd.
Applicant Address:	1204, Changwon-daero, Seongsan-gu, Chang won-si, Gyeongsangnam-do
Manufacturer Name:	Tianjin Samsung Techwin Opto-Electronic Co., Ltd.
Manufacturer Address:	No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin, 300385, People's Republic of China
Test Report Reference No.:	KES-E1-16T0151-R1

NETWORK VIDEO RECORDER, Model XRN-2010N has been tested in accordance with the measurement procedures specified in FCC 47CFR Part 15 Subpart B class A and has been shown to be complied with the electromagnetic emission limits specified in FCC Rule Part 15 Subpart B class A. A testing of the sample product has been valid for the sample tested based on the reference test report, KES-E1-16T0151-R1

Date of Issue: 12. 13. 2016

Dong Hun, Jang
Technical Manager
Signature:



KES.Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 // Fax: +82-31-424-0450



EMC TEST REPORT For FCC

Test Report No. : KES-E1-16T0151-R1

Date of Issue : Dec. 13, 2016

Product name : NETWORK VIDEO RECORDER

Model/Type No. : XRN-2010N

Variant Model : XRN-3010N

Applicant : Hanwha Techwin Co., Ltd.

Applicant Address : 1204, Changwon-daero, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea

Manufacturer : Tianjin Samsung Techwin Opto-Electronic Co., Ltd.

Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA,
Tianjin, 300385, People's Republic of China

Equipment authorization : ☐ Declaration of Conformity
☒ Verification
☐ Certification

Date of Receipt : Mar. 25, 2016

Test date : Mar. 31, 2016 ~ Apr. 04, 2016

Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Dae Hyun, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0151-R1

Page (2) of (34)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Apr. 07, 2016	KES-E1-16T0151	Issued
Dec. 13, 2016	KES-E1-16T0151-R1	Adding Variant model

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences.....	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	8
1.8	Configuration	9
1.9	Calibration Details of Equipment Used for Measurement.....	10
1.10	Test Facility	10
1.11	Laboratory Accreditations and Listings	10
2.0	Test Regulations	11
2.1	Conducted Emissionsat Mains Power Ports	13
2.2	Radiated Electric Field Emissions(Below 1 GHz)	14
2.3	Radiated Electric Field Emissions(Above 1 GHz)	15
APPENDIX A – TEST DATA		16
Conducted Emissions at Mains Power Ports.....		16
Radiated Electric Field Emissions(Below 1 GHz)		18
Radiated Electric Field Emissions(Above 1 GHz)		19
Test Setup Photos and Configuration.....		23
Conducted Voltage Emissions		23
Radiated Electric Field Emissions(Below 1 GHz)		24
Radiated Electric Field Emissions(Above 1 GHz)		25
EUT External Photographs		26
EUT Internal Photographs		27

1.0 General Product Description

Main Specifications of EUT are:

단계 Model		DVR XRN-2010
Display		
Network Camera	Inputs	Max. 32CH
	Resolution	CIF ~ 12MP
	Protocols	Samsung, ONVIF
Live	Local Display	1x HDMI / 1x VGA
	Multi-Channel Display	[Local Monitor] 1 / 2V / 3V / 4 / 6 / 8 / 9 / 13 / 16 / 25 / 36 / Sequence [Web] 1 / 2V / 3V / 4 / 6 / 9 / 16 / 25 / 36 / Sequence
	Performance	[Local Monitor] - 12M (30fps) - 8.3M (120fps) - 720P (960fps) - D1 (1920fps) [Web] TBD
Performance		
Operating System	Embedded	Linux
Record	Compression	H.265, H.264, MJPEG
	Recording Bandwidth	Max. 250Mbps (2MP 32camera real-time recording)
	Resolution	CIF ~ 12MP
	Type	Manual, Schedule (Continuous/Event), Event (Pre/Post)
	Event Trigger	Alarm Input, Video Loss, Camera Event (Sensor, MD, Video Analytics)
	Event Action	e-Mail, PTZ Preset, Alarm Out, Buzzer, Monitor Out
Search & Play	Playback Bandwidth	32Mbps (16CH simultaneously)
	Performance	Max. 4 Users (Local 1, Remote 3)
	Mode	Date & Time (Calendar)/Event Log list / Text Search
	Simultaneous playback	Max. 16CH (Local Monitor, CMS)
	Resolution	CIF ~ 12MP
	Fisheye Dewarping	Remote Viewer (CMS, WEB)
Storage	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down
	Built-In	0TB ~ 8TB
	Internal HDD	8 (Max 48TB)
	External	iSCSI storage (Max. 384TB) ① Promise VessRaid R2600
Backup	RAID	N/A
	File backup (Via Web)	BU/Exe (GUI), JPG/AVI (Network)
Sensor	Function	Multi channel (Upto 16CH) Play, Date-Time/Title display
	I/O	8/4 (NO/NC Selectable)
Audio	Input	32 CH (network)
	Compression	G.711, G.726, AAC (16/48KHz)
	Audio Communication	2-Way
Network		
Interface	RJ-45, Gigabit Ethernet x2	
Protocol	TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI (Server, Client)	
DDNS	Samsung IPollis DDNS	
Transmission Bandwidth	~ 512Mbps (iSCSI Off), 256Mbps (iSCSI On)	
Max Remote Users	Search (3), Live Unicast (10), Multicast (20)	
IP Version	IPv4/v6	
Security	User access Log, IP Filtering, 802.1x, Encryption	
Language (24)	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai	
OS	Supported OS : Vista, 7, 8, 10, Mac OS X (10.7 or above)	
Web Browser	MS IE, Google Chrome, Mac Safari, Firefox	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0151-R1

Page (5) of (34)

단계		DVR
Model		XRN-2010
Viewer Software	Type	SSM, Webviewer, Smart Viewer, iPolis Mobile
	CMS Support	Support SDK/CGI
Smart phone	Support Model	I-Phone, Android
	Protocol Support	RTP, RTSP, HTTP, CGI
	Control	Live(16ch) : Multi-Profile Support Playback(1ch)
	Max. Remote Users	Search (3), Live Unicast (10), Multicast (20)
Functions		
Camera Setup	Register	Auto, Manual
	Setup Items	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS), Fisheye Dewarping, Hallway View Setup, Camera Web
	PoE Power Control	N/A
PTZ	Control	Via GUI, Webviewer, SPC-2000
	Preset	255 Presets
Redundancy	Failover	N+1
	ARB	Yes
System Control		Mouse, Web, SPC-2000 (Controller)
Indicator/Interface		
Front	Indicator	LED(Status indicator) : - SRN-2000 (67%) ① HDD Action(1), ② Alarm(1), ③ Power(1), ④ Record(1), ⑤ Backup(1), ⑥ Network(1)
	Switch	N/A
Connectors	VGA	1 EA (Support Live screen upto 16 div. mode)
	HDMI	1 EA (Both Support Live / PB / Setup) - Support upto 4K (3840 x 2160)
	Audio	Out(1EA, RCA, Line)
	Ethernet	RJ-45 2ea (LAN/WAN, 1Gbps)
	Alarm	(1) In(8EA, Terminal Block) (2) Alarm Reset(1EA) (3) Out(4EA, Terminal Block) - Relay Out1(NO/NC/COM) - Relay Out2~4(NO/COM)
	USB	2EA(Front 1, Rear 1(USB3.0))
	Storage	1 e-SATA
	Serial	RS-232C
	Reset	Switch(1EA)
	Power Cord	1EA AC Inlet
System		
Log	Log List	Max. 20000 (System Log, Event Log each)
Environmental		
Operating Temperature / Humidity		+0°C to +40°C(+32°F to +104°F)
Humidity		20% ~ 85% RH
Electrical		
Power		100 to 240 VAC ±10%; 50/60 Hz, 4~1.5A
Power Consumption		Normal 90W, MAX200W
PoE Budget		N/A
Mechanical		
Color / Material		Black / Metal
Dimension (WxHxD)		440*88*384.8
Weight		5.38kg
Standards		
Approvals	Safety	UL, KC
	EMC	CE, FCC, CCC, Gost-R, KC

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 100 Vac ☐ 110 Vac ☒ 120 Vac ☐ 24 Vac ☐ 12 Vdc

Frequency ☐ 50 Hz ☒ 60 Hz ☐ Hz

1.2 Variant Model Differences

Variant Model	Difference
XRN-3010N	That by distribution channel management model.

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK VIDEO RECORDER	XRN-2010N	-	Tianjin Samsung Techwin Opto-Electronic Co., Ltd.	E.U.T
HDD	ST1000VM002	-	Seagate	1 TB
Switching Power Supply	FSP250-50GUB	-	FSP GROUP INC.	-

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0151-R1

Page (7) of (34)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook	NT63025J	JK9091EF400142M	Samsung Electronics Co., Ltd	-
Notebook Adapter	A13-040N2A	CN60BA4400313AD0N 843KO2OO	Chicony Power Technology (suzhou)Co., Ltd.	-
Mouse 1	SMB-400	0DJM010118	SEJIN ELECTRON INC.	-
Monitor 1	SMT-2232	C95V67VF900038B	Weihai Daewoo Electronics Co., Ltd.	-
Monitor 2	HSTND-7041-L	6CM6020YQQ	HP Inc.	-
NETWORK CAMERA	SND-E5031RN	ZBUM67ZG101007H	Hanwha Techwin Co., Ltd.	-
Adapter 1	PA-1041-0	-	DONGGUANG LITE POWER 2ND PLANT	-
Speaker	MS-760	-	MASS	-
Mouse	YTOP-589	-	Hanwha Techwin Co., Ltd.	-
External Hard drive	NEXT-652DC	1207230749	YCN	-
Adapter 2	GT-41062-1805-T3	-	GlobTek, Inc.	-
HDD	Diamond Max Plus9	Y41P45KE	Maxtor	-
USB 3.0 Memoery	-	-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.6 External I / O Cabling

Start		END		Cable Spec.	
Description	I / O Port	Description	I / O Port	Length	Shield
NETWORK VIDEO RECORDER (E.U.T)	HDMI	Monitor 1	HDMI	1.5	S
	D-SUB	Monitor 2	D-SUB	1.4	S
	RJ-45(LAN) (Notebook)	Notebook	RJ-45(LAN)	3.0	U
	RJ-45(LAN) (NETWORK CAMERA)	NETWORK CAMERA	RJ-45(LAN)	3.0	U
	RS-232	Mouse 1	RS-232	2.2	U
	USB 3.0	USB 3.0 Memoery	USB 3.0	-	-
	USB	Mouse 2	USB	1.3	U
	ALARM	Impedance Terminating	-	-	-
	eSATA	External Hard drive	eSATA	1.1	U

* Unshielded=U, Shielded=S


1.7 EUT Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:

Test mode	Normal operating
OP	MONITORING Network ping test

1.8 Configuration

■ AC Main
□ DC Main

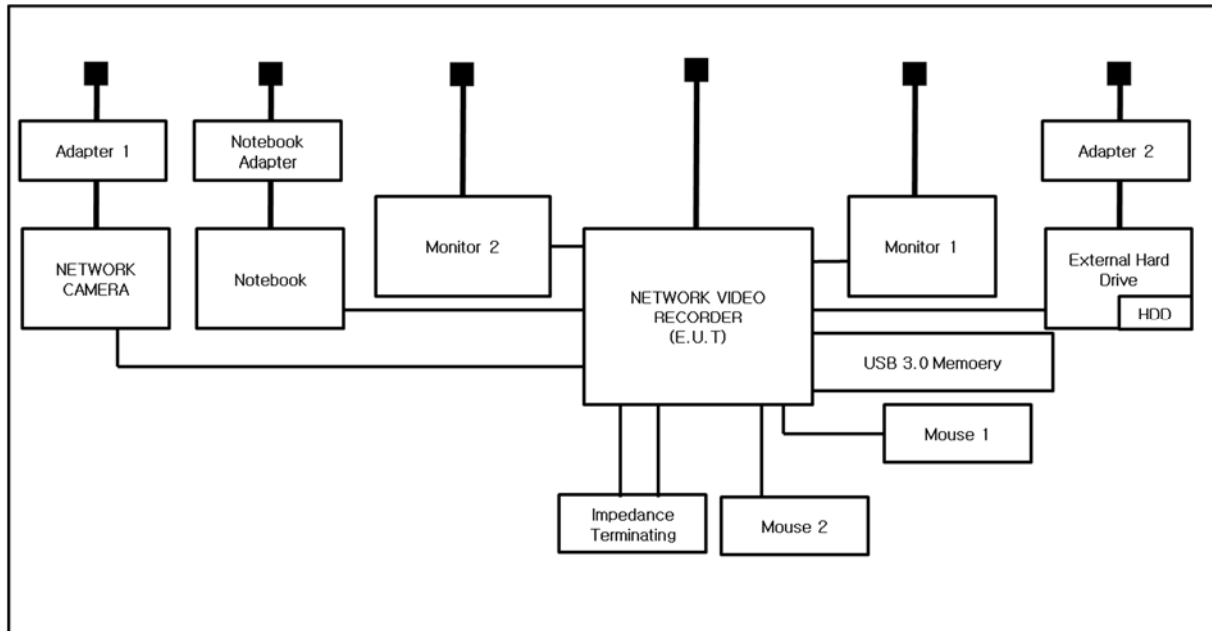

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-29 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2004/108/EC**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55022:2010

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013

☐ VCCI V-3 / 2013.04

☐ Class A

☐ Class B

☐ AS/NZS CISPR22:2009 +A1:2010

☐ Class A

☐ Class B

☒ 47 CFR Part 15, Subpart B / ANSI C63.4-2009 ☒ Class A

☐ Class B

☐ IC Regulation ICES-003 : 2012
/ ANSI C63.4-2014

☐ Class A

☐ Class B

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0151-R1

Page (12) of (34)

☐ **R&TTE- Directive 1999 / 5 / EC**

☐ EN 301 489-1 V1.9.2

- ☐ Equipment for fixed use
- ☐ Equipment for vehicular use
- ☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



2.1 Conducted Emissions at Mains Power Ports

Test Date

Apr. 04, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R&S	101783	05, 06, 2016
☒	LISN	ENV216	R&S	101137	02, 04, 2017
☒	LISN	ENV216	R&S	101786	05, 06, 2016
☒	Electro wave Shieldroom	-	SEMITEC	-	-

Test Conditions

Temperature: 24.1 °C

Relative Humidity: 39.2 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Mar. 31, 2016

Test Location

☐ Open Area Test Site #1

☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R&S	101781	05, 06, 2016
☒	Trilog-Broadband Antenna	VULB 9163	SCHWARZBECK	9168-713	05, 15, 2017
☒	Open Area Test Site	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-

Test Conditions

Temperature: 19.2 °C

Relative Humidity: 32.0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS

☐ NOT PASS

☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Mar. 31, 2016

Test Location

Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESU26	R&S	100552	05, 06, 2016
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 23, 2016
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM, INC	781	05, 07, 2017
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-

Test Conditions

Temperature: 25.3 °C

Relative Humidity: 42.1 %

Frequency Range of Measurement

1 GHz to 5 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

Common Information

Test Description: Conducted Emission
Model No.: XRN-2010N
Mode:
Operator Name: KES

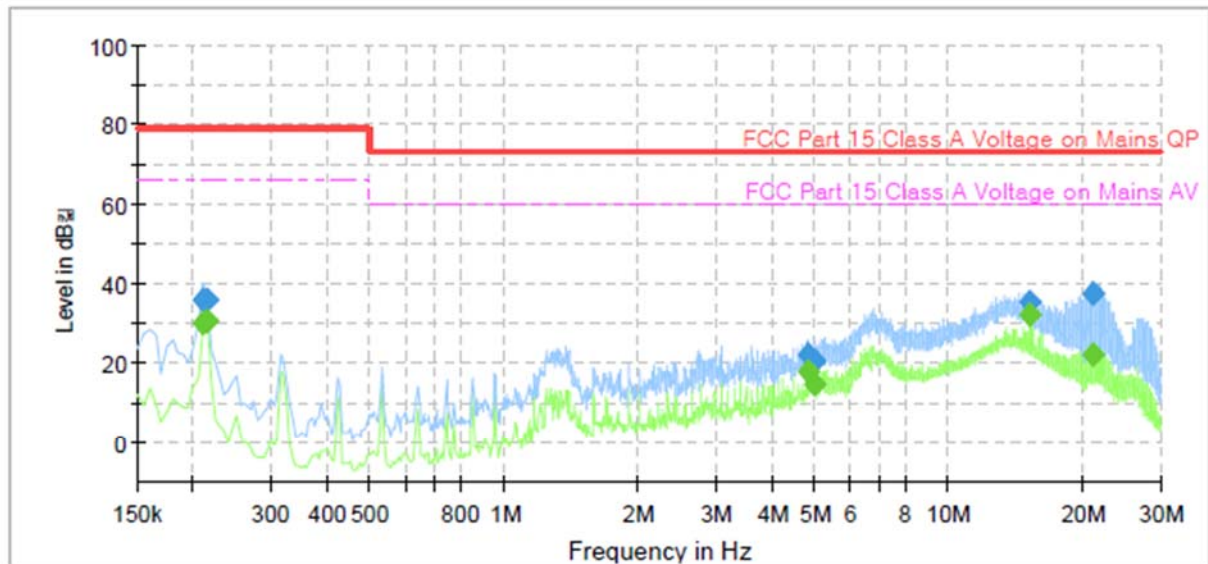

Final Result

Frequency (MHz)	QuasiPeak (dBμ)	CAverage (dBμ)	Limit (dBμ)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.210000	---	30.01	66.00	35.99	1000.0	9.000	L1	9.7
0.210000	36.07	---	79.00	42.93	1000.0	9.000	L1	9.7
0.215000	---	30.59	66.00	35.41	1000.0	9.000	L1	9.7
0.215000	36.06	---	79.00	42.94	1000.0	9.000	L1	9.7
4.860000	---	17.89	60.00	42.11	1000.0	9.000	L1	9.8
4.860000	22.05	---	73.00	50.95	1000.0	9.000	L1	9.8
5.005000	---	15.09	60.00	44.91	1000.0	9.000	L1	9.8
5.005000	20.47	---	73.00	52.53	1000.0	9.000	L1	9.8
15.250000	---	32.21	60.00	27.79	1000.0	9.000	L1	10.1
15.250000	35.62	---	73.00	37.38	1000.0	9.000	L1	10.1
21.155000	---	22.46	60.00	37.54	1000.0	9.000	L1	10.2
21.155000	37.66	---	73.00	35.34	1000.0	9.000	L1	10.2



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0151-R1

Page (17) of (34)


[NEUTRAL]

Common Information

Test Description:
Model No.:
Mode
Operator Name:

Conducted Emission
XRN-2010N

KES

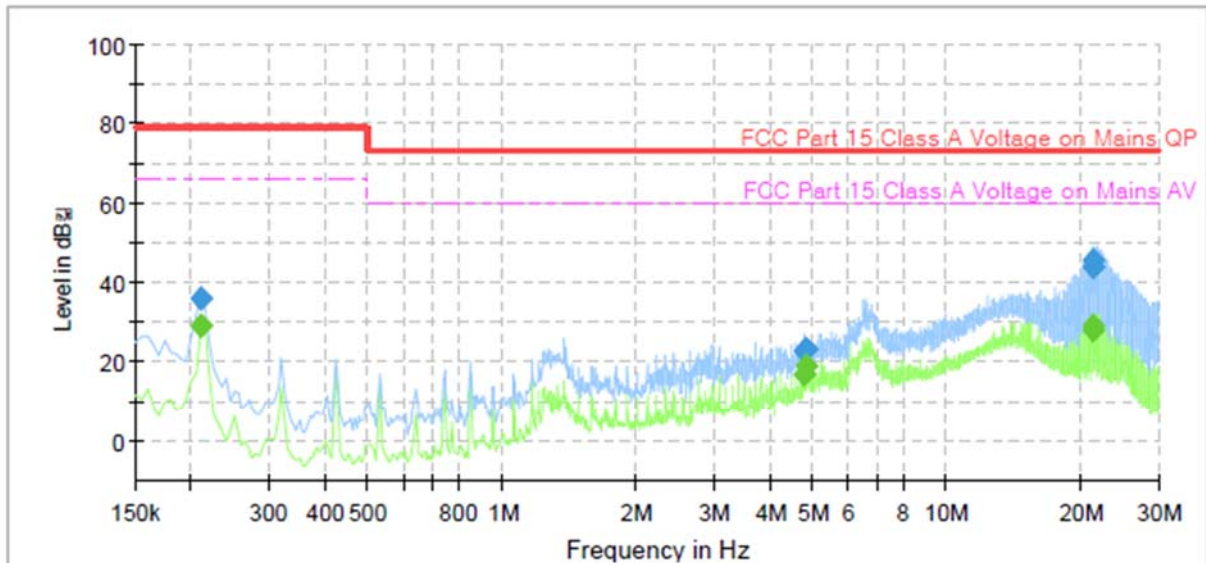

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.210000	---	29.19	66.00	36.81	1000.0	9.000	N	9.6
0.210000	35.91	---	79.00	43.09	1000.0	9.000	N	9.6
4.785000	---	17.17	60.00	42.83	1000.0	9.000	N	9.8
4.785000	22.72	---	73.00	50.28	1000.0	9.000	N	9.8
4.865000	---	18.86	60.00	41.14	1000.0	9.000	N	9.8
4.865000	23.45	---	73.00	49.55	1000.0	9.000	N	9.8
21.380000	---	28.28	60.00	31.72	1000.0	9.000	N	10.2
21.380000	44.04	---	73.00	28.96	1000.0	9.000	N	10.2
21.480000	---	29.30	60.00	30.70	1000.0	9.000	N	10.2
21.480000	45.58	---	73.00	27.42	1000.0	9.000	N	10.2

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0151-R1

Page (18) of (34)

Radiated Electric Field Emissions(Below 1 GHz)


Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
48.25	18.24	V	1.00	13.87	1.43	33.54	39.00	5.46
241.13	19.76	H	3.90	12.21	3.71	35.68	46.40	10.72
248.10	21.13	H	4.00	12.37	3.78	37.28	46.40	9.12
391.58	16.88	H	4.00	15.50	4.98	37.36	46.40	9.04
400.40	20.63	V	1.00	15.71	5.04	41.38	46.40	5.02
600.03	16.93	V	1.50	19.30	6.32	42.55	46.40	3.85

* H : Horizontal, V : Vertical

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Radiated Electric Field Emissions(Above 1 GHz)

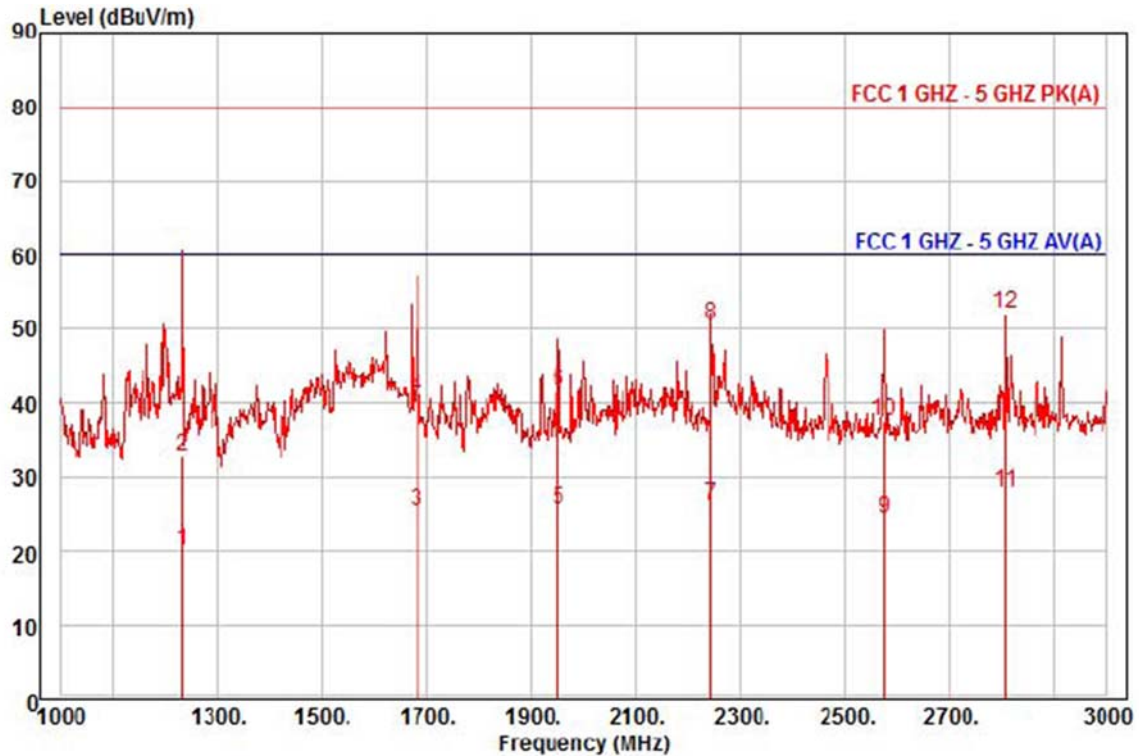

Site : chamber
Condition: FCC 1 GHZ - 5 GHZ PK(A) 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK VIDEO RECORDER
Model : XRN-2010N
Mode :
Memo : 1 ~ 3 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1232.00	28.17	24.83	7.18	40.01	128	60.00	-39.83	horizontal Average
2	1232.00	40.94	24.83	7.18	40.01	128	80.00	-47.06	horizontal Peak
3	1682.00	30.18	26.62	8.48	39.79	128	60.00	-34.51	horizontal Average
4	1682.00	45.56	26.62	8.48	39.79	128	80.00	-39.13	horizontal Peak
5	1952.00	28.43	27.69	9.22	39.65	30	60.00	-34.31	horizontal Average
6	1952.00	44.34	27.69	9.22	39.65	30	80.00	-38.40	horizontal Peak
7	2244.00	27.93	28.48	9.72	39.77	49	60.00	-33.64	horizontal Average
8	2244.00	52.23	28.48	9.72	39.77	49	80.00	-29.34	horizontal Peak
9	2574.00	24.95	29.29	10.23	39.96	128	60.00	-35.49	horizontal Average
10	2574.00	38.00	29.29	10.23	39.96	128	80.00	-42.44	horizontal Peak
11 av	2808.00	27.50	29.86	10.76	40.10	67	60.00	-31.98	horizontal Average
12 pp	2808.00	51.66	29.86	10.76	40.10	67	80.00	-27.82	horizontal Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.




KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0151-R1

Page (20) of (34)

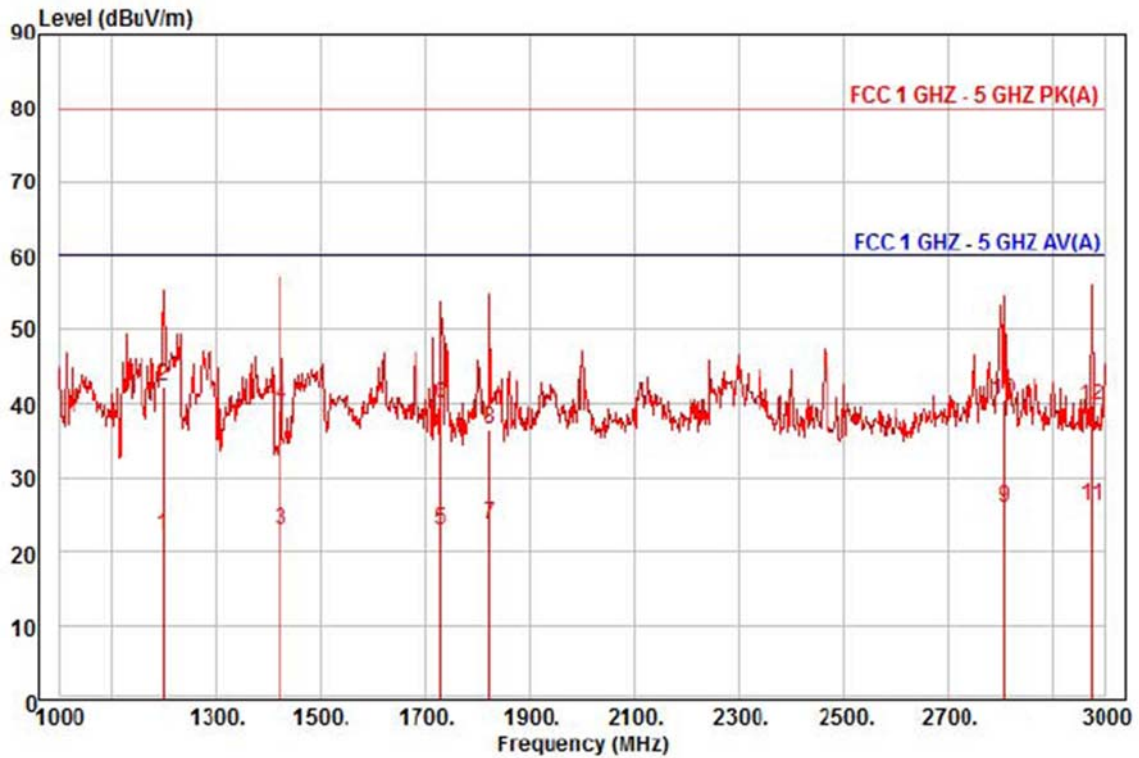

Site : chamber
Condition: FCC 1 GHZ - 5 GHZ PK(A) 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK VIDEO RECORDER
Model : XRN-2010N
Mode :
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1200.00	30.55	24.70	7.09	40.02	93	60.00	-37.68	vertical	Average
2 pk	1200.00	50.55	24.70	7.09	40.02	93	80.00	-37.68	vertical	Peak
3	1424.00	29.56	25.59	7.74	39.91	31	60.00	-37.02	vertical	Average
4	1424.00	46.33	25.59	7.74	39.91	31	80.00	-40.25	vertical	Peak
5	1730.00	27.49	26.81	8.61	39.76	62	60.00	-36.85	vertical	Average
6	1730.00	44.28	26.81	8.61	39.76	62	80.00	-40.06	vertical	Peak
7	1824.00	27.38	27.18	8.87	39.72	107	60.00	-36.29	vertical	Average
8	1824.00	40.13	27.18	8.87	39.72	107	80.00	-43.54	vertical	Peak
9	2808.00	25.49	29.86	10.76	40.10	134	60.00	-33.99	vertical	Average
10	2808.00	39.89	29.86	10.76	40.10	134	80.00	-39.59	vertical	Peak
11 pp	2974.00	24.94	30.27	11.16	40.19	107	60.00	-33.82	vertical	Average
12	2974.00	38.45	30.27	11.16	40.19	107	80.00	-40.31	vertical	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0151-R1
Page (21) of (34)

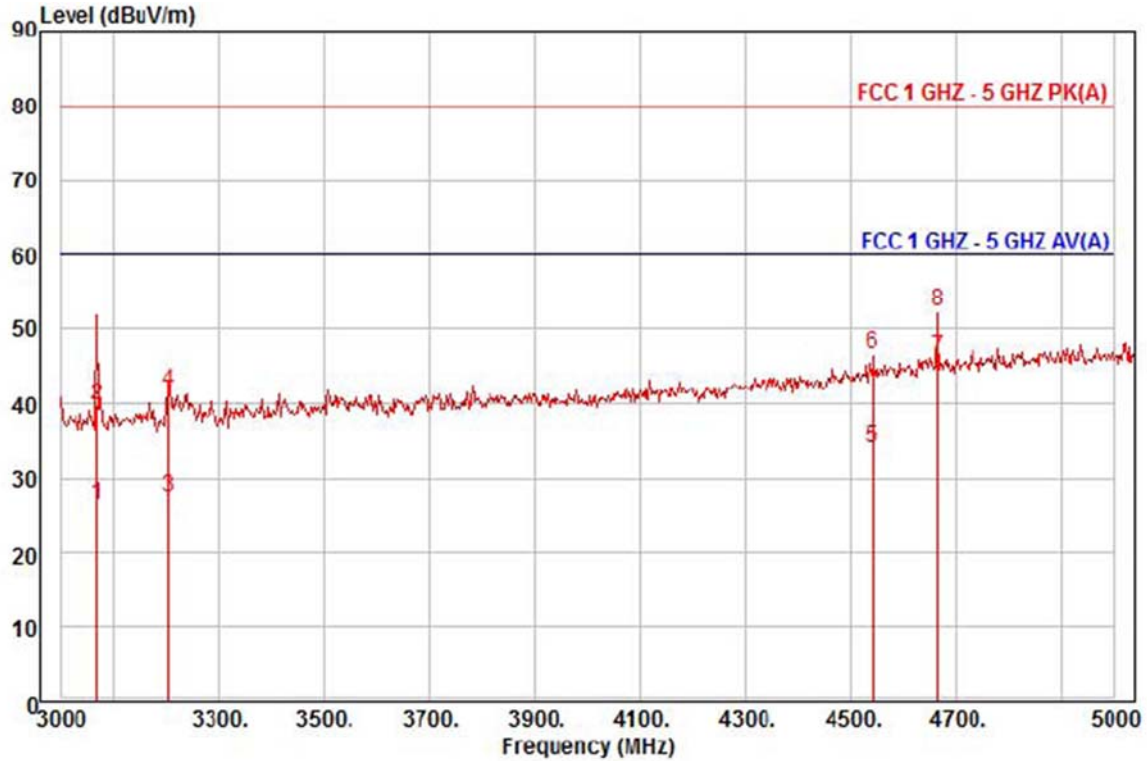

Site : chamber
Condition: FCC 1 GHZ - 5 GHZ PK(A) 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK VIDEO RECORDER
Model : XRN-2010N
Mode :
Memo : 3 ~ 6 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3069.00	24.80	30.45	11.40	40.22	164	60.00	-33.57	horizontal	Average
2	3069.00	38.20	30.45	11.40	40.22	164	80.00	-40.17	horizontal	Peak
3	3204.00	25.18	30.67	11.75	40.25	59	60.00	-32.65	horizontal	Average
4	3204.00	39.40	30.67	11.75	40.25	59	80.00	-38.43	horizontal	Peak
5	4542.00	24.82	35.10	14.51	40.41	243	60.00	-25.98	horizontal	Average
6	4542.00	37.49	35.10	14.51	40.41	243	80.00	-33.31	horizontal	Peak
7 pp	4665.00	35.93	35.81	14.73	40.41	304	60.00	-13.94	horizontal	Average
8 pk	4665.00	42.26	35.81	14.73	40.41	304	80.00	-27.61	horizontal	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.




KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0151-R1

Page (22) of (34)

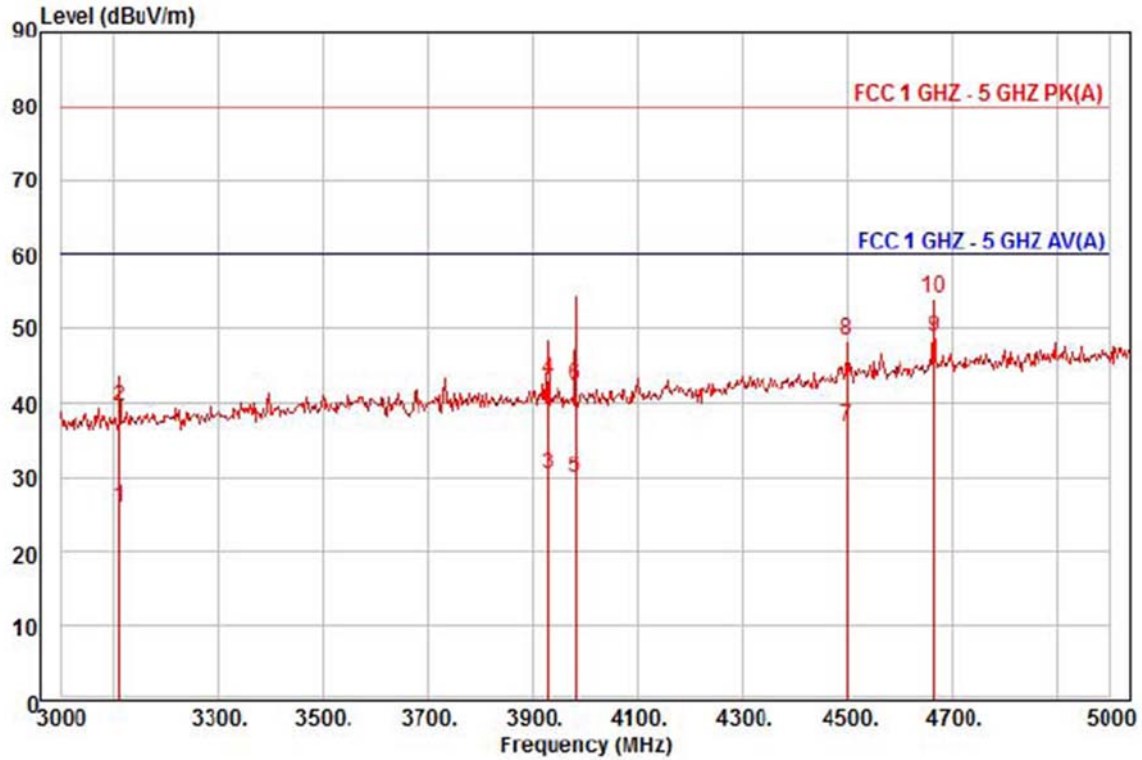

Site : chamber
Condition: FCC 1 GHZ - 5 GHZ PK(A) 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK VIDEO RECORDER
Model : XRN-2010N
Mode :
Memo : 3 ~ 6 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3111.00	24.29	30.52	11.51	40.23	212	60.00	-33.91	vertical	Average
2	3111.00	37.64	30.52	11.51	40.23	212	80.00	-40.56	vertical	Peak
3	3927.00	25.53	31.89	13.36	40.40	206	60.00	-29.62	vertical	Average
4	3927.00	38.29	31.89	13.36	40.40	206	80.00	-36.86	vertical	Peak
5	3981.00	24.86	31.98	13.47	40.41	190	60.00	-30.10	vertical	Average
6	3981.00	37.46	31.98	13.47	40.41	190	80.00	-37.50	vertical	Peak
7	4500.00	27.83	34.86	14.43	40.41	169	60.00	-23.29	vertical	Average
8	4500.00	39.40	34.86	14.43	40.41	169	80.00	-31.72	vertical	Peak
9 pp	4665.00	38.75	35.81	14.73	40.41	206	60.00	-11.12	vertical	Average
10 pk	4665.00	44.11	35.81	14.73	40.41	206	80.00	-25.76	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Setup Photos and Configuration

Conducted Voltage Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs

(Internal View)

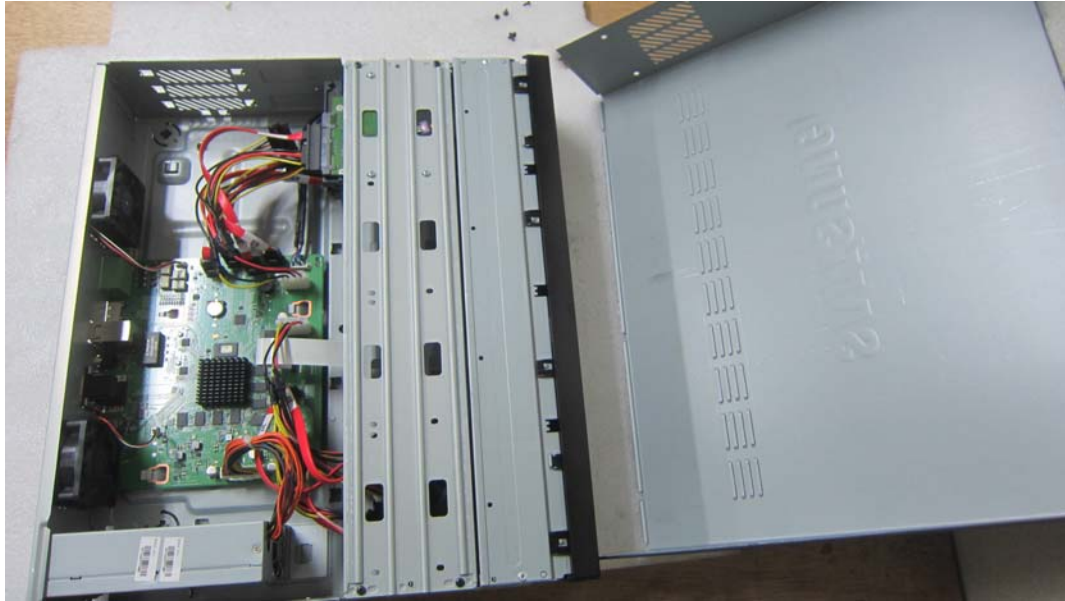


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Main Board

(Top)



(Bottom)

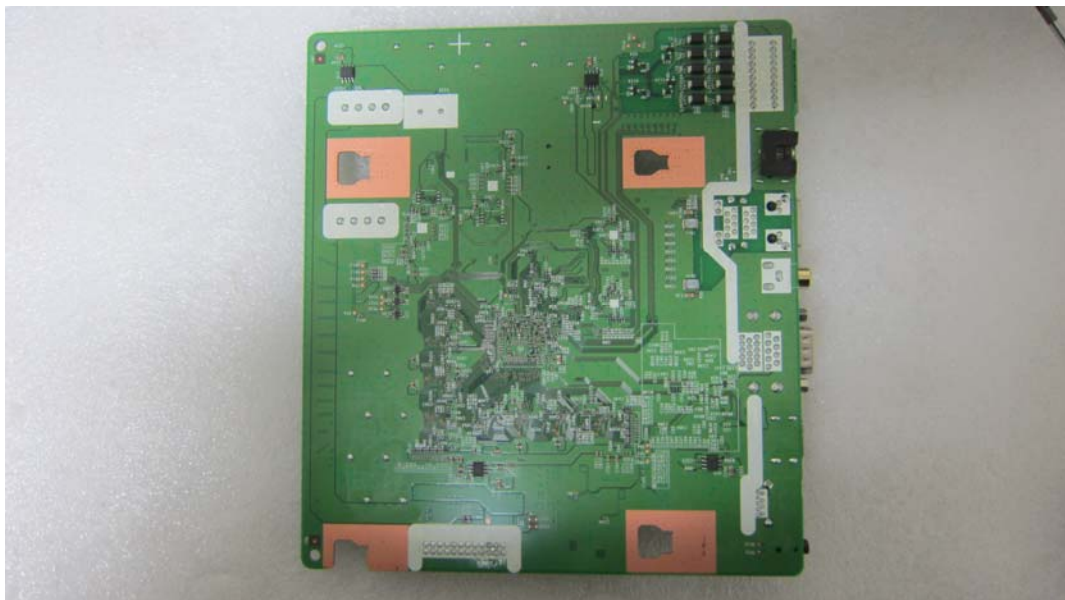

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Sub Board


(Top)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – USB Board

(Top)

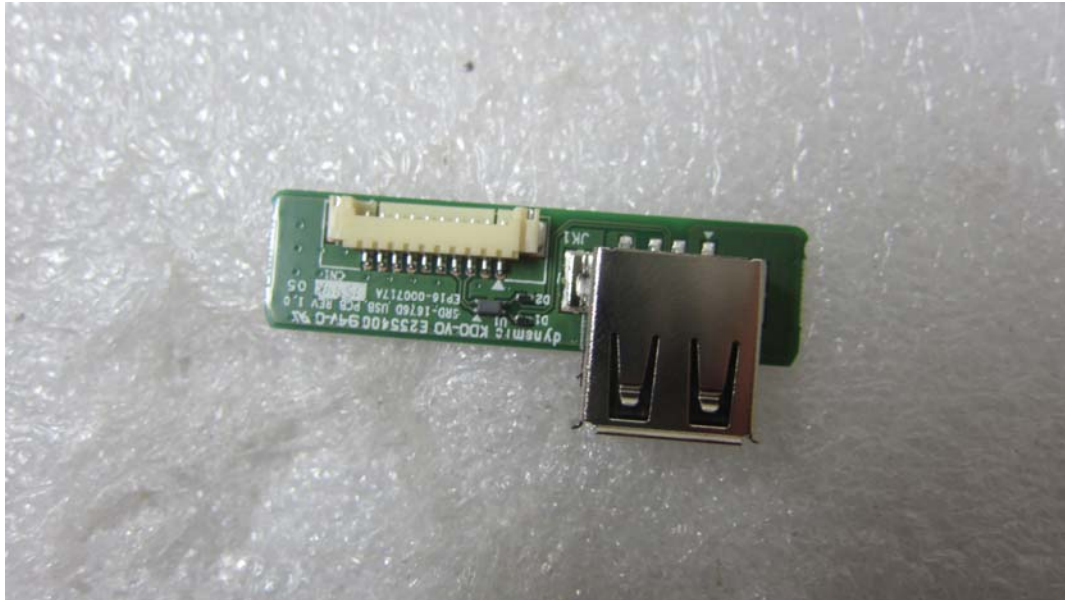


(Bottom)

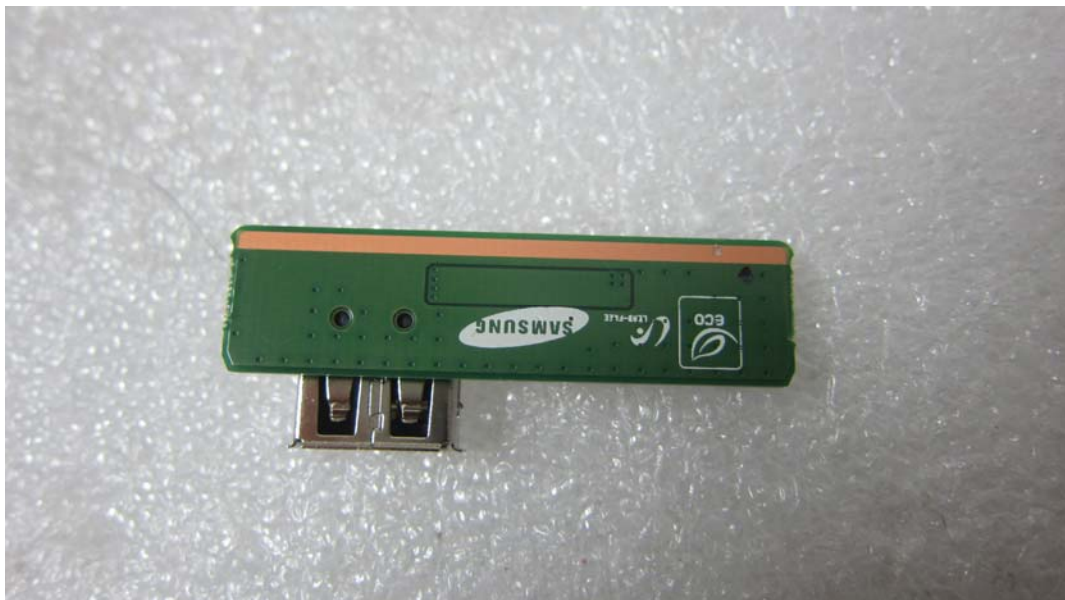

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Power Main Board

(Top)

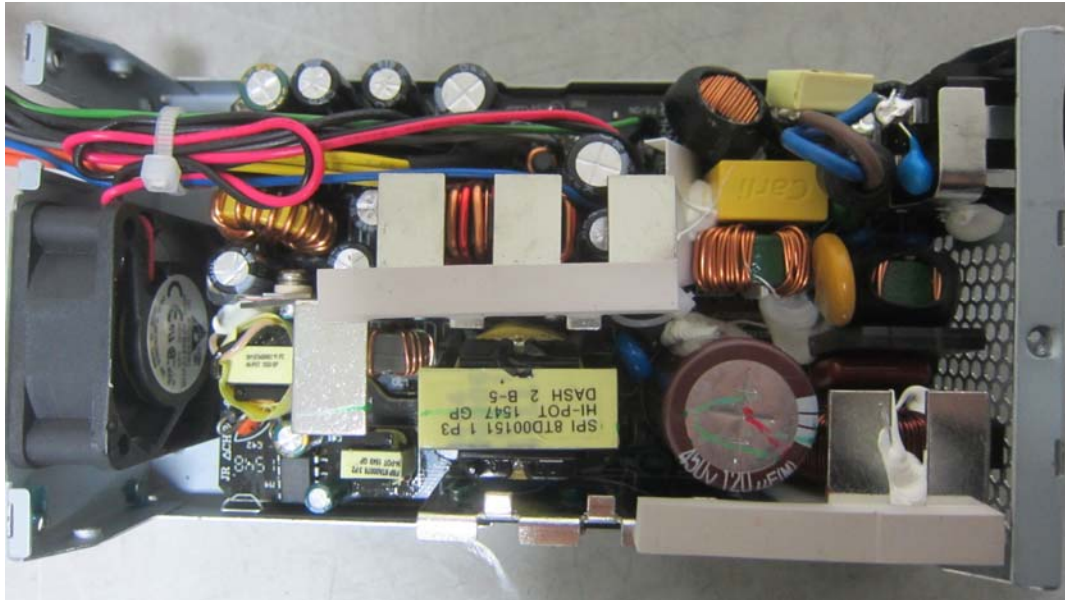

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – HDD

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – POWER

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Label Photographs



This device complies with part 15 of the FCC Rules. Operation in subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.