



EMC TEST REPORT

Test Report No. : KES-EM-22T0533-R1
Date of Issue : Feb. 24, 2023
Product name : NVR
Model/Type No. : XRN-6410B4
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Jun. 22, 2022
Test date : Jun. 22, 2022 ~ Jun. 27, 2022
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dong-Yun, Lee
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0533-R1
Page (2) of (73)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jun. 30, 2022	KES-EM-22T0533	Issued
Feb. 24, 2023	KES-EM-22T0533-R1	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	8
1.6	External I/O Cabling	9
1.7	EUT Operating Mode(s)	9
1.8	Configuration.....	10
1.9	Remarks when standards applied	11
1.10	Calibration Details of Equipment Used for Measurement	11
1.11	Test Facility	11
1.12	Laboratory Accreditations and Listings	11
2.0	Test Regulations.....	12
2.1	Conducted Emissions at Mains Power Ports	13
2.2	Conducted Emissions at Telecommunication Ports	14
2.3	Radiated Electric Field Emissions(Below 1 GHz)	15
2.4	Radiated Electric Field Emissions(Above 1 GHz)	16
2.5	Harmonic Current Emissions	17
2.6	Voltage Fluctuations and Flicker	18
3.0	Criteria for compliance	19
3.1	Electrostatic Discharge.....	21
3.2	Radiated Electric Field Immunity	25
3.3	Electrical Fast Transients/Bursts	28
3.4	Surge Transients	30
3.5	Conducted Disturbance	33
3.6	Voltage Dips and Short Interruptions	36
APPENDIX A – TEST DATA.....		38
Conducted Emissions at Mains Power Ports.....		38
Conducted Emissions at Telecommunication Ports		40
Radiated Electric Field Emissions(Below 1 GHz)		42
Radiated Electric Field Emissions(Above 1 GHz).....		43
Harmonic Current Emissions and Voltage Fluctuations and Flicker		44
Test Setup Photos and Configuration		47
Conducted Emissions at Mains Power Ports.....		47
Conducted Emissions at Telecommunication Ports		48
Radiated Electric Field Emissions(Below 1 GHz)		49
Radiated Electric Field Emissions(Above 1 GHz).....		50
Harmonic Current Emissions and Voltage Fluctuations and Flicker		51
Electrostatic Discharge		52
Radiated Electric Field Immunity		52
Electrical Fast Transients/Bursts		53
Surge Transients.....		53
Conducted Disturbance.....		54
Voltage Dips and Short Interruptions.....		54
EUT External Photographs.....		55
ssEUT Internal Photographs.....		56



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0533-R1
Page (4) of (73)

1.0 General Product Description

Main Specifications of EUT are:

Display		
Network camera	Inputs	Max. 64CH
	Resolution	32MP ~ CIF
	Protocols	SUNAPI, ONVIF
Decoding	Local Display	[Dual Display] HDMI 1: 3840 x 2160 (30Hz) HDMI 2: 1920x1080 (60Hz)
	Multi Screen Display	[Local Monitor] - Dynamic layout, Virtual channel view - Clone Mode : Up to 64 Division - Expand Mode : HDMI1 up to 36 Div. HDMI2 up to 16 Div. [Web] 1/ 2H/ 2V/ 3V/ 4/ 6/ 8/ 9
	Resolution	32M(15fps, H.265 Only), 12M(30fps, H.265 Only), 8.3M(120fps), 1080p(480fps), 720P(960fps), D1(1920fps)
Performance		
Operating System	Embedded	Linux
Record	Compression	H.265, H.264, MJPEG
	Recording Bandwidth	Distributed mode : Up to 400 Mbps Normal mode : Up to 150 Mbps {RAID mode} Normal : Up to 400 Mbps Degrade/ Rebuild : Up to 320 Mbps
	Resolution	32MP ~ CIF
	Mode	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark
	Event Trigger	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event, User Event
	Event Action	e-Mail, Event Push, PTZ Preset, Alarm Out, Buzzer, Monitor Out, FTP, SUNAPI Command, Shutdown
Search & Play	Playback Bandwidth	RAID Mode : Max. 64Mbps(64CH simultaneously) Non-RAID Mode : Max. 32Mbps
	User	Max. 4 Users (Local 1, Remote 3)
	Simultaneous playback	Max. 112CH(Local 64CH, Remote 16CH per user)
	Fisheye Dewarping	Support (Local 1CH), CMS
	Mode	Date & Time(Calendar), Event list, Text Search, Smart Search
	Resolution	CIF ~ 32MP (Up to H.264 9MP, H.265 32MP)
	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down
Storage	Supported HDD	Up to 10TB
	HDD Slot	SATA 16ea(Max. 160TB, Non-RAID mode)
	External	iSCSI storage
	RAID	RAID-5/6(Array Size : 8 HDDs x 2 Array)
Backup	File backup	BU/Exe/AVI(GUI), JPG/AVI(Network)
	Function	Multi channel(Up to 16CH) Play, Date-Time/Title display
Network		
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)	
DDNS	Hanwha DDNS	
Transmission Bandwidth	Max. 400Mbps	
Audio	Input/Output	64 CH(network)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0533-R1
Page (5) of (73)

	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way
Max Remote Users		Search(3), Live Unicast(10), Multicast(20)
Security		IP address filtering, User access Log, 802.1x, Encryption Device certificate(Hanwha Techwin Root CA), Signed firmware
Web viewer	Supported OS	Windows 10, macOS 10.13
	Supported browser	Google Chrome, Microsoft Edge, Mac Safari
Viewer Software		SSM, Webviewer, Smart Viewer, Wisenet mobile Support CGI(SUNAPI) for integration to 3'rd party VMS

Functions

Camera Setup	Register	Auto, Manual
	Item	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup (4, 8 point polygon) Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS), Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
PTZ	Control	Via GUI, Webviewer, SPC-2000
	Preset	300 Presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live 16CH(Multi-Profile Support), Playback 4CH
	Max. Remote Users	Search(3), Live Unicast(10)
Redundancy	Fallover	N+1
	ARB	Support
Easy configuration		P2P(QR code)

Interface

Front	Indicator	HDD, Alarm, Power, Record, Backup, Network, RAID
Storage		OK
Reset		Power button
HDD Key Lock		OK
HDMI		2EA (Playback/Setup → HDMI1) HDMI1 : 3840x2160 30Hz HDMI2 : 1920x1080 60Hz
Audio		Out 1EA (3.5mm Audio Jack)
Ethernet		RJ-45 3EA (LAN/WAN, 1Gbps)
Alarm		In 8EA, Out 4EA
USB		4EA(Front 2 x USB 2.0, Rear 2 x USB 3.0)
Power Inlet		AC 1EA

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0533-R1

Page (6) of (73)

System

Log	Log List	Max. 100,000 (System Log, Event Log each)
System Control		Mouse, Keyboard, Web, Controller (SPC-2000)
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnamese

Environmental

Operating Temperature	0°C to +40°C (32°F to 104°F)
Operating Humidity	20% ~ 85% RH

Electrical

Power Input	100 ~ 240 VAC $\pm$ 10%; 50/60 Hz, 2.7A (Single SMPS)
Power Consumption	Max. 265W (904.2 BTU with HDD 16ea)

Mechanical

Color / Material	Black / Metal
Dimension (WxHxD)	440.0 x 132.0 x 571.1mm
Weight	Approx. 13.4Kg (29.6 lb, HDD not included)

Intelligent Analysis

AI Search	Object Attribute	Compatible for Wisenet AI Camera
-----------	------------------	----------------------------------

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 230 V, 50 Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NVR	XRN-6410B4	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
Mouse	MOKJUO	-	Primax Electronics Ltd.	-
SWITCHING POWER SUPPLY	DPS-500AB-33 C	-	Delta Electronics Power (Dongguan)Co., Ltd.	-
Main Board	EP16-002995C	-	-	-
CPU	INTEL PENTIUM G5400T SR3XB 3.10GHz	-	INTEL	-
RAM	8GB 1Rx8 PC4- 3200AA-UA2-11	-	SAMSUNG	8 GB x 2 EA
SSD	TS32GMTS800	-	Transcend	32 GB

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0533-R1

Page (8) of (73)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Camera	XNV-6020R	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
PoE Adapter	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	-
Laptop	LG15N54	503NZWY038929	LG Electronics	-
Laptop Adapter	PA-1900-14	OF2R263348701 7764	LITE-ON TECHNOLOGY COPORATION	-
Monitor	QTM-OR24.9WB	-	Topsync	-
Keyboard	KU-0316	-	Chicony Electronics Co., Ltd.	-
Earphone	-	-	-	-
Alarm	-	-	-	-
Button alarm	-	-	-	-
HDD	WD40PURX- 64N96Y0	-	WD	4 TB
Smart phone	-	-	LG Electronics	-
USB Memory1	-	-	Sandisk	32 GB
USB Memory2	-	-	Sandisk	16 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NVR (EUT)	RJ-45 (LAN1)	PoE Adapter	RJ-45 (LAN1)	3.0	U
	RJ-45 (LAN2)	Laptop	RJ-45 (LAN2)	3.0	U
	USB	Mouse (EUT)	USB	1.4	U
	USB	USB Memory1	USB	-	-
	USB	USB Memory2	USB	-	-
	HDMI	Monitor	HDMI	1.6	S
	USB	Keyboard	USB	1.5	U
	3.5mm	Earphone	3.5mm	1.6	U
	Alarm out	Alarm	Alarm in	3.0	U
	Alarm in	Button alarm	Alarm out	3.0	U
	SATA	HDD	SATA	0.2	U
PoE Adapter	RJ-45 (PoE)	Camera	RJ-45 (PoE)	3.0	U
Laptop	DC Jack	Laptop Adapter	DC Jack	1.7	U
	3.5 mm	Smart phone	3.5 mm	1.4	U

* Unshielded=U, Shielded=S


1.7 EUT Operating Mode(s)

Test Mode	operating
Operation Mode	EUT Monitoring, Ping Test after testing, check if the recording is normally done on the HDD and USB Memory

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

1.8 Configuration

■ AC Main
 □ DC Main

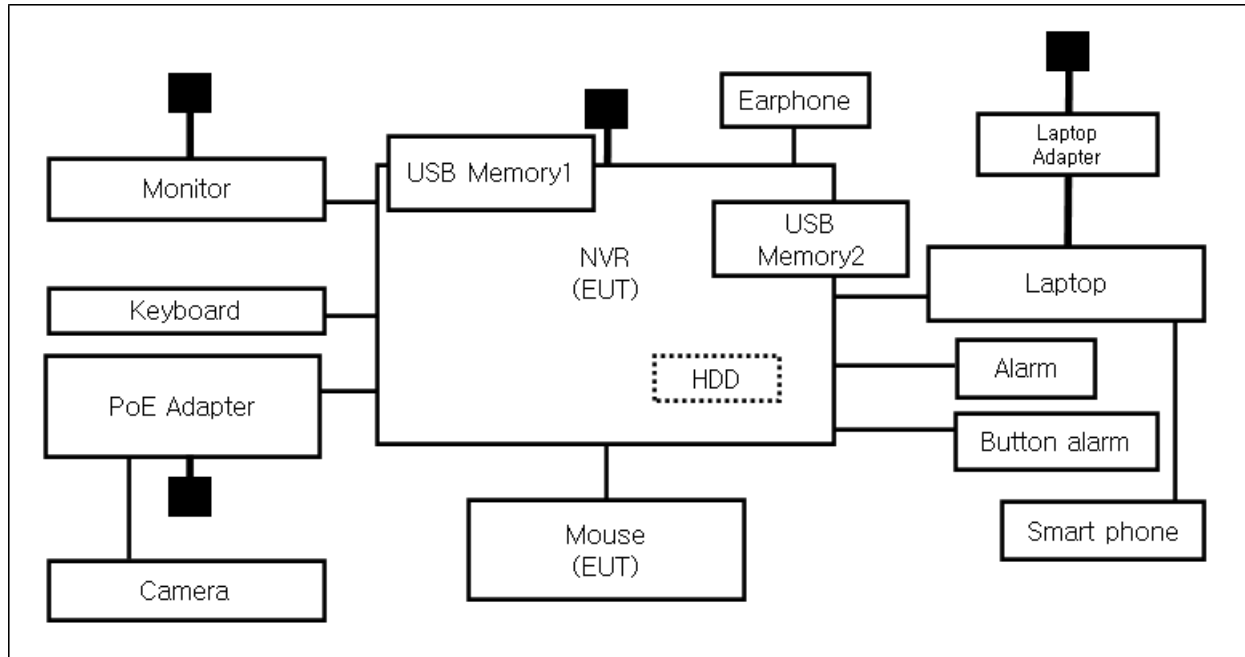

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☒ **EMC – Regulations 2016**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013



2.1 Conducted Emissions at Mains Power Ports

Test Date

Jun. 22, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022

Test Conditions

Temperature: (24,3 ± 0,2) °C

Relative Humidity: (44,5 ± 0,2) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Conducted Emissions at Telecommunication Ports

Test Date

Jun. 22, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022
☐	8-WIRE ISN CAT3,5	ENY81	R & S	100174	12, 28, 2022
☒	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	12, 28, 2022

Test Conditions

Temperature: (24,3 ± 0,2) °C

Relative Humidity: (44,5 ± 0,2) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jun. 22, 2022

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023
☒	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 08, 2023

Test Conditions

Temperature: (24,5 ± 0,3) °C
Relative Humidity: (44,3 ± 0,2) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jun. 23, 2022

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 03, 2022
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 01, 2023
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 03, 2023

Test Conditions

Temperature: (24,9 ± 0,2) °C

Relative Humidity: (44,8 ± 0,2) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

Jun. 27, 2022

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2023
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (24,5 ± 0,1) °C
Relative Humidity: (45,7 ± 0,1) % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.6 Voltage Fluctuations and Flicker

Test Date

Jun. 27, 2022

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2023
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (24,5 ± 0,3) °C
Relative Humidity: (45,7 ± 0,3) % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family
standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.
For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:
(a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no
residual
change in the EUT or any change in outputs, which could be interpreted by associated
equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the
conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Jun. 23, 2022

Test Location

EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	02, 24, 2023
☒	HCP	-	KES	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: (24,8 ± 0,1) °C
Relative Humidity: (44,9 ± 0,1) % R.H.
Atmospheric Pressure: (99,2 ± 0,0) kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge



Discharge Voltage:	Contact ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	Air ☒ 2 kV ☒ 4 kV ☐ 6 kV ☒ 8 kV ☐ 15 kV	HCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	VCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV
--------------------	---	---	---	---


Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

Location of Discharge:

Air
Contact

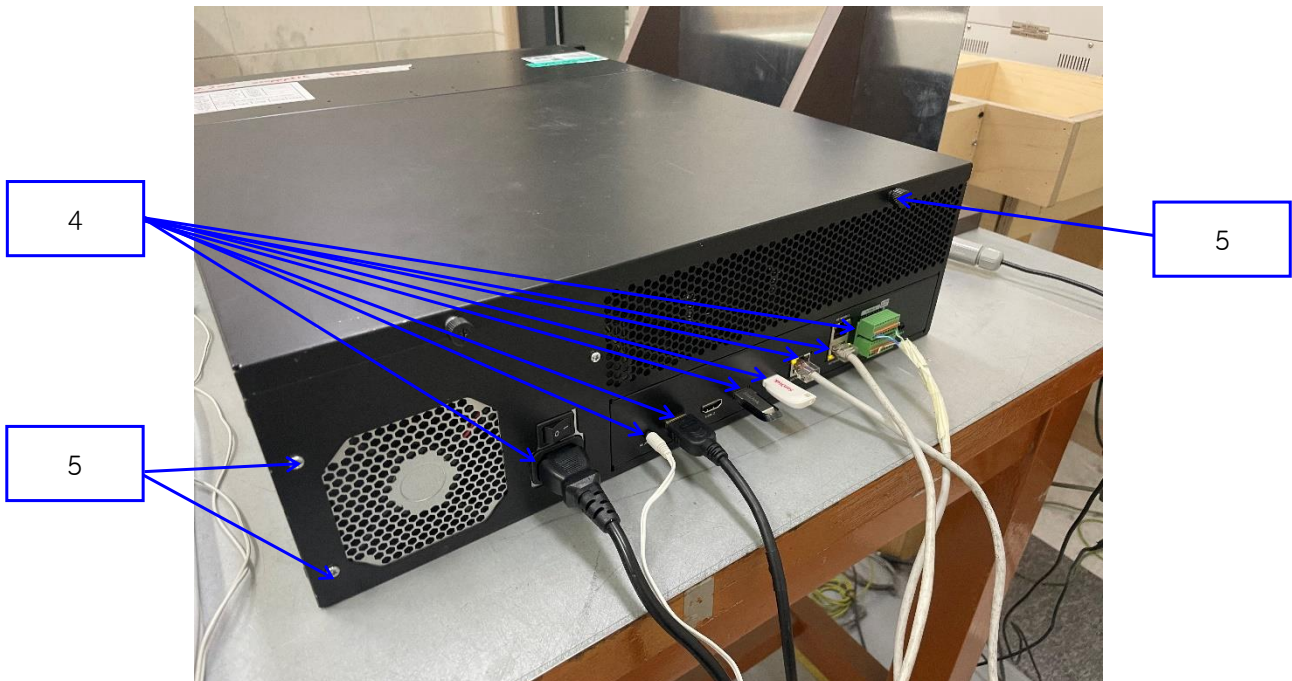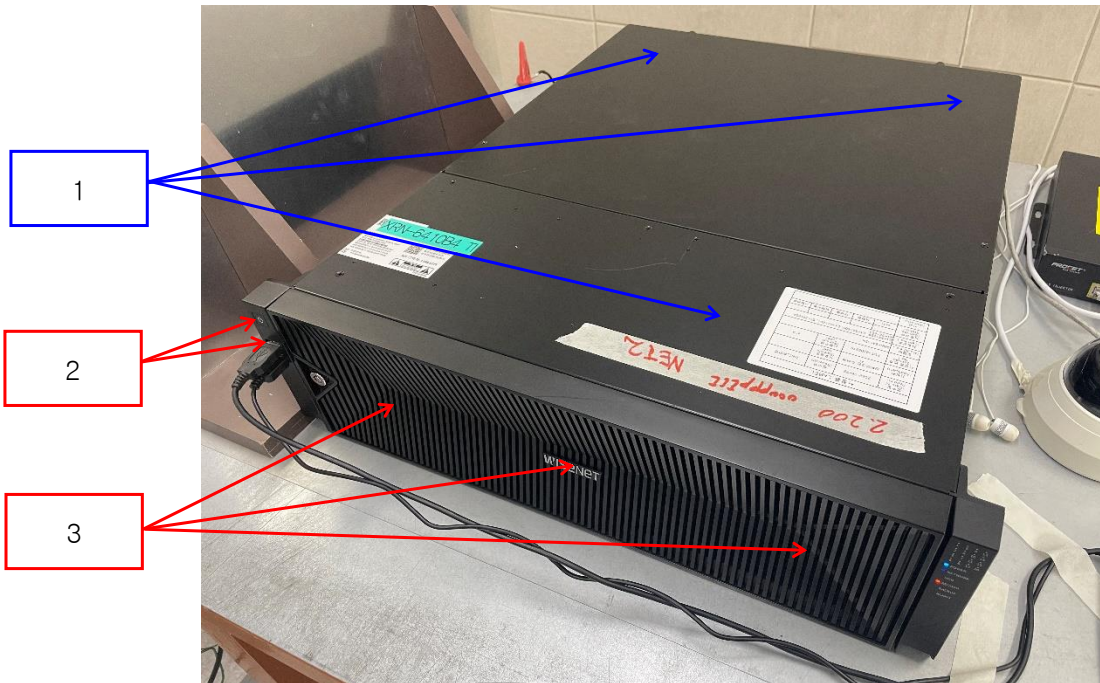

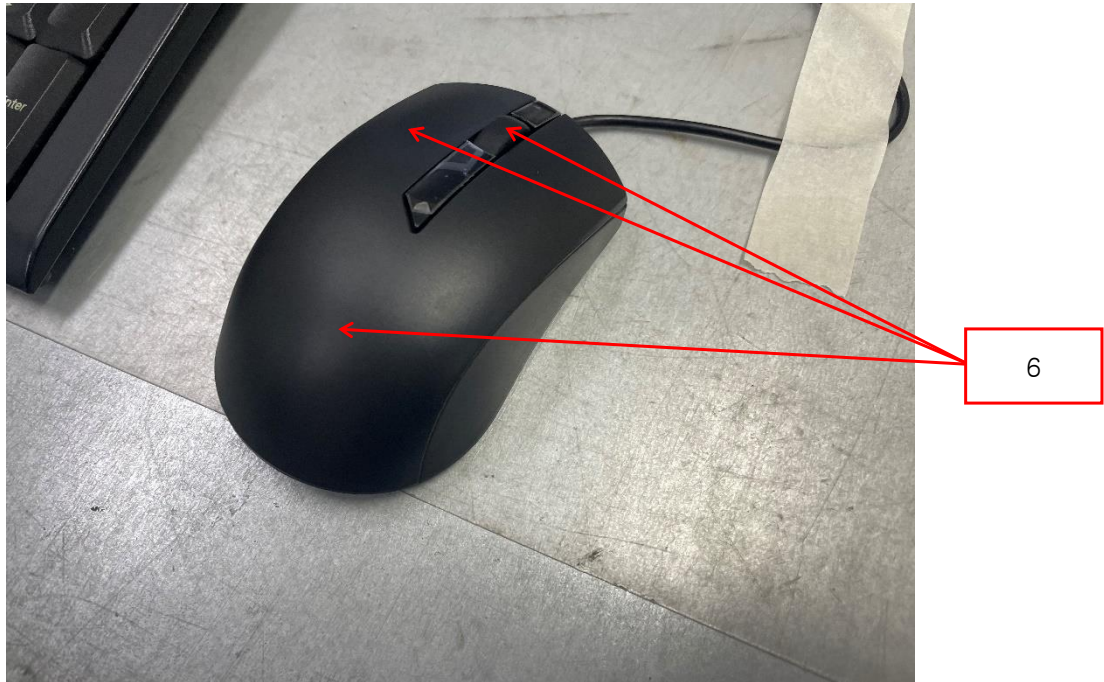

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0533-R1

Page (24) of (73)

Test Data

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure	Contact Discharge	Complied	-
2	Power Button And USB port	Air Discharge	Complied	-
3	Enclosure	Air Discharge	Complied	-
4	Around the port	Contact Discharge	Complied	-
5	Screw	Contact Discharge	Complied	-
6	Mouse	Air Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria

3.2 Radiated Electric Field Immunity

Reference Standard

EN IEC 61000-4-3:2020

Test Date

Jun. 25, 2022

Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 03, 2022
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
☒	POWER METER	E4419B	Agilent	GB40203000	03, 31, 2023
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY52170007	04, 04, 2023
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY41498669	04, 04, 2023
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 03, 2023

Test Conditions

Temperature: (24,5 ± 0,3) °C
Relative Humidity: (45,3 ± 0,3) % R.H.
Atmospheric Pressure: (99,2 ± 0,0) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0533-R1

Page (26) of (73)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0533-R1

Page (27) of (73)

Test Data

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Jun. 26, 2022

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	12, 03, 2022
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	03, 31, 2023
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	12, 03, 2022

Test Conditions

Temperature: (24,6 ± 0,2) °C
Relative Humidity: (44,6 ± 0,2) % R.H.
Atmospheric Pressure: (99,3 ± 0,0) kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☒ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

Test Data

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	Complied	Complied
L – N	Complied	Complied
L – PE	Complied	Complied
N – PE	Complied	Complied
L – N – PE	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45 (LAN 1)	Complied	Complied
RJ-45 (LAN 2)	Complied	Complied
Alarm	Complied	Complied
Button Alarm	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria



3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014/A1:2017

Test Date

Jun. 26, 2022

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	12, 03, 2022
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	03, 31, 2023
☒	CDN	CNV 508N1	EM TEST	P1610176296	12, 03, 2022

Test Conditions

Temperature: (24,6 ± 0,2) °C
Relative Humidity: (44,6 ± 0,2) % R.H.
Atmospheric Pressure: (99,3 ± 0,0) kPa

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0533-R1

Page (31) of (73)

Test Specifications**AC Power Lines**

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode☒ (0,5 / 1,0 / 2,0) kVDifferential Mode☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.Required Performance Criteria: ☒ Complied**Other supply / Signal Lines**

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0533-R1

Page (32) of (73)

Test Data☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	Complied	Complied
N – PE	Complied	Complied

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45 (LAN 1)	CDN	Complied	Complied
	LINE	Complied	Complied
RJ-45 (LAN 2)	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

RemarksPASS Required Performance Criteria



3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Jun. 24, 2022

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.12	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 24, 2022
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 24, 2022
☒	CDN	CDN M016	TESEQ	43694	11, 24, 2022
☒	CDN	CDN M016	TESEQ	43697	11, 24, 2022
☒	CDN	CDN T8RJ45	EM TEST	0909-09	08, 03, 2022
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 25, 2022

Test Conditions

Temperature: (24,4 ± 0,4) °C
Relative Humidity: (44,5 ± 0,3) % R.H.
Atmospheric Pressure: (99,5 ± 0,0) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0533-R1
Page (34) of (73)

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0533-R1

Page (35) of (73)

Test Data☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N – PE	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45 (LAN 1)	CDN	Complied
RJ-45 (LAN 2)	CDN	Complied
Alarm	Clamp	Complied
Button Alarm	Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**PASS Required Performance Criteria



3.6 Voltage Dips and Short Interruptions

Reference Standard
EN IEC 61000-4-11:2020

Test Date
Jun. 26, 2022

Test Location
EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	03, 31, 2023
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	03, 31, 2023

Test Conditions

Temperature: (24,6 ± 0,1) °C
Relative Humidity: (44,6 ± 0,1) % R.H.
Atmospheric Pressure: (99,3 ± 0,0) kPa



Test Specifications & Observations/Remarks

- Voltage Dips and Short Interruptions

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Degradation</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Degradation - See "Remarks "

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks


During the test(100%, 250cycle), EUT was turned off but after the test, it was recovered by no operator's intervention.

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports [HOT]

Common Information

Test Description: Conducted Emission
 Model No.: XRN-6410B4
 Phase: L1
 Mode:
 Operator Name: KES

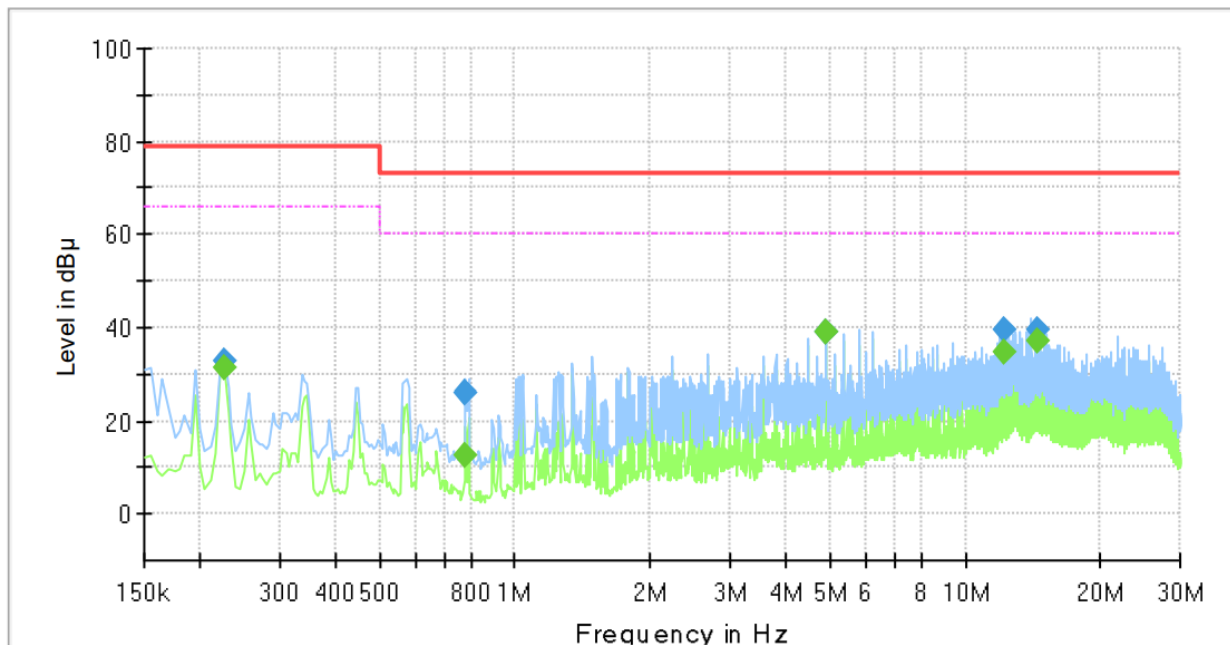


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.225000	---	31.53	66.00	34.47	1000.0	9.000	L1	19.4
0.225000	32.96	---	79.00	46.04	1000.0	9.000	L1	19.4
0.775000	---	12.48	60.00	47.52	1000.0	9.000	L1	20.0
0.775000	26.01	---	73.00	46.99	1000.0	9.000	L1	20.0
4.910000	---	38.96	60.00	21.04	1000.0	9.000	L1	19.6
4.910000	39.22	---	73.00	33.78	1000.0	9.000	L1	19.6
12.130000	---	34.74	60.00	25.26	1000.0	9.000	L1	20.0
12.130000	39.43	---	73.00	33.57	1000.0	9.000	L1	20.0
14.470000	---	37.27	60.00	22.73	1000.0	9.000	L1	19.9
14.470000	39.71	---	73.00	33.29	1000.0	9.000	L1	19.9

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	XRN-6410B4
Phase:	N
Mode:	
Operator Name:	KES

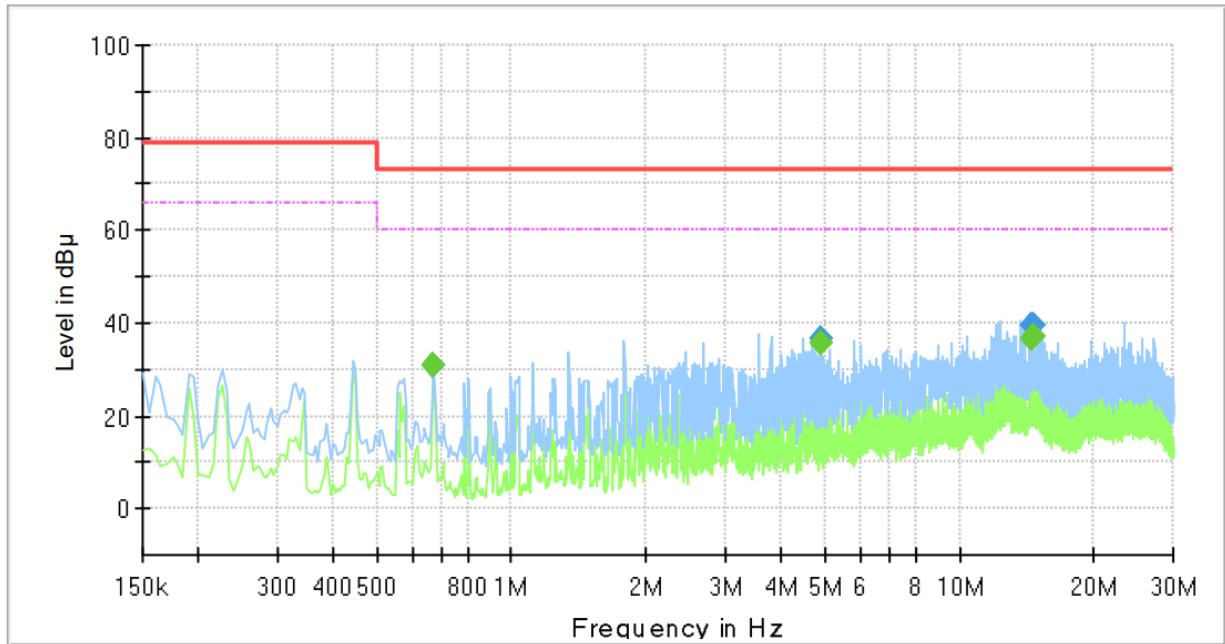

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.670000	---	30.87	60.00	29.13	1000.0	9.000	N	19.9
0.670000	30.99	---	73.00	42.01	1000.0	9.000	N	19.9
4.910000	---	35.47	60.00	24.53	1000.0	9.000	N	19.6
4.910000	36.55	---	73.00	36.45	1000.0	9.000	N	19.6
14.465000	---	36.57	60.00	23.43	1000.0	9.000	N	19.9
14.465000	39.31	---	73.00	33.69	1000.0	9.000	N	19.9
14.680000	---	37.08	60.00	22.92	1000.0	9.000	N	19.9
14.680000	39.49	---	73.00	33.51	1000.0	9.000	N	19.9

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


Conducted Emissions at Telecommunication Ports

■ LAN 1

[1 000 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XRN-6410B4
Mode : LAN1_TEL 1 000 Mbps
Speed :
Operator Name: KES

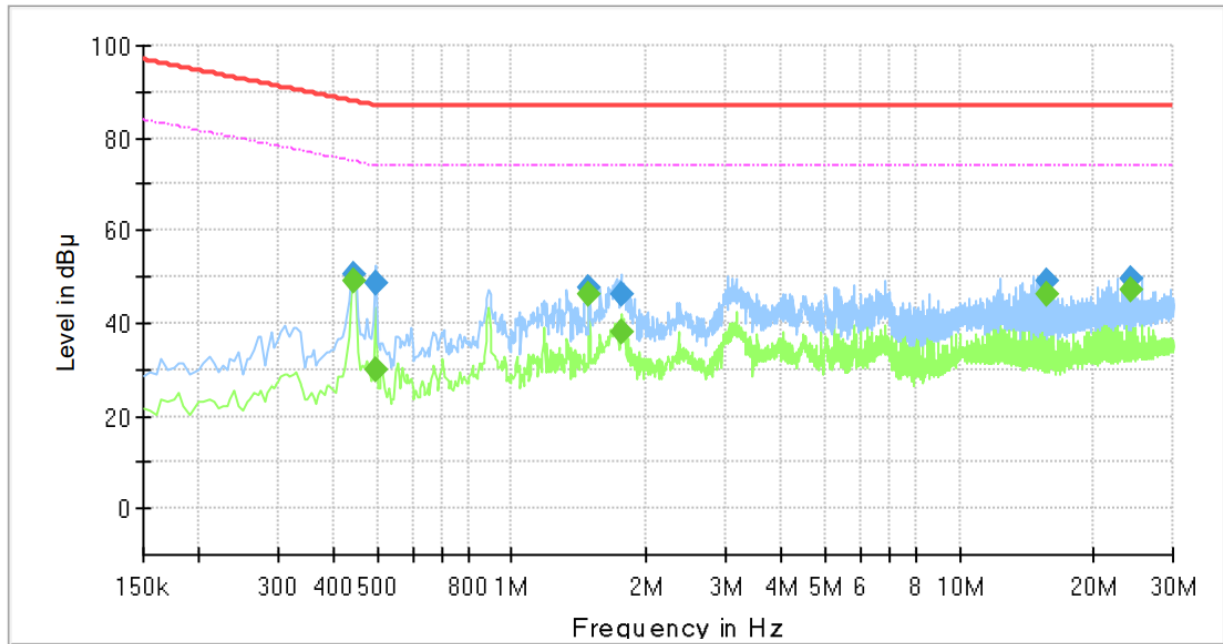

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.445000	---	49.10	74.97	25.87	1000.0	9.000	Single Line	19.7
0.445000	50.33	---	87.97	37.64	1000.0	9.000	Single Line	19.7
0.495000	---	29.92	74.08	44.16	1000.0	9.000	Single Line	19.7
0.495000	48.83	---	87.08	38.25	1000.0	9.000	Single Line	19.7
1.490000	---	46.43	74.00	27.57	1000.0	9.000	Single Line	20.1
1.490000	47.84	---	87.00	39.16	1000.0	9.000	Single Line	20.1
1.750000	---	38.24	74.00	35.76	1000.0	9.000	Single Line	20.1
1.750000	45.97	---	87.00	41.03	1000.0	9.000	Single Line	20.1
15.740000	---	46.01	74.00	27.99	1000.0	9.000	Single Line	19.6
15.740000	49.12	---	87.00	37.88	1000.0	9.000	Single Line	19.6
24.030000	---	47.00	74.00	27.00	1000.0	9.000	Single Line	19.9
24.030000	49.73	---	87.00	37.27	1000.0	9.000	Single Line	19.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


The authenticity of the test report, contact kes@kes.co.kr

■ LAN 2

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XRN-6410B4
Mode :	LAN2_TEL 1 000 Mbps
Speed :	
Operator Name:	KES

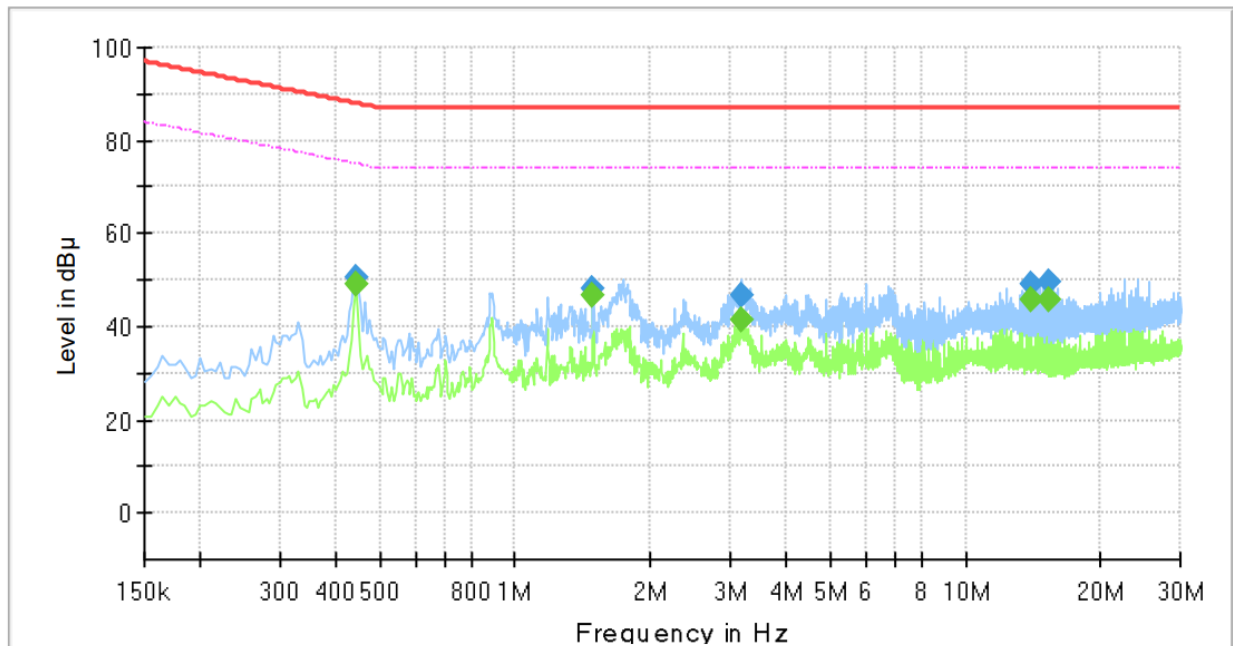

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.445000	---	49.30	74.97	25.67	1000.0	9.000	Single Line	19.7
0.445000	50.33	---	87.97	37.64	1000.0	9.000	Single Line	19.7
1.490000	---	46.52	74.00	27.48	1000.0	9.000	Single Line	20.1
1.490000	48.12	---	87.00	38.88	1000.0	9.000	Single Line	20.1
3.170000	---	41.32	74.00	32.68	1000.0	9.000	Single Line	19.9
3.170000	46.49	---	87.00	40.51	1000.0	9.000	Single Line	19.9
14.040000	---	45.60	74.00	28.40	1000.0	9.000	Single Line	19.6
14.040000	48.86	---	87.00	38.14	1000.0	9.000	Single Line	19.6
15.315000	---	45.62	74.00	28.38	1000.0	9.000	Single Line	19.6
15.315000	49.36	---	87.00	37.64	1000.0	9.000	Single Line	19.6

◆ Calculation

$$\text{QuasiPeak [dBuV]} / \text{CAverage [dBuV]} = \text{Reading Value [dBuV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



Radiated Electric Field Emissions(Below 1 GHz)

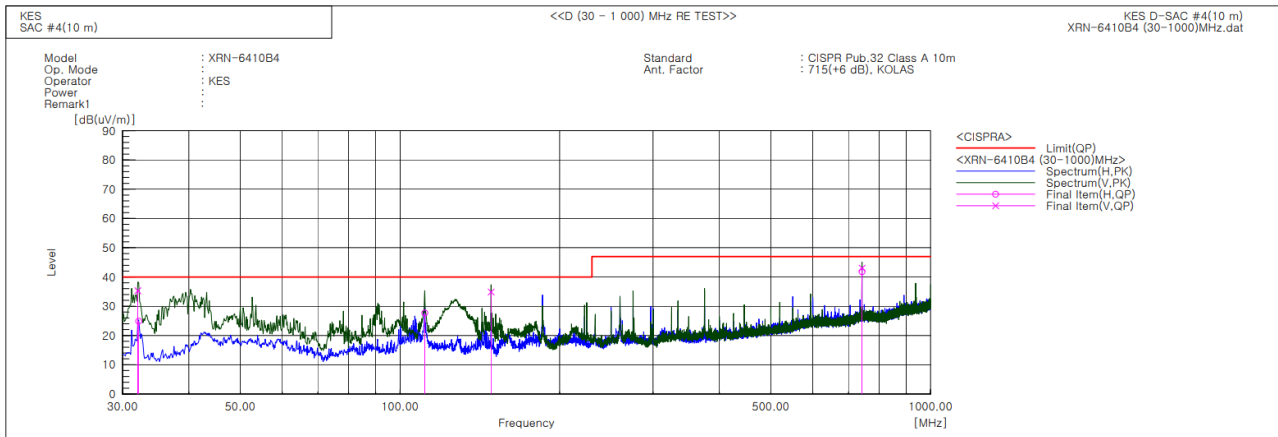

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	32.061	V	60.3	-25.0	35.3	40.0	4.7	138.0	105.0	
2	32.183	H	49.9	-25.0	24.9	40.0	15.1	396.0	197.3	
3	111.359	H	50.1	-22.4	27.7	40.0	12.3	388.0	52.8	
4	148.461	V	60.2	-25.3	34.9	40.0	5.1	116.0	143.4	
5	742.586	H	48.2	-6.4	41.8	47.0	5.2	108.0	151.8	
6	742.590	V	49.4	-6.4	43.0	47.0	4.0	147.0	358.1	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0533-R1

Page (43) of (73)

Radiated Electric Field Emissions(Above 1 GHz)

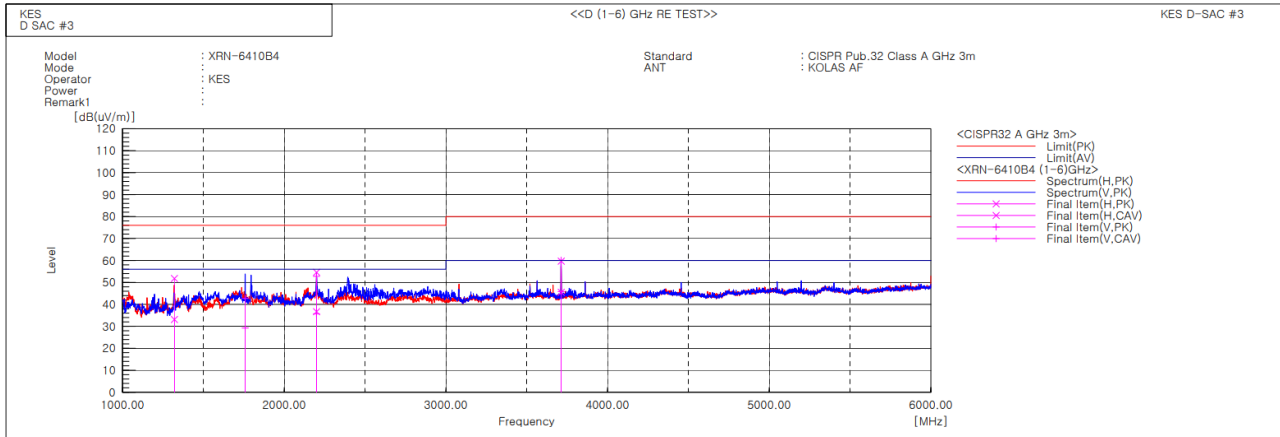

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1320.900	H	58.9	40.2	-7.1	51.8	33.1	76.0	56.0	24.2	22.9	100.0	8.0	
2	1758.880	V	45.4	31.9	-2.7	42.7	29.2	76.0	56.0	33.3	26.8	100.0	191.0	
3	2199.820	V	53.1	36.0	-0.3	52.8	35.7	76.0	56.0	23.2	20.3	100.0	281.1	
4	2199.890	H	54.9	37.0	-0.3	54.6	36.7	76.0	56.0	21.4	19.3	100.0	269.2	
5	3713.225	V	55.5	41.2	4.6	60.1	45.8	80.0	60.0	19.9	14.2	100.0	39.2	
6	3713.700	H	55.1	40.9	4.6	59.7	45.5	80.0	60.0	20.3	14.5	100.0	44.8	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



Harmonic Current Emissions and Voltage Fluctuations and Flicker

Average harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.233			
2	0.006	0.554	1.080	PASS
3	0.042	1.813	2.300	PASS
4	0.004	0.904	0.430	n/a
5	0.022	1.907	1.140	PASS
6	0.003	1.157	0.300	n/a
7	0.013	1.639	0.770	PASS
8	0.003	1.428	0.230	n/a
9	0.011	2.732	0.400	PASS
10	0.003	1.615	0.184	n/a
11	0.009	2.859	0.330	PASS
12	0.003	2.115	0.153	n/a
13	0.007	3.344	0.210	PASS
14	0.003	2.381	0.131	n/a
15	0.006	3.874	0.150	PASS
16	0.003	2.882	0.115	n/a
17	0.005	4.055	0.132	PASS
18	0.003	3.381	0.102	n/a
19	0.005	4.280	0.118	PASS
20	0.004	3.883	0.092	n/a
21	0.005	3.124	0.161	PASS
22	0.004	4.367	0.084	n/a
23	0.005	3.137	0.147	n/a
24	0.004	4.858	0.077	n/a
25	0.004	3.310	0.135	n/a
26	0.004	5.417	0.071	n/a
27	0.004	3.537	0.125	n/a
28	0.004	5.701	0.066	n/a
29	0.004	3.505	0.116	n/a
30	0.004	6.138	0.061	n/a
31	0.004	3.630	0.109	n/a
32	0.004	6.518	0.058	n/a
33	0.004	3.793	0.102	n/a
34	0.004	6.878	0.054	n/a
35	0.004	4.236	0.096	n/a
36	0.004	7.177	0.051	n/a
37	0.005	4.977	0.091	n/a
38	0.004	7.331	0.048	n/a
39	0.004	5.109	0.087	n/a
40	0.003	7.484	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Harmonics (continued)

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.234			
2	0.007	0.404	1.620	PASS
3	0.043	1.244	3.450	PASS
4	0.004	0.661	0.645	n/a
5	0.023	1.318	1.710	PASS
6	0.004	0.879	0.450	n/a
7	0.013	1.145	1.155	PASS
8	0.004	1.076	0.345	n/a
9	0.011	1.911	0.600	PASS
10	0.003	1.263	0.276	n/a
11	0.010	2.000	0.495	PASS
12	0.004	1.551	0.230	n/a
13	0.007	2.354	0.315	PASS
14	0.003	1.769	0.197	n/a
15	0.006	2.769	0.225	PASS
16	0.004	2.094	0.173	n/a
17	0.006	2.960	0.199	PASS
18	0.004	2.482	0.153	n/a
19	0.006	3.125	0.178	PASS
20	0.004	2.845	0.138	n/a
21	0.005	3.358	0.161	PASS
22	0.004	3.225	0.125	n/a
23	0.005	3.423	0.147	PASS
24	0.004	3.506	0.115	n/a
25	0.005	3.675	0.135	n/a
26	0.004	4.037	0.106	n/a
27	0.005	3.839	0.125	n/a
28	0.004	4.252	0.099	n/a
29	0.005	3.923	0.116	n/a
30	0.004	4.540	0.092	n/a
31	0.004	4.069	0.109	n/a
32	0.004	4.760	0.086	n/a
33	0.004	4.244	0.102	n/a
34	0.004	5.102	0.081	n/a
35	0.005	4.681	0.096	n/a
36	0.004	5.233	0.077	n/a
37	0.005	5.498	0.091	PASS
38	0.004	5.586	0.073	n/a
39	0.005	5.618	0.087	n/a
40	0.004	5.760	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0533-R1

Page (46) of (73)

Test Data - Voltage Fluctuations

Maximum Flicker results

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

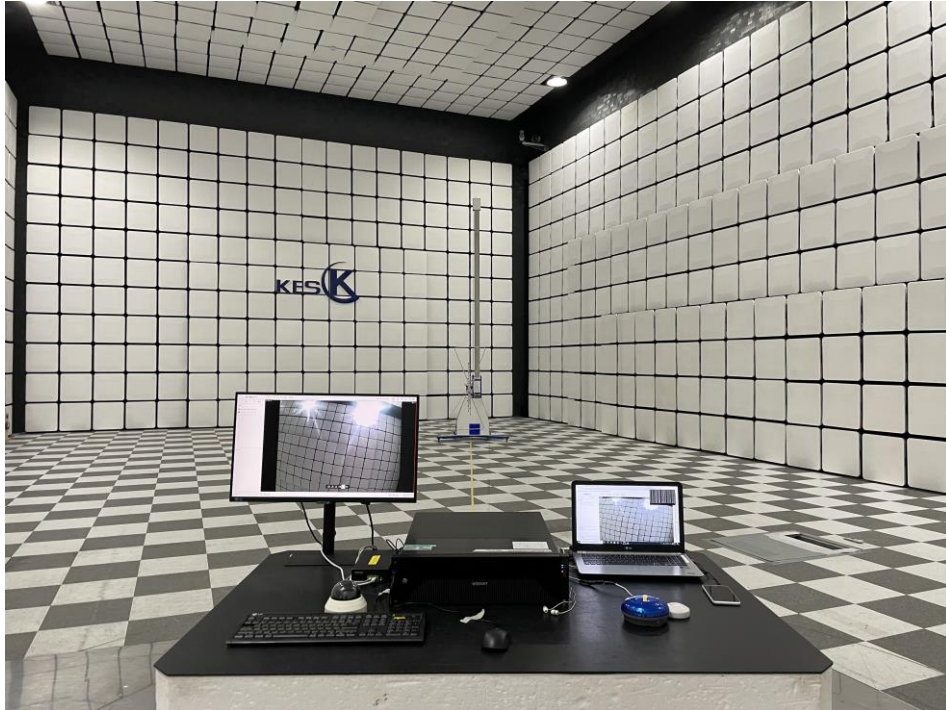

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

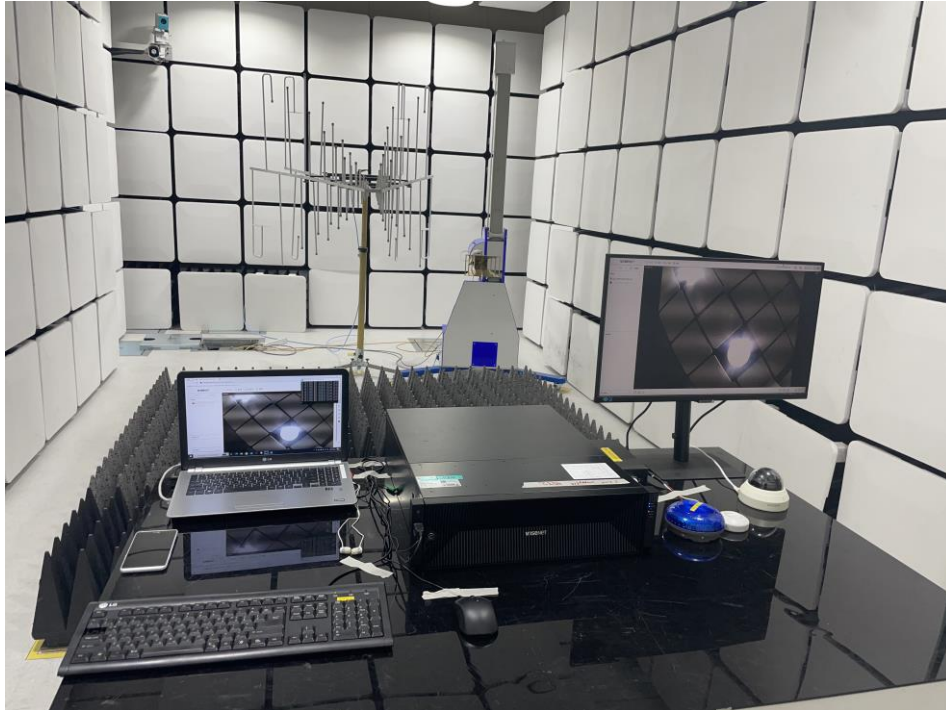

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Harmonic Current Emissions and Voltage Fluctuations and Flicker



Electrostatic Discharge




Radiated Electric Field Immunity

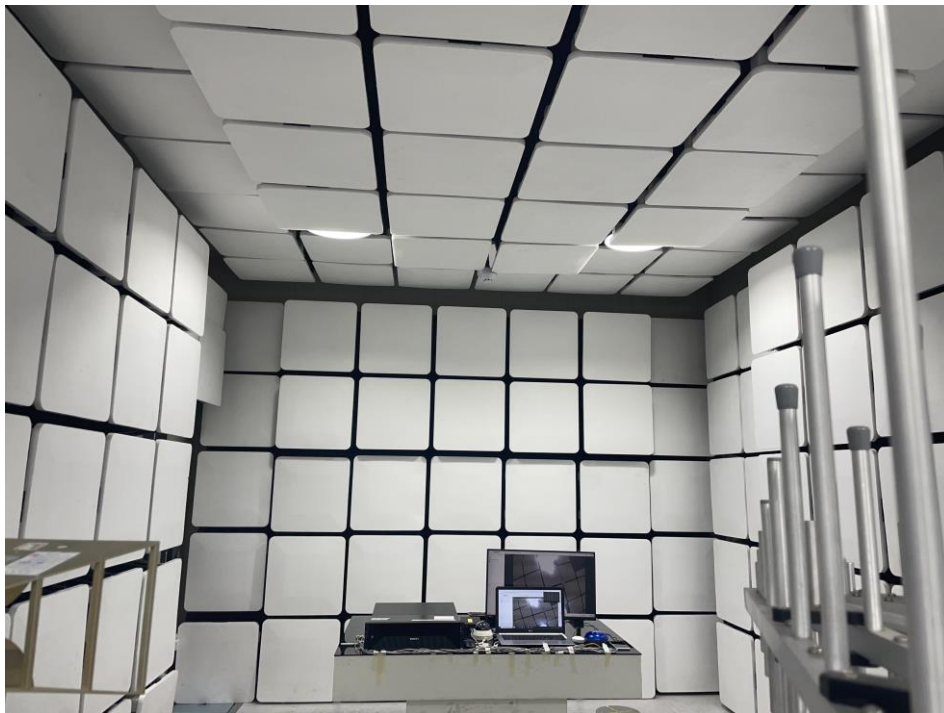

Electrical Fast Transients/Bursts



Surge Transients

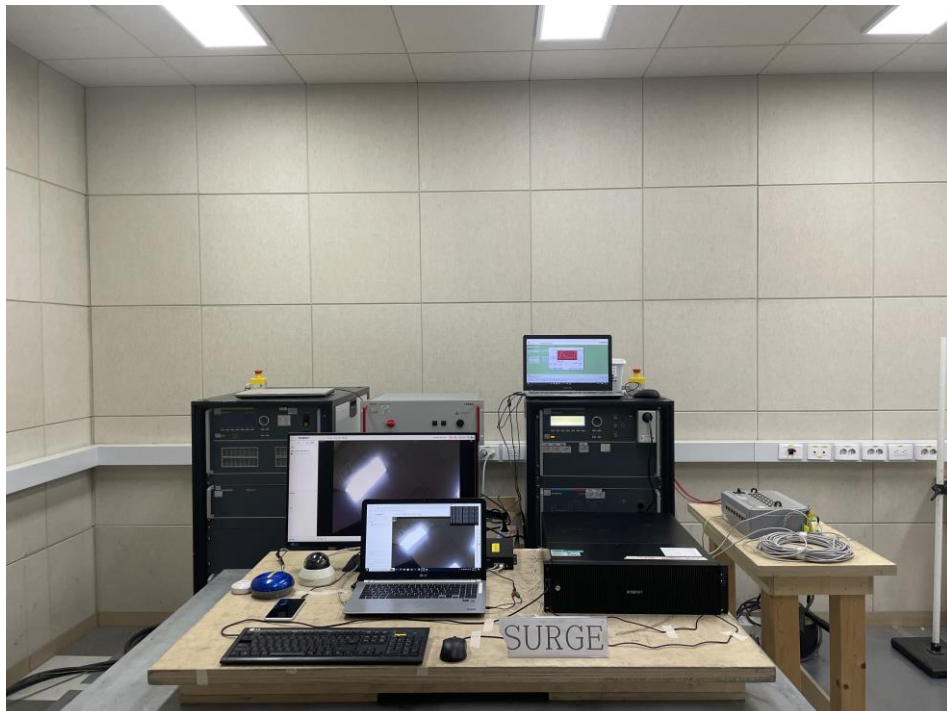

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Disturbance



Voltage Dips and Short Interruptions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)




EUT Internal Photographs

(Internal View)




EUT Internal View – Main Board

(Top)

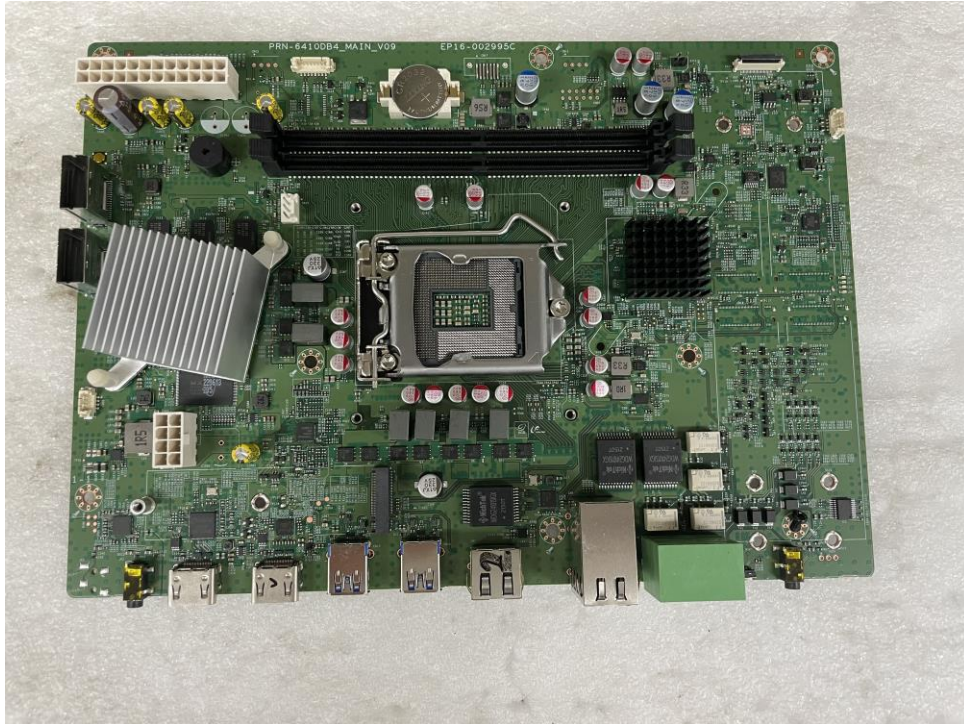


(Bottom)

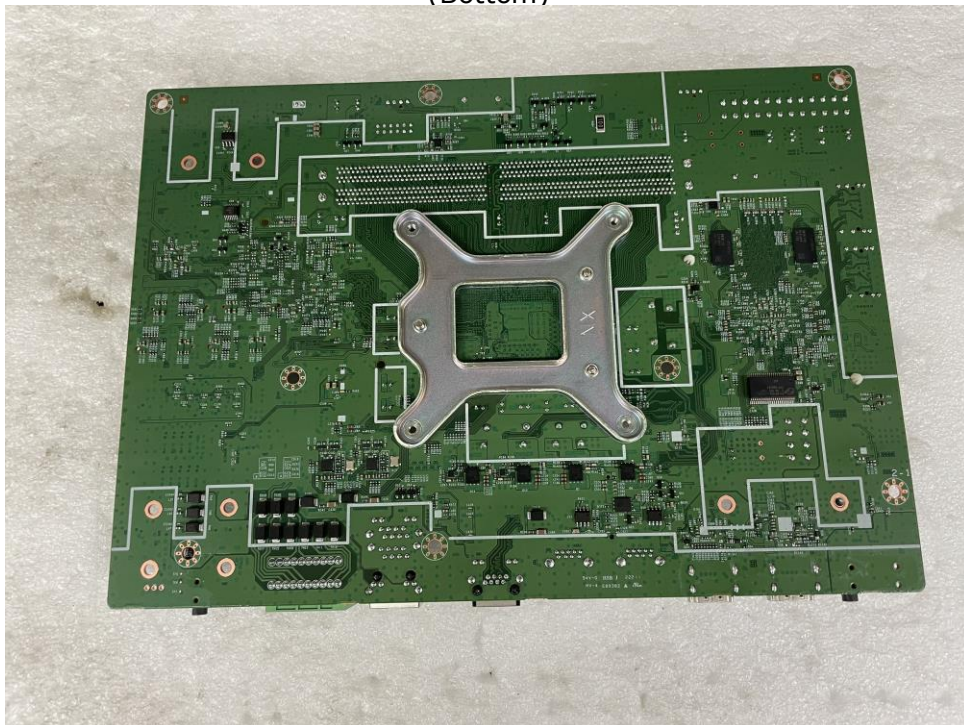


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub Board 1

(Top)

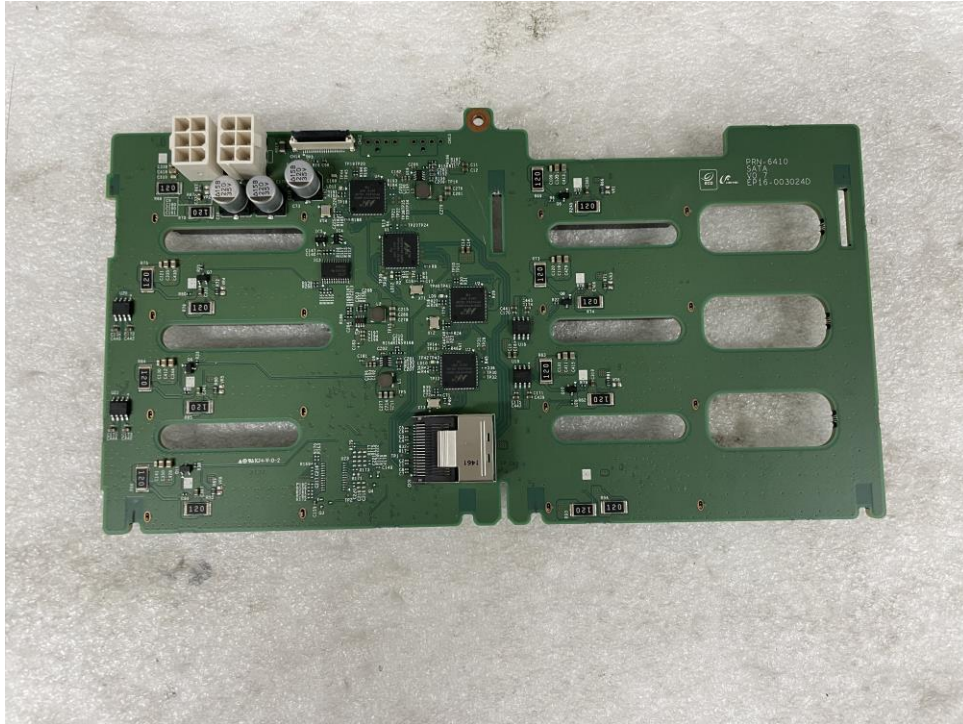


(Bottom)

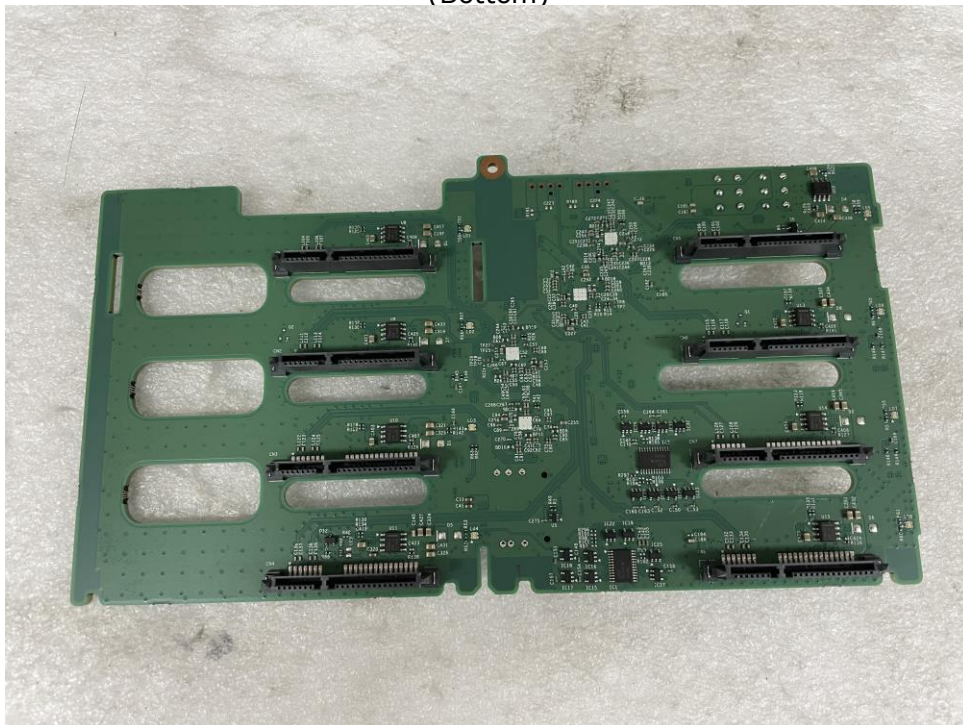


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub Board 2

(Top)

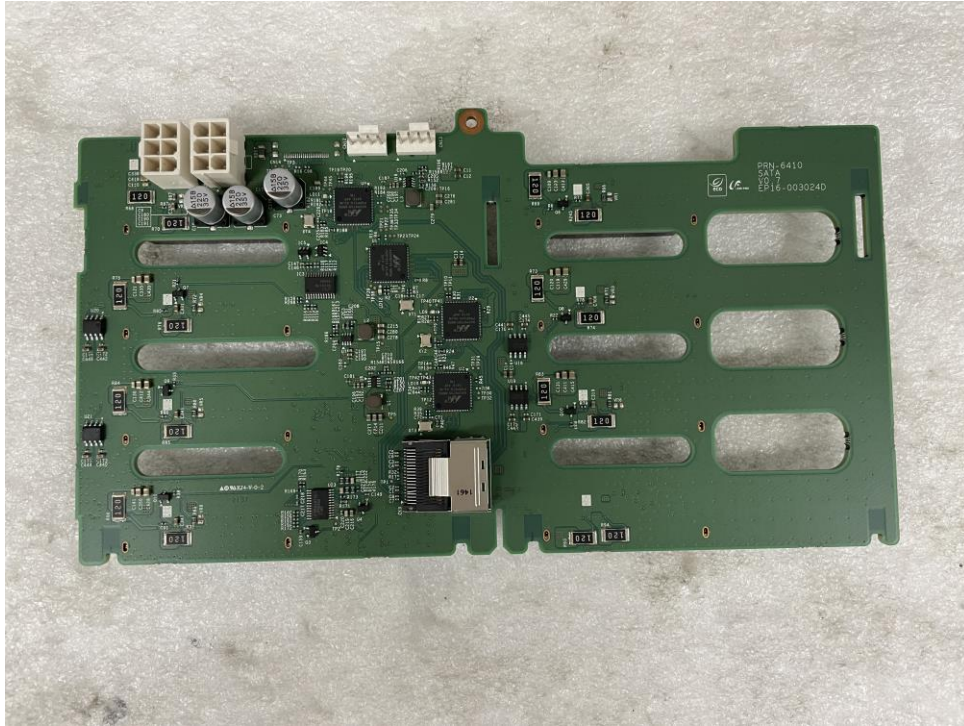

(Bottom)

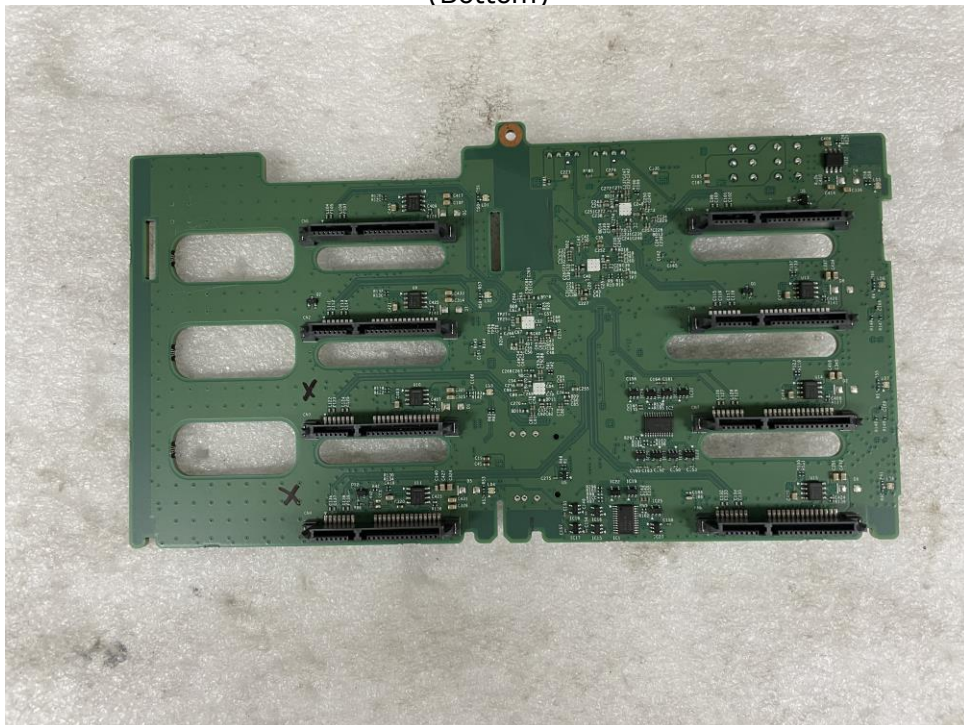


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Power

(Top)



(Bottom)

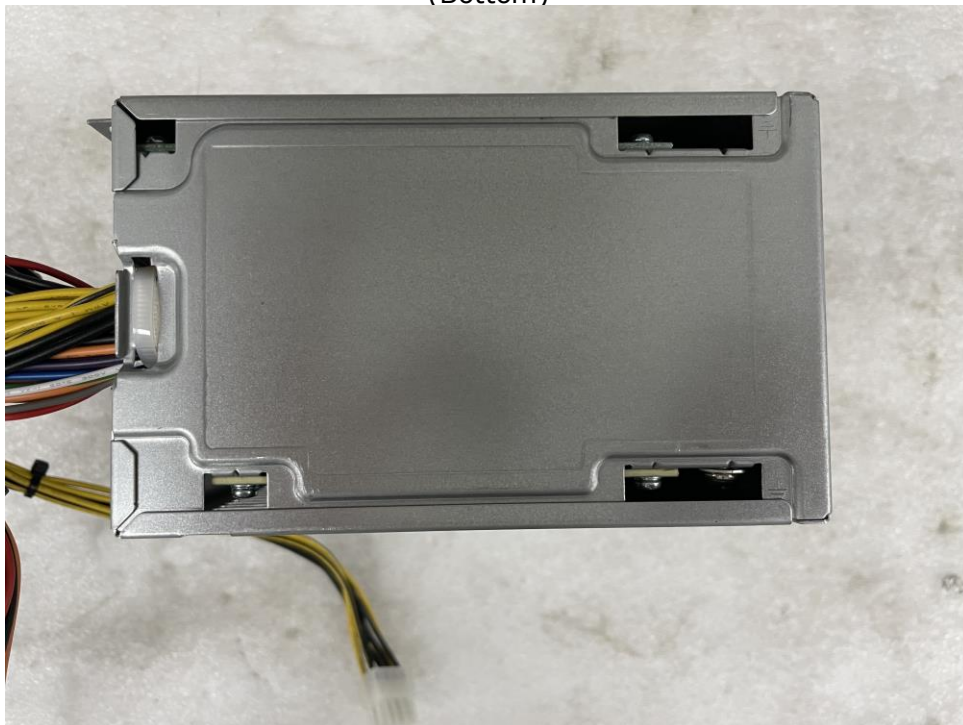

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

(Label)



EUT Internal View – CPU

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – CPU Cooler

(Top)



(Bottom)

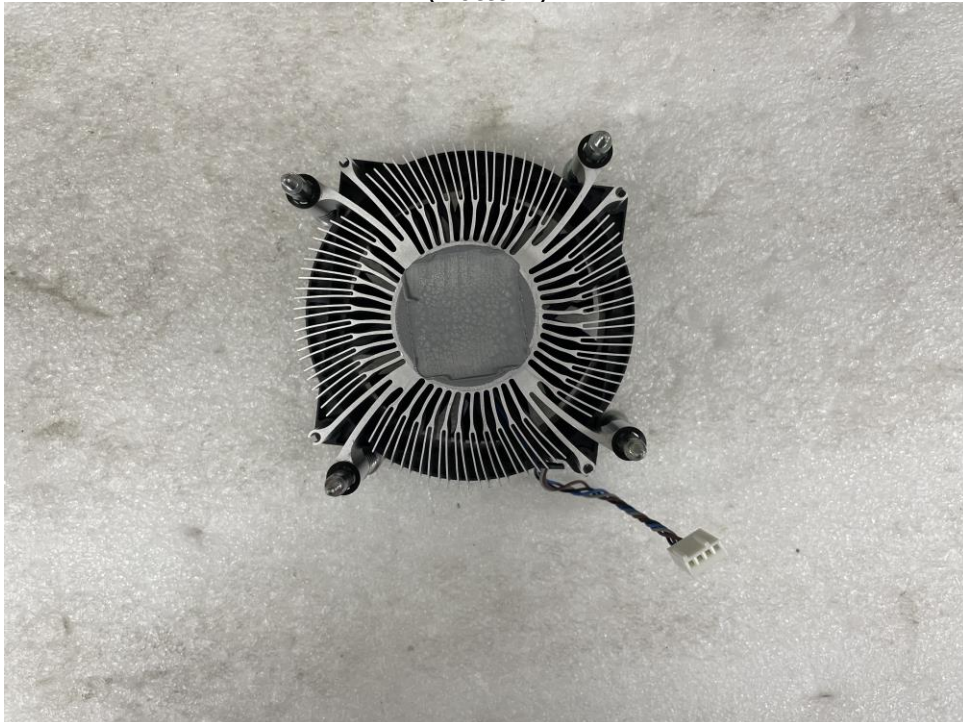

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – RAM 1

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – RAM 2

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – SSD

(Top)



(Bottom)

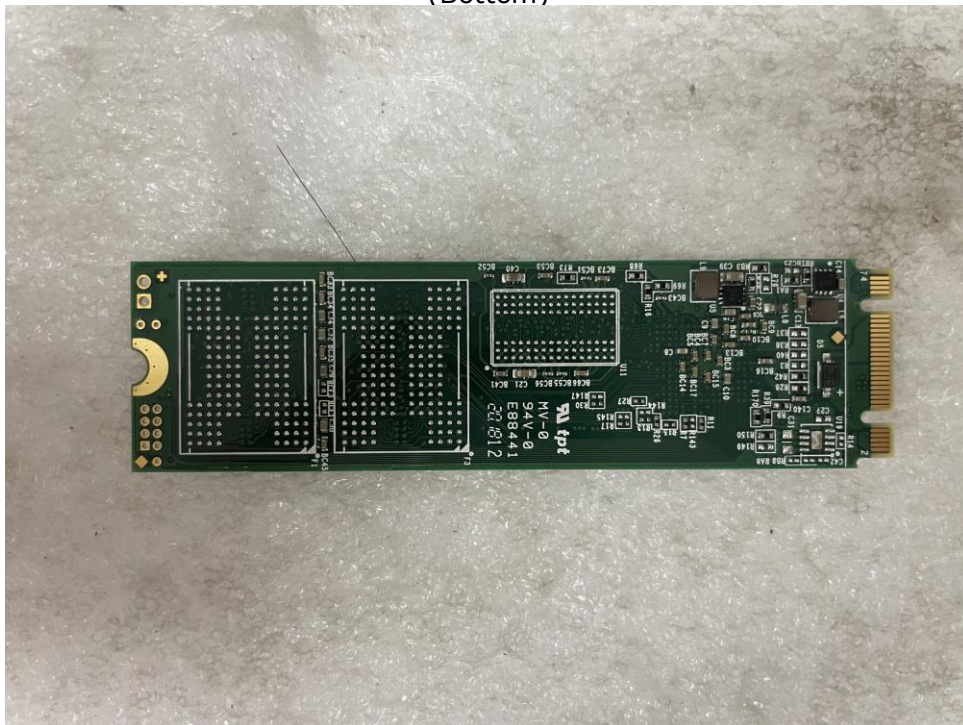


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – LED Board

(Top)



(Bottom)

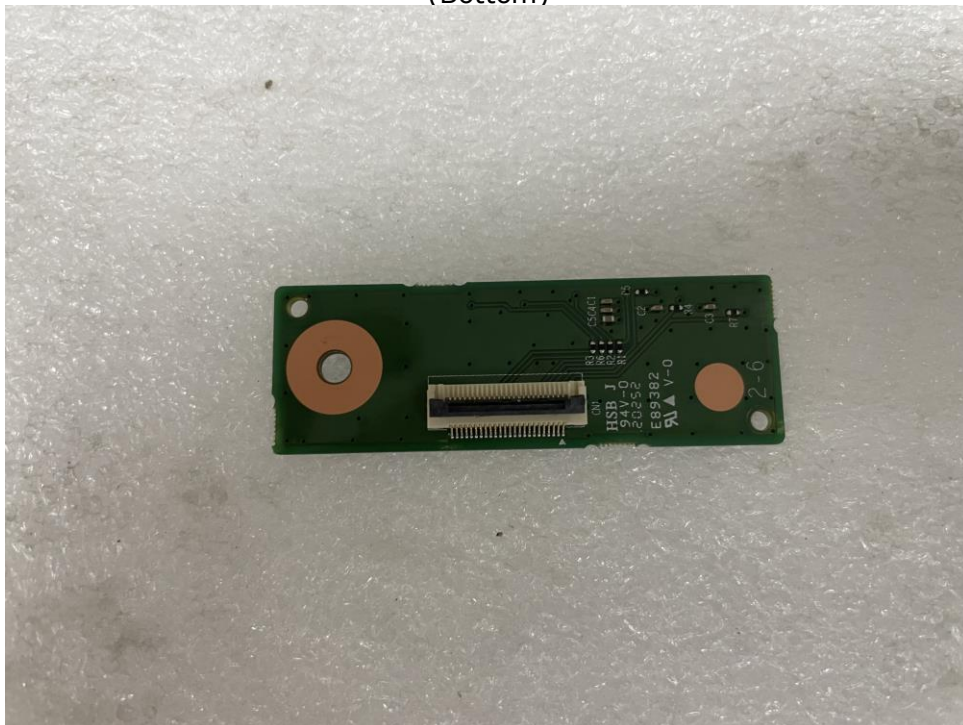

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – USB Board

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – MOUSE

(Top)

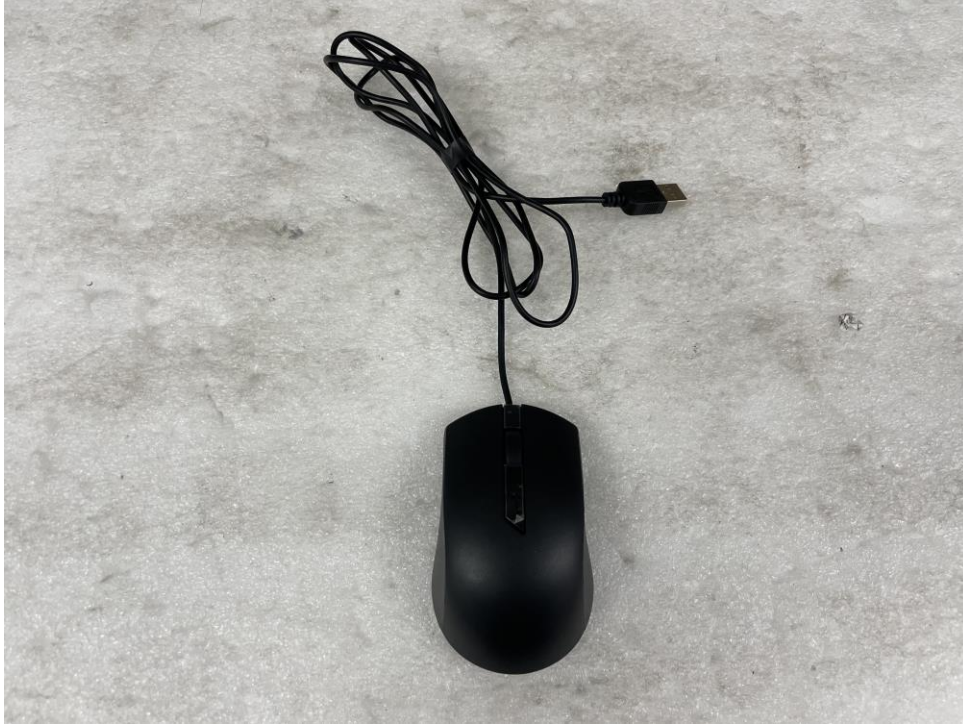

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

(Label)



EUT Internal View – COOLER

(Top)



(Bottom)



(Label)



Label and Location

**NVR**

Model No : XRN-6410B4

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

