



EMC TEST REPORT For IC

Test Report No. : KES-E1-16T0559
Date of Issue : Nov. 14, 2016
Product name : NETWORK VIDEO RECORDER
Model/Type No. : XRN-810SN
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 1204, Changwon-daero, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, korea
Manufacturer : Tianjin Samsung Techwin Opto-Electronic Co.,Ltd.
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA,
Tianjin, 300385, People's Republic of China
Date of Receipt : Nov, 01, 2016
Test date : Nov, 08, 2016
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Young Suk, Song
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0559
Page (2) of (32)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Nov. 14, 2016	KES-E1-16T0559	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences.....	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	9
1.8	Configuration.....	9
1.9	Calibration Details of Equipment Used for Measurement	10
1.10	Test Facility	10
1.11	Laboratory Accreditations and Listings	10
2.0	Test Regulations.....	11
2.1	Conducted Emissions Mains Power Ports.....	13
2.2	Radiated Electric Field Emissions(Below 1 GHz)	14
2.3	Radiated Electric Field Emissions(Above 1 GHz)	15
APPENDIX A – TEST DATA.....		16
Conducted Emissions at Mains Power Ports.....		16
Radiated Electric Field Emissions(Below 1 GHz)		18
Radiated Electric Field Emissions(Above 1 GHz)		19
Test Setup Photos and Configuration		23
Conducted Voltage Emissions		23
Radiated Electric Field Emissions(Below 1 GHz)		24
Radiated Electric Field Emissions(Above 1 GHz)		25
EUT External Photographs		26
EUT Internal Photographs		27

1.0 General Product Description

Main Specifications of EUT are:

Model		XRN-810S
Display		
Network Camera	Inputs	Max. 8CH
	Resolution	CIF ~ 8MP
	Protocols	Samsung, ONVIF
Live	Local Display	1x HDMI / 1x VGA
	Multi-Channel Display	[Local Monitor] 1 / 2V / 3V / 4 / 6 / 8 / Auto Sequence [Web] 1 / 4 / 8 / Auto Sequence
	Performance	[Local Monitor] 8MP(60fps, only One Ch) 5MP(90fps), 3MP(120fps), 2MP(240fps), 720p(240fps), D1(240fps) [Web] 5MP(30fps), 3MP(60fps), 2MP(120fps), 720p(240fps), D1(240fps)
Performance		
Operating System	Embedded	Linux
Record	Compression	H.265, H.264, MJPEG
	Recording Bandwidth	Max. 100Mbps
	Resolution	CIF ~ 8MP
	Type	Manual, Schedule(Continuous/Event), Event (Pre/Post)
Search & Play	Event Action	e-Mail, PTZ Preset, Alarm Out, Buzzer, Monitor Out
	Playback Bandwidth	32Mbps (8CH simultaneously)
	Performance	Max. 3 Users (Remote 3)
	Mode	Date & Time(Calendar) Event Log list Text Search(POS, ANPR)
	Simultaneous playback	Max. 8CH (Local, Network)
Storage	Resolution	CIF ~ 8MP
	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down
	Default Built-In	0TB ~ 8TB (dependent on region)
	Internal	2SATA
Backup	Max.Capacity	8TB
	File backup	BU/Exe(USB), JPG/AVI(Web, CMS)
	Function	Multi channel(Upto 8CH) Play, Date-Time/Title display
Sensor	I/O	4/3 (NO 2EA, NO/NC 1EA)
Audio	Input	8 CH (network)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way
Network		
Protocol		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS		Hanwha Security DDNS
Transmission Bandwidth		128Mbps
Max Remote Users		Search (3), Live Unicast (10), Multicast (20)
IP Version		IPv4/v6
Security		User access Log, IP Filtering, 802.1x, Encryption
OS		Supported OS : Windows 7, 8, 10, Mac OS X 10.8, 10.9, 10.10, 10.11

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0559
Page (5) of (32)

Web Browser		Non-plugin Webviewer Supported Browser: Google Chrome 47, MS Edge 20 Plug-in Webviewer Supported MS Explore 11 , Mozilla Firefox 43 , Apple Safari 9 * Mac OS X only
Viewer Software	Type	SSM, Webviewer, Smart Viewer, wisenet Mobile
	CMS Support	Support SDK/CGI(SUNAPI)
Functions		
Camera Setup	Register	PnP, Manual
	Setup Items	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SDR, DIS), Fisheye Dewarping(web), Hallway View Setup, Camera Webpage
Camera Control	PoE	1) Monitor PoE Power consumption 2) On/Off Control for each PoE camera 3) Remote Reset for each PoE camera
Easy Configuration		Setup Wizard (Date/Time, Network, Auto Camera Configuration) P2P (TUTK)
Redundancy	ARB	Yes
PTZ	Control	Via GUI, Webviewer, SPC-2000
	Preset	300 Presets (Camera)
Smart phone	Support Model	i-Phone, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live(8ch) : Multi-Profile Support Playback(1ch) Event push
	Max. Remote Users	Search (3), Live Unicast (10), Multicast (20)
System Control	Control Applications	Mouse, Web, SPC-2000 (Controller), IR Remacon
Indicator/Interface		
Front	Indicator	Power Status LED 1EA HDD Action LED 1EA Alarm Status LED 1EA Record Status LED 1EA Network Action LED 1EA Backup LED 1EA
Connectors	HDMI	1 EA - Support upto 4K (3840 x 2160)
	Audio	Out(1EA, RCA, Line)
	Ethernet	■ 8EA (PoE/PoE+, 100Mbps) ■ 1EA (WAN, 1Gbps) - WAN : Uplink to CMS
	Alarm	In(4EA, Terminal Block) Out(3EA, Terminal Block)
	USB	Front 2EA(USB2.0), Rear 1(USB3.0)
	Reset	Switch(1EA)
	Power Cord	Included
System		
Log	Log List	Max. 20000 (System Log, Event Log each)
Environmental		
Operating Temperature / Humidity		+0°C to +40°C(+32°F to +104°F)
Humidity		20% ~ 85% RH

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 100 Vac ☐ 110 Vac ☒ 120 Vac ☐ 24 Vac ☐ PoE

Frequency ☐ 50 Hz ☒ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK VIDEO RECORDER	XRN-810SN	-	Tianjin Samsung Techwin Opto-Electronic Co.,Ltd.	E.U.T
MOUSE	MOEIUOA,AA-SM2PCPB	-	Dongguan Primax Electronic & Telecommunication Products Ltd.	
REMOTE CONTROL	EP10-000331A	-	SAMSUNG	
HDD	WD10PURX	-	West digital	

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0559
Page (7) of (32)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
MONITOR 1	SMT-2232	C95V67VF900025B	Weihai Daewoo Electronics Co., Ltd.	-
MONITOR 2	SMT-2232	C95V67VF900038B	Weihai Daewoo Electronics Co., Ltd.	-
SPEAKER	BZ-T3400 AV Soundbar	-	AVIM AUDIO	-
NETWORK CAMERA	SND-L6013RN	-	SAMSUNG TECHWIN CO., LTD.	8 ea
USB MEMORY	-	-	SanDisk	16 GB
NOTEBOOK	X56K	HN11N5151FJ0045 W	HANSUNG	-
NOTEBOOK ADAPTOR	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
Alarm	-	-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK VIDEO RECORDER (E.U.T)	HDMI	MONITOR 1	HDMI	1.4	S
	VGA OUT	MONITOR 2	D-SUB	1.6	S
	AUDIO OUT	SPEAKER	AUX	1.4	U
	USB 3.0	USB MEMORY	USB 3.0	-	U
	VIEWER	NOTEBOOK	RJ-45	3.0	U
	USB 2.0	MOUSE	USB 2.0	1.8	U
	2 PIN	Alarm	2 PIN	3.0	U
	POE CAMERA	NETWORK CAMERA	RJ-45	5.0	U
	POE CAMERA	NETWORK CAMERA	RJ-45	5.0	U
	POE CAMERA	NETWORK CAMERA	RJ-45	5.0	U
	POE CAMERA	NETWORK CAMERA	RJ-45	5.0	U
	POE CAMERA	NETWORK CAMERA	RJ-45	5.0	U
	POE CAMERA	NETWORK CAMERA	RJ-45	5.0	U
	POE CAMERA	NETWORK CAMERA	RJ-45	5.0	U
	POE CAMERA	NETWORK CAMERA	RJ-45	5.0	U

* Unshielded = U, Shielded = S

1.7 EUT Operating Mode(s)


Equipment under test was operated during the measurement under the following conditions:

Test mode	operating
	E.U.T Monitoring , Ping test, 1 kHz

E.U.T Test operating S/W		
Name	Version	Manufacture Company
WebView	-	Hanwha Techwin Co., Ltd.

- Input power condition during the measurements was 24 v (ac).

1.8 Configuration

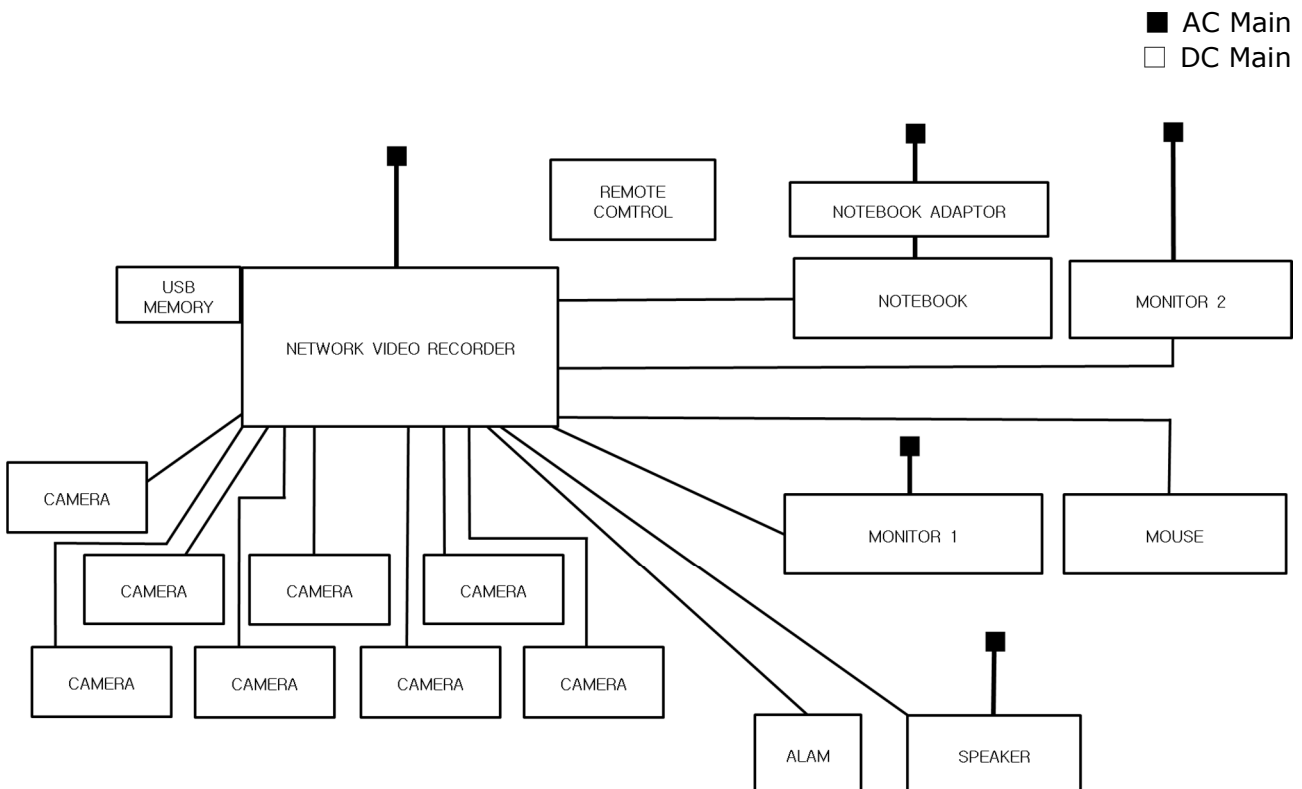

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	 R-4308, C-4798, T-2311, G-914
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547 :2009

☐ EN 55022:2010

☐ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



☐ **VCCI V-3 / 2015.04**

☐ Class A

☐ Class B

☐ **AS/NZS CISPR22:2009 +A1:2010**

☐ Class A

☐ Class B

☐ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B

☐ ANSI C63.4-2014

☒ **IC Regulation ICES-003 : 2016**

☒ CAN/CSA CISPR 22-10

☒ Class A

☐ Class B

☐ ANSI C63.4-2014

☐ **RE- Directive 2014/53/EU**

☐ EN 301 489-1 V1.9.2

☐ Equipment for fixed use

☐ Equipment for vehicular use

☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002



2.1 Conducted Emissions Mains Power Ports

Test Date

Nov, 08, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02, 04, 2017
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	Electro wave Shieldroom	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R & S	9.12.00	-

Test Conditions

Temperature: 18,2 °C
Relative Humidity: 41,5 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Nov, 08, 2016

Test Location

☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R&S	101781	05, 03, 2017
☒	Trilog-Broadband Antenna	VULB 9163	SCHWARZBECK	9168-713	05, 15, 2017
☒	Open Area Test Site	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-
☒	EMI Test S/W	-	-	-	-

Test Conditions

Temperature: 10,1 °C
Relative Humidity: 50,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Nov, 08, 2016

Test Location

Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESU26	R&S	100552	04, 24, 2017
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 14, 2017
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 07, 2017
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-
☒	EMI Test S/W	e3	AUDIX	8.083b	-

Test Conditions

Temperature: 18,2 °C

Relative Humidity: 41,5 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

Common Information

Test Description: Conducted Emission
Model No.: XRN-810SN
Mode
Operator Name: KES

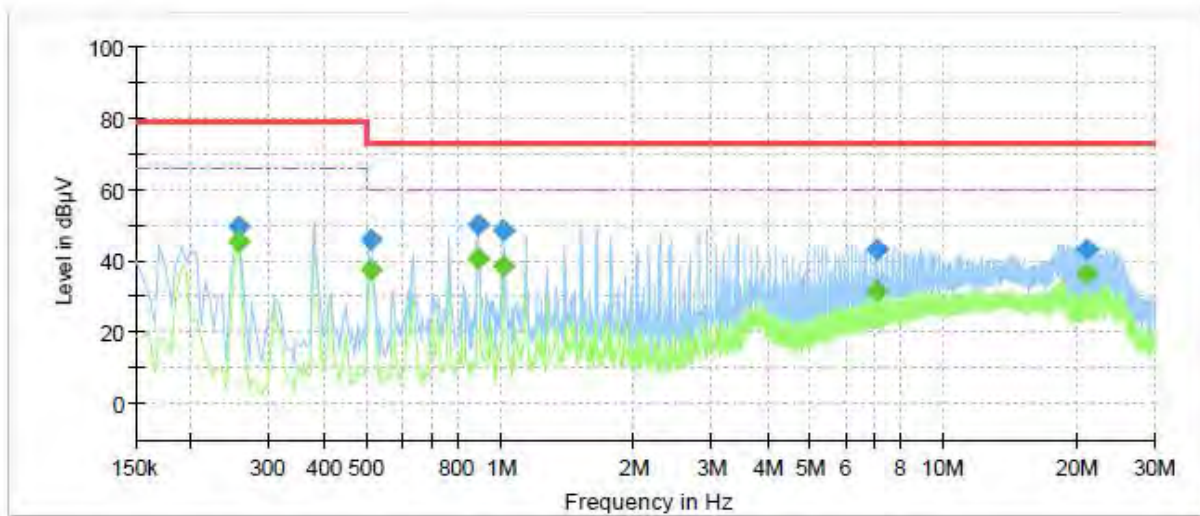

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.255000	---	45.49	66.00	20.51	1000.0	9.000	L1	9.7
0.255000	49.87	---	79.00	29.13	1000.0	9.000	L1	9.7
0.510000	---	37.65	60.00	22.35	1000.0	9.000	L1	9.8
0.510000	46.09	---	73.00	26.91	1000.0	9.000	L1	9.8
0.890000	---	40.66	60.00	19.34	1000.0	9.000	L1	9.9
0.890000	50.31	---	73.00	22.69	1000.0	9.000	L1	9.9
1.015000	---	38.71	60.00	21.29	1000.0	9.000	L1	9.9
1.015000	48.66	---	73.00	24.34	1000.0	9.000	L1	9.9
7.125000	---	31.87	60.00	28.13	1000.0	9.000	L1	10.0
7.125000	43.60	---	73.00	29.40	1000.0	9.000	L1	10.0
21.130000	---	36.50	60.00	23.50	1000.0	9.000	L1	10.2
21.130000	43.29	---	73.00	29.71	1000.0	9.000	L1	10.2

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

[NEUTRAL]

Common Information

Test Description: Conducted Emission
Model No.: XRN-810SN
Mode
Operator Name: KES

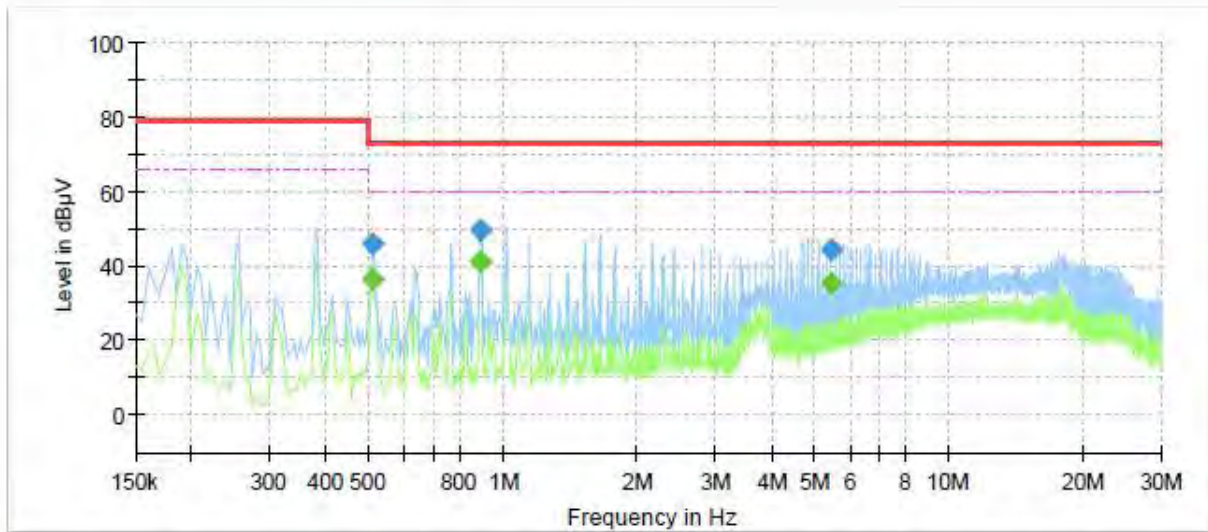

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.510000	---	36.64	60.00	23.36	1000.0	9.000	N	9.8
0.510000	46.19	---	73.00	26.81	1000.0	9.000	N	9.8
0.890000	---	41.06	60.00	18.94	1000.0	9.000	N	9.9
0.890000	49.96	---	73.00	23.04	1000.0	9.000	N	9.9
5.470000	---	35.56	60.00	24.44	1000.0	9.000	N	10.0
5.470000	44.57	---	73.00	28.43	1000.0	9.000	N	10.0

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)



Radiated Electric Field Emissions(Below 1 GHz)

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin [dB]
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	
149.31	12.52	V	2.94	8.18	3.56	24.26	40.00	15.74
222.98	10.25	H	2.01	11.81	4.39	26.45	40.00	13.55
250.17	14.69	V	2.36	12.41	4.72	31.82	47.00	15.18
297.67	11.68	H	1.29	13.33	5.13	30.14	47.00	16.86
375.26	10.99	H	2.14	15.13	5.91	32.03	47.00	14.97
425.71	14.58	H	1.36	16.06	6.49	37.13	47.00	9.87
475.32	13.58	V	3.02	16.75	6.90	37.23	47.00	9.77
519.77	17.87	V	1.08	17.53	7.16	42.56	47.00	4.44

* H : Horizontal, V : Vertical

◆ Calculation


Corrected Amplitude [dB μ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss



Radiated Electric Field Emissions(Above 1 GHz)

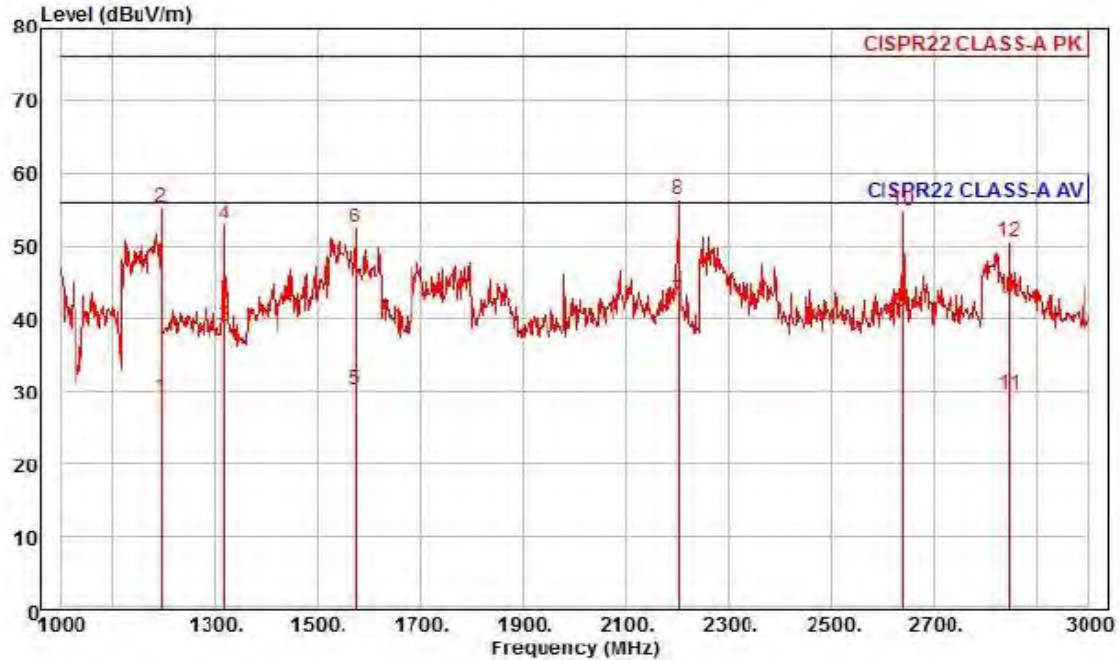

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XRN-810SN
Mode :
Memo : 1 ~ 3 GHz


	Read Freq	Ant Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1196.00	37.00	24.69	7.13	39.62	309	56.00	-26.80	horizontal	Average
2	1196.00	63.18	24.69	7.13	39.62	309	76.00	-20.62	horizontal	Peak
3	1320.00	45.58	25.18	7.49	39.32	271	56.00	-17.07	horizontal	Average
4	1320.00	59.72	25.18	7.49	39.32	271	76.00	-22.93	horizontal	Peak
5	1574.00	35.15	26.19	8.23	39.21	37	56.00	-25.64	horizontal	Average
6	1574.00	57.40	26.19	8.23	39.21	37	76.00	-23.39	horizontal	Peak
7 pp	2200.00	43.82	28.37	9.80	39.42	21	56.00	-13.43	horizontal	Average
8 pk	2200.00	57.68	28.37	9.80	39.42	21	76.00	-19.57	horizontal	Peak
9	2640.00	40.28	29.45	10.84	39.70	209	56.00	-15.13	horizontal	Average
10	2640.00	54.41	29.45	10.84	39.70	209	76.00	-21.00	horizontal	Peak
11	2846.00	28.34	29.95	11.34	39.93	287	56.00	-26.30	horizontal	Average
12	2846.00	49.16	29.95	11.34	39.93	287	76.00	-25.48	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

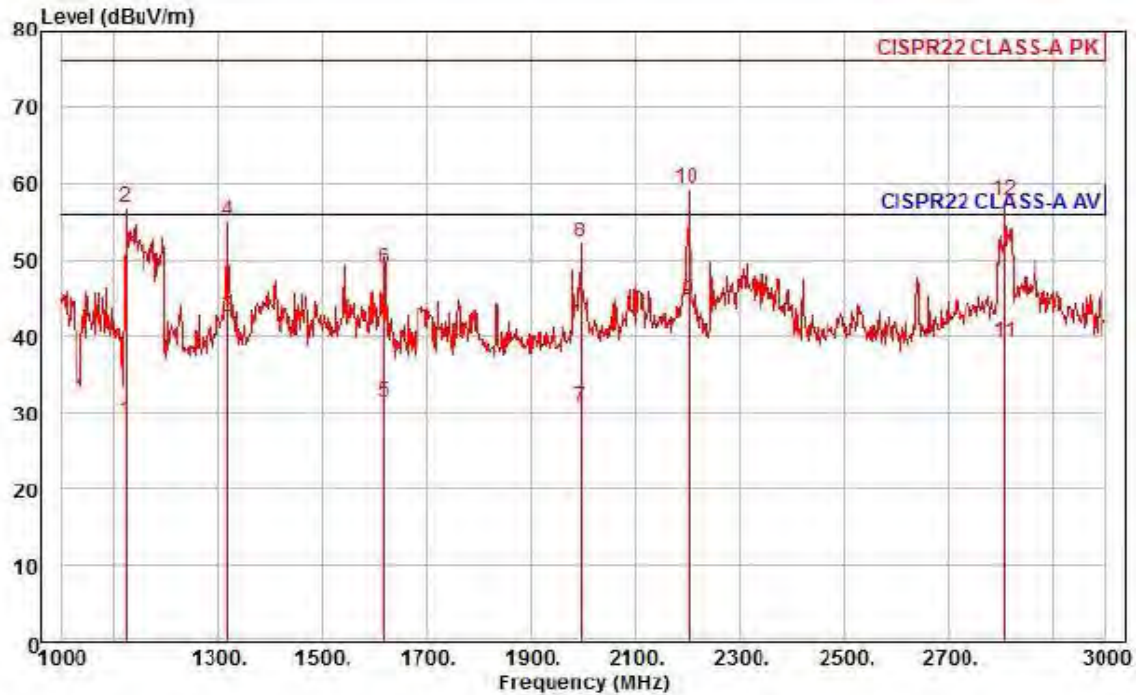


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XRN-810SN
Mode :
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1122.00	37.53	24.39	6.88	39.80	353	56.00	-27.00	vertical	Average
2	1122.00	65.33	24.39	6.88	39.80	353	76.00	-19.20	vertical	Peak
3	1320.00	49.14	25.18	7.49	39.32	238	56.00	-13.51	vertical	Average
4	1320.00	61.75	25.18	7.49	39.32	238	76.00	-20.90	vertical	Peak
5	1618.00	35.95	26.36	8.36	39.23	27	56.00	-24.56	vertical	Average
6	1618.00	53.35	26.36	8.36	39.23	27	76.00	-27.16	vertical	Peak
7	1996.00	33.03	27.86	9.33	39.41	182	56.00	-25.19	vertical	Average
8	1996.00	54.63	27.86	9.33	39.41	182	76.00	-23.59	vertical	Peak
9 pp	2200.00	45.94	28.37	9.80	39.42	140	56.00	-11.31	vertical	Average
10 pk	2200.00	60.46	28.37	9.80	39.42	140	76.00	-16.79	vertical	Peak
11	2808.00	38.00	29.86	11.25	39.89	7	56.00	-16.78	vertical	Average
12	2808.00	56.61	29.86	11.25	39.89	7	76.00	-18.17	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

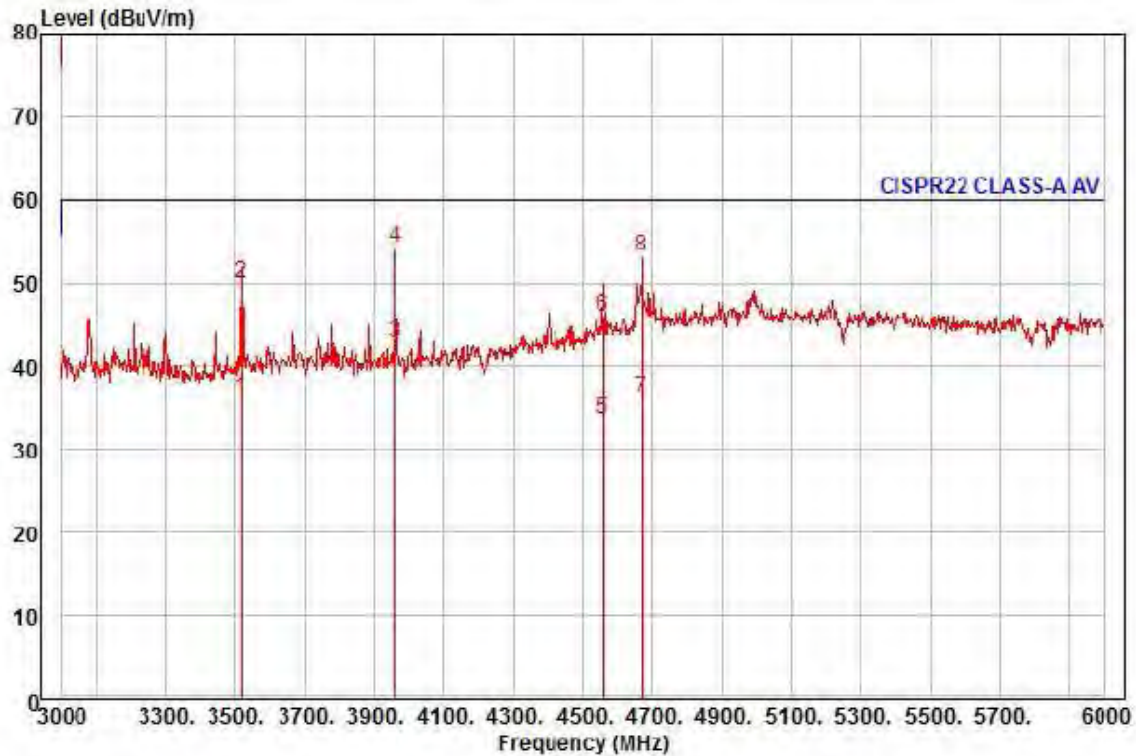


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XRN-810SN
Mode :
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3519.00	33.25	31.20	12.66	40.87	222	60.00	-23.76	horizontal	Average
2	3519.00	46.97	31.20	12.66	40.87	222	80.00	-30.04	horizontal	Peak
3 pp	3960.00	37.98	31.94	13.49	40.71	88	60.00	-17.30	horizontal	Average
4 pk	3960.00	49.55	31.94	13.49	40.71	88	80.00	-25.73	horizontal	Peak
5	4557.00	24.45	35.19	14.57	40.71	185	60.00	-26.50	horizontal	Average
6	4557.00	37.00	35.19	14.57	40.71	185	80.00	-33.95	horizontal	Peak
7	4671.00	26.03	35.84	14.81	40.60	318	60.00	-23.92	horizontal	Average
8	4671.00	43.16	35.84	14.81	40.60	318	80.00	-26.79	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

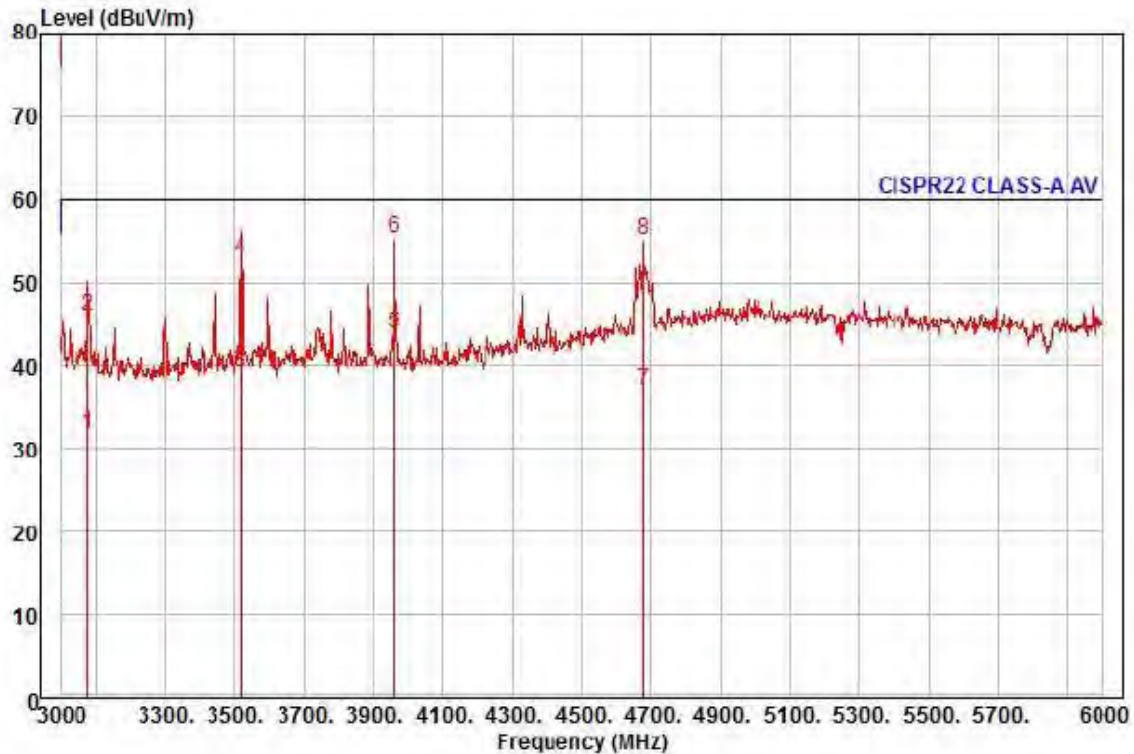

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XRN-810SN
Mode :
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3078.00	29.78	30.46	11.84	40.23	195	60.00	-28.15	vertical	Average
2	3078.00	43.88	30.46	11.84	40.23	195	80.00	-34.05	vertical	Peak
3	3519.00	36.26	31.20	12.66	40.87	206	60.00	-20.75	vertical	Average
4	3519.00	49.74	31.20	12.66	40.87	206	80.00	-27.27	vertical	Peak
5 pp	3960.00	39.15	31.94	13.49	40.71	256	60.00	-16.13	vertical	Average
6 pk	3960.00	50.58	31.94	13.49	40.71	256	80.00	-24.70	vertical	Peak
7	4680.00	26.87	35.89	14.83	40.59	7	60.00	-23.00	vertical	Average
8	4680.00	44.97	35.89	14.83	40.59	7	80.00	-24.90	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

Test Setup Photos and Configuration

Conducted Voltage Emissions





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 GHz)

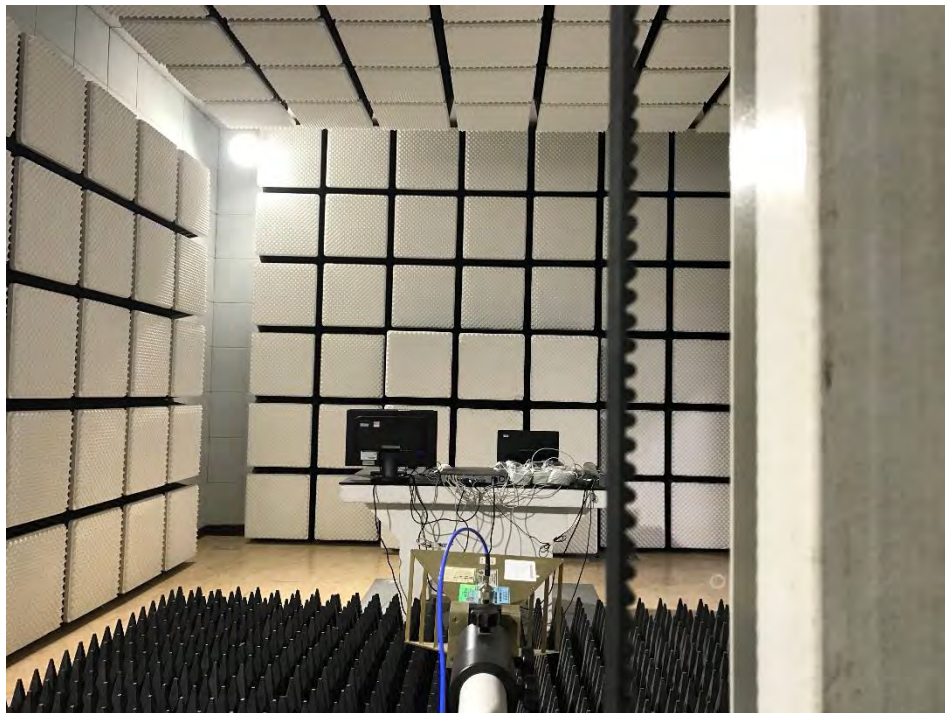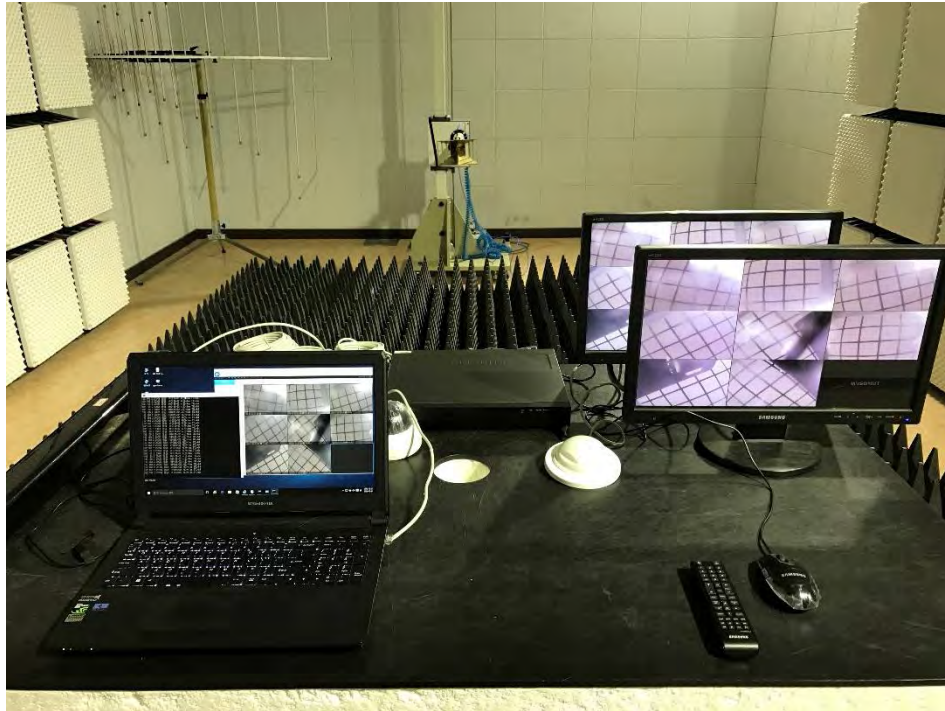

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs

(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Main Board

(Top)




(Bottom)

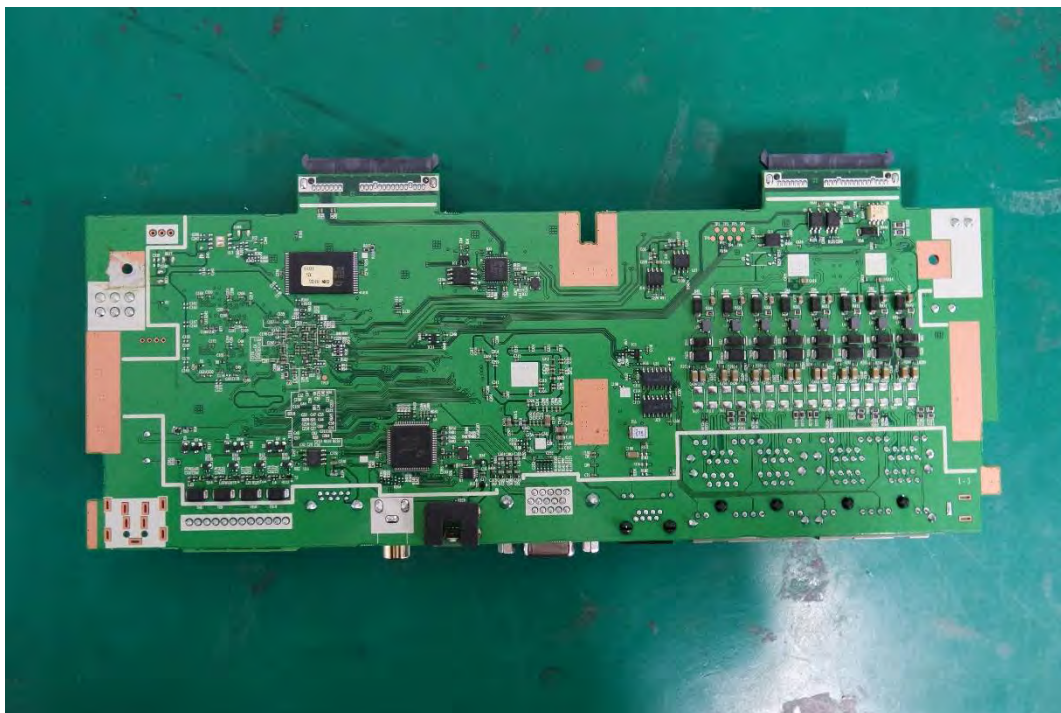


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

(Top)

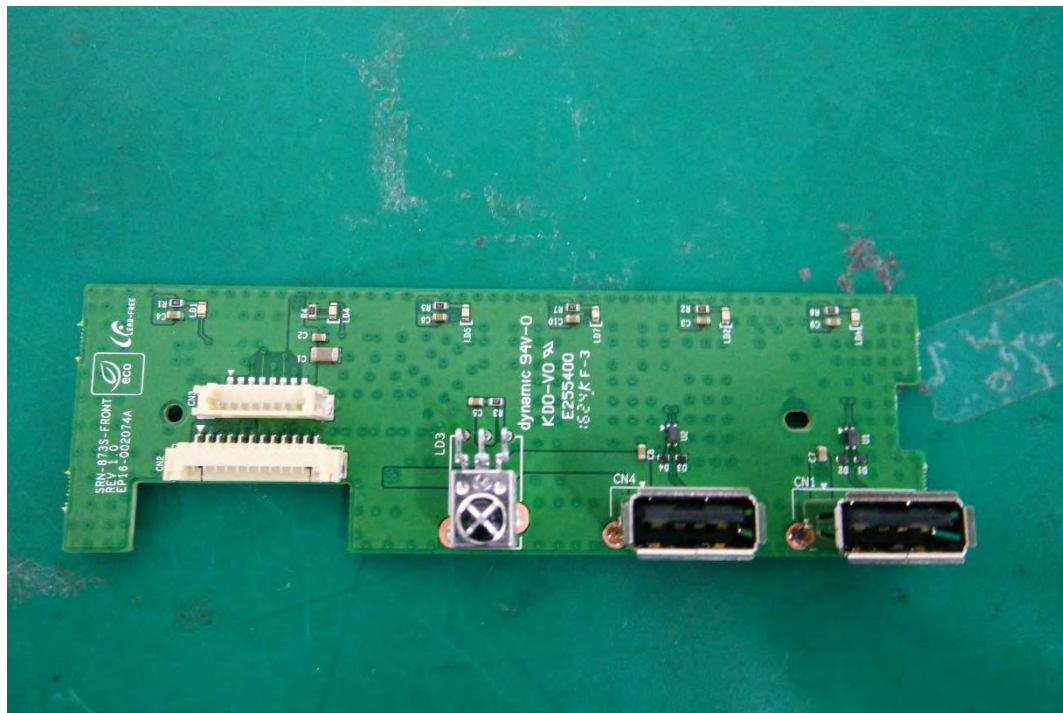

(Bottom)

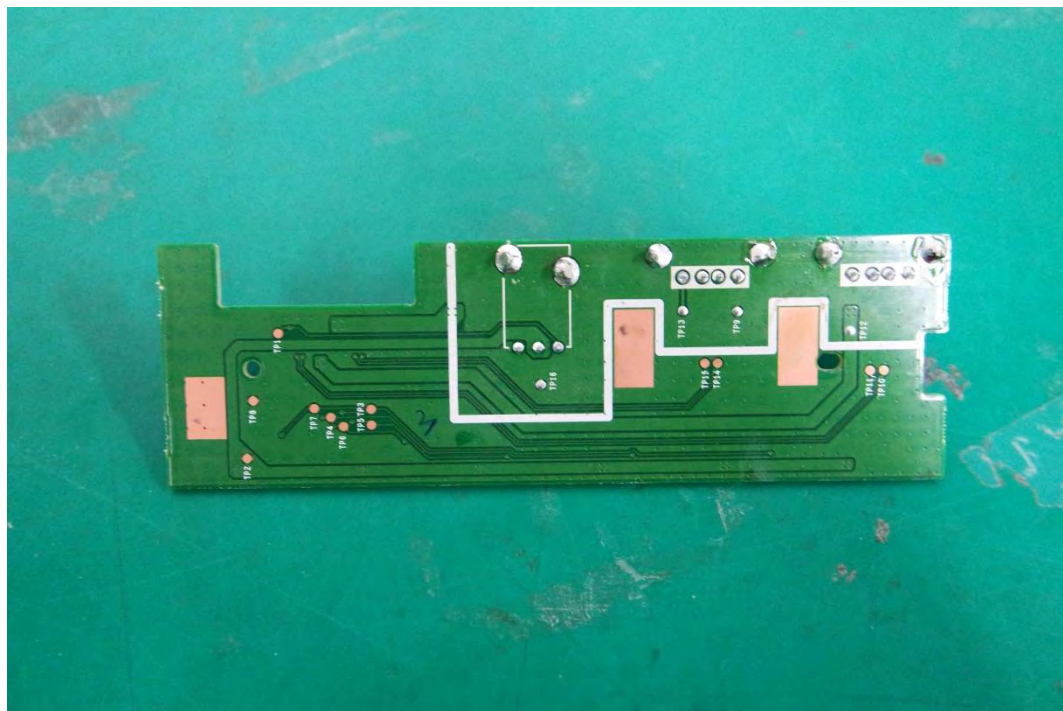

EUT Internal View – Power

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – HDD

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Label Photographs

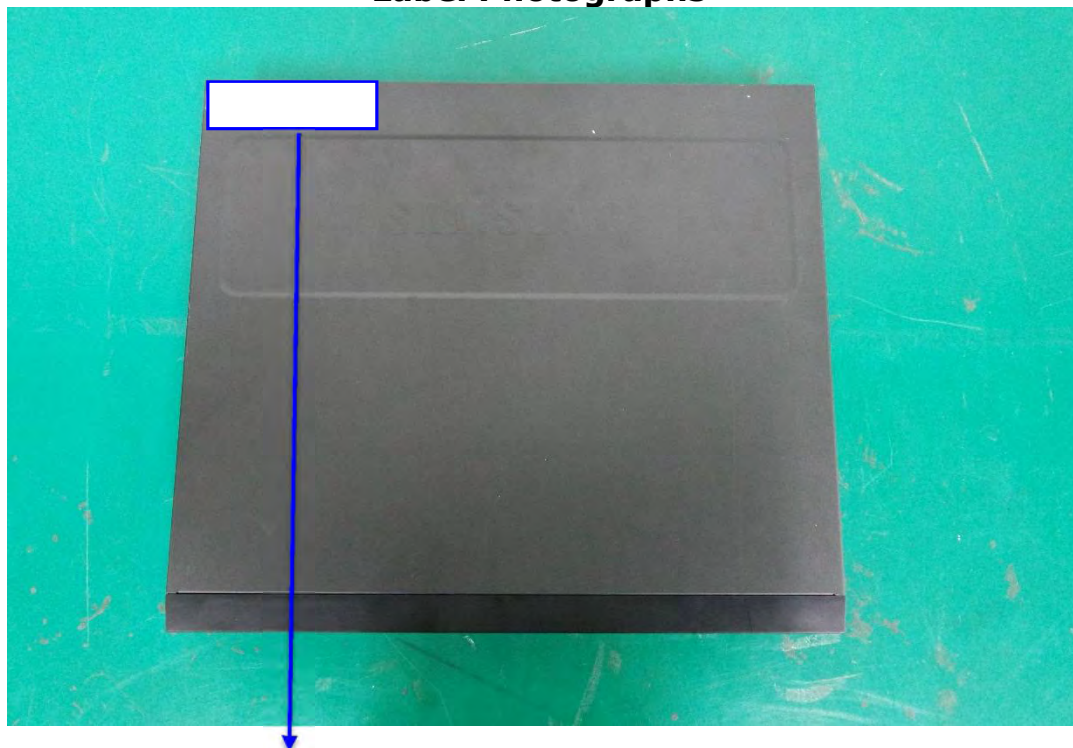

CAN ICES-3 (A)/NMB-3(A)