



EMC TEST REPORT

Test Report No. : KES-EM-22T0218-R1
Date of Issue : Feb. 24, 2023
Product name : NVR
Model/Type No. : XRN-815S
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Equipment authorization : **Supplier's Declaration of Conformity**
Date of Receipt : Jan. 26, 2022
Test date : Feb. 07, 2022
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Kang Hyeon, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0218-R1

Page (2) of (36)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Feb. 25, 2022	KES-EM-22T0218	Issued
Feb. 24, 2023	KES-EM-22T0218-R1	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0218-R1

Page (3) of (36)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	9
1.2	Variant Model Differences	9
1.3	Device Modifications	9
1.4	Equipment Under Test.....	9
1.5	Support Equipments	10
1.6	External I/O Cabling	12
1.7	EUT Operating Mode(s)	13
1.8	Configuration.....	13
1.9	Remarks when standards applied	14
1.10	Calibration Details of Equipment Used for Measurement	14
1.11	Test Facility	14
1.12	Laboratory Accreditations and Listings	14
2.0	Test Regulations.....	15
2.1	Conducted Emissions at Mains Power Ports	16
2.2	Radiated Electric Field Emissions(Below 1 GHz)	17
2.3	Radiated Electric Field Emissions(Above 1 GHz)	18
APPENDIX A – TEST DATA.....		19
Conducted Emissions at Mains Power Ports.....		19
Radiated Electric Field Emissions(Below 1 GHz)		21
Radiated Electric Field Emissions(Above 1 GHz)		23
Test Setup Photos and Configuration		24
Conducted Emissions at Mains Power Ports.....		24
Radiated Electric Field Emissions(Below 1 GHz)		25
Radiated Electric Field Emissions(Above 1 GHz)		26
EUT External Photographs		27
EUT Internal Photographs		28

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.0 General Product Description

Main Specifications of EUT are:

Model		XRN-815S
		8CH PoE
Display		
Video	Inputs	Max. 8CH
	Resolution	CIF ~ 8MP
	Protocols	sunapi, ONVIF
Live	Local Display	HDMI1, HDMI2 1) HDMI1 : 3840x2160 30Hz HDMI2 : 1920x1080 60Hz
	Multi Screen Display	[Clone Monitor] Dynamic layout
	Resolution	[Local Monitor] 12M(30fps), 8M(60fps), 1080p(240fps), 720P(240fps), D1(480fps)
Intelligent Analysis		
Search	Object image	AI Search support
Performance		
System	Operating System	Linux
	Processor	NT98336
Record	Compression	H.265, H.264, MJPEG, WiseStream(H.265, H.264)
	Recording Bandwidth	100Mbps
	Resolution	CIF ~ 12MP
	Mode	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0218-R1

Page (5) of (36)

	Event Trigger	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event, Manual Event
	Event Action	e-Mail, Event Push, PTZ Preset, Alarm Out, Buzzer, Monitor Out
Search & Play	Playback Bandwidth	Max 32Mbps
	User	Max. 4 Users (Local 1, Remote 3)
	Mode	Time, Event, Text, Export, ARB, Bookmark Person, Face, Vehicle, LP
	Simultaneous playback	Max 40CH – Set : 16CH – Remote : 8CH Per User
	Resolution	CIF ~ 8MP
	Fisheye Dewarping	Yes
	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down
Storage	Built-In	2TB ~ 10TB
	Internal HDD	2ea (Max 20TB)
	External	N/A
	RAID	N/A
Backup	File backup	BU/Exe(GUI), JPG/AVI(Web)
	Function	Multi channel(Upto 8 CH) Play, Date- Time/Title display
Sensor	I/O	4/2 (NO/NC Selectable)
Audio	Input/Output	8CH (network)/output (Set)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way
Network		
Interface		16 Port PoE, RJ-45(1 Gbps)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0218-R1

Page (6) of (36)

Protocol	TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), FTP SUNAPI(Server, Client)	
DDNS	Hanwha DDNS	
Transmission Bandwidth	80Mbps	
Max Remote Users	Search (3), Live Unicast (10), Multicast (20)	
IP Version	IPv4/v6	
Security	IP address filtering, User access Log, 802.1x, Encryption	
Language	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnam	
OS	Window 10, Mac OS X(10.13)	
Web Browser	Google Chrome, Mac Safari, Firefox, Edge	
Viewer Software	Type	WAVE(Sunapi peristalsis), SSM, Webviewer, Smart Viewer, Wisenet Viewer, Wisenet Mobile
	CMS Support	Support CGI(SUNAPI) for integration to 3'rd party VMS
Functions		
Camera Setup	Register	Auto, Manual
	Setup Items	IP address, Add profile edit, Bitrate, Camera MD setup (8 point polygon) Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS), Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



PTZ	Control	Via GUI, Webviewer
	Preset	300 Presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live : Multi-Profile Support Multi Channel Playback
	Max. Remote Users	Search (3), Live Unicast (10)
Redundancy	Failover	N+1
	ARB	Yes
Easy configuration		P2P(QR code)
System Control		Mouse, Keyboard, Web
Indicator/Interface		
Front	Indicator	LED(Status indicator) : – Power(1), Record(1), Network(1)
Connectors	HDMI	2 EA, 3840x2160 30Hz
	VGA	N/A
	Audio	Out(1EA) : RCA output
	Ethernet	PoE RJ-45(LAN, 10/100) 16 ea ,RJ-45 1ea (WAN, 1Gbps)
	Alarm	(1) In(4EA, Terminal Block) (2) Out(2EA, Terminal Block) – Relay Out1(NO/NC/COM) – Relay Out2(NO/COM)
	USB	3EA(Front 2 X USB 2.0, Rear 1 X USB3.0)
	Storage	N/A
	Serial	N/A
	Reset	Switch(1EA, PW clear)
	Power Cord	1EA
	POE Budget	Max. 100W
System		
Log	Log List	Max. 100,000 (System, Event each log)
Environmental		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0218-R1

Page (8) of (36)

Operating Temperature / Humidity		+0°C to +40°C(+32°F to +104°F)
Humidity		20% ~ 85% RH
Noise		47 db
Electrical		
Power		100 ~ 240 VAC $\pm$ 10%; 50/60 Hz
Power Consumption		Max 165W(2HDD, PoE ON)
Mechanical		
Color / Material		Black
Dimension (WxHxD)		370*50.7*320 (370*44*320 FOOT except)
Weight		2,856g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 120 V, 60 Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NVR	XRN-815S	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
Mouse	MOKJUO	-	Primax Electronics Ltd.	-
SWITCHING POWER SUPPLY	DPS-200PB-185 C	HAPD214801504 8	Delta Electronics Power(Dongguan) Co., Ltd.	-



1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Camera1	QNV-6023R	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
Camera2	QNV-6023R	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
Camera3	QNV-6024RM	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
Camera4	QNV-6023R	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
Camera5	QNV-6020RN	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
Camera6	-	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
Camera7	LND-6070R	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
Camera8	SND-7084N	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
Laptop	P98F004	21599158359	DELL INC.	-
Laptop Adapter	LA240PM190	-	LITE-ON TECHNOLOGY(CHANG ZHOU)CO.,LTD.	-
Monitor1	DELL E2222H DVT	8221TCM10D00103X	DELL INC.	-
Monitor2	SMT-2232	C95V67VF900038B	Weihai Daewoo Electronics Co., Ltd.	-
Earphone	-	-	-	-
USB memory	-	-	Transcend	8 GB
Alarm1	PRO-SL	-	SENSOR PRO	-
Alarm2	PRO-SL	-	SENSOR PRO	-
Button alarm1	-	-	-	-
Button alarm2	-	-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0218-R1

Page (11) of (36)

Button alarm3	-	-	-	-
Button alarm4	-	-	-	-
HDD	810051	-	WESTERN DIGITAL TECHNOLOGIES, INC.	4 TB
Smartphone	A1303	-	APPLE .Inc	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NVR (EUT)	RJ-45 (PoE)	Camera1	RJ-45 (PoE)	10.0	U
	RJ-45 (PoE)	Camera2	RJ-45 (PoE)	10.0	U
	RJ-45 (PoE)	Camera3	RJ-45 (PoE)	10.0	U
	RJ-45 (PoE)	Camera4	RJ-45 (PoE)	10.0	U
	RJ-45 (PoE)	Camera5	RJ-45 (PoE)	10.0	U
	RJ-45 (PoE)	Camera6	RJ-45 (PoE)	10.0	U
	RJ-45 (PoE)	Camera7	RJ-45 (PoE)	10.0	U
	RJ-45 (PoE)	Camera8	RJ-45 (PoE)	10.0	U
	RJ-45 (LAN)	Laptop	RJ-45 (LAN)	4.0	U
	USB	Mouse (EUT)	USB	1.4	U
	HDMI	Monitor	HDMI	1.5	S
	grounding	grounding	grounding	1.2	U
	USB 3.0	USB memory	USB 3.0	-	-
	RCA	Earphone	3.5mm	1.0	U
	Alarm out	Alarm1	Alarm in	3.0	U
	Alarm out	Alarm2	Alarm in	3.0	U
	Alarm in	Button alarm1	Alarm out	3.0	U
	Alarm in	Button alarm2	Alarm out	3.0	U
	Alarm in	Button alarm3	Alarm out	3.0	U
	Alarm in	Button alarm4	Alarm out	3.0	U
	SATA	HDD	SATA	0.2	U
Laptop	DC Jack	Laptop Adapter	DC Jack	1.6	U
	3.3 mm	Smartphone	3.3 mm	1.0	U

* Unshielded=U, Shielded=S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


1.7 EUT Operating Mode(s)

Test Mode	operating
Operation Mode	EUT Monitoring, Ping Test HDD : after testing, check if the recording is normally done on the micro sd card

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

1.8 Configuration

■ AC Main 120 V, 60 Hz
 □ DC Main

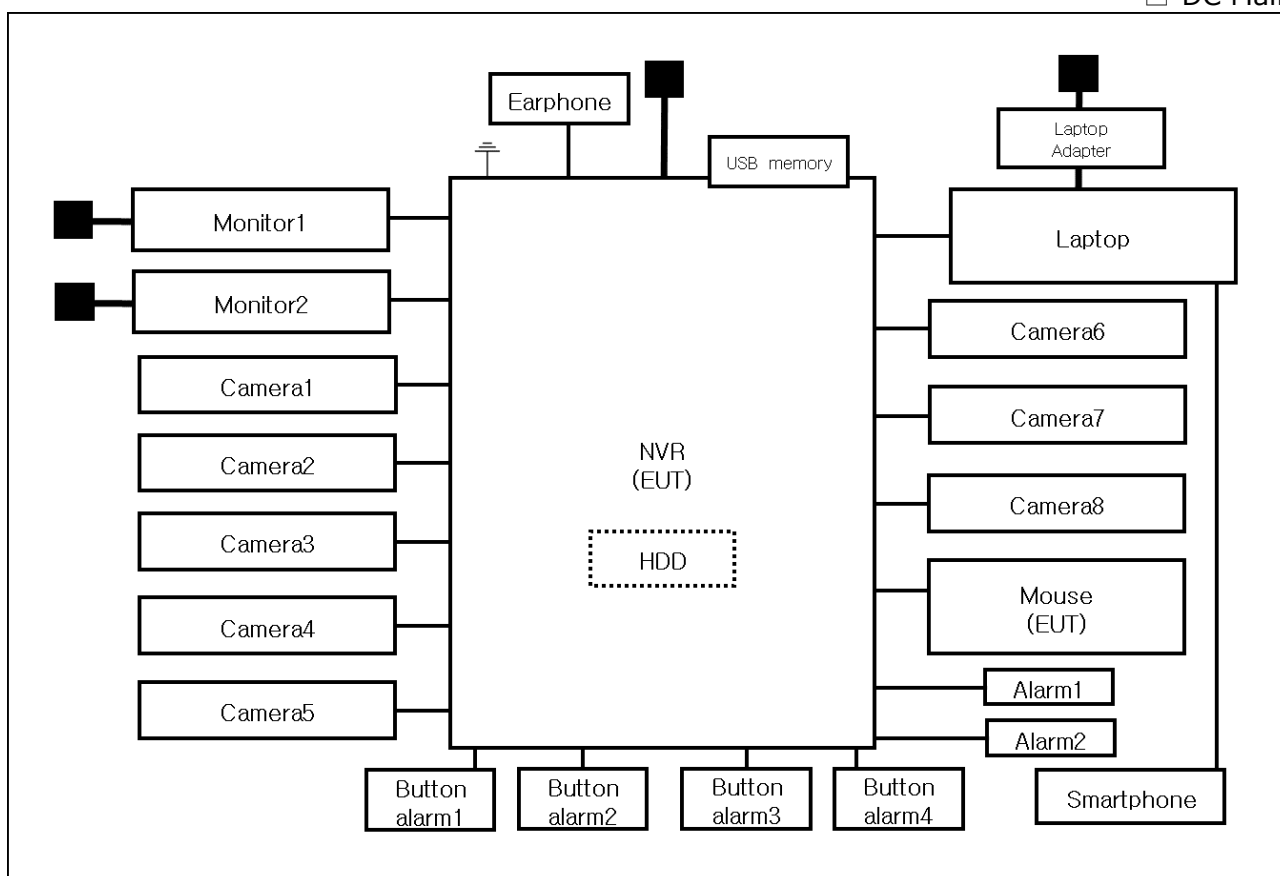

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B

☒ ANSI C63.4a-2017

☒ Class A

☐ Class B

☒ **IC Regulation ICES-003 Issue 7**

☐ CAN/CSA-CISPR 32:17

☐ Class A

☐ Class B

☒ ANSI C63.4a-2017

☒ Class A

☐ Class B



2.1 Conducted Emissions at Mains Power Ports

Test Date

Feb. 07, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022

Test Conditions

Temperature: (22,6 ± 0,3) °C

Relative Humidity: (42,8 ± 0,3) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Feb. 07, 2022

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2022

Test Conditions

Temperature: (22,6 ± 0,4) °C

Relative Humidity: (43,8 ± 0,4) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Feb. 07, 2022

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.120	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	04, 01, 2022
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	12, 16, 2022
☒	PREAMPLIFIER	8449B	HP	3008A00538	06, 21, 2022

Test Conditions

Temperature: (23,2 ± 0,4) °C

Relative Humidity: (43,0 ± 0,3) % R.H.

Frequency Range of Measurement

1 GHz to 5 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

☒ PASS

☐ NOT PASS

☐ NOT APPLICABLE

Remarks

See Appendix A for test data.


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

HOT LINE

Common Information

Test Description: Conducted Emission
 Model No.: XRN-815S
 Phase:
 Mode:
 Operator Name: KES

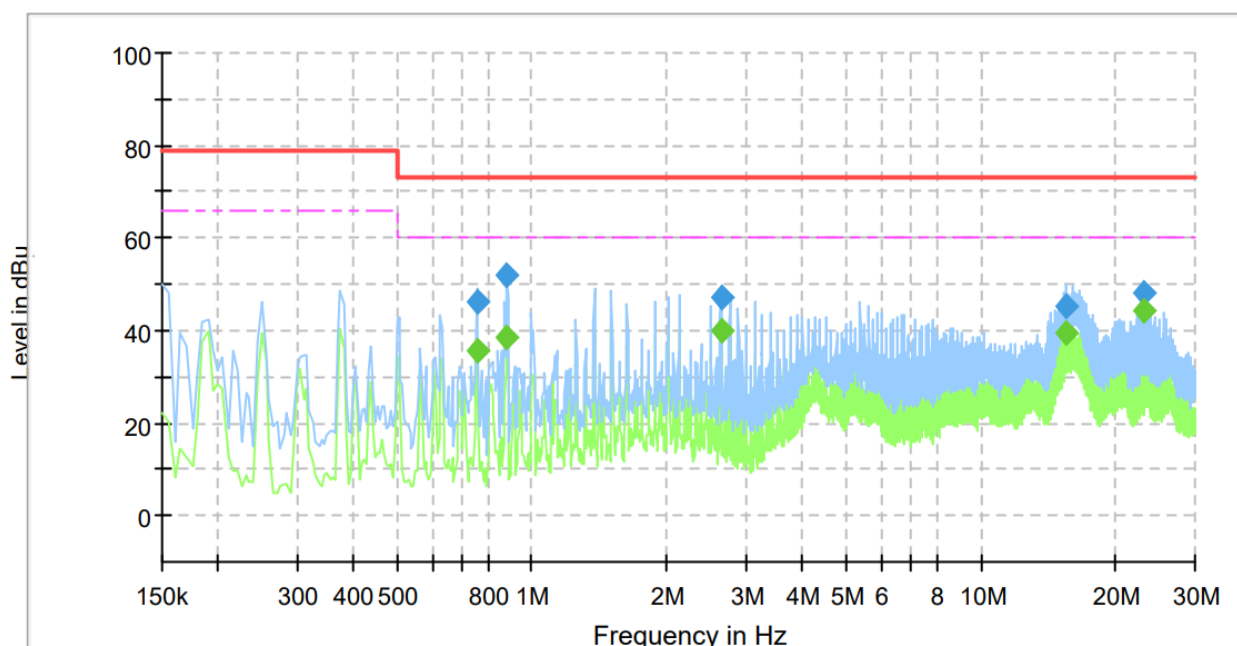

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.755000	---	35.40	60.00	24.60	1000.0	9.000	L1	20.0
0.755000	46.05	---	73.00	26.95	1000.0	9.000	L1	20.0
0.880000	---	38.47	60.00	21.53	1000.0	9.000	L1	20.1
0.880000	52.02	---	73.00	20.98	1000.0	9.000	L1	20.1
2.635000	---	39.89	60.00	20.11	1000.0	9.000	L1	20.2
2.635000	47.33	---	73.00	25.67	1000.0	9.000	L1	20.2
15.435000	---	39.43	60.00	20.57	1000.0	9.000	L1	19.9
15.435000	45.35	---	73.00	27.65	1000.0	9.000	L1	19.9
23.130000	---	44.28	60.00	15.72	1000.0	9.000	L1	20.2
23.130000	48.15	---	73.00	24.85	1000.0	9.000	L1	20.2

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
 Model No.: XRN-815S
 Phase:
 Mode:
 Operator Name: KES

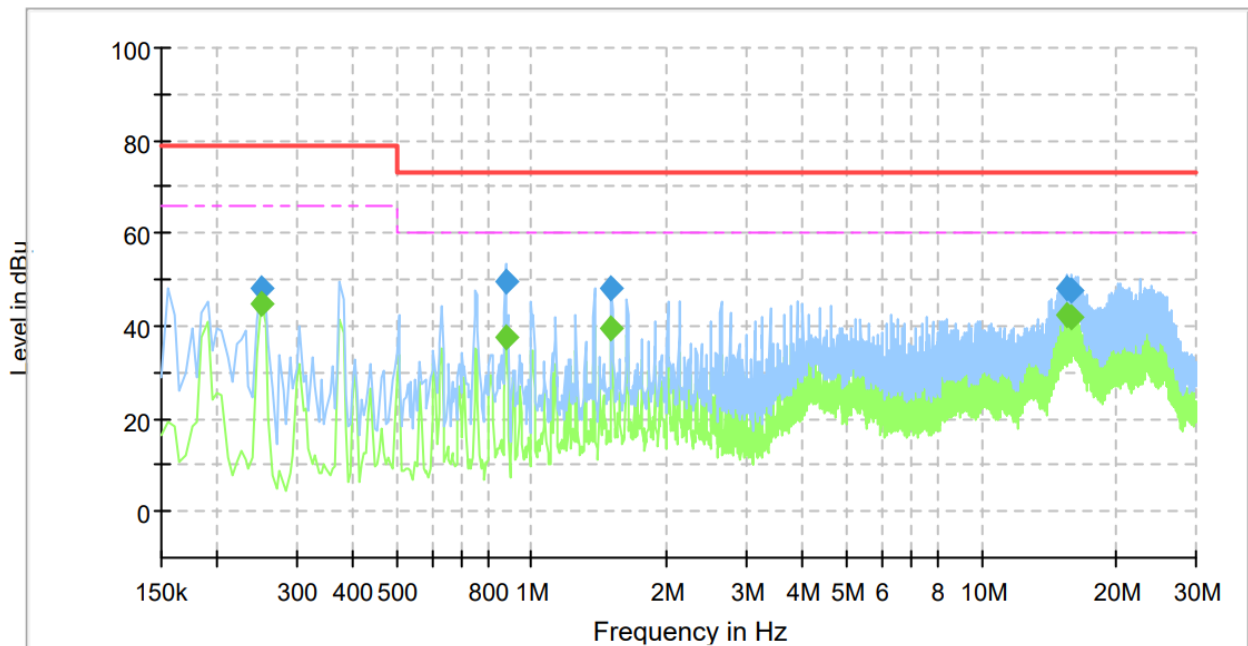

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.250000	---	44.79	66.00	21.21	1000.0	9.000	N	19.5
0.250000	48.05	---	79.00	30.95	1000.0	9.000	N	19.5
0.875000	---	37.59	60.00	22.41	1000.0	9.000	N	20.1
0.875000	49.55	---	73.00	23.45	1000.0	9.000	N	20.1
1.505000	---	39.66	60.00	20.34	1000.0	9.000	N	20.2
1.505000	48.21	---	73.00	24.79	1000.0	9.000	N	20.2
15.555000	---	42.12	60.00	17.88	1000.0	9.000	N	19.9
15.555000	47.92	---	73.00	25.08	1000.0	9.000	N	19.9
15.930000	---	41.89	60.00	18.11	1000.0	9.000	N	19.9
15.930000	47.83	---	73.00	25.17	1000.0	9.000	N	19.9

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



Radiated Electric Field Emissions(Below 1 GHz)

- 47 CFR Part 15, Subpart B

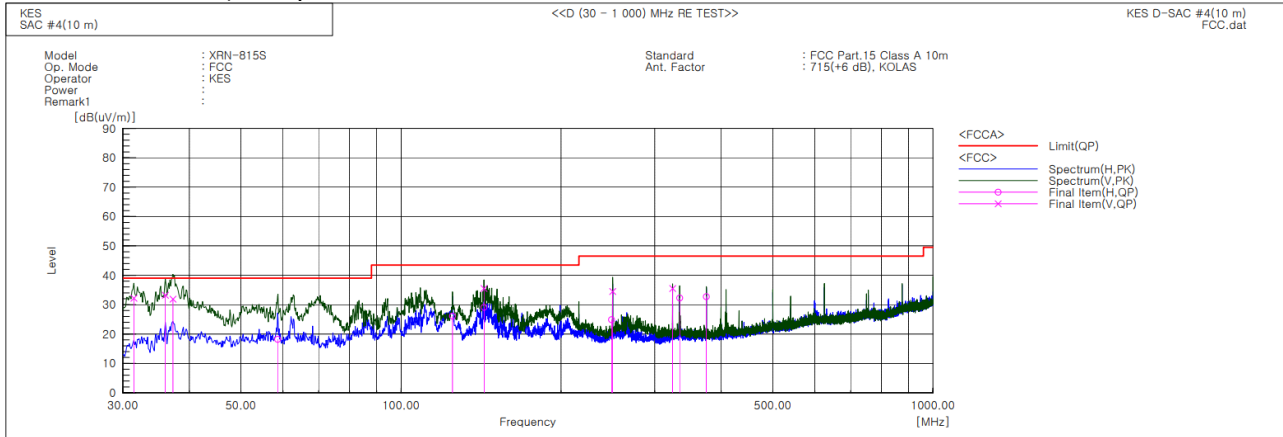


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	31.455	V	57.0	-24.8	32.2	39.0	6.8	100.0	53.0	
2	36.063	V	57.5	-24.3	33.2	39.0	5.8	112.0	276.0	
3	37.275	V	55.7	-23.8	31.9	39.0	7.1	100.0	99.0	
4	58.615	H	39.8	-21.6	18.2	39.0	20.8	362.0	99.0	
5	124.939	H	50.9	-24.8	26.1	43.5	17.4	400.0	36.0	
6	143.179	V	60.8	-25.3	35.5	43.5	8.0	101.0	329.0	
7	143.248	H	54.4	-25.3	29.1	43.5	14.4	390.0	295.0	
8	249.948	V	53.6	-19.1	34.5	46.5	12.0	100.0	49.0	
9	248.693	H	44.1	-19.2	24.9	46.5	21.6	376.0	221.0	
10	324.031	V	51.9	-16.4	35.5	46.5	11.0	100.0	57.0	
11	334.095	H	48.1	-15.8	32.3	46.5	14.2	400.0	36.0	
12	374.956	H	47.3	-14.6	32.7	46.5	13.8	400.0	70.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



- IC Regulation ICES-003 Issue 7

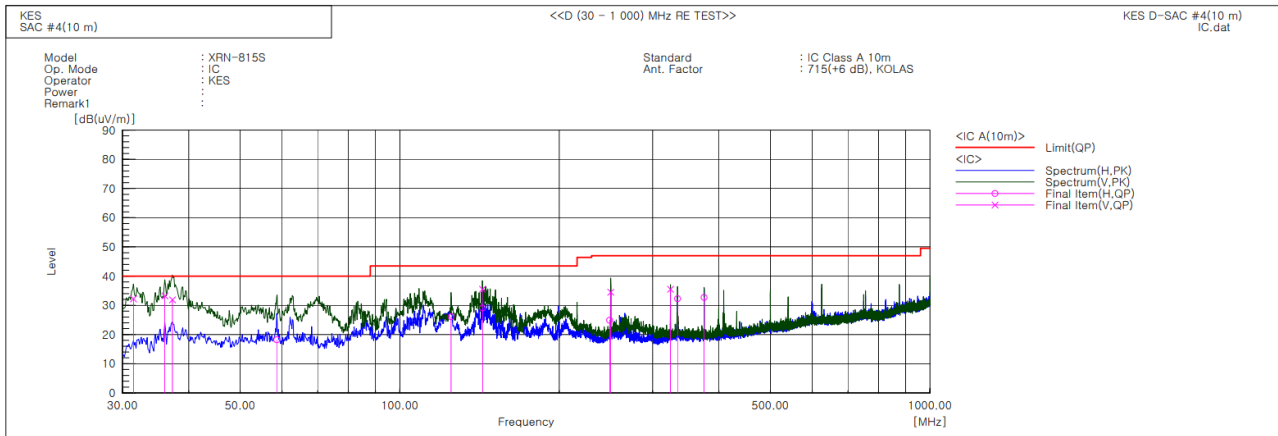

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	31.455	V	57.0	-24.8	32.2	40.0	7.8	100.0	53.0	
2	36.063	V	57.5	-24.3	33.2	40.0	6.8	112.0	276.0	
3	37.275	V	55.7	-23.8	31.9	40.0	8.1	100.0	99.0	
4	58.615	H	39.8	-21.6	18.2	40.0	21.8	362.0	99.0	
5	124.939	H	50.9	-24.8	26.1	43.5	17.4	400.0	36.0	
6	143.179	V	60.8	-25.3	35.5	43.5	8.0	101.0	329.0	
7	143.248	H	54.4	-25.3	29.1	43.5	14.4	390.0	295.0	
8	249.948	V	53.6	-19.1	34.5	47.0	12.5	100.0	49.0	
9	248.693	H	44.1	-19.2	24.9	47.0	22.1	376.0	221.0	
10	324.031	V	51.9	-16.4	35.5	47.0	11.5	100.0	57.0	
11	334.095	H	48.1	-15.8	32.3	47.0	14.7	400.0	36.0	
12	374.956	H	47.3	-14.6	32.7	47.0	14.3	400.0	70.0	

◆ Calculation - SAC #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0218-R1

Page (23) of (36)

Radiated Electric Field Emissions(Above 1 GHz)

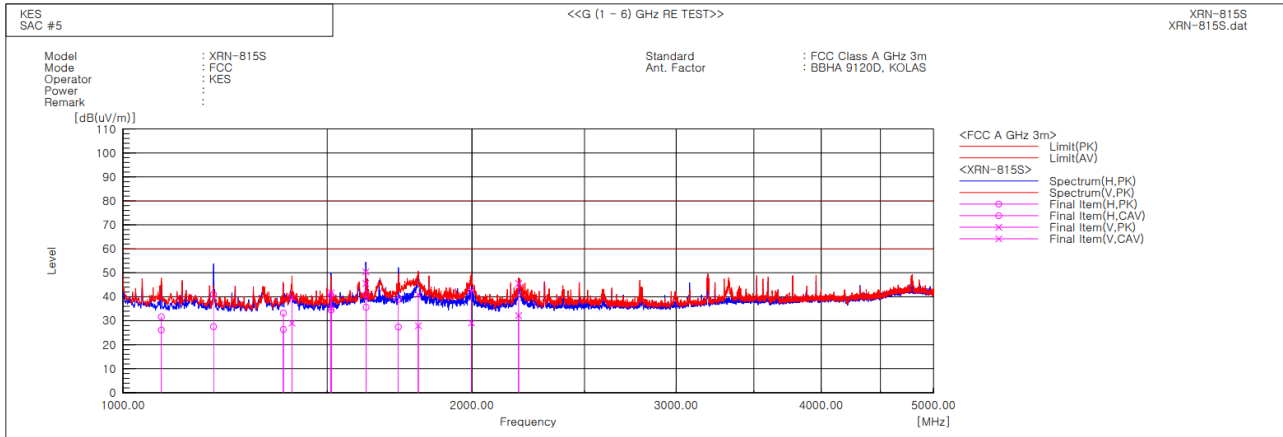

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1079.375	H	39.3	33.7	-7.6	31.7	26.1	80.0	60.0	48.3	33.9	331.0	58.4	
2	1197.012	H	48.0	34.4	-6.9	41.1	27.5	80.0	60.0	38.9	32.5	258.0	125.1	
3	1375.293	H	39.2	32.4	-6.0	33.2	26.4	80.0	60.0	46.8	33.6	400.0	158.6	
4	1398.750	V	45.5	34.8	-5.8	39.7	29.0	80.0	60.0	40.3	31.0	102.0	81.8	
5	1511.875	V	47.0	40.6	-5.3	41.7	35.3	80.0	60.0	38.3	24.7	100.0	129.3	
6	1511.875	H	45.9	39.8	-5.3	40.6	34.5	80.0	60.0	39.4	25.5	354.0	328.3	
7	1619.375	V	55.3	50.5	-4.9	50.4	45.6	80.0	60.0	29.6	14.4	149.9	348.7	
8	1620.380	H	45.9	40.5	-4.9	41.0	35.6	80.0	60.0	39.0	24.4	369.0	313.3	
9	1727.881	H	43.3	31.8	-4.4	38.9	27.4	80.0	60.0	41.1	32.6	351.0	316.5	
10	1797.593	V	45.1	32.0	-4.1	41.0	27.9	80.0	60.0	39.0	32.1	100.0	172.2	
11	1997.500	V	46.3	32.6	-3.5	42.8	29.1	80.0	60.0	37.2	30.9	116.0	99.7	
12	2193.125	V	48.4	35.0	-2.8	45.6	32.2	80.0	60.0	34.4	27.8	109.0	102.2	

◆ Calculation

Result(PK/CAV) [dB(uV/m)] = (Reading(PK/CAV)[dB(uV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(uV/m)] - Result(PK/CAV) [dB(uV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

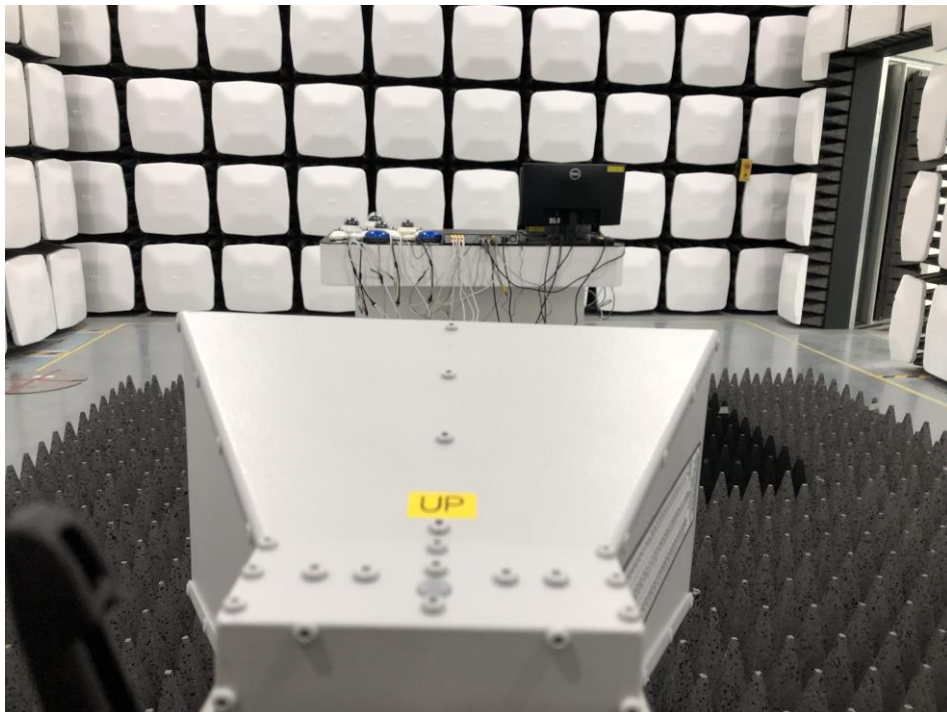

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal Photographs


(Internal View)

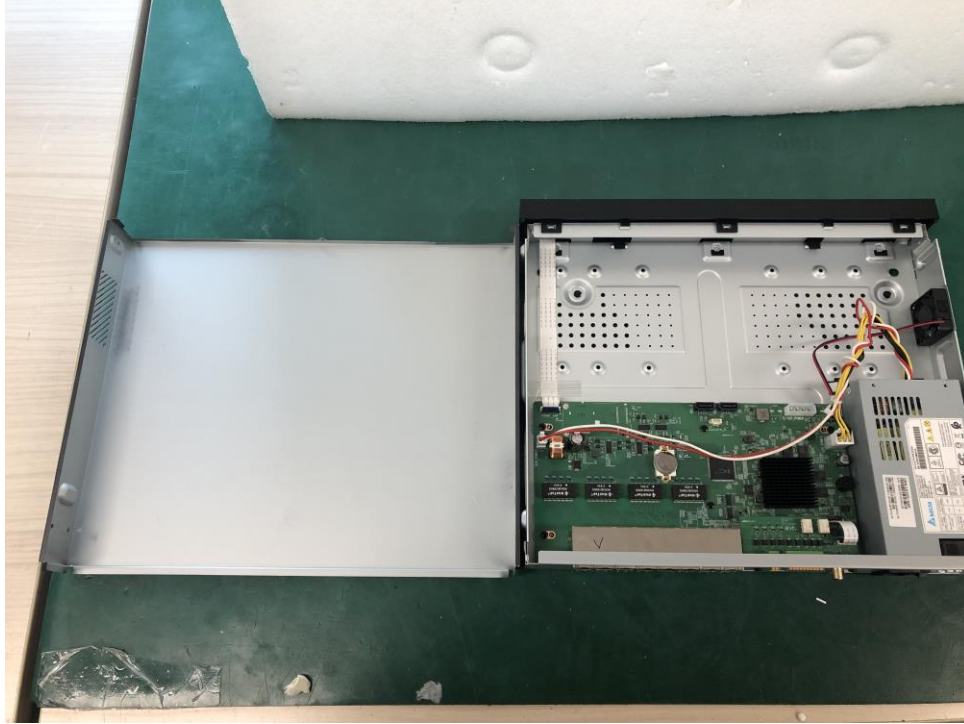


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 1

(Top)

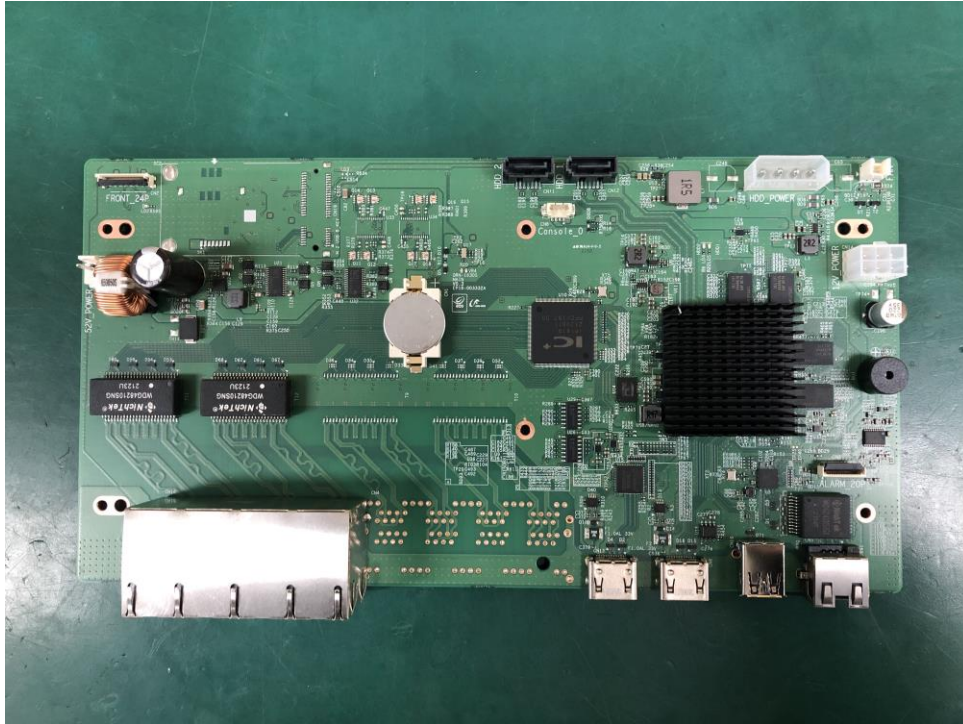


(Bottom)

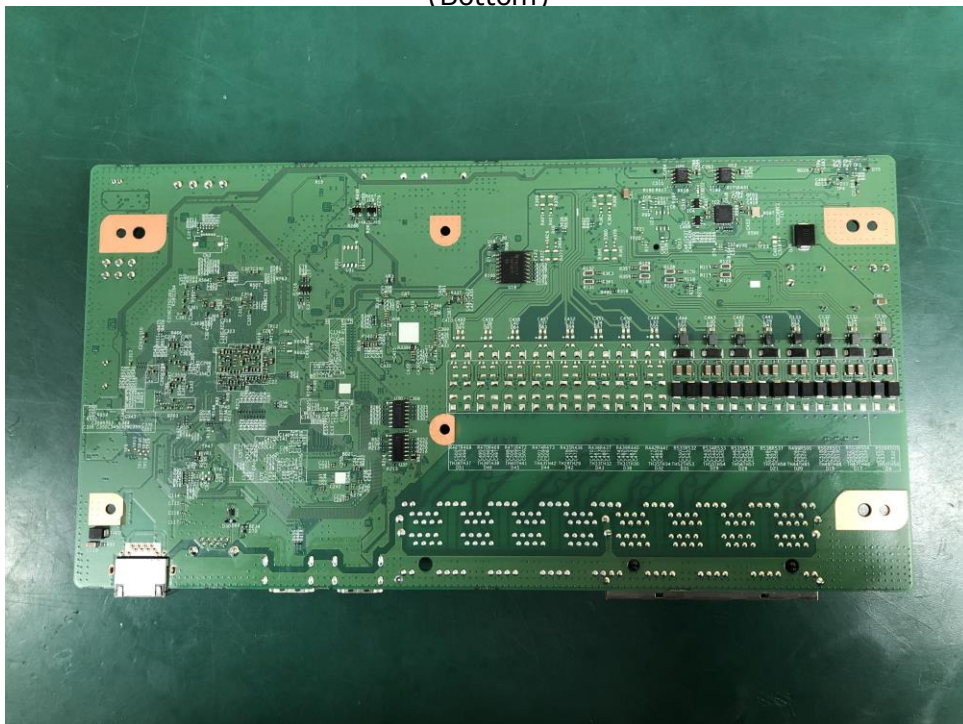

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 2

(Top)

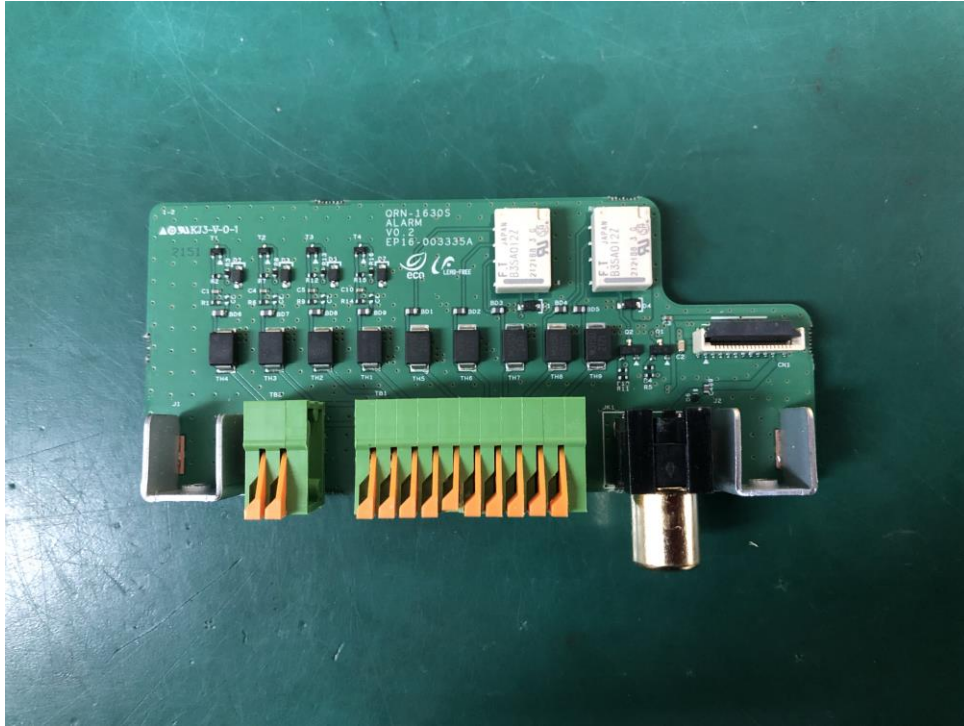

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 3

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Power SUPPLY

(Top)

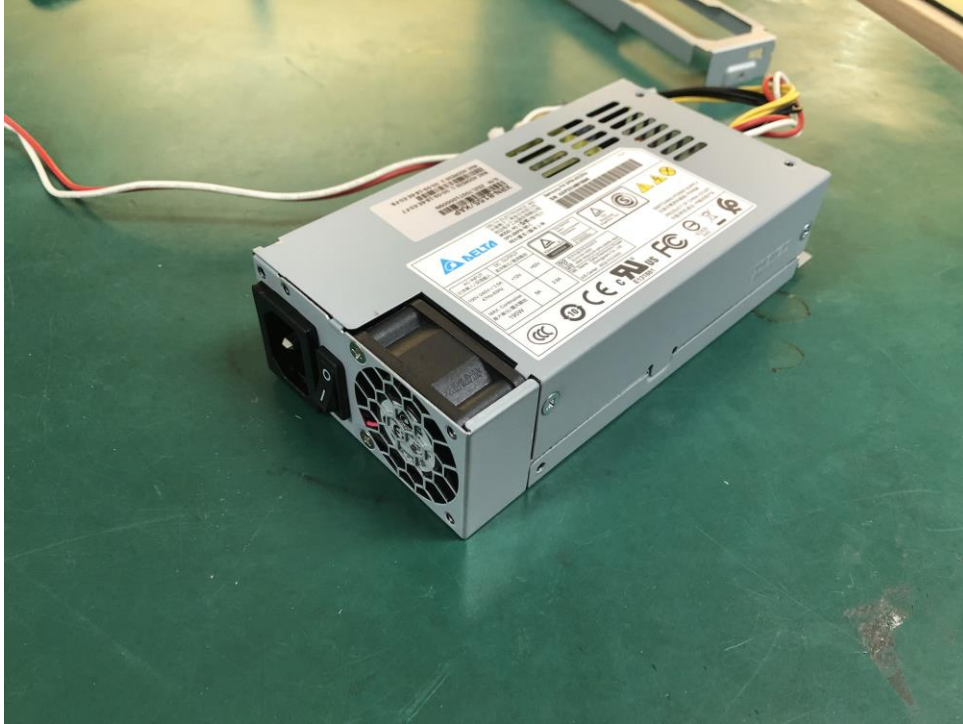

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

(Label)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – MOUSE

(Top)

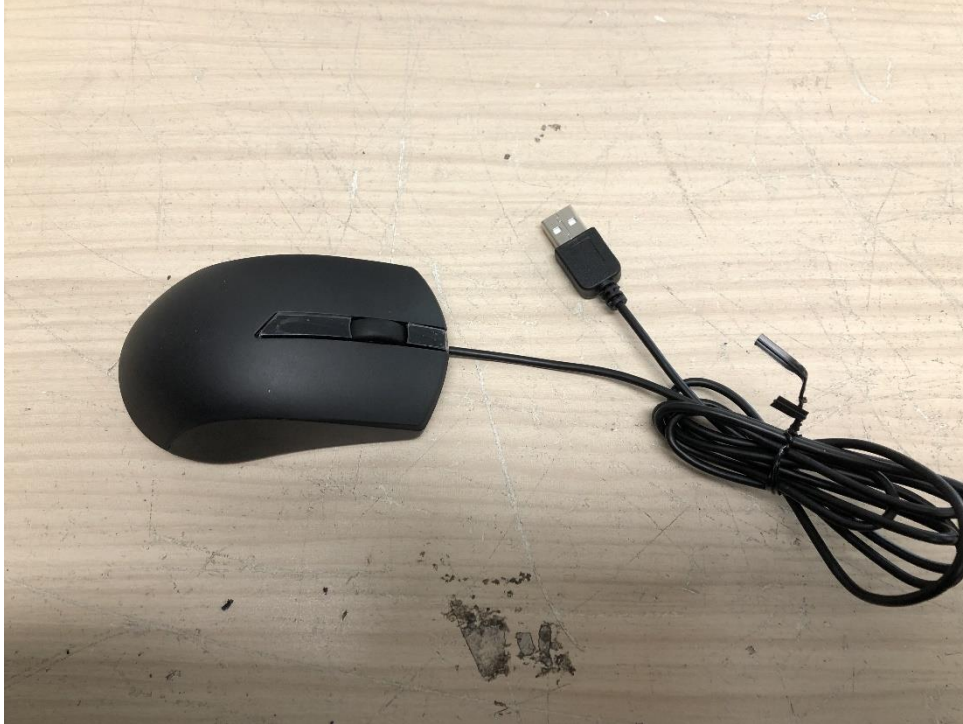

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

(Label)



Label Photographs



CAN ICES-3(A) / NMB-3(A)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.