

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0220-R1

Page (1) of (37)

EMC TEST REPORT For VCCI

Test Report No. : KES-EM-22T0220-R1
Date of Issue : Feb. 24, 2023
Product name : NVR
Model/Type No. : XRN-815S
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Jan. 26, 2022
Test date : Feb. 07, 2022
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Kang Hyeon, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0220-R1

Page (2) of (37)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Feb. 25, 2022	KES-EM-22T0220	Issued
Feb. 24, 2023	KES-EM-22T0220-R1	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	8
1.2	Variant Model Differences	8
1.3	Device Modifications	8
1.4	Equipment Under Test	8
1.5	Support Equipments	9
1.6	External I/O Cabling	10
1.7	EUT Operating Mode(s)	10
1.8	Configuration	11
1.9	Remarks when standards applied	12
1.10	Calibration Details of Equipment Used for Measurement	12
1.11	Test Facility	12
1.12	Laboratory Accreditations and Listings	12
2.0	Test Regulations	13
2.1	Conducted Emissions Mains Power Ports	14
2.2	Conducted Emissions at Telecommunication Ports	15
2.3	Radiated Electric Field Emissions(Below 1 GHz)	16
2.4	Radiated Electric Field Emissions(Above 1 GHz)	17
APPENDIX A – TEST DATA		18
Conducted Emissions at Mains Power Ports		18
Conducted Emissions at Telecommunication Ports		20
Radiated Electric Field Emissions(Below 1 GHz)		22
Radiated Electric Field Emissions(Above 1 GHz)		23
Test Setup Photos and Configuration		24
Conducted Emissions at Mains Power Ports		24
Conducted Emissions at Telecommunication Ports		25
Radiated Electric Field Emissions(Below 1 GHz)		26
Radiated Electric Field Emissions(Above 1 GHz)		27
EUT External Photographs		28
EUT Internal Photographs		29



1.0 General Product Description

Main Specifications of EUT are:

Model		XRN-815S
		8CH PoE
Display		
Video	Inputs	Max. 8CH
	Resolution	CIF ~ 8MP
	Protocols	sunapi, ONVIF
Live	Local Display	HDMI1, HDMI2 1) HDMI1 : 3840x2160 30Hz HDMI2 : 1920x1080 60Hz
	Multi Screen Display	[Clone Monitor] Dynamic layout
	Resolution	[Local Monitor] 12M(30fps), 8M(60fps), 1080p(240fps), 720P(240fps), D1(480fps)
Intelligent Analysis		
Search	Object image	AI Search support
Performance		
System	Operating System	Linux
	Processor	NT98336
Record	Compression	H.265, H.264, MJPEG, WiseStream(H.265, H.264)
	Recording Bandwidth	100Mbps
	Resolution	CIF ~ 12MP
	Mode	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark
	Event Trigger	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event, Manual Event
	Event Action	e-Mail, Event Push, PTZ Preset, Alarm Out, Buzzer, Monitor Out
Search & Play	Playback Bandwidth	Max 32Mbps
	User	Max. 4 Users (Local 1, Remote 3)

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0220-R1

Page (5) of (37)

	Mode	Time, Event, Text, Export, ARB, Bookmark Person, Face, Vehicle, LP
	Simultaneous playback	Max 40CH - Set : 16CH - Remote : 8CH Per User
	Resolution	CIF ~ 8MP
	Fisheye Dewarping	Yes
	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down
Storage	Built-In	2TB ~ 10TB
	Internal HDD	2ea (Max 20TB)
	External	N/A
	RAID	N/A
Backup	File backup	BU/Exe(GUI), JPG/AVI(Web)
	Function	Multi channel(Upto 8 CH) Play, Date-Time/Title display
Sensor	I/O	4/2 (NO/NC Selectable)
Audio	Input/Output	8CH (network)/output (Set)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way
Network		
Interface		16 Port PoE, RJ-45(1 Gbps)
Protocol		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), FTP, SUNAPI(Server, Client)
DDNS		Hanwha DDNS
Transmission Bandwidth		80Mbps
Max Remote Users		Search (3), Live Unicast (10), Multicast (20)
IP Version		IPv4/v6
Security		IP address filtering, User access Log, 802.1x, Encryption
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnam
OS		Window 10, Mac OS X(10.13)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



Web Browser		Google Chrome, Mac Safari, Firefox, Edge
Viewer Software	Type	WAVE(Sunapi peristalsis), SSM, Webviewer, Smart Viewer, Wisenet Viewer, Wisenet Mobile
	CMS Support	Support CGI(SUNAPI) for integration to 3'rd party VMS
Functions		
Camera Setup	Register	Auto, Manual
	Setup Items	IP address, Add profile edit, Bitrate, Camera MD setup (8 point polygon) Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS), Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
PTZ	Control	Via GUI, Webviewer
	Preset	300 Presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live : Multi-Profile Support Multi Channel Playback
	Max. Remote Users	Search (3), Live Unicast (10)
Redundancy	Failover	N+1
	ARB	Yes
Easy configuration		P2P(QR code)
System Control		Mouse, Keyboard, Web
Indicator/Interface		
Front	Indicator	LED(Status indicator) : - Power(1), Record(1), Network(1)
Connectors	HDMI	2 EA, 3840x2160 30Hz
	VGA	N/A
	Audio	Out(1EA) : RCA output
	Ethernet	PoE RJ-45(LAN, 10/100) 16 ea ,RJ-45 1ea (WAN, 1Gbps)
	Alarm	(1) In(4EA, Terminal Block) (2) Out(2EA, Terminal Block) - Relay Out1(NO/NC/COM) - Relay Out2(NO/COM)
	USB	3EA(Front 2 X USB 2.0, Rear 1 X USB3.0)
	Storage	N/A
	Serial	N/A
	Reset	Switch(1EA, PW clear)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0220-R1

Page (7) of (37)

	Power Cord	1EA
	POE Budget	Max. 100W
System		
Log	Log List	Max. 100,000 (System, Event each log)
Environmental		
Operating Temperature / Humidity		+0°C to +40°C(+32°F to +104°F)
Humidity		20% ~ 85% RH
Noise		47 db
Electrical		
Power		100 ~ 240 VAC $\pm$ 10%; 50/60 Hz
Power Consumption		Max 165W(2HDD, PoE ON)
Mechanical		
Color / Material		Black
Dimension (WxHxD)		370*50.7*320 (370*44*320 FOOT except)
Weight		2,856g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 100 V, 60 Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NVR	XRN-815S	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
Mouse	MOKJUO	-	Primax Electronics Ltd.	-
SWITCHING POWER SUPPLY	DPS-200PB-185 C	HAPD214801504 8	Delta Electronics Power(Dongguan) Co., Ltd.	-

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0220-R1

Page (9) of (37)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Camera	QNV-6023R	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
Laptop	P98F004	21599158359	DELL INC.	-
Laptop Adapter	LA240PM190	-	LITE-ON TECHNOLOGY(CHANGZ HOU)CO.,LTD.	-
Monitor	DELL E2222H DVT	8221TCM10D001 03X	DELL INC.	-
Earphone	-	-	-	-
USB memory	-	-	Transcend	8 GB
Alarm	PRO-SL	-	SENSOR PRO	-
Button alarm	-	-	-	-
HDD	810051	-	WESTERN DIGITAL TECHNOLOGIES, INC.	4 TB
Smartphone	A1303	-	APPLE .Inc	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NVR (EUT) Laptop	RJ-45 (PoE)	Camera	RJ-45 (PoE)	10.0	U
	RJ-45 (LAN)	Laptop	RJ-45 (LAN)	4.0	U
	USB	Mouse (EUT)	USB	1.4	U
	HDMI	Monitor	HDMI	1.5	S
	grounding	grounding	grounding	1.2	U
	USB 3.0	USB memory	USB 3.0	-	-
	RCA	Earphone	3.5mm	1.0	U
	Alarm out	Alarm	Alarm in	3.0	U
	Alarm in	Button alarm	Alarm out	3.0	U
	SATA	HDD	SATA	0.2	U
Laptop	DC Jack	Laptop Adapter	DC Jack	1.6	U
	3.3 mm	Smartphone	3.3 mm	1.0	U

* Unshielded=U, Shielded=S


1.7 EUT Operating Mode(s)

Test Mode	operating
Operation Mode	EUT Monitoring, Ping Test HDD : after testing, check if the recording is normally done

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

1.8 Configuration

■ AC Main 230 V, 50 Hz
 □ DC Main

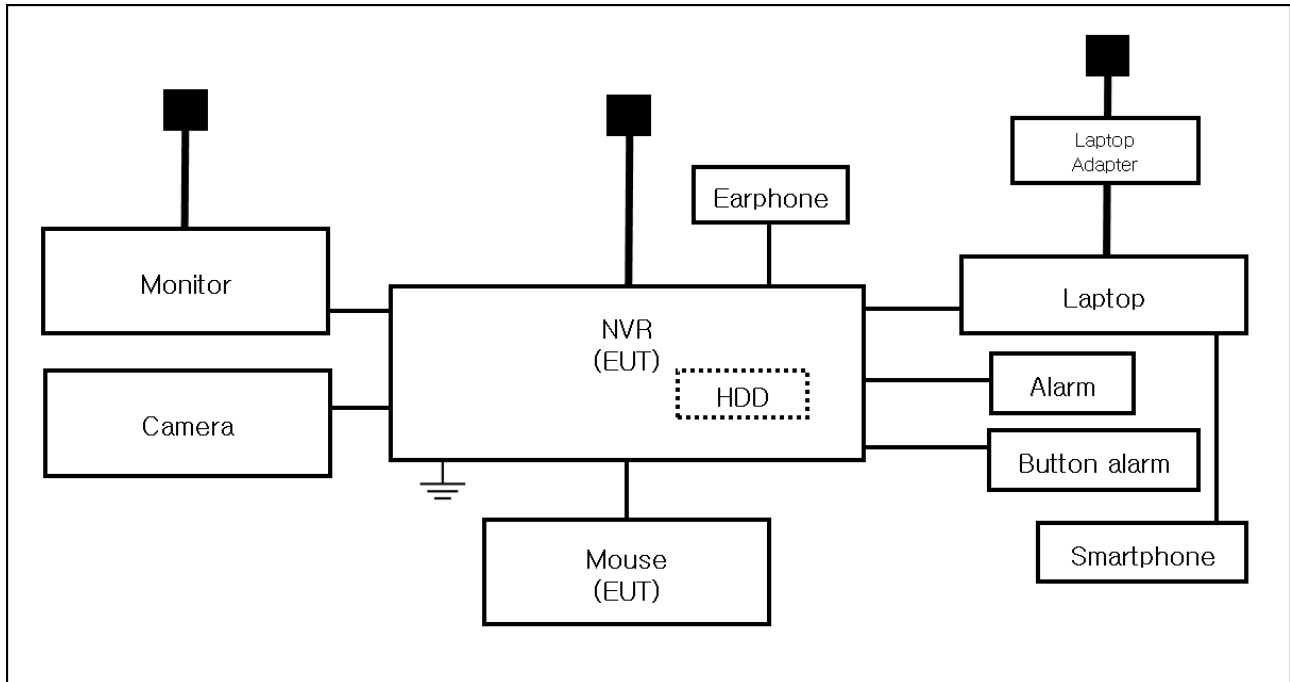

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **VCCI-CISPR 32:2016**

☒ Class A

☐ Class B



2.1 Conducted Emissions Mains Power Ports

Test Date

Feb. 07, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022

Test Conditions

Temperature: (23,4 ± 0,3) °C

Relative Humidity: (42,5 ± 0,3) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Feb. 07, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022
☒	8-WIRE ISN CAT3,5	ENY81	R & S	100174	12, 28, 2022
☒	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	12, 28, 2022
☐	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	03, 10, 2022

Test Conditions

Temperature: (23,8 ± 0,4) °C

Relative Humidity: (42,9 ± 0,4) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Feb. 07, 2022

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2022

Test Conditions

Temperature: (22,9 ± 0,4) °C
Relative Humidity: (43,8 ± 0,3) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Feb. 07, 2022

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 03, 2022
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 07, 2022
☐	ATTENUATOR	8491A	HP	35496	03, 10, 2022
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

Test Conditions

Temperature: (23,0 ± 0,4) °C

Relative Humidity: (42,6 ± 0,4) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.




APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

HOT LINE

Common Information

Test Description: Conducted Emission
Model No.: XRN-815S
Phase:
Mode:
Operator Name: KES

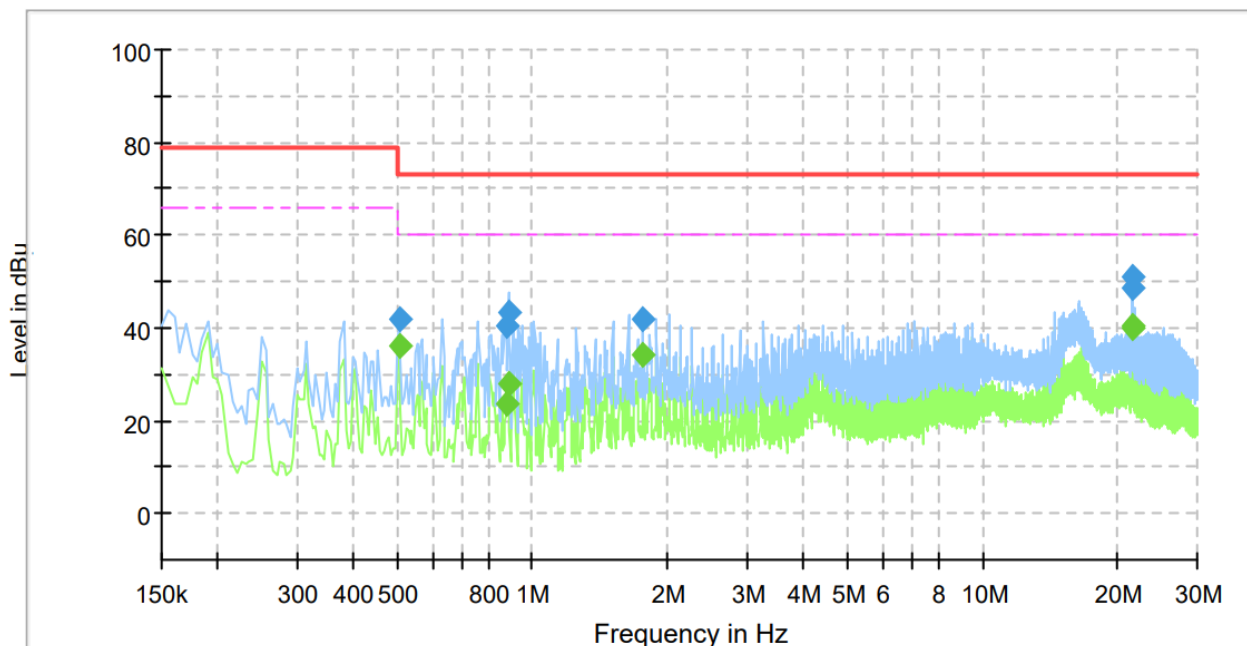

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.505000	---	36.16	60.00	23.84	1000.0	9.000	L1	19.7
0.505000	41.65	---	73.00	31.35	1000.0	9.000	L1	19.7
0.875000	---	23.46	60.00	36.54	1000.0	9.000	L1	20.0
0.875000	40.25	---	73.00	32.75	1000.0	9.000	L1	20.0
0.885000	---	27.87	60.00	32.13	1000.0	9.000	L1	20.1
0.885000	43.14	---	73.00	29.86	1000.0	9.000	L1	20.1
1.760000	---	34.15	60.00	25.85	1000.0	9.000	L1	20.3
1.760000	42.06	---	73.00	30.94	1000.0	9.000	L1	20.3
21.560000	---	39.84	60.00	20.16	1000.0	9.000	L1	20.1
21.560000	48.40	---	73.00	24.60	1000.0	9.000	L1	20.1
21.625000	---	40.66	60.00	19.34	1000.0	9.000	L1	20.1
21.625000	50.77	---	73.00	22.23	1000.0	9.000	L1	20.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
 Model No.: XRN-815S
 Phase:
 Mode:
 Operator Name: KES

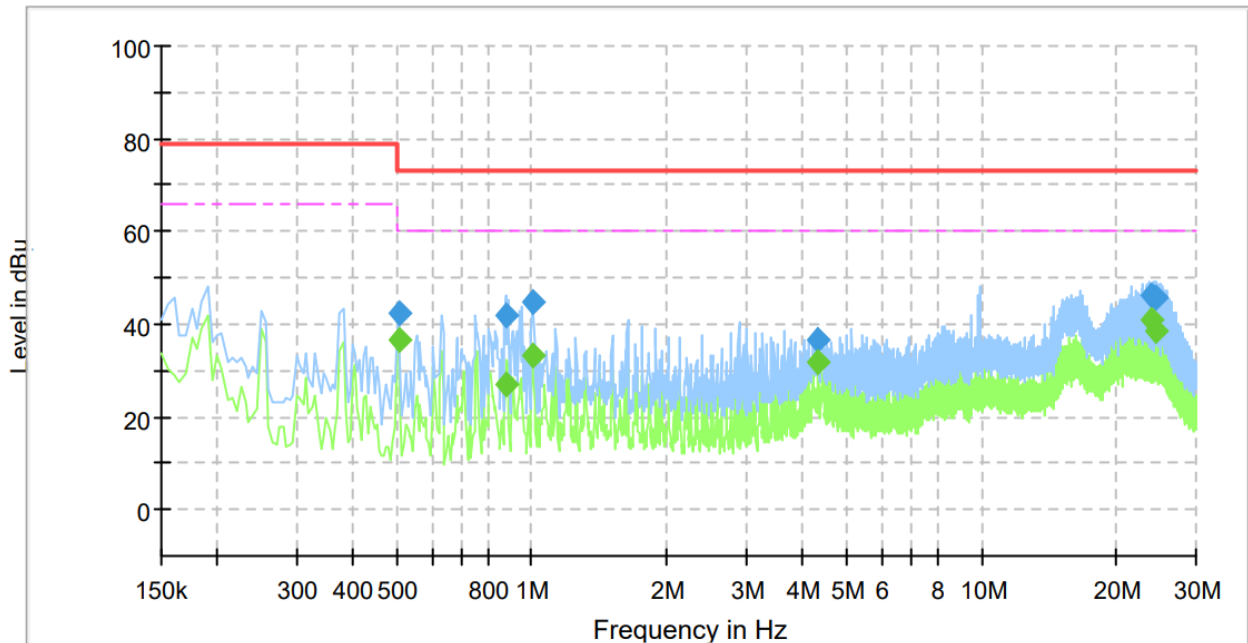

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.505000	---	36.78	60.00	23.22	1000.0	9.000	N	19.7
0.505000	42.42	---	73.00	30.58	1000.0	9.000	N	19.7
0.875000	---	26.84	60.00	33.16	1000.0	9.000	N	20.0
0.875000	41.81	---	73.00	31.19	1000.0	9.000	N	20.0
1.005000	---	33.29	60.00	26.71	1000.0	9.000	N	20.0
1.005000	44.92	---	73.00	28.08	1000.0	9.000	N	20.0
4.340000	---	32.00	60.00	28.00	1000.0	9.000	N	19.8
4.340000	36.61	---	73.00	36.39	1000.0	9.000	N	19.8
23.830000	---	40.90	60.00	19.10	1000.0	9.000	N	20.1
23.830000	46.33	---	73.00	26.67	1000.0	9.000	N	20.1
24.535000	---	38.38	60.00	21.62	1000.0	9.000	N	20.1
24.535000	45.62	---	73.00	27.38	1000.0	9.000	N	20.1

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


Conducted Emissions at Telecommunication Ports

■ LAN

[1 000 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XRN-815S
Mode : LAN
Speed : 1000
Operator Name: KES

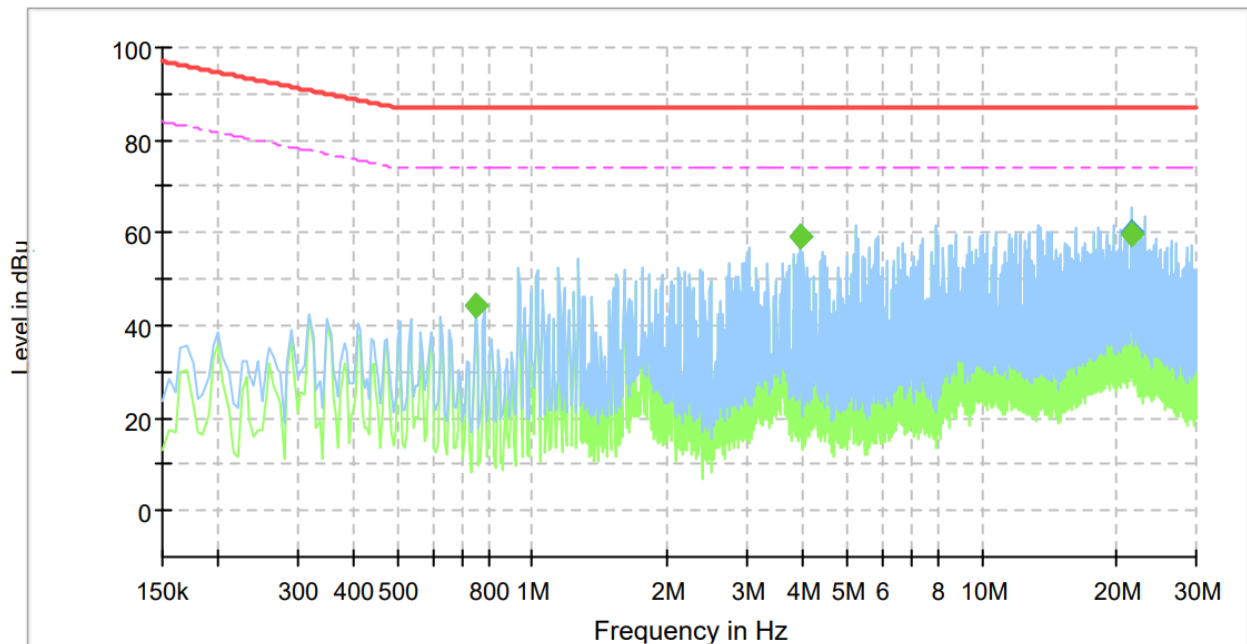

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.750000	---	44.11	74.00	29.89	1000.0	9.000	Single Line	19.9
0.750000	44.20	---	87.00	42.80	1000.0	9.000	Single Line	19.9
3.955000	---	59.12	74.00	14.88	1000.0	9.000	Single Line	19.7
3.955000	59.28	---	87.00	27.72	1000.0	9.000	Single Line	19.7
21.665000	---	59.46	74.00	14.54	1000.0	9.000	Single Line	19.9
21.665000	60.24	---	87.00	26.76	1000.0	9.000	Single Line	19.9


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

PoE
[100 Mbps]
Common Information

Test Description:	Telecommunication Emission
Model No.:	XRN-815S
Mode :	PoE
Speed :	100
Operator Name:	KES

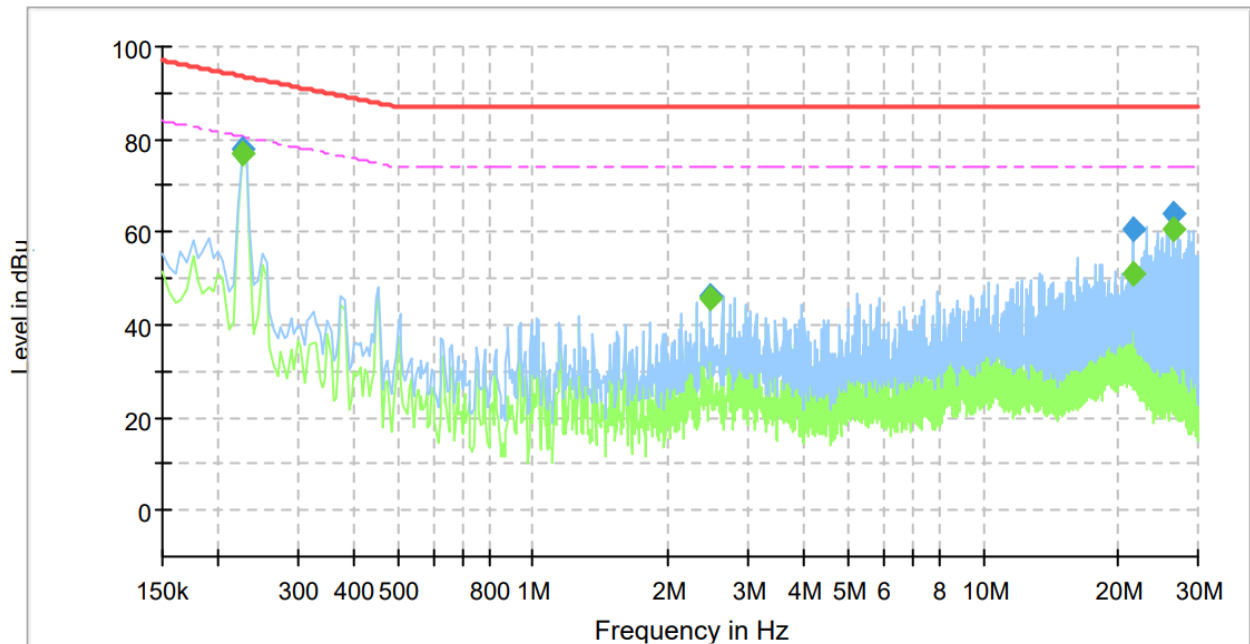
Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.225000	---	76.84	80.63	3.79	1000.0	9.000	Single Line	19.7
0.225000	78.11	---	93.63	15.52	1000.0	9.000	Single Line	19.7
2.470000	---	45.67	74.00	28.33	1000.0	9.000	Single Line	20.1
2.470000	45.97	---	87.00	41.03	1000.0	9.000	Single Line	20.1
21.625000	---	50.84	74.00	23.16	1000.0	9.000	Single Line	19.9
21.625000	60.79	---	87.00	26.21	1000.0	9.000	Single Line	19.9
26.610000	---	60.54	74.00	13.46	1000.0	9.000	Single Line	20.0
26.610000	63.83	---	87.00	23.17	1000.0	9.000	Single Line	20.0

◆ Calculation

$$\text{QuasiPeak [dBuV]} / \text{CAverage [dBuV]} = \text{Reading Value [dBuV]} + \text{Corr. [dB]}$$


QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



Radiated Electric Field Emissions(Below 1 GHz)

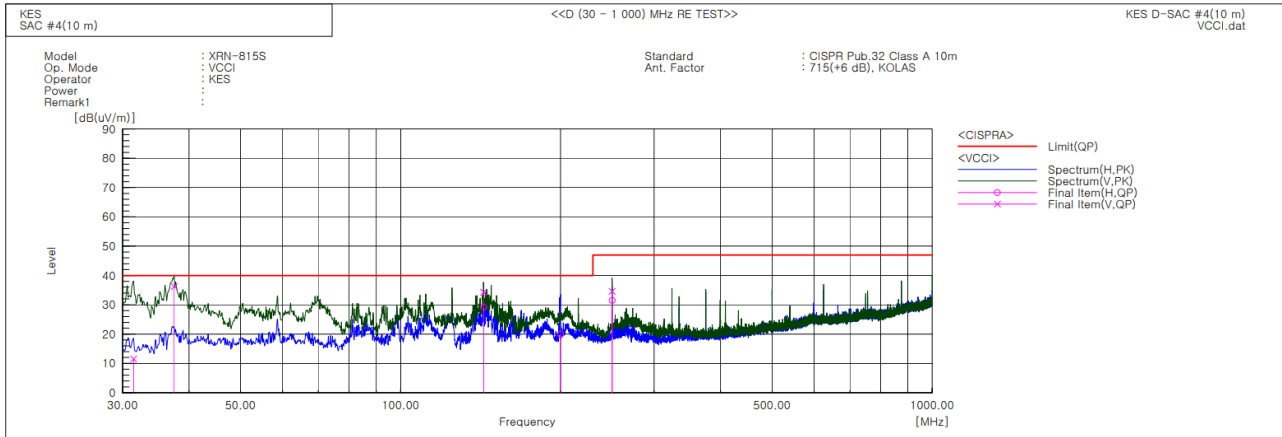

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	31.455	V	36.3	-24.8	11.5	40.0	28.5	111.0	229.0	
2	37.518	V	60.0	-23.7	36.3	40.0	3.7	109.0	3.0	
3	143.248	V	59.6	-25.3	34.3	40.0	5.7	100.0	348.0	
4	143.365	H	54.5	-25.3	29.2	40.0	10.8	400.0	355.0	
5	199.871	H	40.8	-20.8	20.0	40.0	20.0	312.0	95.0	
6	249.948	V	53.7	-19.1	34.6	47.0	12.4	100.0	34.0	
7	250.120	H	50.6	-19.1	31.5	47.0	15.5	400.0	219.0	

◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0220-R1

Page (23) of (37)

Radiated Electric Field Emissions(Above 1 GHz)

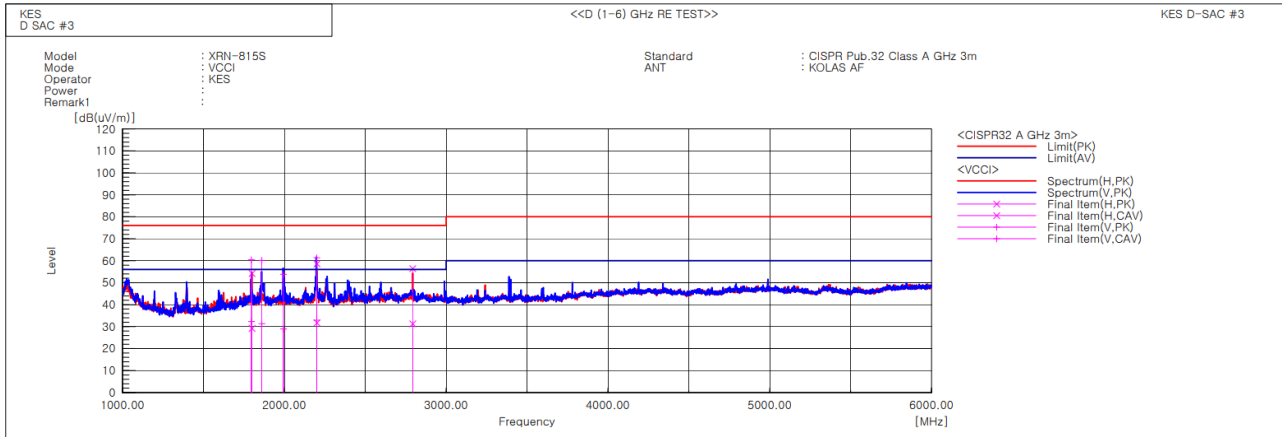

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1796.990	V	63.5	35.4	-3.1	60.4	32.3	76.0	56.0	15.6	23.7	100.0	272.5	
2	1800.040	H	57.3	32.3	-3.1	54.2	29.2	76.0	56.0	21.8	26.8	100.0	165.2	
3	1860.740	V	62.5	33.6	-2.3	60.2	31.3	76.0	56.0	15.8	24.7	100.0	275.4	
4	1993.730	V	54.9	30.0	-1.1	53.8	28.9	76.0	56.0	22.2	27.1	100.0	223.2	
5	2199.880	V	61.8	33.3	-0.4	61.4	32.9	76.0	56.0	14.6	23.1	100.0	99.4	
6	2200.868	H	59.0	32.1	-0.4	58.6	31.7	76.0	56.0	17.4	24.3	100.0	2.3	
7	2793.560	H	54.7	29.6	1.7	56.4	31.3	76.0	56.0	19.6	24.7	100.0	255.2	

◆ Calculation

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports




Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

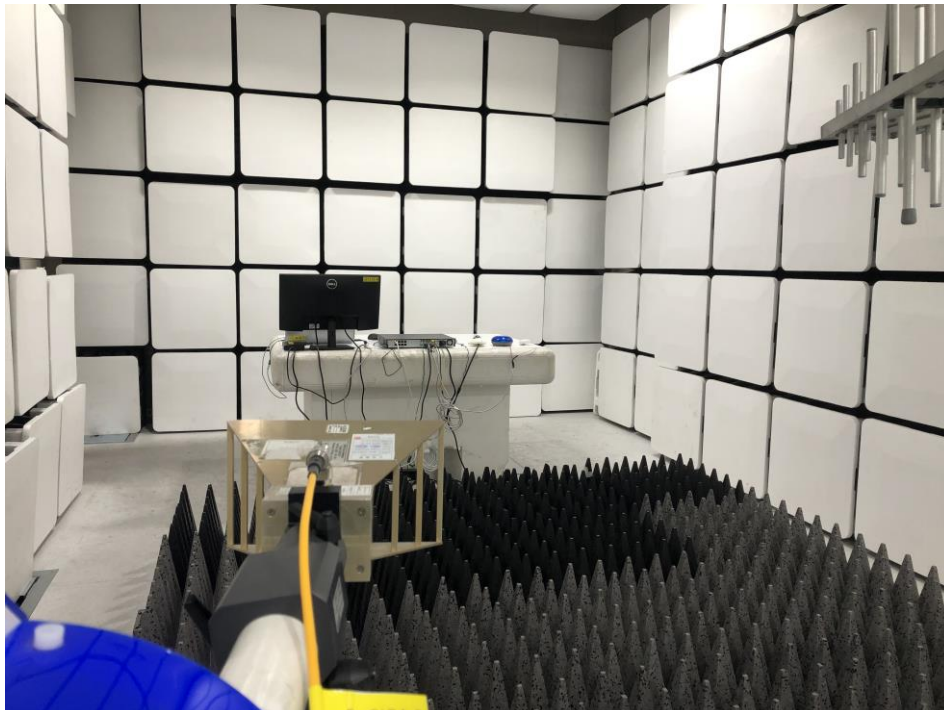

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EUT Internal Photographs

(Internal View)

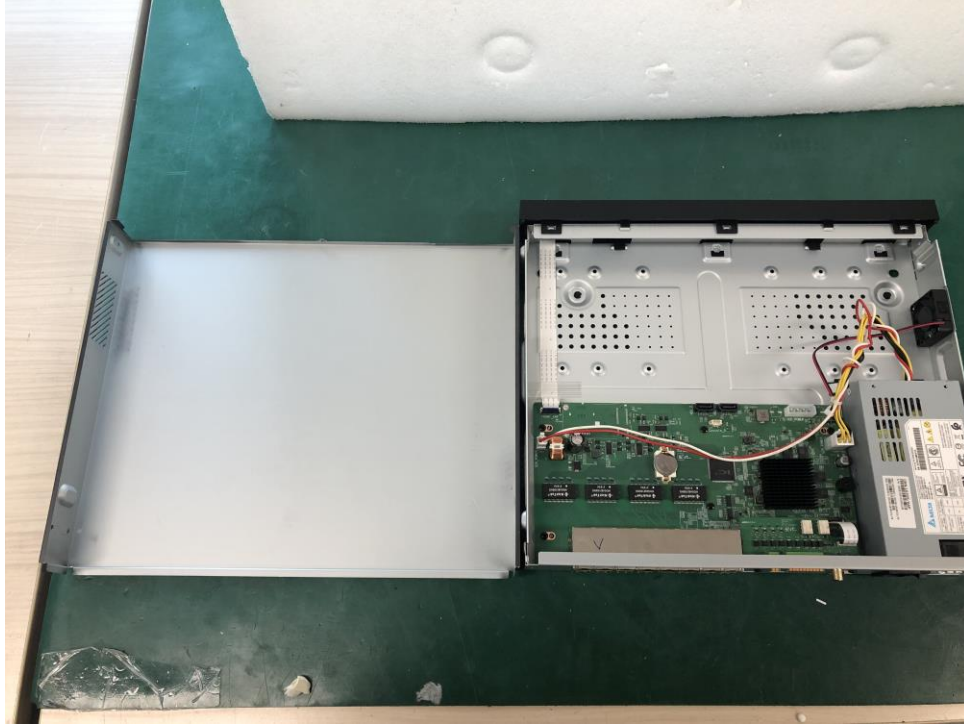


EUT Internal View – Board 1

(Top)

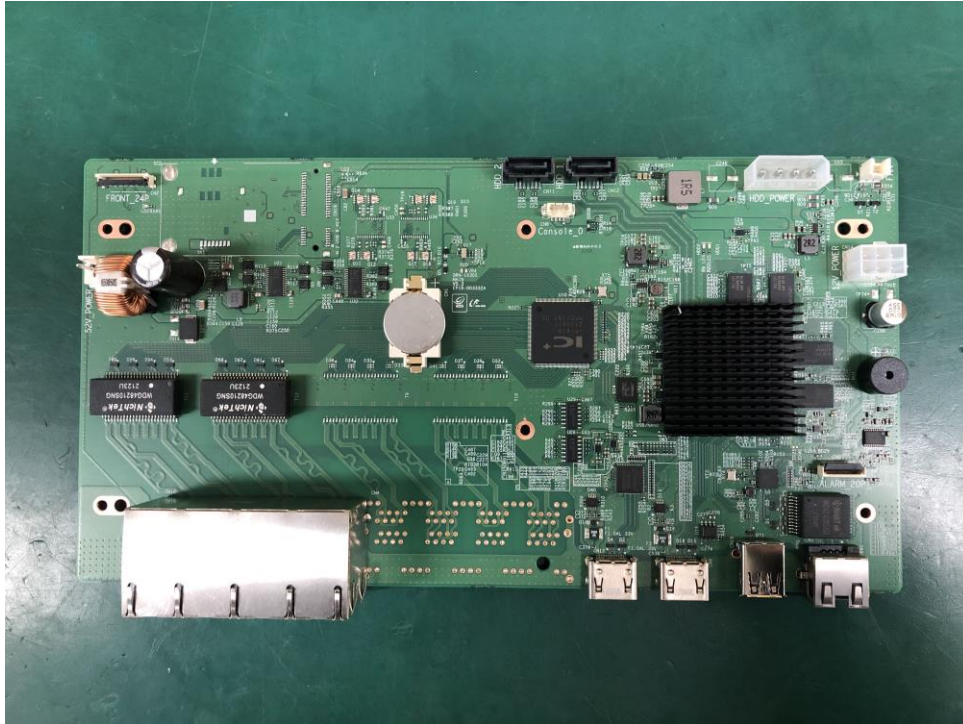


(Bottom)

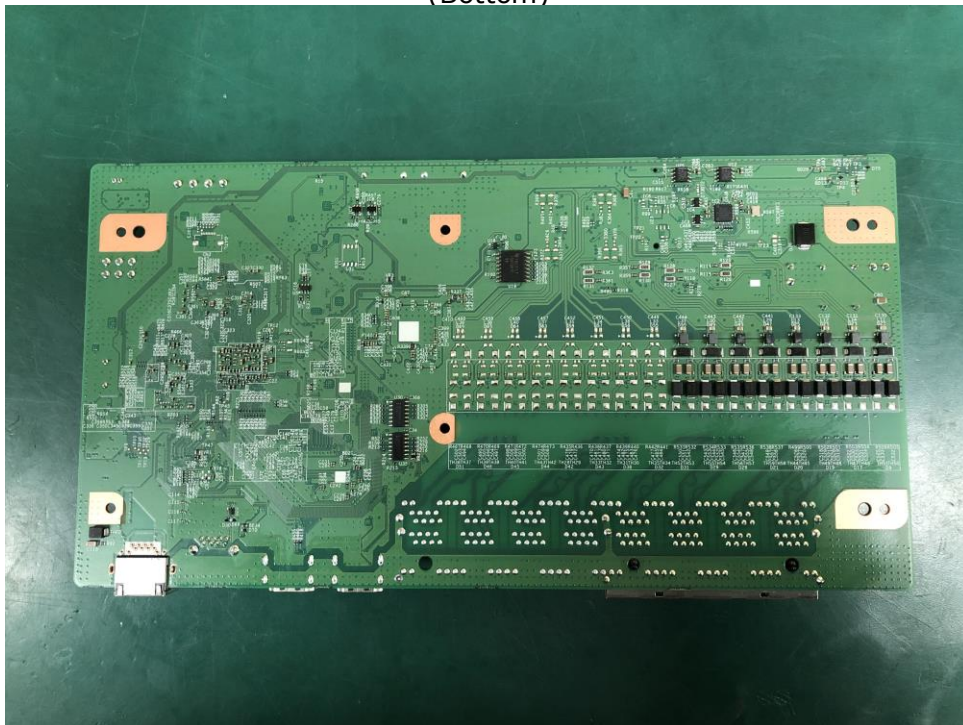


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 2

(Top)

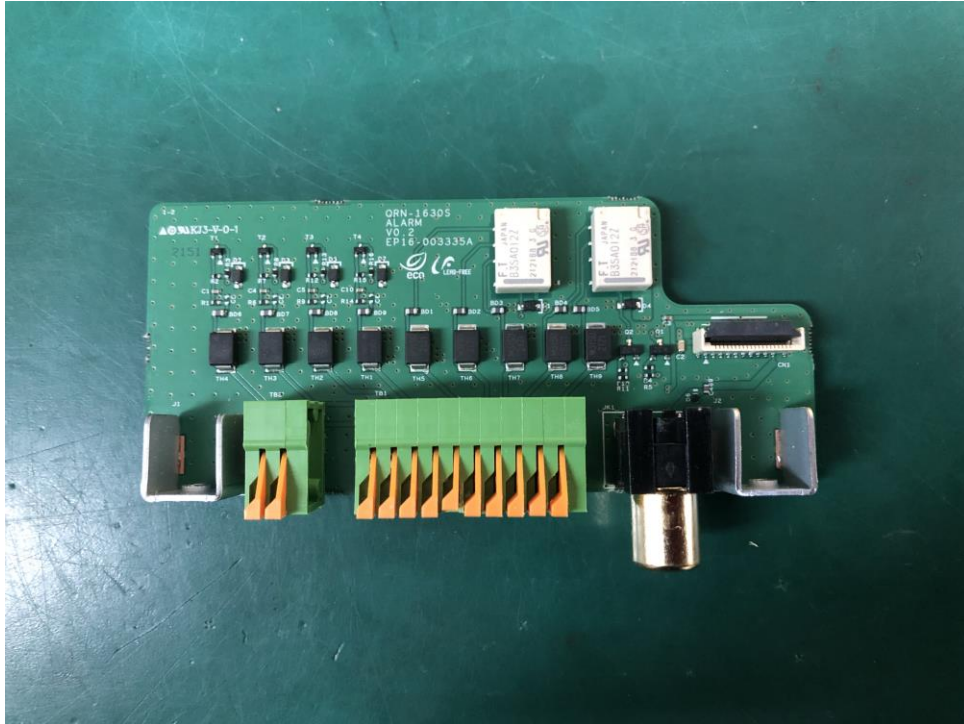

(Bottom)

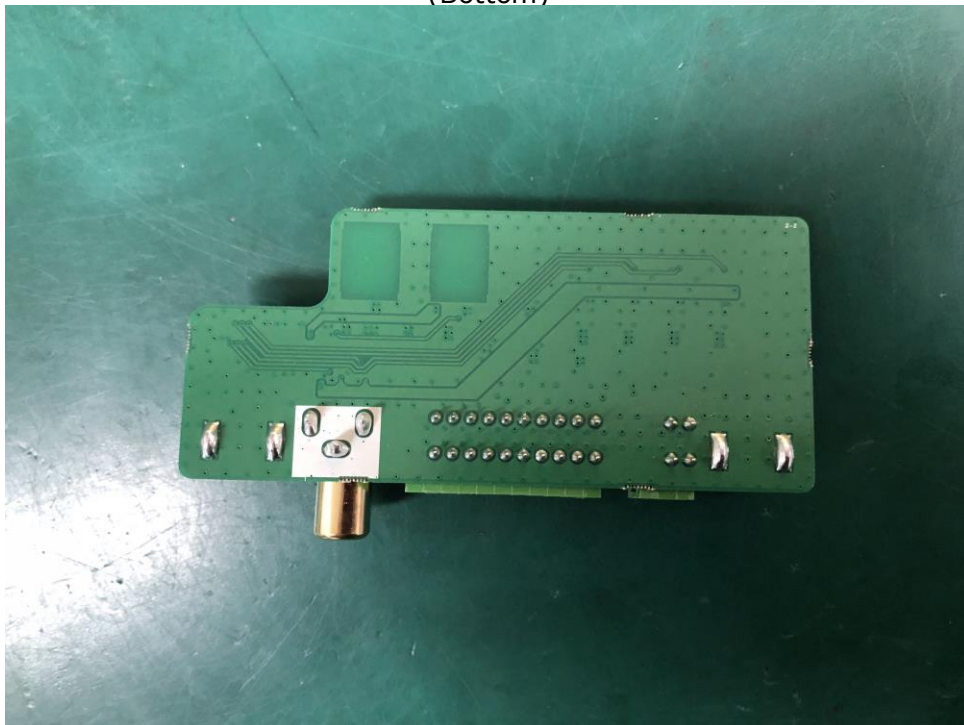


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 3

(Top)




(Bottom)

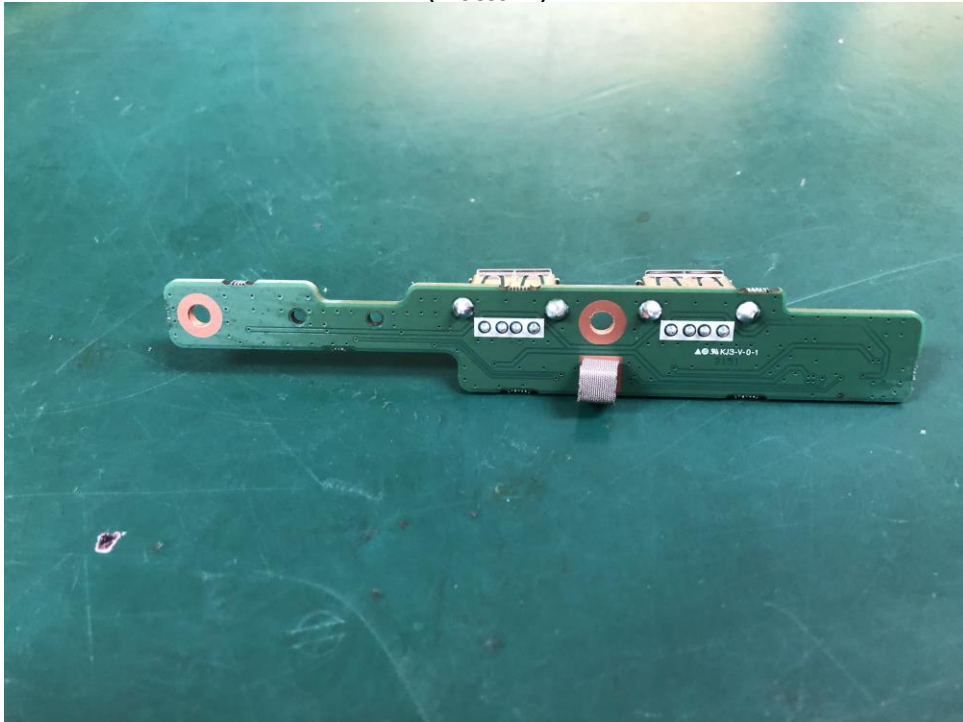

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Power

(Top)

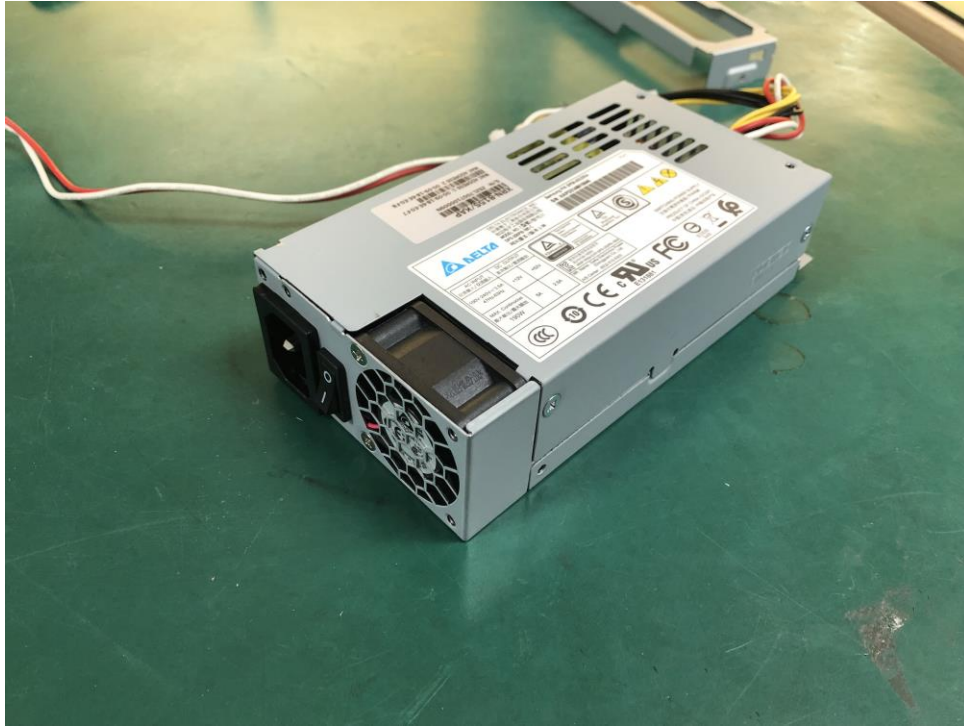

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

(Label)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – MOUSE

(Top)

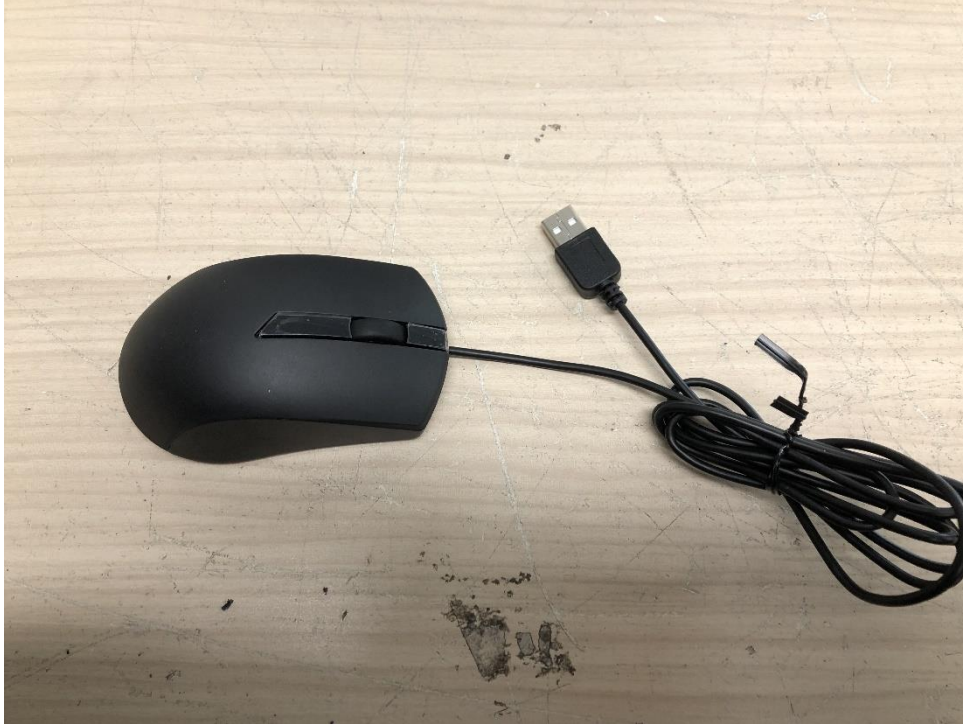

(Bottom)



(Label)



Label Photographs



この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

VCCI-A