



4, Songju-ro 236beon-gil, Yangji-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do,
17159, Korea
Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>

EMC TEST REPORT

Dates of Tests: July 21 – 27, 2020
Test Report S/N: LR500122008H
Test Site : LTA Co., Ltd.

Model No.

XRP-4310DB4

APPLICANT

Hanwha Techwin Co., Ltd.

Equipment Name : NVR
Manufacturer : HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
Model name : XRP-4310DB4
Test Device Serial No.: Identification
Directive : Electromagnetic Compatibility Directive 2014/30/EU
Rule Part(s) : EN 55032:2015/AC:2016-07
EN 50130-4:2011/A1:2014
EN 61000-3-2:2014
EN 61000-3-3:2013
Data of reissue : August 05, 2020

This test report is issued under the authority of:

The test was supervised by:

Gi Won Lee, Technical Manager

Jun Hwan Park, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

NVLAP[®]
TESTING NVLAP LAB CODE 200723-0

Revision history

Revision	Date of issue	Test report No.	Description
0	05.08.2020	LR500122008H	Initial

TABLE OF CONTENTS

1. General information's	4
2. Information's about test item	5
3. Test Report	8
3.1 Summary of tests	8
3.2 EMISSION	9
3.2.1 Conducted Emissions.....	9
3.2.2 Radiated Emissions.....	18
3.2.3 Harmonic Current Emission	23
3.2.4 Voltage Fluctuations and Flicker	26
3.3 IMMUNITY	31
3.3.1 Electrostatic Discharge	31
3.3.2 RF Electromagnetic Field	34
3.3.3 Electrical Fast Transients	35
3.3.4 Surges.....	36
3.3.5 Conducted Disturbances, Induced by Radio-Frequency Fields.....	37
3.3.6 Voltage dips and Interruptions	38
3.3.7 Mains supply voltage variations	39
APPENDIX A TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS.....	40
APPENDIX B PERFORMANCE CRITERIA	44
APPENDIX C PHOTOGRAPHS	47

1. General information's

1-1 Test Performed

Company name : **LTA Co., Ltd**
 Address : 4, Songju-ro 236beon-gil, Yangji-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do, 17159, Korea
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2020-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	-	RRA accredited Lab.
	U.S.A		2021-04-11	
	CANADA		2021-06-16	
	VIETNAM		2021-04-12	
VCCI	JAPAN	C-14948	2023-09-10	VCCI registration
		T-12416	2023-09-10	
		R-14483	2023-10-15	
		G-10847	2021-12-13	
KOLAS	KOREA	KT551	2021-08-20	KOLAS accredited Lab.

2. Information's about test item

2-1 Client/ Manufacturer

Company name : Hanwha Techwin Co., Ltd.
 Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, 13488, KOREA
 Telephone / Facsimile : +82-70-7147-8753(<http://hanhwa-security.com>)

Factory #1

Company name : HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
 Address : Lot O-2, Que Vo Industrial Zone extended area ,Nam Son commune, Bac Ninh city,Bac Ninh province, Vietnam

Factory #2

Company name : D-TECH CO.,LTD.
 Address : 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex)

2-2 Equipment Under Test (EUT)

Class : A
 Equipment Name : NVR
 Model name : XRP-4310DB4
 Serial number : Identification
 Date of receipt : July 15, 2020
 EUT condition : Pre-production, not damaged
 Interface Ports : AC IN, LAN, HDMI, USB 3.0, USB 2.0, HDD, AUDIO OUT, HDD
 Power rating : AC 230 V, 50 Hz

2-3 Modification

- NONE

2-4 Model Specification

- NONE

2-5 Test conditions

Temp. / Humid. / Pressure : (21 - 24) °C / (48 - 55) % R.H. / (100.1 – 100.3) kPa
 Tested Model : XRP-4310DB4
 Test mode : REC mode
 Tested Voltage : AC 230 V, 50 Hz

2-6 List of EUT and ACCESSORY

EUT				
Equipment Name	Model Name	Serial No.	Manufacturer	Remarks
NVR	XRP-4310DB4	N/A	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD. D-TECH CO.,LTD.	-
Keyboard	PKB-650U	N/A	SHENZHEN TYCHO TECHNOLOGY CO., LIMITED	-
Mouse	MOKJUO	N/A	PRIMAX ELECTRONICS LTD	-
ACCESSORY				
Equipment Name	Model Name	Serial No.	Manufacturer	Remarks
Monitor #1	P2018H	N/A	DELL	-
Monitor #2	24MA53D	N/A	LG	-
Monitor #2 Adapter	A11-120P1A	N/A	Chicony	-
Speaker	MINI-X3	N/A	Shenzhen Music Technology Co., Ltd	-
Notebook	TFG13	N/A	HANSUNG	-
Switch Hub	H608	N/A	ipTIME	-
Switch Hub Adapter	DCP015A050600K	N/A	Zioncom Electronics	-
Network Camera	QNV-6082R	N/A	HANWHA TECHWIN CO.,LTD.	-
PoE Injector	SFC501G	N/A	SOLTECH INFONET INC.	-
USB Memory Stick #1	Ultra Flair CZ73 32GB	N/A	SanDisk	64 GB
USB Memory Stick #2	Ultra Z48USB 3.0 32GB	N/A	SanDisk	64 GB
HDD	WD40PURX- 64N96Y0	N/A	Western Digital	4 TB

2-7 Cable List

Cable List						
From		To		Length	Shielding	
Type	I/O Port	Type	I/O Port	(m)	Cable	backshell
EUT	AC IN #1	AC Power Source	3 Pin AC Line	1.5	NO	Plastic
	AC IN #2	AC Power Source	3 Pin AC Line	1.5	NO	Plastic
	LAN #1	Poe Injector	LAN	3.0	NO	Plastic
	LAN #2	Switch Hub	LAN	3.0	NO	Plastic
	LAN #3	Switch Hub	LAN	3.0	NO	Plastic
	USB 2.0 #1	Keyboard	-	1.5	NO	Plastic
	USB 2.0 #2	Mouse	-	1.5	NO	Plastic
	USB 3.0 #1	USB Memory Stick #1	-	-	-	Metal
	USB 3.0 #2	USB Memory Stick #2	-	-	-	Plastic
	AUDIO OUT	Speaker	AUDIO IN	1.0	NO	Plastic
	HDMI #1	Monitor #1	HDMI	1.5	YES	Plastic
	HDMI #2	Monitor #2	HDMI	1.5	YES	Plastic
	HDD	HDD	-	-	-	-
Switch Hub	LAN	Notebook	LAN	2.0	NO	Plastic
	DC IN	Switch Hub Adapter	DC OUT	1.5	NO	Plastic
Switch Hub Adapter	AC IN	AC Power Source	2 Pin AC Line	-	-	-
Monitor #2	DC IN	Monitor #2 Adapter	DC OUT	1.3	NO	Plastic
Monitor #2 Adapter	AC IN	AC Power Source	3 Pin AC Line	1.5	NO	Plastic
PoE Injector	PoE	Network Camera	PoE	2.0	NO	Plastic
	AC IN	AC Power Source	3 Pin AC Line	1.5	NO	Plastic
Notebook	-	-	-	-	-	-

3. Test Report

3.1 Summary of tests

Reference	Parameter	Status (note)
I. Emission		
Conducted Emissions	EN 55032:2015/AC:2016-07	C
Radiated Emissions	EN 55032:2015/AC:2016-07	C
Harmonic Current Emission	EN 61000-3-2:2014	NA ^{Note 3}
Voltage Fluctuations and Flicker	EN 61000-3-3:2013	C
II. Immunity (EN 50130-4:2011/A1:2014)		
Electrostatic Discharge	EN 61000-4-2:2009	C
RF Electromagnetic Field	EN 61000-4-3:2006/A1:2008/A2:2010	C
Electrical Fast Transients	EN 61000-4-4:2012	C
Surges	EN 61000-4-5:2014/A1:2017	C
Conducted Disturbances, Induced by Radio-Frequency Fields	EN 61000-4-6:2014/AC:2015	C
Voltage dips and Interruptions	EN 61000-4-11:2004/A1:2017	C
Main supply voltage variations	EN 50130-4:2011/A1:2014	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

Note 3: We did not test EN61000-3-2 (Harmonic current emissions) for the XRP-4310DB4 because equipment whose rated power is less or equal 75 W don't need to be tested.

3.2 EMISSION

3.2.1 Conducted Emissions

Definition:

The test assesses the ability of the EUT to limit its internal noise from being present on the AC mains Power In/Output ports.

We were performed the test according to LTA procedure LTA-QI-04.

Measurement Frequency range	: 150 kHz – 30 MHz
Test method	: EN 55032:2015/AC:2016-07
Measurement RBW	: 9 kHz
Test mode	: REC mode
Result	: Complies

Measurement Data:

- Refer to the Next page (Maximum emission configuration)

A sample calculation:

COR. F (correction factor)= LISN Insertion loss + Cable loss + Pulse Limiter Factors

Emission Level= meter reading + COR.F

Limits for conducted disturbance at the mains ports of class A ITE

Frequency Range	Quasi-peak	Average
(0.15 – 0.5) MHz	79 dB μ V	66 dB μ V
(0.5 – 30) MHz	73 dB μ V	60 dB μ V

Note: The limits will decrease with the frequency logarithmically within 0.15 MHz to 0.5 MHz

Limits for conducted disturbance at the mains ports of class B ITE

Frequency Range	Quasi-peak	Average
(0.15 – 0.5) MHz	(66 – 56) dB μ V	(56 - 46) dB μ V
(0.5 – 5) MHz	56 dB μ V	46 dB μ V
(5 – 30) MHz	60 dB μ V	50 dB μ V

Note: The limits will decrease with the frequency logarithmically within 0.15 MHz to 0.5 MHz

Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class A equipment

Frequency Range	Voltage limits		Current limits	
	Quasi-peak	Average	Quasi-peak	Average
(0.15 – 0.5) MHz	(97 – 87) dB μ V	(84 – 74) dB μ V	(53 – 43) dB μ V	(40 – 30) dB μ V
(0.5 – 30) MHz	87 dB μ V	74 dB μ V	43 dB μ V	30 dB μ V

Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44$ dB)

Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class B equipment

Frequency Range	Voltage limits		Current limits	
	Quasi-peak	Average	Quasi-peak	Average
(0.15 – 0.5) MHz	(84 – 74) dB μ V	(74 – 64) dB μ V	(40 – 30) dB μ V	(30 – 20) dB μ V
(0.5 – 30) MHz	74 dB μ V	64 dB μ V	30 dB μ V	20 dB μ V

Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44$ dB)

Conducted Emissions (LINE) / AC #1



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. : XRP-4310DB4


Phase : Line(AC #1)

Test Mode : REC mode

Test Power : 230 V / 50 Hz

Temp./ Humi. : 23 'C / 51 % R.H.

Test Engineer : PARK J H

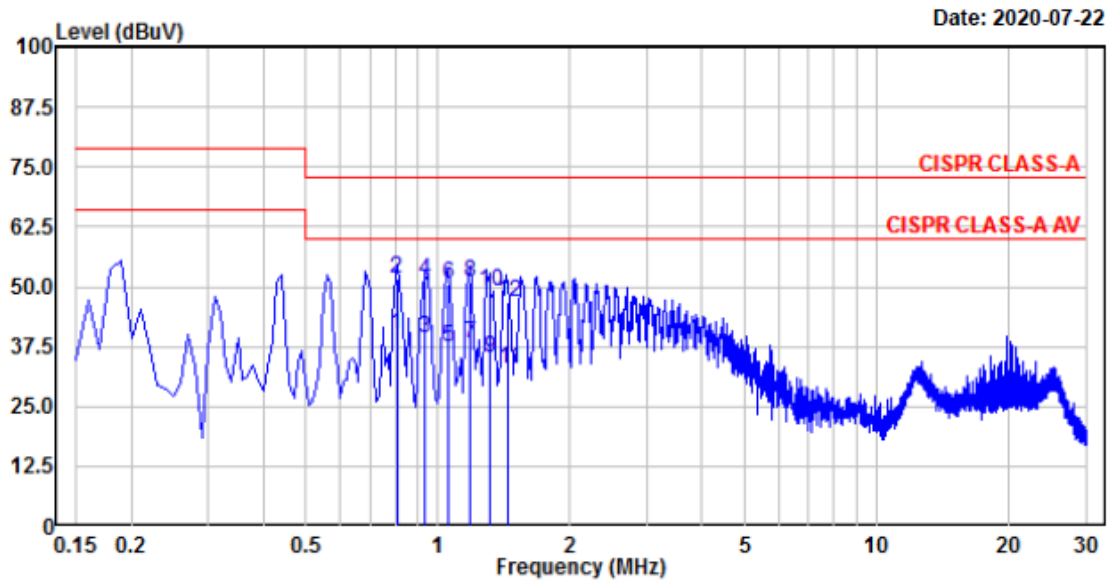

No.	Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB	Phase
2.	0.806	32.09	20.49	19.52	51.61	40.01	73.00	60.00	21.39	19.99	Line
4.	0.936	31.59	19.58	19.54	51.13	39.12	73.00	60.00	21.87	20.88	Line
6.	1.054	31.08	17.90	19.54	50.62	37.44	73.00	60.00	22.38	22.56	Line
8.	1.181	31.24	18.48	19.55	50.79	38.03	73.00	60.00	22.21	21.97	Line
10.	1.318	29.55	15.72	19.56	49.11	35.28	73.00	60.00	23.89	24.72	Line
12.	1.450	27.30	13.30	19.56	46.86	32.86	73.00	60.00	26.14	27.14	Line

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions (NEUTRAL) / AC #1



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. : XRP-4310DB4


Phase : Neutral (AC #1)

Test Mode : REC mode

Test Power : 230 V / 50 Hz

Temp./ Humi. : 23 'C / 51 % R.H.

Test Engineer : PARK J H

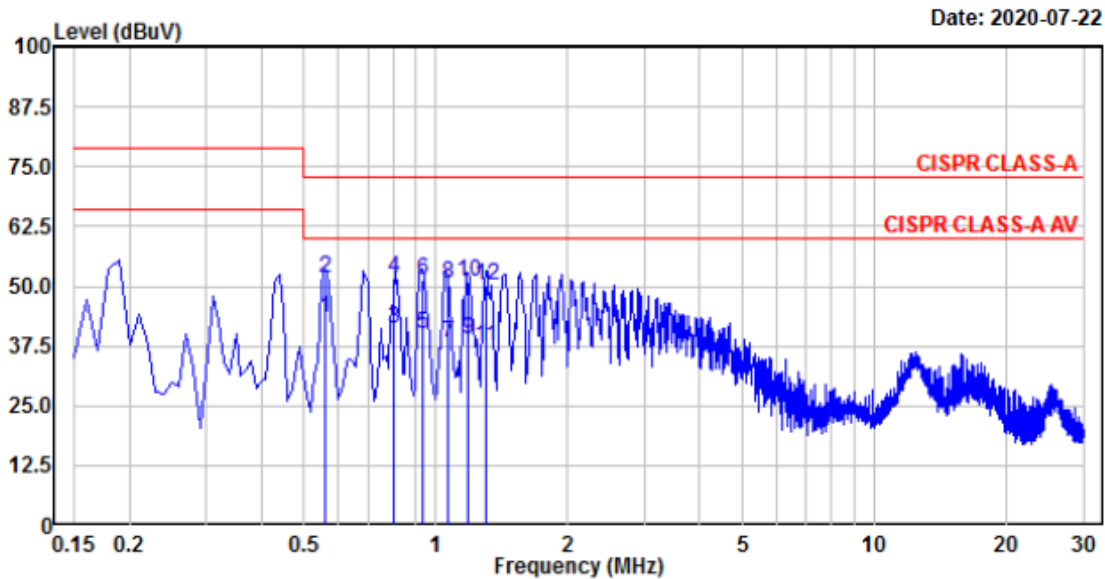

No.	Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB	Phase
2.	0.561	32.24	23.79	19.55	51.79	43.34	73.00	60.00	21.21	16.66	neutral
4.	0.806	32.16	21.53	19.56	51.72	41.09	73.00	60.00	21.28	18.91	neutral
6.	0.937	31.75	20.30	19.58	51.33	39.88	73.00	60.00	21.67	20.12	neutral
8.	1.065	31.05	18.50	19.58	50.63	38.08	73.00	60.00	22.37	21.92	neutral
10.	1.180	31.37	19.38	19.60	50.97	38.98	73.00	60.00	22.03	21.02	neutral
12.	1.302	30.62	17.70	19.61	50.23	37.31	73.00	60.00	22.77	22.69	neutral

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions (LINE) / AC #2



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. : XRP-4310DB4


Phase : Line(AC #2)

Test Mode : REC mode

Test Power : 230 V / 50 Hz

Temp./ Humi. : 23 'C / 51 % R.H.

Test Engineer : PARK J H

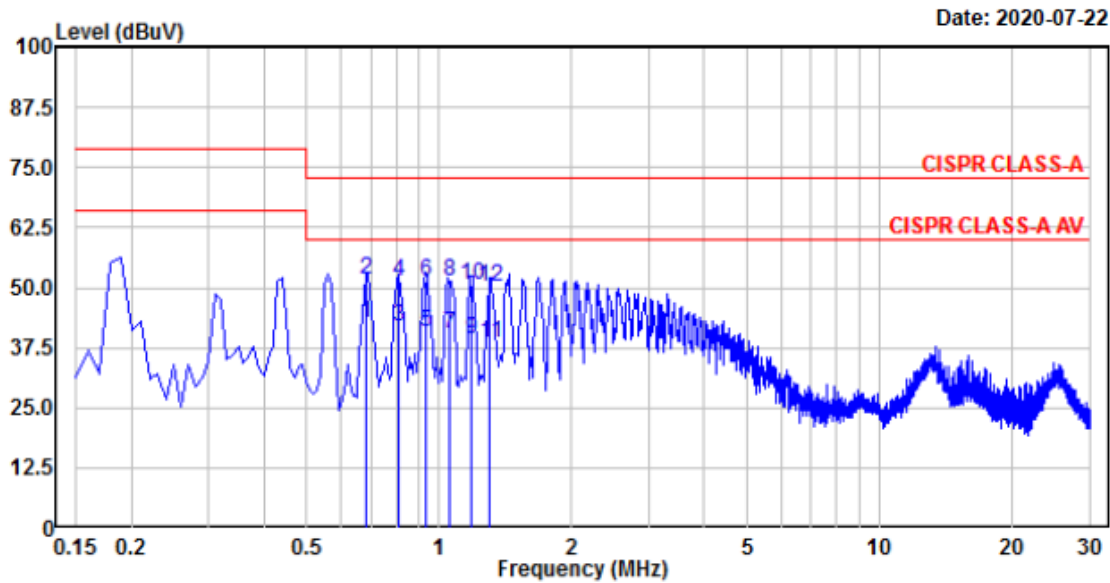

No.	Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB	Phase
2.	0.685	32.03	23.30	19.51	51.54	42.81	73.00	60.00	21.46	17.19	Line
4.	0.811	31.94	22.37	19.52	51.46	41.89	73.00	60.00	21.54	18.11	Line
6.	0.936	31.65	21.06	19.54	51.19	40.60	73.00	60.00	21.81	19.40	Line
8.	1.059	31.67	20.76	19.54	51.21	40.30	73.00	60.00	21.79	19.70	Line
10.	1.185	30.98	19.64	19.55	50.53	39.19	73.00	60.00	22.47	20.81	Line
12.	1.306	30.80	19.09	19.56	50.36	38.65	73.00	60.00	22.64	21.35	Line

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions (NEUTRAL) / AC #2



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. : XRP-4310DB4


Phase : Neutral (AC #2)

Test Mode : REC mode

Test Power : 230 V / 50 Hz

Temp./ Humi. : 23 'C / 51 % R.H.

Test Engineer : PARK J H

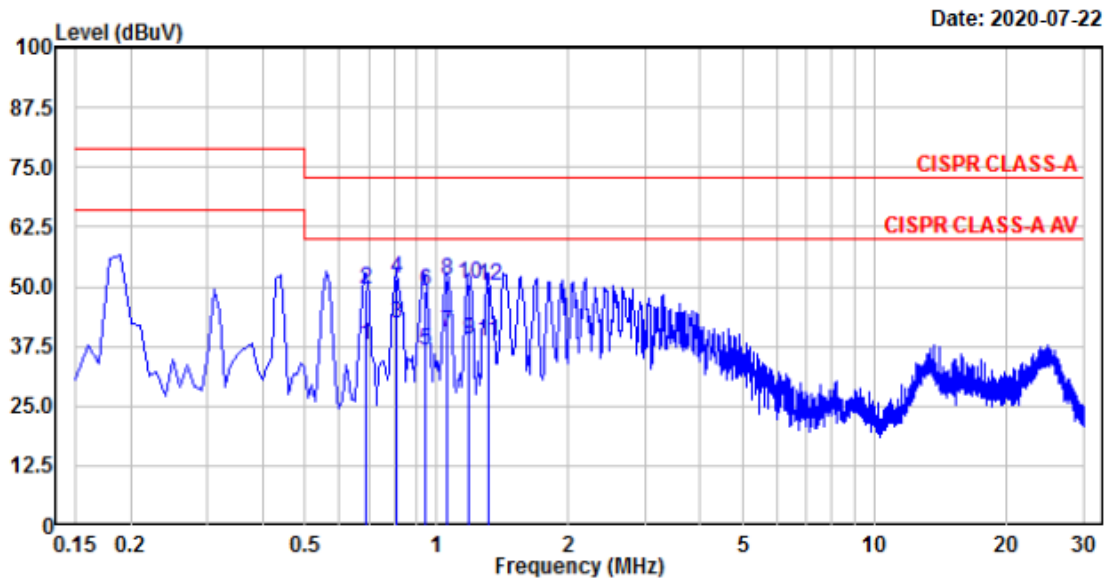

No.	Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB	Phase
2.	0.692	29.93	18.22	19.55	49.48	37.77	73.00	60.00	23.52	22.23	neutral
4.	0.808	32.24	22.61	19.56	51.80	42.17	73.00	60.00	21.20	17.83	neutral
6.	0.944	29.47	16.86	19.58	49.05	36.44	73.00	60.00	23.95	23.56	neutral
8.	1.059	31.69	20.87	19.58	51.27	40.45	73.00	60.00	21.73	19.55	neutral
10.	1.188	30.95	19.33	19.60	50.55	38.93	73.00	60.00	22.45	21.07	neutral
12.	1.312	30.66	18.73	19.61	50.27	38.34	73.00	60.00	22.73	21.66	neutral

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions (TEL_1000 M) / LAN #1



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. : XRP-4310DB4


Phase : TEL_1000M(LAN #1)

Test Mode : REC mode

Test Power : 230 V / 50 Hz

Temp./ Humi. : 23 'C / 51 % R.H.

Test Engineer : PARK J H

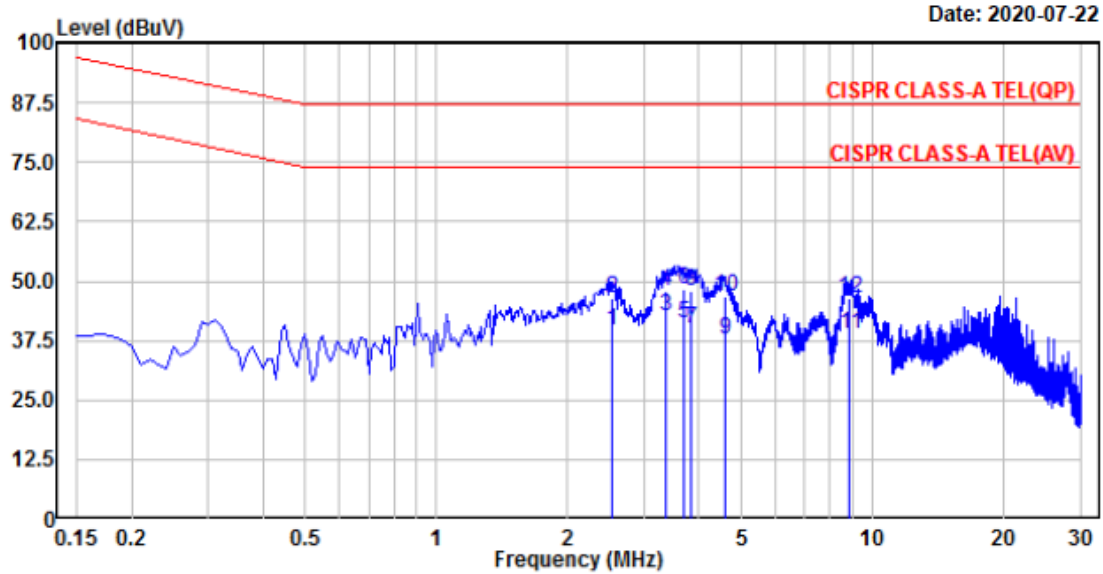

No.	Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB	Phase
2.	2.527	26.88	20.38	19.39	46.27	39.77	87.00	74.00	40.73	34.23	Line
4.	3.362	28.46	23.15	19.40	47.86	42.55	87.00	74.00	39.14	31.45	Line
6.	3.679	28.93	21.82	19.40	48.33	41.22	87.00	74.00	38.67	32.78	Line
8.	3.845	28.60	20.64	19.41	48.01	40.05	87.00	74.00	38.99	33.95	Line
10.	4.579	27.32	18.27	19.42	46.74	37.69	87.00	74.00	40.26	36.31	Line
12.	8.869	26.89	19.53	19.52	46.41	39.05	87.00	74.00	40.59	34.95	Line

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions (TEL_1000 M) / LAN #2



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. : XRP-4310DB4


Phase : TEL_1000M(LAN #2)

Test Mode : REC mode

Test Power : 230 V / 50 Hz

Temp./ Humi. : 23 'C / 51 % R.H.

Test Engineer : PARK J H

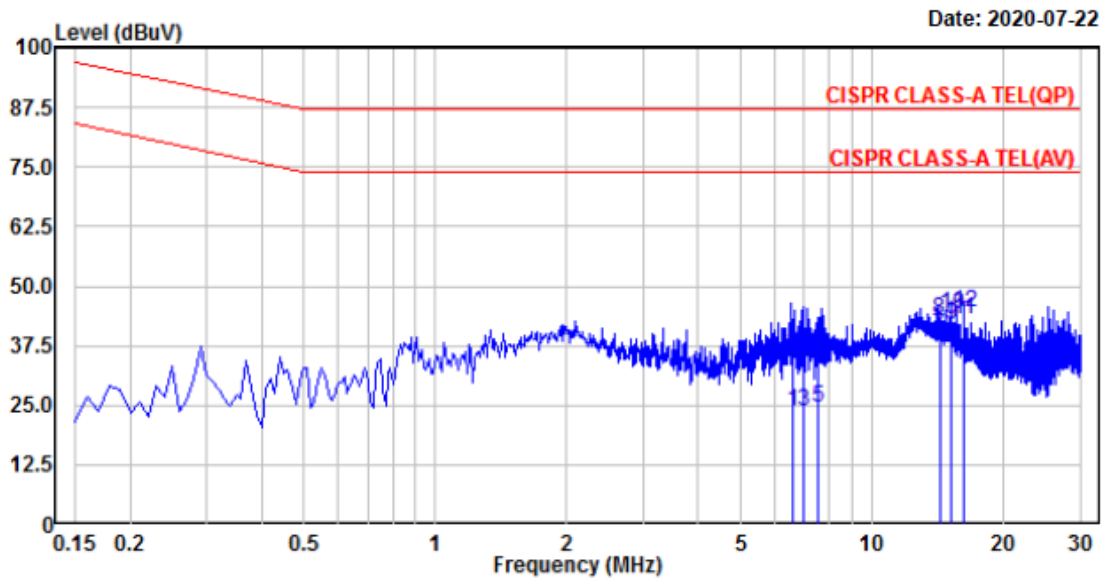

No.	Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB	Phase
2.	6.606	16.59	4.29	19.44	36.03	23.73	87.00	74.00	50.97	50.27	Line
4.	6.997	16.51	4.41	19.45	35.96	23.86	87.00	74.00	51.04	50.14	Line
6.	7.494	15.45	5.21	19.46	34.91	24.67	87.00	74.00	52.09	49.33	Line
8.	14.273	23.29	19.83	19.65	42.94	39.48	87.00	74.00	44.06	34.52	Line
10.	15.250	24.66	22.13	19.66	44.32	41.79	87.00	74.00	42.68	32.21	Line
12.	16.228	24.90	23.18	19.69	44.59	42.87	87.00	74.00	42.41	31.13	Line

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions (TEL_1000 M) / LAN #3



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. : XRP-4310DB4


Phase : TEL_1000M(LAN #3)

Test Mode : REC mode

Test Power : 230 V / 50 Hz

Temp./ Humi. : 23 'C / 51 % R.H.

Test Engineer : PARK J H

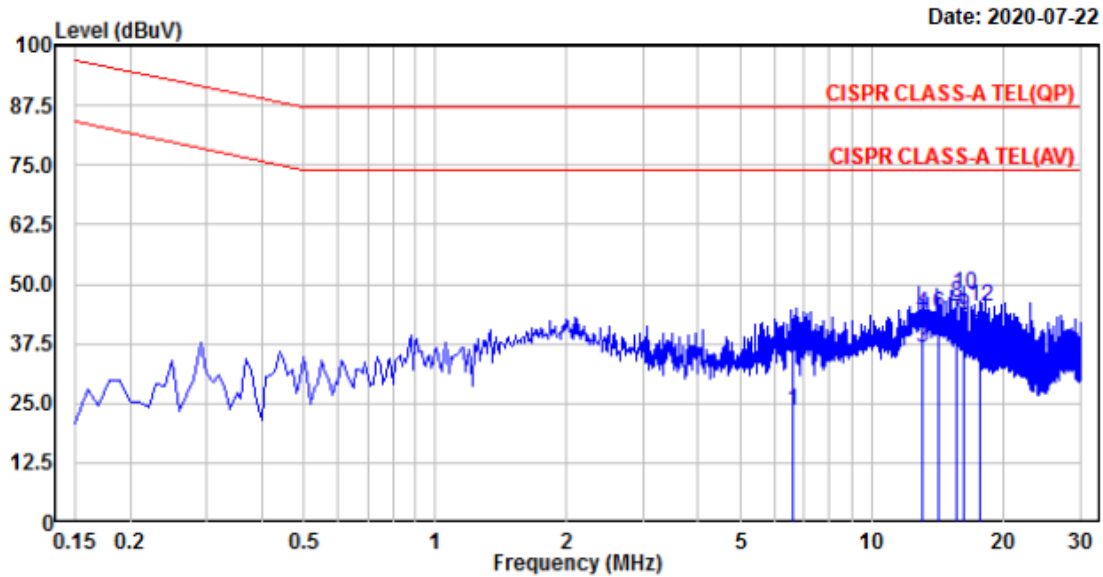

No.	Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB	Phase
2.	6.606	15.56	3.99	19.44	35.00	23.43	87.00	74.00	52.00	50.57	Line
4.	13.008	24.24	17.14	19.62	43.86	36.76	87.00	74.00	43.14	37.24	Line
6.	14.210	24.30	19.25	19.65	43.95	38.90	87.00	74.00	43.05	35.10	Line
8.	15.618	26.19	22.48	19.67	45.86	42.15	87.00	74.00	41.14	31.85	Line
10.	16.227	28.40	23.68	19.69	48.09	43.37	87.00	74.00	38.91	30.63	Line
12.	17.695	25.63	19.42	19.71	45.34	39.13	87.00	74.00	41.66	34.87	Line

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

3.2.2 Radiated Emissions

Definition:

The test assesses the ability of ancillary equipment to limit their internal noise from being radiated from the enclosure.

We were performed the test according to LTA procedure LTA-QI-04.

Test method	: EN 55032:2015/AC:2016-07
Measuring Distance	: 10 m below 1 GHz / 3 m above 1 GHz
Measurement Frequency range	: 30 MHz – 6 000 MHz
Measurement RBW	: 120 kHz @ 10 m / 1 MHz @ 3 m
Test mode	: REC mode
Result	: Complies

Measurement Data:

- Refer to the Next page (Maximum emission configuration)

- The highest internal source of an EUT is higher than 108 MHz, the measurement shall be made up to 6 GHz.

(The highest internal source of an EUT : 4 GHz)

A sample calculation:

COR. F (correction factor)= Antenna factor + Cable loss- Amp.gain- Distance correction

Emission Level= meter reading + COR.F

Limit of 10 m below 1 GHz

CLASS A

Frequency Range	Quasi-peak
(30 – 230) MHz	40 dB μ V/m
(230 – 1 000) MHz	47 dB μ V/m

CLASS B

Frequency Range	Quasi-peak
(30 – 230) MHz	30 dB μ V/m
(230 – 1 000) MHz	37 dB μ V/m

Limit of 3m above 1 GHz

CLASS A

Frequency Range	Average Limit @ 3m (dB μ V/m)	Peak limit @ 3m (dB μ V/m)
(1 000 – 3 000) MHz	56	76
(3 000 – 6 000) MHz	60	80

NOTE: The lower limit applies at the transition frequency.

CLASS B

Frequency Range	Average Limit @ 3m (dB μ V/m)	Peak limit @ 3m (dB μ V/m)
(1 000 – 3 000) MHz	50	70
(3 000 – 6 000) MHz	54	74

NOTE: The lower limit applies at the transition frequency.

Radiated Emissions (Below 1 GHz) / V



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: XRP-4310DB4


Temp/Humi: 23 'C / 55 % R.H.

Test Mode : REC mode

Tested by: PARK J H

Power : 230 V / 50 Hz

Date: 2020-07-21

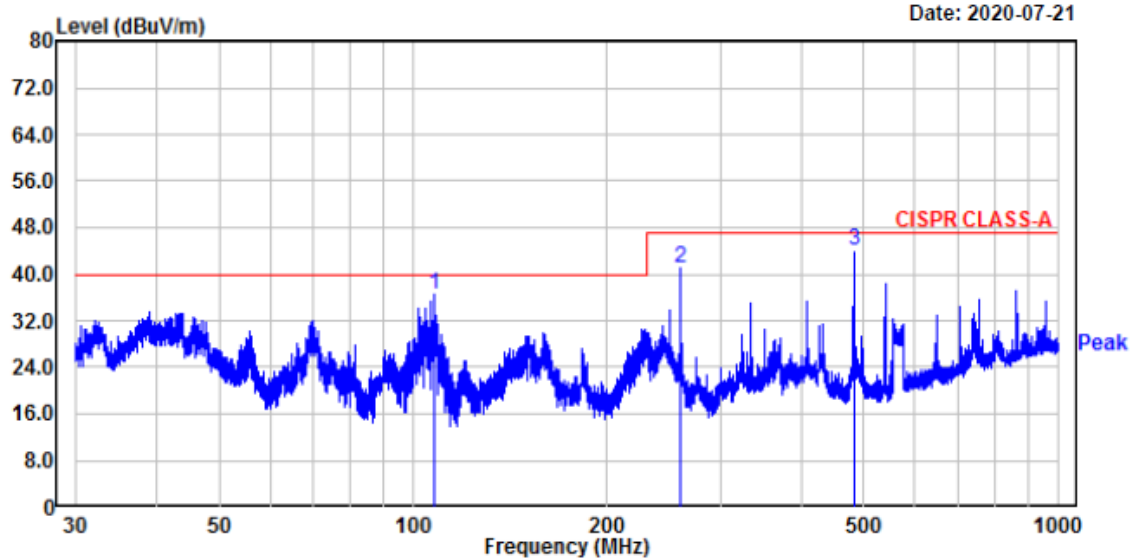

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	107.89	52.65	-16.05	36.60	40.00	3.40	101	267	vertical
2.	259.92	53.38	-12.34	41.04	47.00	5.96	104	23	vertical
3.	482.64	51.25	-7.14	44.11	47.00	2.89	114	232	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions (Below 1 GHz) / H



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: XRP-4310DB4

Temp/Humi: 23 'C / 55 % R.H.

Test Mode : REC mode

Tested by: PARK J H

Power : 230 V / 50 Hz

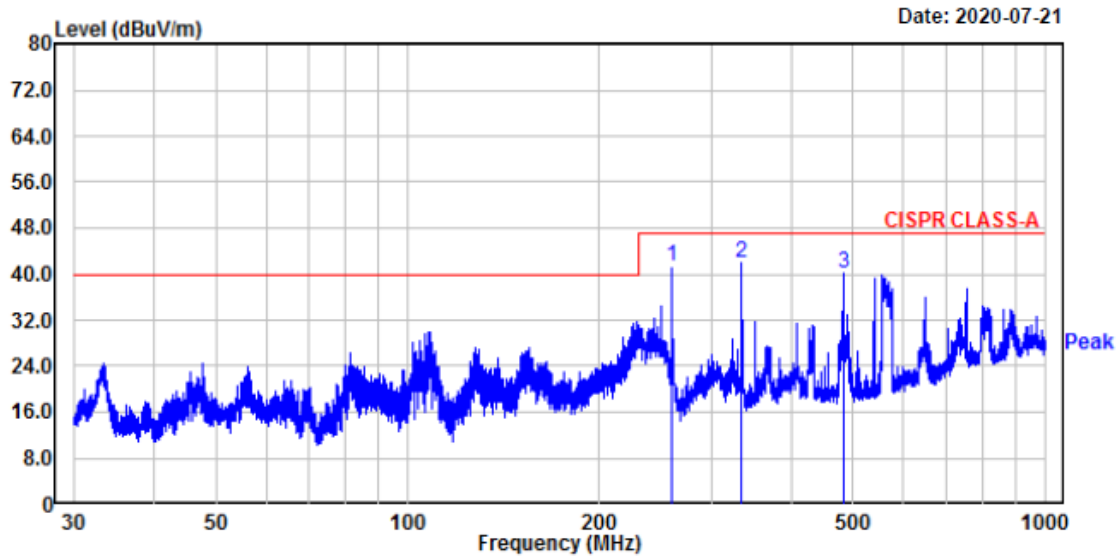

No.	Freq MHz	Reading dBuV	C.F dB	Result QP dBuV/m	Limit dBuV/m	Margin dB	Height cm	Angle deg	Polarity
1.	259.92	53.62	-12.34	41.28	47.00	5.72	385	313	horizontal
2.	334.13	51.69	-9.70	41.99	47.00	5.01	397	208	horizontal
3.	482.64	47.26	-7.14	40.12	47.00	6.88	378	246	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions

(Above 1 GHz) / V


EUT/Model No.: XRP-4310DB4

Temp/Humi: 21 °C / 54 % R.H.

Test Mode : REC mode

Tested by: PARK J H

Power : 230 V / 50 Hz

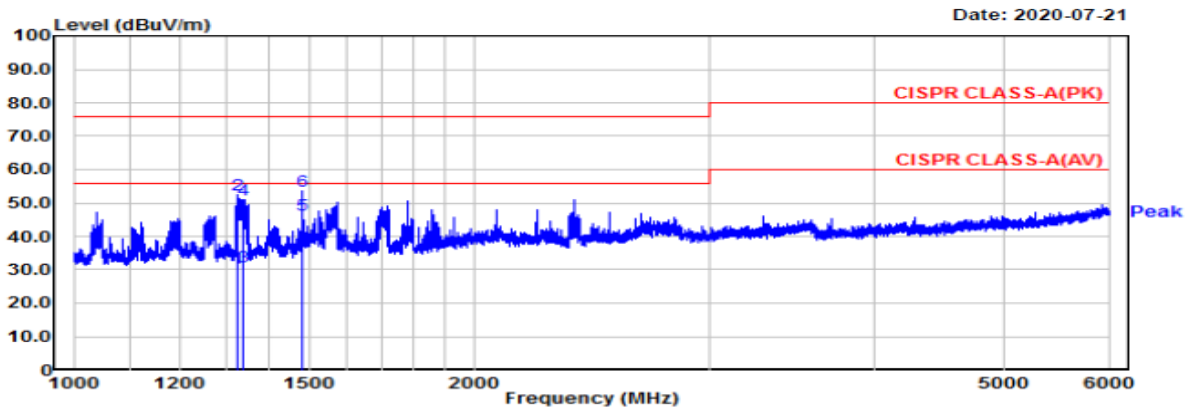

(Above 1 GHz) / H


EUT/Model No.: XRP-4310DB4

Temp/Humi: 21 °C / 54 % R.H.

Test Mode : REC mode

Tested by: PARK J H

Power : 230 V / 50 Hz

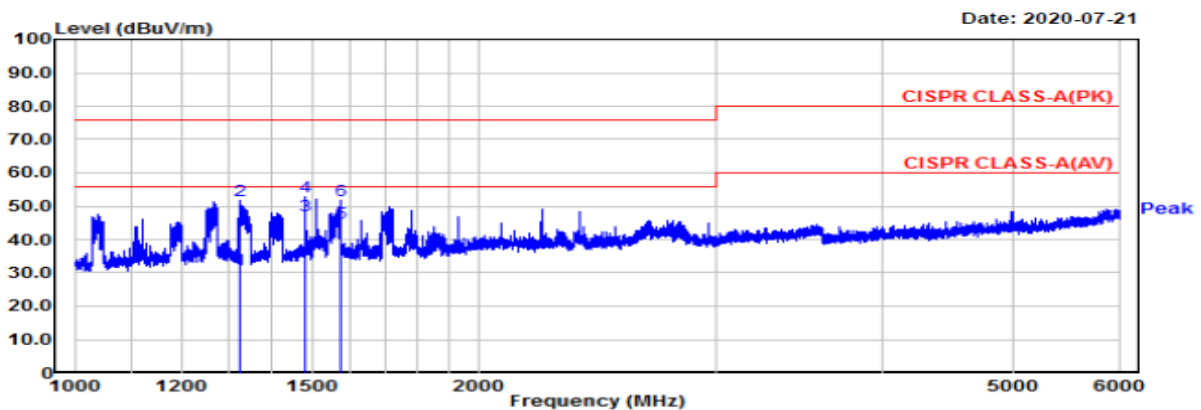

Manufacture : HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.

Test Date	Temp.: [°C]	Humidity: [%]	Distance (m)
2020-07-21	21.00	54.00	3.85

Model : XRP-4310DB4

TEST mode : REC mode

Frequency MHz	Reading(PK) dBuV	Reading(AV) dBuV	C.F dB	Result(PK) dBuV/m	Result(AV) dBuV/m	Limit(PK) dBuV/m	Limit(AV) dBuV/m	Margin(PK) dB	Margin(AV) dB	Height cm	Angle deg	Polarity H/V
1323.67	58.98	38.16	-5.10	53.88	33.06	76.00	56.00	22.12	22.94	100	40	H
1483.18	59.09	53.31	-4.05	55.04	49.26	76.00	56.00	20.96	6.74	100	116	H
1574.23	57.22	50.53	-3.52	53.70	47.01	76.00	56.00	22.30	8.99	100	18	H
1323.67	59.56	37.86	-5.10	54.46	32.76	76.00	56.00	21.54	23.24	100	96	V
1337.38	58.18	37.99	-4.93	53.25	33.06	76.00	56.00	22.75	22.94	100	61	V
1483.18	59.75	52.65	-4.05	55.70	48.60	76.00	56.00	20.30	7.40	100	242	V

3.2.3 Harmonic Current Emission

Definition:

This part deals with the Limitation of harmonic currents injected into the public supply system.

We were performed the test according to LTA procedure LTA-QI-04.

Test method	: EN 61000-3-2:2014
Test mode	: REC mode
Rated power	: 38.747 W (MODE : REC mode (AC #1)) 40.719 W (MODE : REC mode (AC #2))
Result	: Not Applicable

Measurement Data:

- We did not test EN61000-3-2 (Harmonic Current Emission) for the XRP-4310DB4 because equipment whose rated power is less or equal 75 W don't need to be tested.

Harmonic Current Emission / AC #1

22nd July 2020 - 12:40:46		Page 1/1	IECSoft v2_6
		BSEN61000-3-2:2014 Fluctuating Harmonics	
Instrument Details			
Instrument Model	PPA5511		
Serial Number	162-04957		
Firmware Version	2.179		
N4L Calibration Date	18th September 2017		
Instrument Version	Standard		
Test Settings			
Class	Class A		
Mode	Measured		
Equipment Under Test			
Brand	Hanwha Techwin Co., Ltd.		
Model	XRP-4310DB4		
Serial	N/A		
Impedance Network ID	N/A		
Test Conditions			
	User Entered	Measured	
Rated Voltage	N/A	230.833V	
Rated Current	N/A	296.333mA	
Rated Frequency	N/A	50.000Hz	
Rated Power	N/A	38.747W	
Additional Test Information			
Measured Power Factor	0.5665		
Max Current THD	23.54%		
Average THC	64.766mA		
Max Power	40.301W		
Max F.Current	285.472mA		
Average F.Current	279.385mA		
Minimum Current	100A		
Test Duration	2.5 minutes		
Additional Test Details			
Operator	N/A		
Lab Name	N/A		
Location	N/A		
Notes			
Signature			
Results	Test - N/A. Rated Power < 75W		

Test not applicable

With the exception of lighting equipment section 7 of the BSEN61000-3-2:2014 standard declares that no Harmonic current limits are specified for equipment with a rated power of 75W or less.

Harmonic Current Emission / AC #2

22nd July 2020 - 15:07:05		Page 1/1	IECSoft v2_6
		BSEN61000-3-2:2014 Fluctuating Harmonics	
Instrument Details			
Instrument Model	PPA5511		
Serial Number	162-04957		
Firmware Version	2.179		
N4L Calibration Date	18th September 2017		
Instrument Version	Standard		
Test Settings			
Class	Class A		
Mode	Measured		
Equipment Under Test			
Brand	Hanwha Techwin Co., Ltd.		
Model	XRP-4310DB4		
Serial	N/A		
Impedance Network ID	N/A		
Test Conditions			
	User Entered	Measured	
Rated Voltage	N/A	230.850V	
Rated Current	N/A	301.077mA	
Rated Frequency	N/A	50.000Hz	
Rated Power	N/A	40.719W	
Additional Test Information			
Measured Power Factor	0.5859		
Max Current THD	22.47%		
Average THC	64.095mA		
Max Power	41.321W		
Max F.Current	290.105mA		
Average F.Current	287.783mA		
Minimum Current	100A		
Test Duration	2.5 minutes		
Additional Test Details			
Operator	N/A		
Lab Name	N/A		
Location	N/A		
Notes			
Signature			
Results	Test - N/A. Rated Power < 75W		

Test not applicable

With the exception of lighting equipment section 7 of the BSEN61000-3-2:2014 standard declares that no Harmonic current limits are specified for equipment with a rated power of 75W or less.

3.2.4 Voltage Fluctuations and Flicker

Definition:

This section is concerned with the limitation of voltage fluctuations and flicker impressed on the public low-voltage system.

We were performed the test according to LTA procedure LTA-QI-04.

Test method : EN 61000-3-3:2013

Test mode : REC mode

Result : **Complies**

Measurement Data:

- Refer to the Next page

Voltage Fluctuations and Flicker / AC #1

22nd July 2020 - 12:50:21		Page 1/2	IECSoft v2_6
		IEC61000-3-3:2013 Ed.3.0 Flickermeter	
Instrument Details			
Instrument Model	PPA5511		
Serial Number	162-04957		
Firmware Version	2.179		
N4L Calibration Date	18th September 2017		
Instrument Version	Standard		
Test Settings			
Class	Voltage		
Mode	Normal (4.0%)		
Minimum Current	10A		
PST	10 minutes		
PLT	12 PSTs		
Equipment Under Test			
Brand	Hanwha Techwin Co., Ltd.		
Model	XRP-4310DB4		
Serial	N/A		
Impedance Network ID	N/A		
Test Conditions			
	User Entered	Measured	
Rated Voltage	N/A	230.889V	
Rated Current	N/A	N/A	
Rated Frequency	N/A	50.000Hz	
Rated Power	N/A	N/A	
D max	0.1482% (Limit: 4.0%)		
T max	0.0000 s (Limit: 0.5 s)		
DC max	0.0064% (Limit: 3.3%)		
Additional Test Details			
Operator	N/A		
Lab Name	N/A		
Location	N/A		
Notes			
Signature			
Results	Phase1: PASS		

22nd July 2020 - 12:50:21			Ph:1 Page 2/2			IECSoft v2_6		
IEC61000-3-3:2013 Ed.3.0 Flickermeter								
Instrument Details								
Instrument Model		PPA5511						
Instrument Serial		162-04957						
Instrument Firmware		2.179						
Equipment Under Test								
Brand		Hanwha Techwin Co., Ltd.						
Model		XRP-4310DB4						
Serial		N/A						
Flicker Test Results								
PST no.	Status	DC (%)	Dmax (%)	Tmax (s)	PST	PST Lim	PLT	PLT Lim
1	Phase1: PASS	0.00645	0.06052	0.00000	0.08226	1.00000	0.08226	N/A
2	Phase1: PASS	0.00645	0.06191	0.00000	0.08226	1.00000	0.08226	N/A
3	Phase1: PASS	0.00645	0.08488	0.00000	0.08226	1.00000	0.08226	N/A
4	Phase1: PASS	0.00645	0.08488	0.00000	0.08226	1.00000	0.08226	N/A
5	Phase1: PASS	0.00645	0.08488	0.00000	0.08226	1.00000	0.08226	N/A
6	Phase1: PASS	0.00645	0.08488	0.00000	0.08226	1.00000	0.08226	N/A
7	Phase1: PASS	0.00645	0.08488	0.00000	0.08226	1.00000	0.08226	N/A
8	Phase1: PASS	0.00645	0.08488	0.00000	0.08226	1.00000	0.08226	N/A
9	Phase1: PASS	0.00645	0.08488	0.00000	0.08226	1.00000	0.08226	N/A
10	Phase1: PASS	0.00645	0.08488	0.00000	0.08226	1.00000	0.08226	N/A
11	Phase1: PASS	0.00645	0.14825	0.00000	0.08226	1.00000	0.08226	N/A
12	Phase1: PASS	0.00645	0.14825	0.00000	0.08226	1.00000	0.08226	0.65000

Voltage Fluctuations and Flicker / AC #2

22nd July 2020 - 15:15:36		Page 1/2	IECSoft v2_6
		IEC61000-3-3:2013 Ed.3.0 Flickermeter	
Instrument Details			
Instrument Model	PPA5511		
Serial Number	162-04957		
Firmware Version	2.179		
N4L Calibration Date	18th September 2017		
Instrument Version	Standard		
Test Settings			
Class	Voltage		
Mode	Normal (4.0%)		
Minimum Current	10A		
PST	10 minutes		
PLT	12 PSTs		
Equipment Under Test			
Brand	Hanwha Techwin Co., Ltd.		
Model	XRP-4310DB4		
Serial	N/A		
Impedance Network ID	N/A		
Test Conditions			
	User Entered	Measured	
Rated Voltage	N/A	230.892V	
Rated Current	N/A	N/A	
Rated Frequency	N/A	50.000Hz	
Rated Power	N/A	N/A	
D max	0.5328% (Limit: 4.0%)		
T max	0.0000 s (Limit: 0.5 s)		
DC max	0.1273% (Limit: 3.3%)		
Additional Test Details			
Operator	N/A		
Lab Name	N/A		
Location	N/A		
Notes			
Signature			
Results	Phase1: PASS		

22nd July 2020 - 22:15:3622nd July 2020 Ph:1 Page 2/2					IECSoft v2_6			
IEC61000-3-3:2013 Ed.3.0 Flickermeter								
Instrument Details								
Instrument Model		PPA5511						
Instrument Serial		162-04957						
Instrument Firmware		2.179						
Equipment Under Test								
Brand		Hanwha Techwin Co., Ltd.						
Model		XRP-4310DB4						
Serial		N/A						
Flicker Test Results								
PST no.	Status	DC (%)	Dmax (%)	Tmax (s)	PST	PST Lim	PLT	PLT Lim
1	Phase1: PASS	0.01026	0.06089	0.00000	0.08226	1.00000	0.08226	N/A
2	Phase1: PASS	0.12730	0.53276	0.00000	0.08226	1.00000	0.08226	N/A
3	Phase1: PASS	0.12730	0.53276	0.00000	0.08226	1.00000	0.08226	N/A
4	Phase1: PASS	0.12730	0.53276	0.00000	0.08226	1.00000	0.08226	N/A
5	Phase1: PASS	0.12730	0.53276	0.00000	0.08226	1.00000	0.08226	N/A
6	Phase1: PASS	0.12730	0.53276	0.00000	0.08226	1.00000	0.08226	N/A
7	Phase1: PASS	0.12730	0.53276	0.00000	0.08226	1.00000	0.08226	N/A
8	Phase1: PASS	0.12730	0.53276	0.00000	0.08226	1.00000	0.08226	N/A
9	Phase1: PASS	0.12730	0.53276	0.00000	0.08226	1.00000	0.08226	N/A
10	Phase1: PASS	0.12730	0.53276	0.00000	0.08226	1.00000	0.08226	N/A
11	Phase1: PASS	0.12730	0.53276	0.00000	0.08226	1.00000	0.08226	N/A
12	Phase1: PASS	0.12730	0.53276	0.00000	0.08226	1.00000	0.08226	0.65000

3.3 IMMUNITY

3.3.1 Electrostatic Discharge

Definition:

The test assesses the ability of the EUT to operate as intended in the event of an electrostatic discharge.

We were performed the test according to LTA procedure LTA-QI-04.

Test date	: 2020. 07. 24.
Test method	: EN 61000-4-2 :2009
Temperature / Humidity / Pressure	: 24 °C / 49 % R.H. / 100.2 kPa
Discharge Impedance	: $(330 \pm 10 \%) \Omega$ / $(150 \pm 10 \%) \text{ pF}$
Type of Discharge (air discharge)	: $\pm 2 \text{ kV}$, $\pm 4 \text{ kV}$, $\pm 8 \text{ kV}$
Type of Discharge (contact discharge)	: $\pm 6 \text{ kV}$
Number of discharges at each point	: 10 of each polarity
Discharge Repetition on Rate	: 1 / sec
Test mode	: REC mode
Result	: Complies

Measurement Data:
1-1. Indirect Discharge

No.	Position	Kind of Discharge	Results	Remarks
1	HCP	Contact	Complies	No reaction recognized
2	VCP	Contact	Complies	No reaction recognized



1-2. Direct Discharge

No.	Position	Kind of Discharge	Result	Remarks
1	Enclosure #1	Contact	Complies	No reaction recognized
2	Enclosure #2	Air	Complies	No reaction recognized
3	Button	Air	Complies	No reaction recognized
4	LED	Air	Complies	No reaction recognized
5	USB 2.0	Contact	Complies	No reaction recognized
6	Key Hole	Contact	Complies	No reaction recognized
7	Screw	Contact	Complies	No reaction recognized
8	AC IN	Air	Complies	No reaction recognized
9	AUDIO OUT	Air	Complies	No reaction recognized
10	HDMI	Contact	Complies	No reaction recognized
11	USB 3.0 #1	Contact	Complies	No reaction recognized
12	USB 3.0 #2	Air	Complies	No reaction recognized
13	LAN	Contact	Complies	No reaction recognized

ESD TEST POINT

[Air discharge]


[Contact discharge]

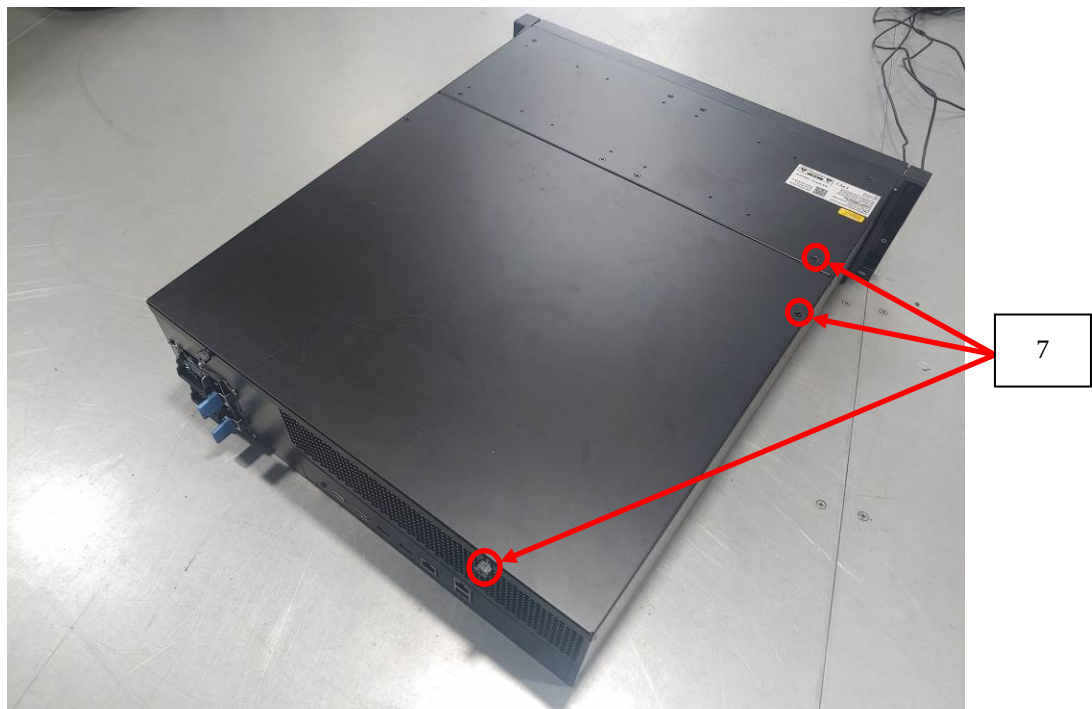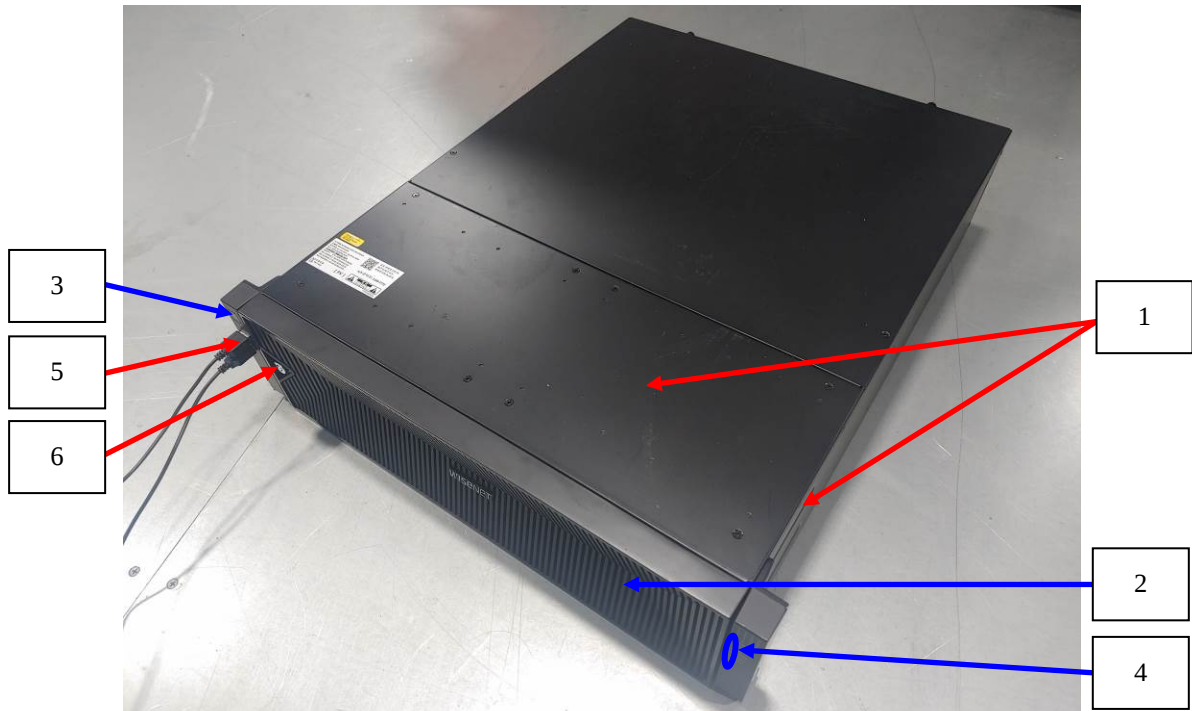

ESD TEST POINT

[Air discharge]

[Contact discharge]

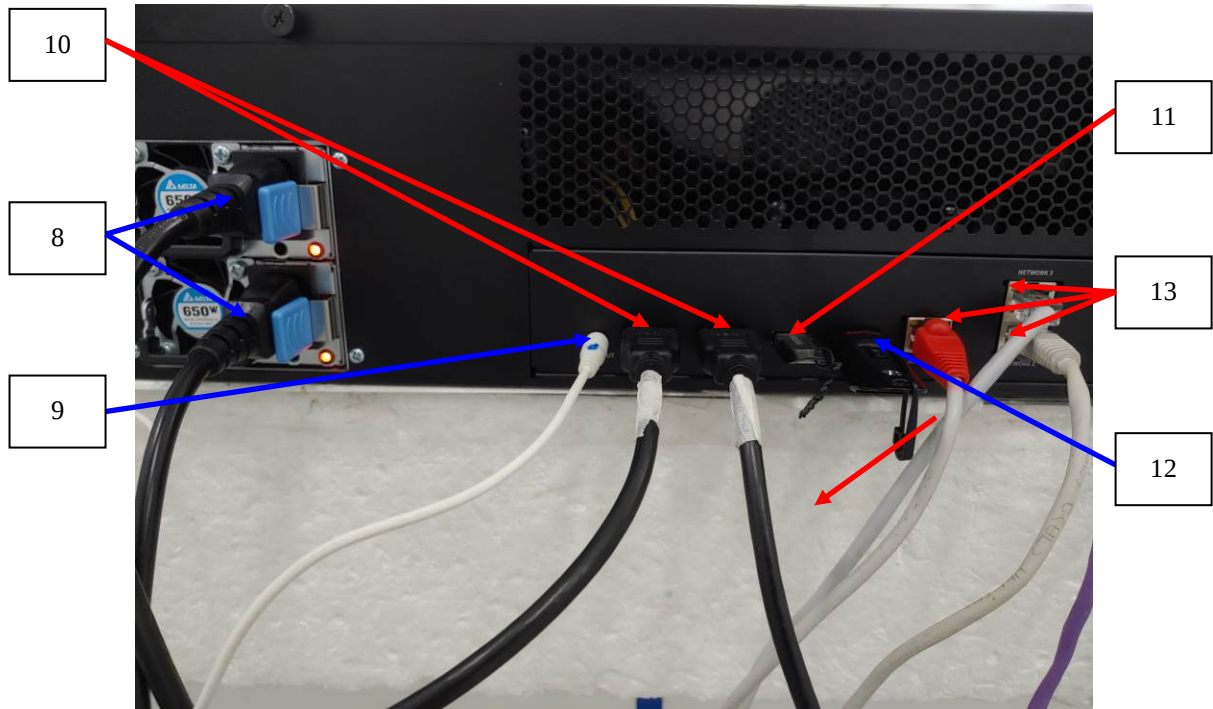

3.3.2 RF Electromagnetic Field

Definition:

The test assesses the ability of the EUT to operate as intended in the presence of a radio frequency electromagnetic field disturbance.

We were performed the test according to LTA procedure LTA-QI-04.

Test date	:	2020. 07. 27.
Test method	:	EN 61000-4-3:2006/A1:2008/A2:2010
Temperature / Humidity / Pressure	:	25 °C / 51 % R.H. / 100.3 kPa
Frequency range	:	80 MHz to 2,700 MHz
Test level	:	10 V/m (measured unmodulated)
Amplitude Modulation	:	AM, 80 %, 1 kHz Sinusoidal PM, 1 Hz (0.5s ON : 0.5s OFF)
Step size	:	1 % of fundamental
Dwell Time	:	3 s
Test mode	:	REC mode
Result	:	Complies

Measurement Data:

Port	Side	Result	Remarks
Horizontal	Front	Complies	No reaction recognized
	Left	Complies	No reaction recognized
	Rear	Complies	No reaction recognized
	Right	Complies	No reaction recognized
Vertical	Front	Complies	No reaction recognized
	Left	Complies	No reaction recognized
	Rear	Complies	No reaction recognized
	Right	Complies	No reaction recognized

3.3.3 Electrical Fast Transients

Definition:

The test assesses the ability of the EUT to operate as intended in the event of fast transients presence on one of the input/output ports.

We were performed the test according to LTA procedure LTA-QI-04.

Test date	:	2020. 07. 23.
Test method	:	EN 61000-4-4:2012
Temperature / Humidity / Pressure	:	24 °C / 48 % R.H. / 100.1 kPa
Cable length	:	> 3 m
Test level	:	2.0 kV (AC power input port) 1.0 kV (Signal port)
Polarity	:	Negative/ positive
Repetition frequency	:	100 kHz
Test mode	:	REC mode
Result	:	Complies

Measurement Data:

Power Line	Test level	Result	Remarks
L – N – PE	±2 kV	Complies	No reaction recognized

Signal Line	Test level	Result	Remarks
LAN #1	±1 kV	Complies	No reaction recognized
LAN #2	±1 kV	Complies	No reaction recognized
LAN #3	±1 kV	Complies	No reaction recognized

3.3.4 Surges

Definition:

The test assesses the ability of the EUT to operate as intended in the event of surge presence on the AC main power input ports.

We were performed the test according to LTA procedure LTA-QI-04.

Test date	:	2020. 07. 23.
Test method	:	EN 61000-4-5:2014/A1:2017
Temperature / Humidity / Pressure	:	25 °C / 48 % R.H. / 100.1 kPa
Test level	:	±0.5 kV, ±1 kV (line to line) ±0.5 kV, ±1 kV, ±2 kV (line to ground), ±0.5 kV, ±1 kV (signal line)
Polarity	:	Negative/ positive
Wave shape	:	1.2/ 50 µs pulse
Number of surges	:	5 (at each phase)
Test mode	:	REC mode
Result	:	Complies

Measurement Data:

Phase	Line	level	Result	Remark
0°	Line(L) to Line(N)	±(0.5, 1.0) kV	Complies	No reaction recognized
	Line(L) to ground(PE)	±(0.5, 1.0, 2.0) kV	Complies	No reaction recognized
	Line(N) to ground(PE)	±(0.5, 1.0, 2.0) kV	Complies	No reaction recognized
90°	Line(L) to Line(N)	±(0.5, 1.0) kV	Complies	No reaction recognized
	Line(L) to ground(PE)	±(0.5, 1.0, 2.0) kV	Complies	No reaction recognized
	Line(N) to ground(PE)	±(0.5, 1.0, 2.0) kV	Complies	No reaction recognized
180°	Line(L) to Line(N)	±(0.5, 1.0) kV	Complies	No reaction recognized
	Line(L) to ground(PE)	±(0.5, 1.0, 2.0) kV	Complies	No reaction recognized
	Line(N) to ground(PE)	±(0.5, 1.0, 2.0) kV	Complies	No reaction recognized
270°	Line(L) to Line(N)	±(0.5, 1.0) kV	Complies	No reaction recognized
	Line(L) to ground(PE)	±(0.5, 1.0, 2.0) kV	Complies	No reaction recognized
	Line(N) to ground(PE)	±(0.5, 1.0, 2.0) kV	Complies	No reaction recognized

Signal Line	level	Result	Remark
LAN #1	±0.5 kV	Complies	No reaction recognized
LAN #2	±0.5 kV	Complies	No reaction recognized
LAN #3	±0.5 kV	Complies	No reaction recognized

3.3.5 Conducted Disturbances, Induced by Radio-Frequency Fields

Definition:

The test assesses the ability of the EUT to operate as intended in the presence of a radio frequency electromagnetic disturbance on the input/output ports.

We were performed the test according to LTA procedure LTA-QI-04.

Test date	:	2020. 07. 24.
Test method	:	EN 61000-4-6:2014/AC:2015
Temperature / Humidity / Pressure	:	23 °C / 49 % R.H. / 100.2 kPa
Frequency range	:	0.15 MHz – 100 MHz
Test level	:	10 Vrms unmodulated
Amplitude Modulation	:	AM, 80 %, 1 kHz Sinusoidal PM, 1 Hz (0.5s ON : 0.5s OFF)
Step size	:	1 % of fundamental.
Test mode	:	REC mode
Result	:	Complies

Measurement Data:

Power Port	Result	Remarks
Power	Complies	No reaction recognized

Signal Port	Result	Remarks
LAN #1	Complies	No reaction recognized
LAN #2	Complies	No reaction recognized
LAN #3	Complies	No reaction recognized

3.3.6 Voltage dips and Interruptions

Definition:

The test assesses the ability of the EUT to operate as intended in the event of voltage dips and interruptions present on the AC mains power input ports.

We were performed the test according to LTA procedure LTA-QI-04.

Test date	:	2020. 07. 23.
Test method	:	EN 61000-4-11:2004/A1:2017
Temperature / Humidity / Pressure	:	25 °C / 49 % R.H. / 100.1 kPa
Ut	:	230 Vac
Test mode	:	REC mode
Result	:	Complies

Measurement Data:

Test Level %Ut	Voltage droop and interruptions %Ut	Duration of Reduction (period)	Result	Remarks
80	20	250	Complies	No reaction recognized
70	30	25	Complies	No reaction recognized
40	60	10	Complies	No reaction recognized
0	100	250	Complies	No reaction recognized

3.3.7 Mains supply voltage variations

Definition:

The test assesses the ability of the EUT to operate as intended in the event of voltage variations present on the AC mains power input ports.

We were performed the test according to LTA procedure LTA-QI-04.

Test date	:	2020. 07. 23.
Test method	:	EN 61000-4-11:2004/A1:2017
Temperature / Humidity / Pressure	:	25 °C / 49 % R.H. / 100.1 kPa
Supply Voltage maximum	:	$U_{nom} + 10 \%$
Supply Voltage minimum	:	$U_{nom} - 15 \%$
Ut	:	230 Vac
Test mode	:	REC mode
Result	:	Complies

Measurement Data:

U_{nom} = Nominal mains voltage. Where provision is made to adapt the equipment to suit a number of nominal supply voltages (e.g. by transformer tap changing), the above conditioning severity shall be applied for each nominal voltage, with the equipment suitably adapted. For equipment which is claimed to be suitable for a range of nominal mains voltages (e.g. 220/240 V) without adaptation, $U_{max} = (\text{Maximum } U_{nom}) + 10 \%$, and $U_{min} = (\text{Minimum } U_{nom}) - 15 \%$. In any case the range of U_{nom} must include the European nominal mains voltage of 230 V.

2 Mains supply voltage variations

Test LevelCondition		Test Level (V)	Result	Remarks
U_{nom}	+10%	253	Complies	No reaction recognized
U_{nom}	-15%	195.5	Complies	No reaction recognized

APPENDIX A

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment are identified by the Test Laboratory.

Conducted Emissions

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
☒	EMI TEST Receiver	ESR	Rohde & Schwarz	101499	2021.07.02	1 year
☒	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	100710	2021.03.16	1 year
☐	ISN	ISN T800	TESEQ	27109	2020.09.09	1 year
☒	ISN	ENY81-CA6	Rohde & Schwarz	101565	2020.09.09	1 year
☐	ISN	ISN S8	Schwarzbeck	79	2020.09.06	1 year
☐	CURRENT PROBE	EZ-17	Rohde & Schwarz	100508	2020.09.09	1 year
☐	CDN	TSCDN-C1-BNC-75	F.C.C	07004	2021.03.16	1 year
☐	LISN	ESH3-Z6	Rohde & Schwarz	100378	2020.09.05	1 year
☐	LISN	ESH3-Z6	Rohde & Schwarz	101468	2020.09.05	1 year
☒	LISN(main)	ENV216	Rohde & Schwarz	101222	2020.09.06	1 year
☒	LISN(sub)	LT32C/10	AFJ	32031518210	2020.09.05	1 year
☒	TEST PROGRAM	e3_ce 20181212a (V9)	AUDIX	-	-	-

Radiated Emissions – Below 1 GHz

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
☒	EMI TEST Receiver	ESU	Rohde & Schwarz	100092	2020.09.05	1 year
☒	Amplifier (25 dB)	8447D	HP	2944A07684	2021.03.16	1 year
☒	BILOG Antenna	VULB 9168	SCHWARZBECK	775	2021.03.26 (KOLAS)	2 year
☒	TEST PROGRAM	e3 20181212a (V9)	AUDIX	-	-	-

Radiated Emissions – Above 1 GHz

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
☒	EMI TEST Receiver	ESU	Rohde & Schwarz	100092	2020.09.05	1 year
☒	Amplifier	8449B	Agilent	3008A02126	2021.03.17	1 year
☐	Amplifier	PAM-840A	COM-POWER	461314	2021.03.16	1 year
☐	HORN ANTENNA	3116B	ETS	133350	2022.05.12	2 year
☐	HORN ANTENNA	3116B	ETS	81109	2022.05.12	2 year
☒	HORN ANTENNA	3115	ETS	114105	2021.09.17 (KOLAS)	2 year
☒	TEST PROGRAM	e3 20181212a (V9)	AUDIX	-	-	-

Harmonic Current Emission / Voltage Fluctuations and Flicker

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
☒	Precision Power Analyzer	PPA5511	Newtons4th Ltd	162-04957	2020.09.16	1 year
☒	Reference Impedance Network	ES4152	NF Corp.	9074424	2020.09.09	1 year

Electrostatic Discharge

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
☒	ESD Simulator	ESS-2000	NOISEKEN	8000C03241	2020.09.09	1 year
☒	ESD GUN	TC-815R	NOISEKEN	ESS0382069	2020.09.09	1 year

RF Electromagnetic Field

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
☒	Signal Generator	E4432B	Agilent	MY41310632	2021.03.16	1 year
☒	Power Meter	E4419B	Agilent	GB38410133	2021.03.16	1 year
☒	Power Sensor	E9300A	Agilent	MY41497992	2021.03.16	1 year
☒	Power Sensor	E9300A	Agilent	MY41497618	2021.03.16	1 year
☒	RF POWER AMPLIFIER	ITA0300KL-300	INFINITECH	0300KL 1507 001	-	-
☒	RF POWER AMPLIFIER	ITA2000KL-120	INFINITECH	200KL 1507 001	-	-
☒	RF POWER AMPLIFIER	ITA4500KL-70	INFINITECH	4500KL 1507 001	-	-
☒	RF POWER AMPLIFIER	ITA0750KL-300	INFINITECH	0750KL 1507 001	-	-
☒	Log.-Per.Antenna (80 MHz ~ 3 GHz)	K9128	RAPA	NONE	-	-
☐	Signal Generator	E4438C	Agilent	MY42080843	2020.09.06	1 year
☐	HORN ANTENNA	BBHA 9120 A	SCHWARZBECK	BBHA 9120 A 481	-	-
☐	Sound Acoustic Tester	TST-1000	TESTEK	150065-A	2020.09.09	1 year
☐	Microphone	MP201	BSWA	530147	2020.10.20	1 year

Electrical Fast Transients

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
☒	Compact Generator	Compact NX	EMTEST	P1725200196	2020.10.31	1 year
☒	AC Power Source	Variac NX	EMTEST	P1745207276	2020.10.31	1 year
☒	Capacitive Coupling Clamp	CCI	EMTEST	P1744207071	2020.10.31	1 year

Surges

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
☒	Compact Generator	Compact NX	EMTEST	P1725200196	2020.10.31	1 year
☒	AC Power Source	Variac NX	EMTEST	P1745207276	2020.10.31	1 year
☐	CDN	CNV 508T5	EMTEST	P1742204978	2020.10.31	1 year
☒	CDN	CNV 508N1	EMTEST	P1742204940	2020.10.31	

Conducted Disturbances, Induced by Radio-Frequency Fields

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
☒	Signal generator	SML03	R&S	103026/0013	2021.03.16	1 year
☒	POWER METER	NRVD	R&S	101689	2021.03.16	1 year
☒	POWER Sensor	URV5-Z2	R&S	100755	2021.03.16	1 year
☒	POWER Sensor	URV5-Z2	R&S	100756	2021.03.16	1 year
☒	RF Power Amplifier	FLL75A	FRANKONIA	1033	-	-
☒	EM INJECTION CLAMP	TSIC-23	F.C.C	529	2021.03.17	1 year
☐	CDN (M1)	TSCDN-M1-16A	F.C.C	07004	2020.09.06	1 year
☒	CDN (M2)	TSCDN-M2-16A	F.C.C	07008	2020.09.06	1 year
☐	CDN (M2)	TSCDN-M2-16A	F.C.C	07009	2021.03.16	1 year
☒	CDN (M3)	TSCDN-M3-16A	F.C.C	07016	2021.03.16	1 year
☒	CDN (M3)	TSCDN-M3-16A	F.C.C	07017	2020.09.06	1 year
☐	Sound Acoustic Tester	TST-1000	TESTEK	150065-A	2020.09.09	1 year
☐	Microphone	MP201	BSWA	530147	2020.10.20	1 year

Voltage dips and Interruptions

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
☒	Compact Generator	Compact NX	EMTEST	P1725200196	2020.10.31	1 year
☒	AC Power Source	Variac NX	EMTEST	P1745207276	2020.10.31	1 year

Mains supply voltage variations

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
☒	Compact Generator	Compact NX	EMTEST	P1725200196	2020.10.31	1 year
☒	AC Power Source	Variac NX	EMTEST	P1745207276	2020.10.31	1 year

APPENDIX B

PERFORMANCE CRITERIA

Performance criteria

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test (see Clause 6), after the conditioning.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to the EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of the bursts is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test (see Clause 6), after the conditioning.

Slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of the surges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test (see Clause 6), after the conditioning.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at $U_0 = 130 \text{ dB}\mu\text{V}$.

For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at $U_0 = 140 \text{ dB}\mu\text{V}$, providing

(a) there is no permanent damage or change to the EUT

(e.g. no corruption of memory or changes to programmable settings, etc.)

(b) at $U_0 = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used, and

(c) there is no observable deterioration of the picture at $U_0 = 120 \text{ dB}\mu\text{V}$.

The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

Voltage dip/interruption

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

It is permitted to use ancillary equipment (e.g. A UPS) to meet the requirements of this clause. This shall be detailed in the test report and the manufacturer's installation manual.

Signaling a mains fault during the 100 % voltage reduction test is permitted.


Mains supply voltage variations

There shall be no damage, malfunction or change of status due to the different supply voltage conditions. The EUT shall meet the acceptance criteria for the functional test(see Clause 6), during the conditioning.

APPENDIX C

PHOTOGRAPHS


Conducted Emissions

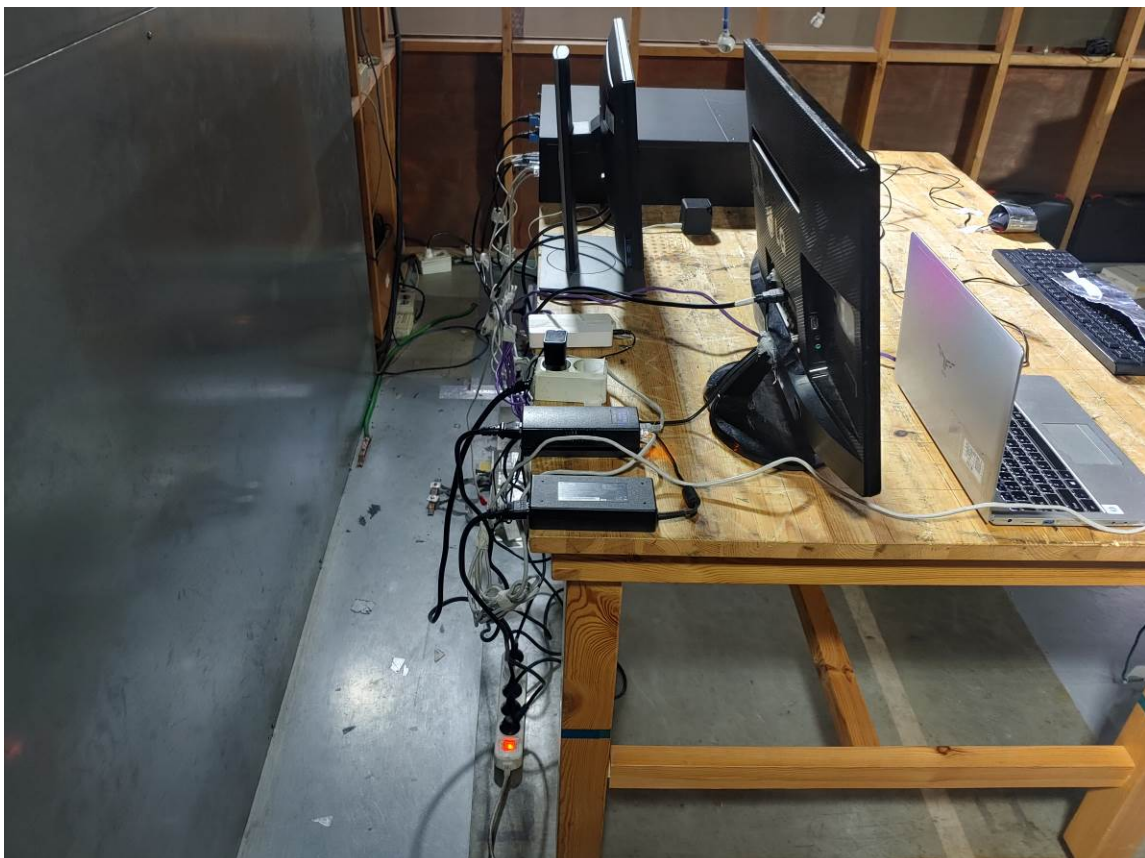


Conducted Emissions (TEL)



Radiated Emissions - Below 1 GHz

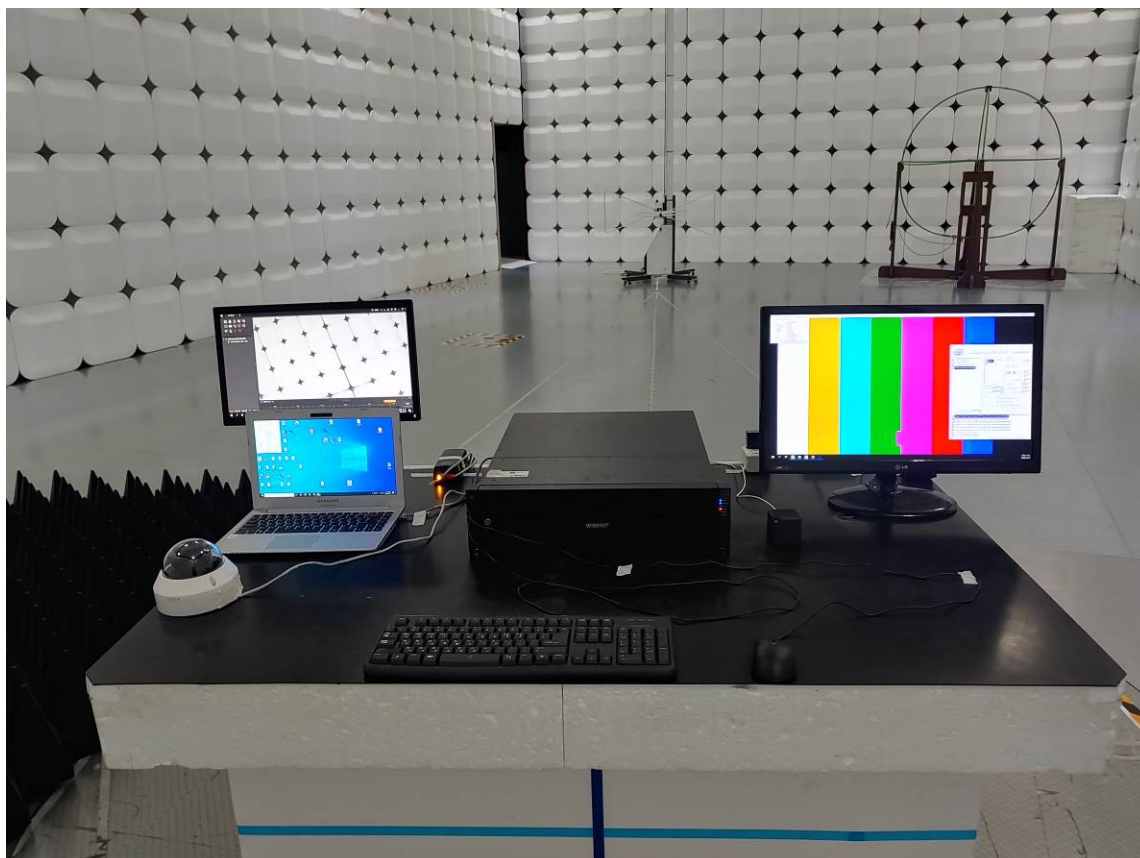

Radiated Emissions - Above 1GHz

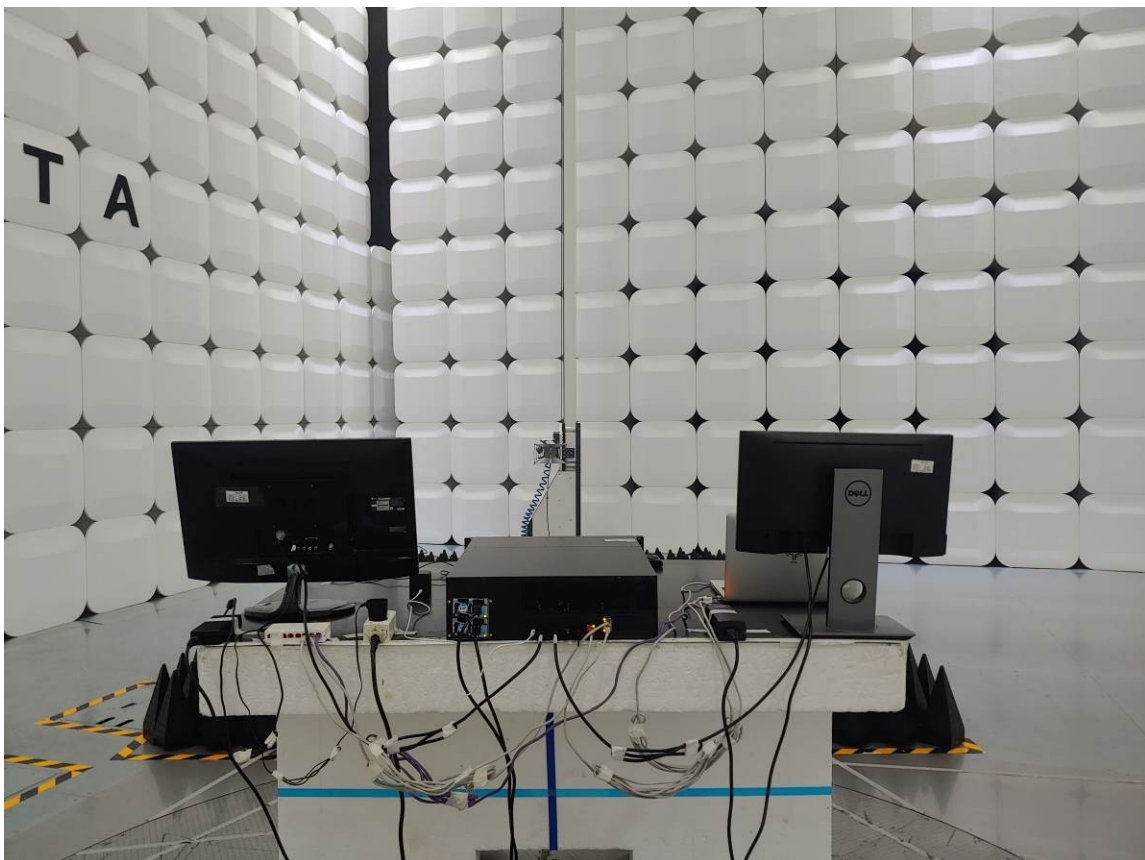


Harmonic Current Emission / Voltage Fluctuations and Flicker



Electrostatic Discharge



RF Electromagnetic Field

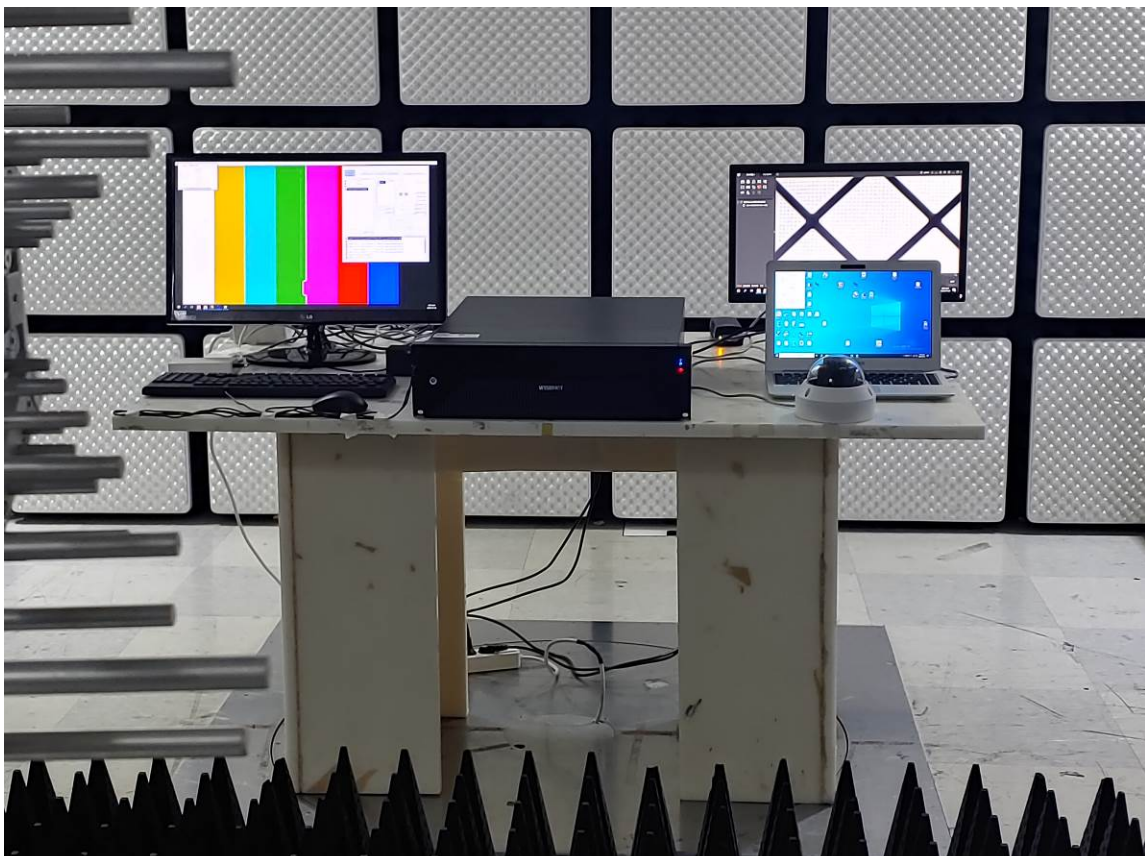

Electrical Fast Transients



Surges




Conducted Disturbances, Induced by Radio-Frequency Fields



Main supply voltage (dips, variations) short interruptions



EUT

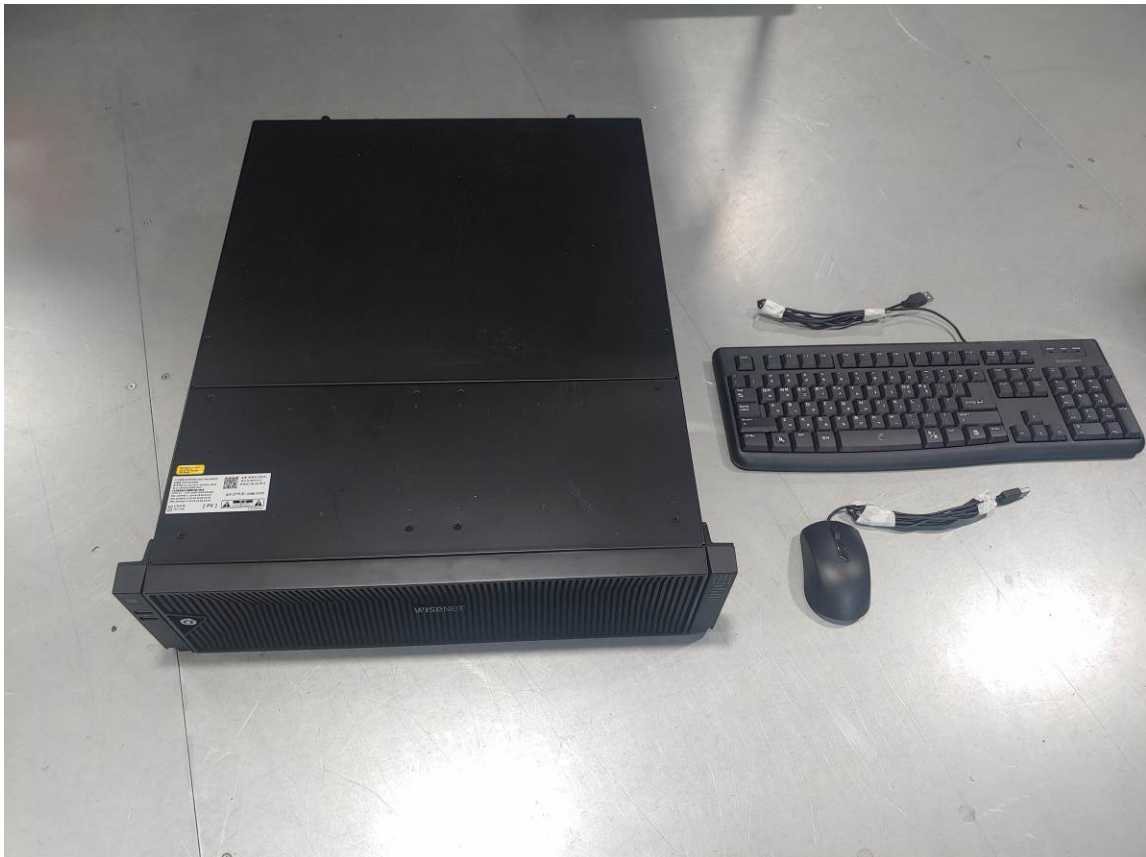

EUT

