

Analog Dome

HCD-7010RA

QHD (4MP) Analog IR Dome Camera

Key Features

- 0.26 Lux@F1.8 (Color),0 Lux (B/W : IR LED on)
- Built-in 2.8mm fixed lens
- Day & Night (ICR), DWDR, Motion detection
- IR Viewable Length 20m
- Transmission distance max.500m
- Easy installation (Plug & play)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCD-7010RA

QHD (4MP) Analog IR Dome Camera



Specifications

Video

Zobrazovací zařízení	Rozměry	1/3"
	Typ	CMOS
Rozlišení		2560 x 1440
Max. snímková frekvence (NTSC/PAL)		30 snímků za sekundu/25 snímků za sekundu
Min. osvětlení	Barva (1/30 s, 30 IRE)	0.26
	Č/B (1/30 s, 30 IRE)	0.026
Video výstup		CVBS: 1,0 Vp-p / 75 Ω kompozitní,720 x 480 (N),720 x 576 (P) pro instalaci, BNC: AHD
Vzdálenost přenosu videa		500m(5C2V Coaxial Cable)

Objektiv

Ohnisková vzdálenost (mm)		2.8
Max. poměr clony (číslo F)	Širokoúhlý	1.8
Úhel zorného pole	Horizontální	107.48°
	Vertikální	59.67°
	Diagonální	122.01°
Min. vzdálenost objektu		0.5m(1.64ft)

Otáčení / naklápění / rotace

Rozsah otáčení / naklápění / rotace	Otáčení	0°~350°
	Naklápění	0°~67°
	Rotace	0°~355°

Provozní parametry

Den a noc		Auto(ICR)
Kompenzace podsvícení		BLC, HPS, DWDR
Digitální redukce šumu		2DDNR
Detekce pohybu	Množství	4 ks
Maskování privátních zón	Množství	2 ks

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Provozní parametry

Řízení zesílení		Nízká, Prostřední, Vysoké, Velmi vysoko
Vyvážení bílé		ATW, AWC, Manuální, Vnitřní, Venkovní
Elektronická závěrka	Rozsah rychlostí	1/30 ~ 1/12 000 s (N), 1/25 ~ 1/12 000 s (P)
Otáčení videa		Překlápěcí, Zrcadlo
Délka viditelná v infračerveném spektru		20m(65.62ft)
Koaxiální protokol		ACP, CVBS

Analytika

Analytické události	Normální	Detekce pohybu

Parametry prostředí a elektrotechnické parametry

Provozní podmínky	Teplota	-10 °C ~ +55 °C (+14 °F ~ +131 °F)
	Vlhkost	0 ~ 95 % relativní vlhkost (nekondenzující)
Vstupní napětí		12 V DC
Spotřeba energie	12 V DC	Max 5W

Mechanické parametry

Barva	Slonová kost
Materiál	PC (polykarbonát)
Rozměry výrobku	Ø110.1x86.1mm(4.33x3.39”)
Hmotnost výrobku	240g(0.53lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCD-7010RA

QHD (4MP) Analog IR Dome Camera



CAD

Unit: mm [inch]

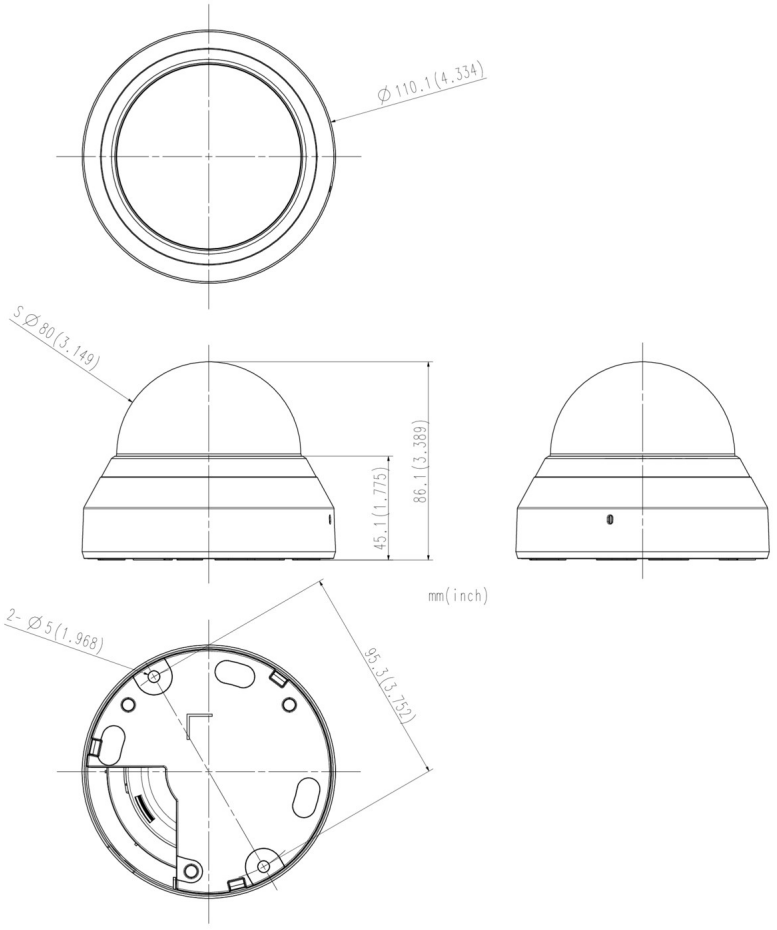

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SPB-IND12



SBP-300CM



SBP-300LM



SBP-120WM



SBP-300KM



SBP-300NB



SBP-300HM7



SBP-300B



SBP-300WM1



SBP-300WM



SBP-300PM

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.