

Analog Dome

HCD-7010RA

QHD (4MP) Analog IR Dome Camera

Key Features

- 0.26 Lux@F1.8 (Color),0 Lux (B/W : IR LED on)
- Built-in 2.8mm fixed lens
- Day & Night (ICR), DWDR, Motion detection
- IR Viewable Length 20m
- Transmission distance max.500m
- Easy installation (Plug & play)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCD-7010RA

QHD (4MP) Analog IR Dome Camera



Specifications

Video

Bildgebungsgerät	Größe	1-3“
	Typ	CMOS
Auflösung		2560x1440
Max. Framerate (NTSC/PAL)		30fps/25fps
Min. Beleuchtung	Farbe (1/30 Sekunde, 30 IRE)	0.26
	S/W (1/30 Sekunde, 30 IRE)	0.026
Video-Ausgang		CVBS: 1,0 Vp-p / 75 Ω Verbundwerkstoff,720x480 (N),720x576 (P) zur Montage, BNC: AHD
Videoübertragungsentfernung		500m(5C2V Coaxial Cable)

Linse

Brennweite (mm)		2.8
Max. Öffnungsverhältnis (F-Zahl)	Breit	1.8
Winkel-Sichtfeld	Horizontal	107.48°
	Vertikal	59.67°
	Diagonal	122.01°
Min. Objektabstand		0.5m(1.64ft)

Schwenken / Neigen / Drehen

Schwenk- / Neigungs- / Drehbereich	Schwenken	0°~350°
	Neigung	0°~67°
	Drehen	0°~355°

Operativ

Tag & Nacht		Auto (ICR)
Hintergrundbeleuchtungskompensation		BLC, HLC, DWDR
Digitale Rauschunterdrückung		2DDNR
Bewegungserkennung	Menge	4ea
Datenschutzmaskierung	Menge	2ea

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Operativ

Verstärkung		Niedrig, Mittel, Hoch, Sehr hoch
Weißabgleich		ATW, AWC, Manuell, Innenbereich, Außenbereich
Elektronischer Verschluss	Geschwindigkeitsbereich	1/30–1/12.000 Sekunde (N), 1/25–1/12.000 Sekunde (P)
Videodrehung		Umdrehen, Spiegeln
IR sichtbare Länge		20m(65.62ft)
Koaxialprotokoll		AKP, CVBS

Analysen

Analyseereignisse	Normal	Bewegungserkennung

Umwelt & Elektrik

Betriebsbedingung	Temperatur	-10 °C~+55 °C(+14 °F~+131 °F)
	Luftfeuchtigkeit	0–90 % relative Feuchte (nicht kondensierend)
Eingangsspannung		12VDC
Stromverbrauch	12VDC	Max 5W

Mechanisch

Farbe	Elfenbein
Material	PC (Polycarbonat)
Produktabmessungen	Ø110.1x86.1mm(4.33x3.39”)
Produktgewicht	240g(0.53lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCD-7010RA

QHD (4MP) Analog IR Dome Camera



CAD

Unit: mm [inch]

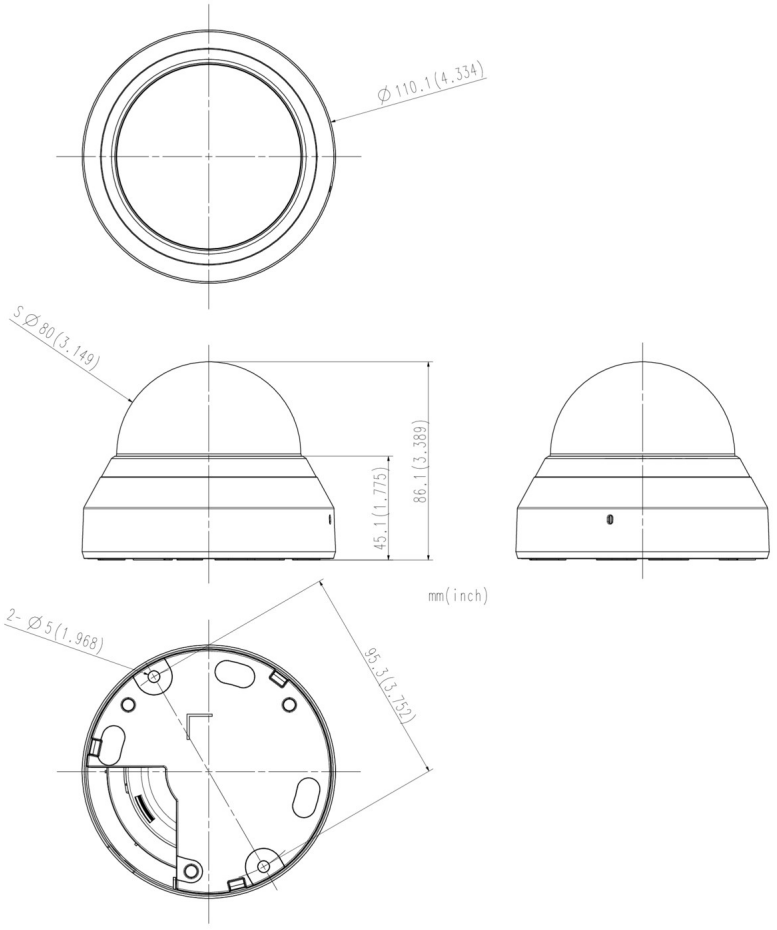

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SPB-IND12



SBP-300CM



SBP-300LM



SBP-120WM



SBP-300KM



SBP-300NB



SBP-300HM7



SBP-300B



SBP-300WM1



SBP-300WM



SBP-300PM

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.