

Analog Dome

HCD-7010RA

QHD (4MP) Analog IR Dome Camera

Key Features

- 0.26 Lux@F1.8 (Color),0 Lux (B/W : IR LED on)
- Built-in 2.8mm fixed lens
- Day & Night (ICR), DWDR, Motion detection
- IR Viewable Length 20m
- Transmission distance max.500m
- Easy installation (Plug & play)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCD-7010RA

QHD (4MP) Analog IR Dome Camera



Specifications

Vídeo

Dispositivo de imagen	Tamaño	1/3"
	Tipo	CMOS
Resolución		2560x1440
Máx. Frecuencia de imágen (NTSC/PAL)		30 ips / 25 ips
Mín. Iluminación	Color(1/30seg., 30IRE)	0.26
	B/N(1/30seg., 30IRE)	0.026
Salida de vídeo		CVBS: 1,0 Vpp / 75 Ω compuesto,720 x 480 (N),720 x 576 (P) para instalación, BNC: AHD
Distancia de transmisión de vídeo		500m(5C2V Coaxial Cable)

Objetivo

Longitud focal (mm)		2.8
Ratio de apertura máx. (número F)	Gran angular	1.8
Campo de visión angular	Horizontal	107.48°
	Vertical	59.67°
	Diagonal	122.01°
Mín. Distancia al objeto		0.5m(1.64ft)

Desplazamiento / inclinación / rotación

Rango de desplazamiento / inclinación / rotación	Desplazamiento horizontal	0°~350°
	Inclinación	0°~67°
	Rotación	0°~355°

Operativo

Día / Noche		Automático (ICR)
Compensación de luz de fondo		BLC, HLC, DWDR
Reducción Digital de Ruido		2DDNR
Detección de movimiento	Cantidad	4

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Operativo

Máscara de privacidad	Cantidad	2
Control de ganancia		Bajo, Media, Alto, Muy alto
Balance de blanco		ATW, AWC, Manual, Interior, Exterior
Obturador electrónico	Rango de velocidad	1/30~1/12 000 s (N), 1/25~1/12 000 s (P)
Rotación de vídeo		Volteo, Espejo
Longitud visible IR		20m(65.62ft)
Protocolo coaxial		ACP, CVBS

Analíticas

Eventos de analíticas	Normal	Detección de movimiento

Medioambiental y eléctrico

Condición de funcionamiento	Temperaturas	-10°C~+55°C(+14°F~+131°F)
	Humedad	0 ~ 90 % HR (sin condensación)
Voltaje de entrada		12 VCC
Consumo de corriente	12 VCC	Max 5W

Mecánico

Color	Marfil
Material	PC (Policarbonato)
Dimensiones del producto	Ø110.1x86.1mm(4.33x3.39”)
Peso del producto	240g(0.53lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCD-7010RA

QHD (4MP) Analog IR Dome Camera



CAD

Unit: mm [inch]

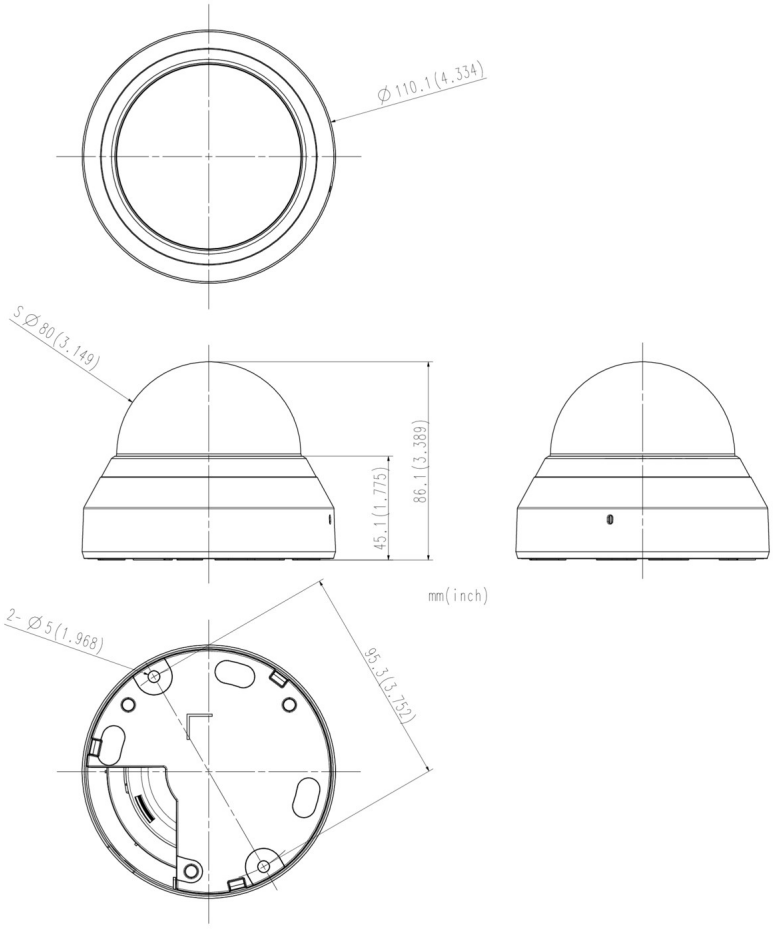

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SPB-IND12



SBP-300CM



SBP-300LM



SBP-120WM



SBP-300KM



SBP-300NB



SBP-300HM7



SBP-300B



SBP-300WM1



SBP-300WM



SBP-300PM

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.