

Analog Dome

HCD-7010RA

QHD (4MP) Analog IR Dome Camera

Key Features

- 0.26 Lux@F1.8 (Color),0 Lux (B/W : IR LED on)
- Built-in 2.8mm fixed lens
- Day & Night (ICR), DWDR, Motion detection
- IR Viewable Length 20m
- Transmission distance max.500m
- Easy installation (Plug & play)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCD-7010RA

QHD (4MP) Analog IR Dome Camera



Specifications

Vidéo

Capteur	Taille	1/3"
	Type	CMOS
Résolution		2560x1440
Max. Fréquence d'images (NTSC/PAL)		30 ips/25 ips
Éclairage min.	Couleur (1/30 s, 30 IRE)	0.26
	N&B (1/30 s, 30 IRE)	0.026
Sortie vidéo		CVBS : 1,0 Vp-p / 75 Ω composite,720x480 (N),720x576 (P) pour installation, BNC : AHD
Distance de transmission de la vidéo		500m(5C2V Coaxial Cable)

Objectif

Distance focale (mm)		2.8
Rapport d'ouverture maximal (nombre F)	Grand angle	1.8
Champ de vision angulaire	Horizontal	107.48°
	Vertical	59.67°
	Diagonale	122.01°
Éclairage des objets :		0.5m(1.64ft)

Panoramique / Inclinaison / Rotation

Plage d'orientation panoramique / inclinaison / rotation	Panoramique	0°~350°
	Inclinaison	0°~67°
	Rotation	0°~355°

Opérationnel

Jour / Nuit		Auto (ICR)
Compensation de contre-jour		BLC, HLC, DWDR
Réduction de bruit numérique		2 DDNR
Détection de mouvement	Quantité	4
Masquage de zones privatives	Quantité	2ea

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Opérationnel

Contrôle du gain		Faible, Moyen, Élevé, Très élevé
Balance des blancs		ATW, AWC, Manuel, Intérieur, Extérieur
Obturateur électronique	Plage de vitesse	1/30~1/12,000 sec(N), 1/25~1/12,000sec(P)
Rotation de la vidéo		Retournement, Miroir
Portée infrarouge		20m(65.62ft)
Protocole coaxial		ACP, CVBS

Analyse vidéo

Événements analytiques	Normal	Détection de mouvement

Environnement et électricité

Conditions de fonctionnement	Température	-10°C~+55°C(+14°F~+131°F)
	Humidité	0-90 % HR (sans condensation)
Tension d'entrée		12 V CC
Consommation électrique	12 V CC	Max 5W

Mécanique

Couleur	Ivoire
Matériau	PC (Polycarbonate)
Dimensions du produit	Ø110.1x86.1mm(4.33x3.39")
Poids du produit	240g(0.53lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCD-7010RA

QHD (4MP) Analog IR Dome Camera



CAD

Unit: mm [inch]

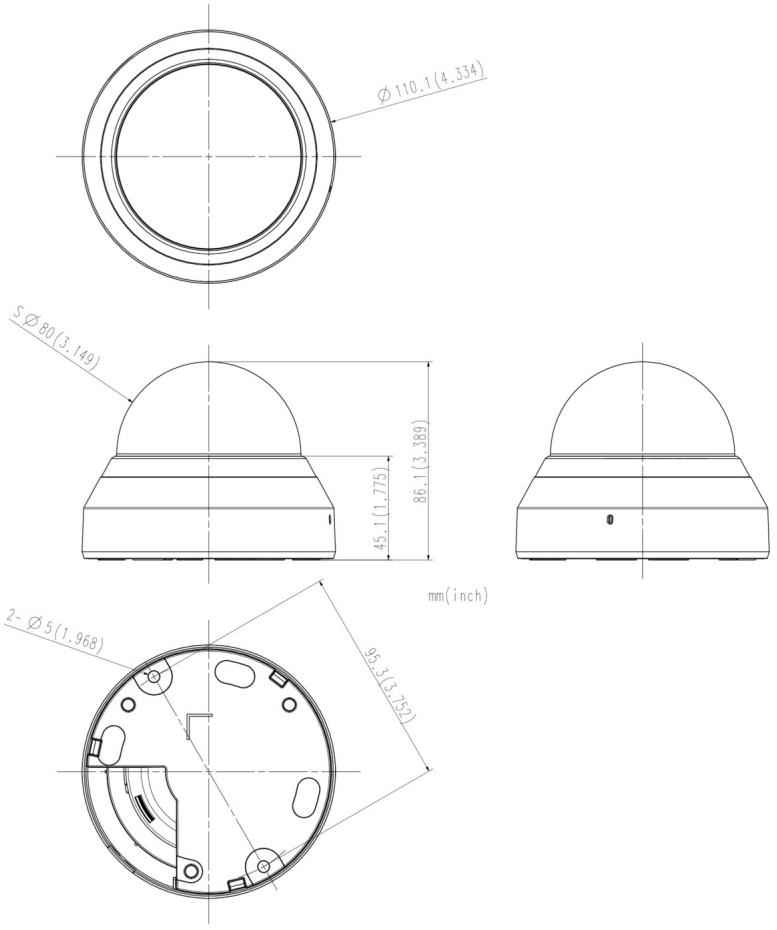

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SPB-IND12



SBP-300CM



SBP-300LM



SBP-120WM



SBP-300KM



SBP-300NB



SBP-300HM7



SBP-300B



SBP-300WM1



SBP-300WM



SBP-300PM

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.