

Analog Dome

HCD-7010RA

QHD (4MP) Analog IR Dome Camera

Key Features

- 0.26 Lux@F1.8 (Color),0 Lux (B/W : IR LED on)
- Built-in 2.8mm fixed lens
- Day & Night (ICR), DWDR, Motion detection
- IR Viewable Length 20m
- Transmission distance max.500m
- Easy installation (Plug & play)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCD-7010RA

QHD (4MP) Analog IR Dome Camera



Specifications

Video

Dispositivo di imaging	Dimensioni	1/3"
	Tipo	CMOS
Risoluzione		2560x1440
Max. Framerate (NTSC/PAL)		30fps/25fps
Min. Illuminazione	Colore (1/30 sec, 30IRE)	0.26
	B/N (1/30 sec, 30IRE)	0.026
Uscita video		CVBS: 1.0Vp-p / 75Ω composito,720x480 (N),720x576 (P) per installazione, BNC: AHD
Distanza di trasmissione video		500m(5C2V Coaxial Cable)

Ottica

Lunghezza focale (mm)		2.8
Rapporto di apertura massimo (numero F)	Grandangolo	1.8
Campo visivo angolare	Orizzontale	107.48°
	Verticale	59.67°
	Diagonale	122.01°
Min. Distanza oggetto		0.5m(1.64ft)

Panoramica / Inclina / Ruota

Intervallo panoramica / Inclina / Ruota	Panoramica	0°~350°
	Inclina	0°~67°
	Ruota	0°~355°

Efficienza

Giorno e notte		Auto (ICR)
Compensazione retroilluminazione		BLC, HLC, DWDR
Riduzione digitale del rumore		2DDNR
Rilevamento movimento	Quantità	4
Mascheramento della privacy	Quantità	2

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Efficienza

Controllo guadagno		Basso, Medio, Alto, Molto alto
Bilanciamento del bianco		ATW, AWC, Manuale, Interno, Esterno
Otturatore elettronico	Intervallo di velocità	1/30~1/12.000 sec (N), 1/25~1/12.000 sec (P)
Rotazione video		Capovolgi, Ribalta
Lunghezza visibile a infrarossi		20m(65.62ft)
Protocollo coassiale		ACP, CVBS

Analisi

Eventi analitici	Normale	Rilevamento movimento

Ambientale ed elettrico

Condizione operativa	Temperatura	-10 °C~+55 °C (+14°F~+131°F)
	Umidità	0~90% UR (senza condensa)
Tensione di ingresso		12 V CC
Consumo energetico	12 V DC	Max 5W

Meccanico

Colore	Avorio
Materiale	PC (Policarbonato)
Dimensioni del prodotto	Ø110.1x86.1mm(4.33x3.39”)
Peso del prodotto	240g(0.53lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCD-7010RA

QHD (4MP) Analog IR Dome Camera



CAD

Unit: mm [inch]

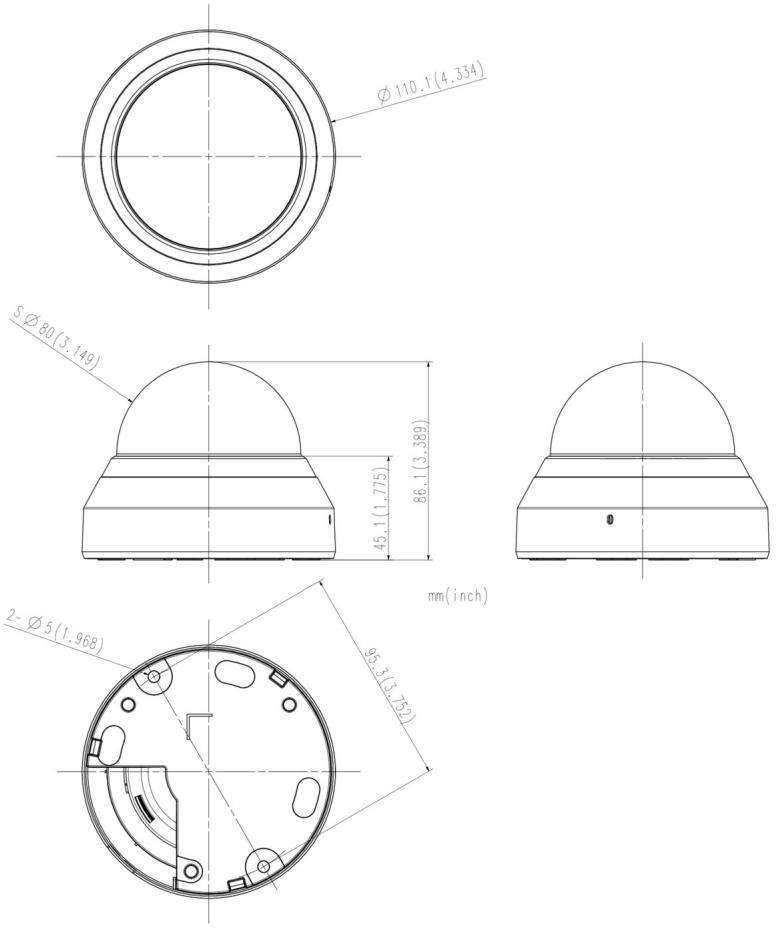

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SPB-IND12



SBP-300CM



SBP-300LM



SBP-120WM



SBP-300KM



SBP-300NB



SBP-300HM7



SBP-300B



SBP-300WM1



SBP-300WM



SBP-300PM

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.