

Analog Dome

HCD-7010RA

QHD (4MP) Analog IR Dome Camera

Key Features

- 0.26 Lux@F1.8 (Color),0 Lux (B/W : IR LED on)
- Built-in 2.8mm fixed lens
- Day & Night (ICR), DWDR, Motion detection
- IR Viewable Length 20m
- Transmission distance max.500m
- Easy installation (Plug & play)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCD-7010RA

QHD (4MP) Analog IR Dome Camera



Specifications

Wideo

Przetwornik obrazu	Rozmiar	1/3"
	Typ	CMOS
Rozdzielczość		2560x1440
Maks. liczba klatek na sekundę (NTSC/PAL)		30 kl./s /25 kkl./s
Min. oświetlenie	Kolor (1/30 s, 30 IRE)	0.26
	BW (1/30 s, 30 IRE)	0.026
Wyjście wideo		CVBS: 1,0 Vp-p / 75 Ω kompozyt,720 x 480 (N),720 x 576 (P) do instalacji, BNC: AHD
Odległość transmisji wideo		500m(5C2V Coaxial Cable)

Obiektyw

Ogniskowa (mm)		2.8
Maksymalny współczynnik apertury (wartość F)	Szeroki	1.8
Kąt widzenia	Poziomo	107.48°
	Pionowo	59.67°
	Po przekątnej	122.01°
Min. odległość od obiektu		0.5m(1.64ft)

Obracanie / pochylanie / obrót

Zakres obrotu/pochylenia/obrotu	Obrót	0°~350°
	Pochylenie	0°~67°
	Obrót	0°~355°

Operacyjne

Dzień i noc		Automatycznie (ICR)
Kompensacja odświetlenia tylnego		BLC, HLC, DWDR
Cyfrowa redukcja szumów		2DDNR
Wykrywanie ruchu	Ilość	4ea

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Operacyjne

Maskowanie prywatności	Ilość	2ea
Kontrola wzmocnienia		Niskie, Średnie, Wysokie, Bardzo wysokie
Balans bieli		ATW, AWC, Ręczny, W pomieszczeniach, Na zewnątrz
Elektroniczna migawka	Zakres prędkości	1/30~1/12 000 s (N), 1/25~1/12 000 s (P)
Obrót obrazu		Odwrócenie, Lustro
Długość widzialna w podczerwieni		20m(65.62ft)
Protokół współosiowy		ACP, CVBS

Analityka

Zdarzenia analityczne	Normalne	Wykrywanie ruchu

Parametry środowiskowe i elektryczne

Warunki pracy	Temperatura	-10°C~+55°C(+14°F~+131°F)
	Wilgotność	0~90% RH (bez kondensacji)
Napięcie wejściowe		12 V DC
Pobór mocy	12 V DC	Max 5W

Mechaniczny

Kolor	Kość słoniowa
Materiał	PC (poliwęglan)
Wymiary produktu	Ø110.1x86.1mm(4.33x3.39")
Waga produktu	240g(0.53lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCD-7010RA

QHD (4MP) Analog IR Dome Camera



CAD

Unit: mm [inch]

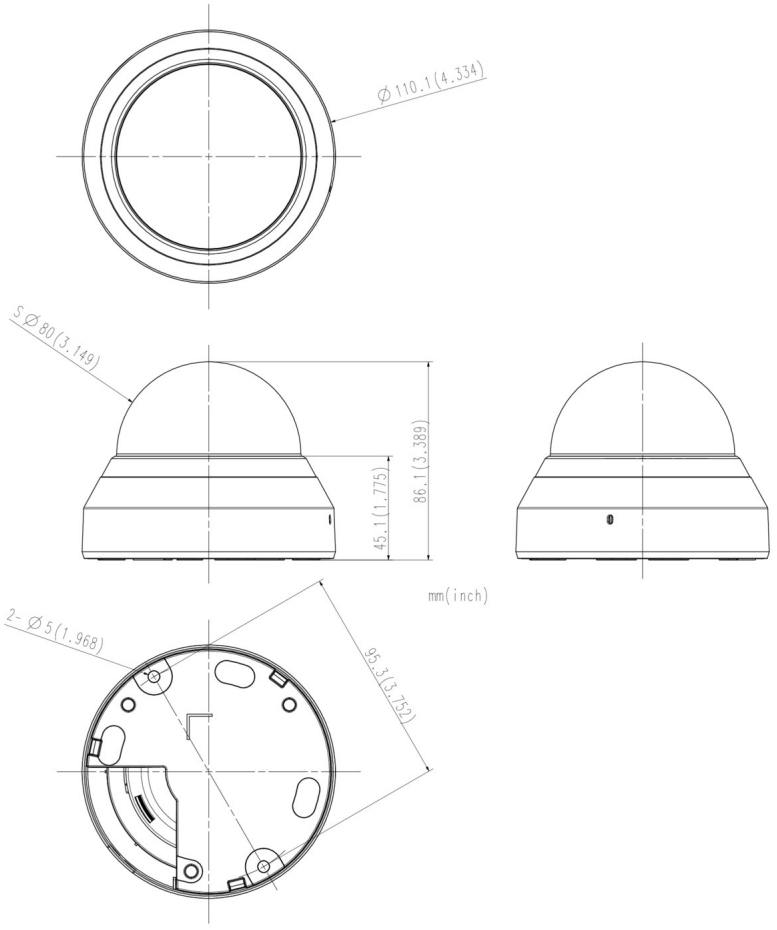

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SPB-IND12



SBP-300CM



SBP-300LM



SBP-120WM



SBP-300KM



SBP-300NB



SBP-300HM7



SBP-300B



SBP-300WM1



SBP-300WM



SBP-300PM

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.