

Analog Купольные

HCD-7010RA

QHD (4МП) аналоговая купольная камера с ИК-подсветкой

Key Features

- 0,26 лк при F1.8 (цветн.), 0 лк (Ч/Б : ИК светодиод вкл.)
- Встроенный объектив 2,8 мм с постоянным фокусом
- Дневной и ночной (с выдвижным ИК-фильтром) режимы, DWDR, обнаружение движения
- Дальность видимости с ИК подсветкой 20 м
- Дальность передачи макс. 500 м
- Простая установка (Plug & play)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCD-7010RA

QHD (4МП) аналоговая купольная камера с ИК-подсветкой



Specifications

Video

Imaging Device	Size	1/3"
	Type	CMOS
Resolution		2560x1440
Max. Framerate(NTSC/PAL)		30fps/25fps
Min. Illumination	Color(1/30sec, 30IRE)	0.26
	BW(1/30sec, 30IRE)	0.026
Video Out		CVBS: 1.0Vp-p / 75Ω composite,720x480(N),720x576(P) for installation, BNC: AHD
Video Transmission Distance		500m(5C2V Coaxial Cable)

Lens

Focal Length (mm)		2.8
Max Aperture Ratio (F number)	Wide	1.8
Angular Field of View	Horizontal	107.48°
	Vertical	59.67°
	Diagonal	122.01°
Min. Object Distance		0.5m(1.64ft)

Pan / Tilt / Rotate

Pan / Tilt / Rotate Range	Pan	0°~350°
	Tilt	0°~67°
	Rotate	0°~355°

Operational

Day & Night		Auto(ICR)
Backlight Compensation		BLC, HLC, DWDR
Digital Noise Reduction		2DDNR
Motion Detection	Quantity	4ea
Privacy Masking	Quantity	2ea
Gain Control		Low, Middle, High, Very High

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Operational

White Balance		ATW, AWC, Manual, Indoor, Outdoor
Electronic Shutter	Speed Range	1/30~1/12,000sec(N), 1/25~1/12,000sec(P)
Video Rotation		Flip, Mirror
IR Viewable Length		20m(65.62ft)
Coaxial Protocol		ACP, CVBS

Analytics

Analytics Events	Normal	Motion detection

Environmental & Electrical

Operating Condition	Temperature	-10°C~+55°C(+14°F~+131°F)
	Humidity	0~90% RH(non-condensing)
Input Voltage		12VDC
Power Consumption	12VDC	Max 5W

Mechanical

Color	Ivory
Material	PC(Polycarbonate)
Product Dimensions	Ø110.1x86.1mm(4.33x3.39”)
Product Weight	240g(0.53lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCD-7010RA

QHD (4МП) аналоговая купольная камера с ИК-подсветкой



CAD

Unit: mm [inch]

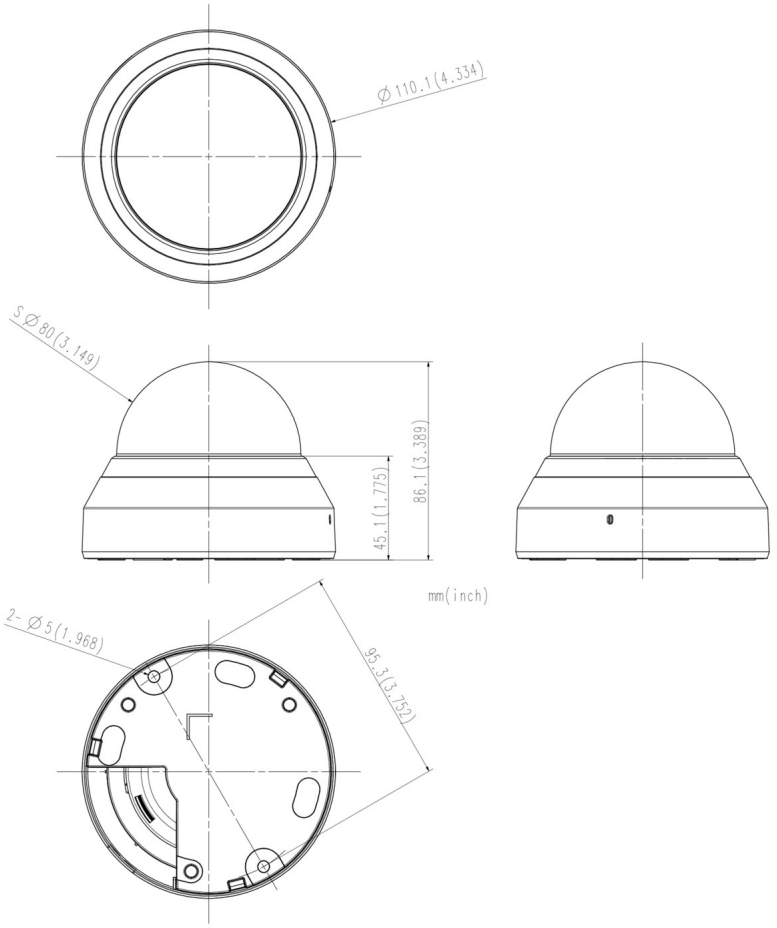

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SBP-300CM



SBP-120WM



SBP-300PM



SBP-300KM



SBP-300WM1



SPB-IND12



SBP-300LM



SBP-390WM2



SPG-IND12B



SBP-300WM



SBP-300B



SBP-300HM7

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.