

Analog Dome

HCD-7010RA

QHD (4MP) Analog IR Dome Camera

Key Features

- 0.26 Lux@F1.8 (Color),0 Lux (B/W : IR LED on)
- Built-in 2.8mm fixed lens
- Day & Night (ICR), DWDR, Motion detection
- IR Viewable Length 20m
- Transmission distance max.500m
- Easy installation (Plug & play)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCD-7010RA

QHD (4MP) Analog IR Dome Camera



Specifications

Video

Görüntüleme Aygıtı	Boyut	1/3"
	Tür	CMOS
Çözünürlük		2560x1440
En Fazla Kare hızı (NTSC/PAL)		30fps/25fps
Min. Aydınlatma	Renk(1/30sn, 30IRE)	0.26
	SB(1/30sn, 30IRE)	0.026
Video Çıkışı		CVBS: kurulum için 1.0Vp-p / 75Ω kompozit,720x480(N),720x576(P), BNC: AHD
Video İletim Mesafesi		500m(5C2V Coaxial Cable)

Lens

Odak Uzunluğu (mm)		2.8
Maks. Diyafram Açıklığı Oranı (F numarası)	Geniş	1.8
Açısal Görüş Alanı	Yatay	107.48°
	Dikey	59.67°
	Diyagonal	122.01°
Min. Nesne Mesafesi		0.5m(1.64ft)

Pan / Tilt / Döndürme

Pan / Tilt / Döndürme Aralığı	Pan	0°~350°
	Tilt	0°~67°
	Döndürme	0°~355°

İşletimsel

Gündüz ve Gece		Otom. (ICR)
Arka Işık Dengeleme		BLC, HLC, DWDR
Dijital Gürültü Azaltma		2DDNR
Hareket Algılama	Miktar	4
Gizlilik Maskesi	Miktar	2

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

İşletimsel

Kazanç Kontrolü		Düşük, Orta, Yüksek, Çok Yüksek
Beyaz Dengesi		ATW, AWC, Manuel, İç Mekan, Dış Mekan
Elektronik Obtüratör	Hız Aralığı	1/30~1/12.000sn(N), 1/25~1/12.000sn(P)
Video Döndürme		Çevirme, Ayna
IR Görüntülenebilir Uzunluk		20m(65.62ft)
Koaksiyel Protokolü		ACP, CVBS

Analiz Araçları

Analiz Araçları Olayları	Normal	Hareket algılama

Çevresel ve Elektriksel

Çalışma Koşulu	Sıcaklık	-10°C~+55°C(+14°F~+131°F)
	Nemlilik	%0~90% BN(yoğuşmayan)
Giriş Voltajı		12VDC
Güç Tüketimi	12VDC	Max 5W

Mekanik

Renk	Fildişi
Malzeme	PC(Polikarbonat)
Ürün Boyutları	Ø110.1x86.1mm(4.33x3.39”)
Ürün Ağırlığı	240g(0.53lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCD-7010RA

QHD (4MP) Analog IR Dome Camera



CAD

Unit: mm [inch]

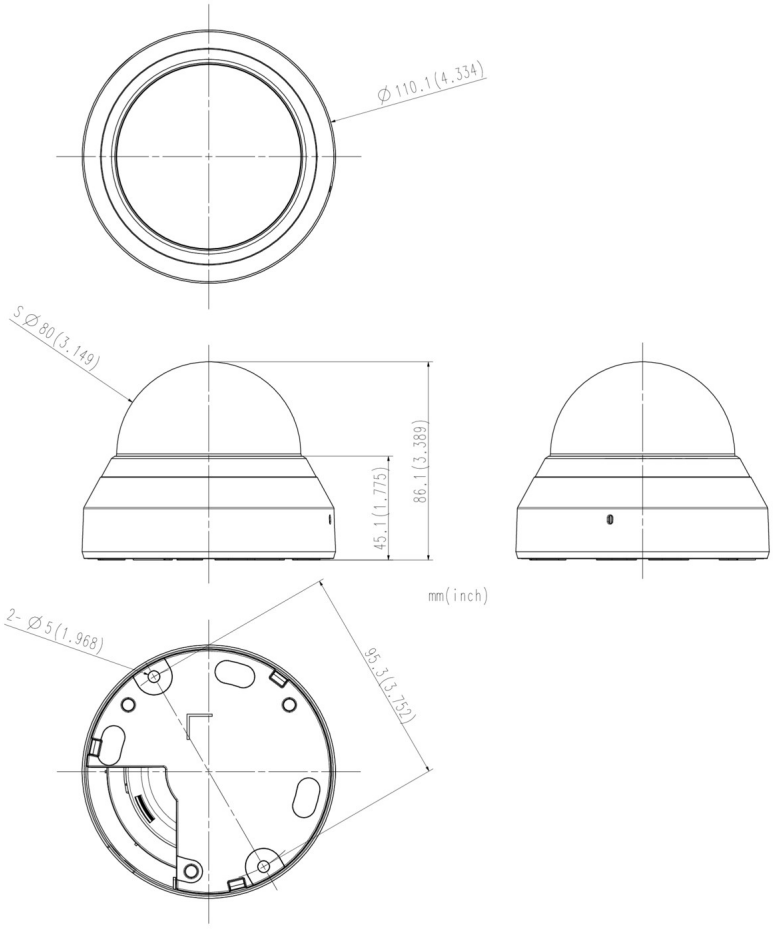

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SPB-IND12



SBP-300CM



SBP-300LM



SBP-120WM



SBP-300KM



SBP-300NB



SBP-300HM7



SBP-300B



SBP-300WM1



SBP-300WM



SBP-300PM

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.