

Analog Цилиндрические

HCO-7020RA

QHD (4МП) аналоговая цилиндрическая камера с ИК-подсветкой

Key Features

- Разрешение QHD (2560 x 1440, 30 кад/с)
- 0,27 лк при F2.0 (цветн.), 0 лк (Ч/Б : ИК светодиод вкл.)
- Встроенный объектив 4,0 мм с постоянным фокусом
- Дневной и ночной (с выдвижным ИК-фильтром) режимы, DWDR, обнаружение движения
- Дальность видимости с ИК подсветкой 25 м
- Дальность передачи макс. 500 м
- Простая установка (Plug & play), двойное питание, IP66, IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCO-7020RA

QHD (4МП) аналоговая цилиндрическая камера с ИК-подсветкой



Specifications

Video

Imaging Device	Size	1/3"
	Type	CMOS
Resolution		2560x1440
Max. Framerate(NTSC/PAL)		30fps/25fps
Min. Illumination	Color(1/30sec, 30IRE)	0.27
	BW(1/30sec, 30IRE)	0.027
Video Out		CVBS: 1.0Vp-p / 75Ω composite,720x480(N),720x576(P) for installation, BNC: AHD
Video Transmission Distance		500m(5C2V Coaxial Cable)

Lens

Focal Length (mm)		4.0
Max Aperture Ratio (F number)	Wide	2.0
Angular Field of View	Horizontal	78°
	Vertical	41°
	Diagonal	88°
Min. Object Distance		0.5m(1.64ft)

Operational

Day & Night		Auto(ICR)
Backlight Compensation		BLC, HLC, DWDR
Digital Noise Reduction		2DDNR
Motion Detection	Quantity	4ea
Privacy Masking	Quantity	2ea
Gain Control		Low, Middle, High, Very High
White Balance		ATW, AWC, Manual, Indoor, Outdoor
Electronic Shutter	Speed Range	1/30~1/12,000sec(N), 1/25~1/12,000sec(P)
Video Rotation		Flip, Mirror
IR Viewable Length		25m(82.02ft)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Operational

Coaxial Protocol		ACP, CVBS

Analytics

Analytics Events	Normal	Motion detection

Environmental & Electrical

Operating Condition	Temperature	-30°C~+55°C(-22°F~+131°F)
	Humidity	0~90% RH(non-condensing)
	Others	Start up should be done at above -10°C
Input Voltage		12VDC
Power Consumption	12VDC	Max 5W

Mechanical

Color	Dark grey
Material	Aluminum
Product Dimensions	Ø70.0x246.0mm(Ø2.76x9.69")
Product Weight	670g(1.48lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCO-7020RA

QHD (4МП) аналоговая цилиндрическая камера с ИК-подсветкой



CAD

Unit: mm [inch]

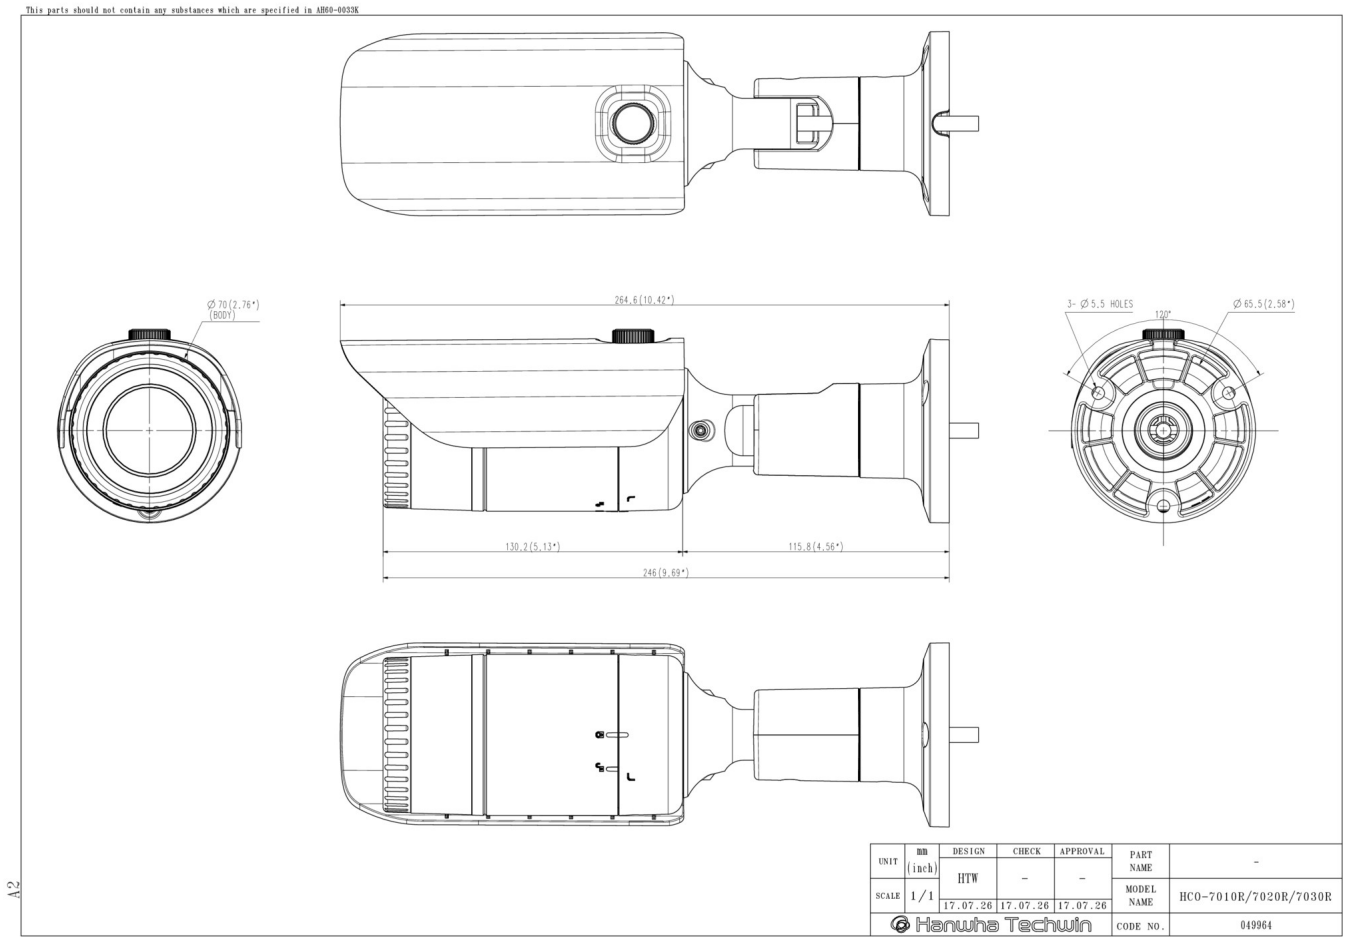

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SBP-302PM



SBO-100B1

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.