

Analog Dome

HCV-7020RA

QHD (4MP) Analog Vandal-Resistant IR Dome Camera

Key Features

- QHD (2560 x 1440, 30fps) resolution
- 0.27 Lux@F2.0 (Colour) (HCV-7020R/7030R),0 Lux (B/W : IR LED on)
- Built-in 4.0mm fixed lens (HCV-7020R)
- Day & Night (ICR), DWDR, Motion detection
- IR Viewable Length 25m(7020R)
- Transmission distance max.500m
- Easy installation (Plug & play), IP66, IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCV-7020RA

QHD (4MP) Analog Vandal-Resistant IR Dome Camera



Specifications

Video

Zobrazovací zařízení	Rozměry	1/3"
	Typ	CMOS
Rozlišení		2560x1440
Max. snímková frekvence (NTSC/PAL)		30fps/25fps
Min. osvětlení	Barva (1/30 s, 30 IRE)	0.27
	Č/B (1/30 s, 30 IRE)	0.027
Video výstup		CVBS: 1.0Vp-p / 75Ω composite,720x480(N),720x576(P) for installation, BNC: AHD
Vzdálenost přenosu videa		500m(5C2V Coaxial Cable)

Objektiv

Ohnisková vzdálenost (mm)		4.0
Max. poměr clony (číslo F)	Širokoúhlý	2.0
Úhel zorného pole	Horizontální	78.22°
	Vertikální	41.21°
	Diagonální	87.91°
Min. vzdálenost objektu		0.5m(1.64ft)

Otáčení / naklápění / rotace

Rozsah otáčení / naklápění / rotace	Otáčení	0°~350°
	Naklápění	0°~67°
	Rotace	0°~355°

Provozní parametry

Den a noc		Auto(ICR)
Kompenzace podsvícení		BLC, HLC, DWDR
Digitální redukce šumu		2DDNR
Detekce pohybu	Množství	4ea
Maskování privátních zón	Množství	2ea

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Provozní parametry

Řízení zesílení		Low, Middle, High, Very High
Vyvážení bílé		ATW, AWC, Manual, Indoor, Outdoor
Elektronická závěrka	Rozsah rychlostí	1/30~1/12,000sec(N), 1/25~1/12,000sec(P)
Otáčení videa		Flip, Mirror
Délka viditelná v infračerveném spektru		25m(82.02ft)
Koaxiální protokol		ACP, CVBS

Parametry prostředí a elektrotechnické parametry

Provozní podmínky	Teplota	-30°C~+55°C(-22°F~+131°F)
	Vlhkost	0~90% RH(non-condensing)
	Jiné	Start up should be done at above -10°C
Vstupní napětí		12VDC
Spotřeba energie	12 V DC	Max 5W

Mechanické parametry

Barva	Ivory
Materiál	Aluminum
Rozměry výrobku	Ø120.3 x 91.7mm(Ø4.74"x3.61")
Hmotnost výrobku	510g(1.12 lb)

Certifikace a normy

Prostředí	IEC 60529 IP66, IEC 62262 IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCV-7020RA

QHD (4MP) Analog Vandal-Resistant
IR Dome Camera



CAD

Unit: mm [inch]

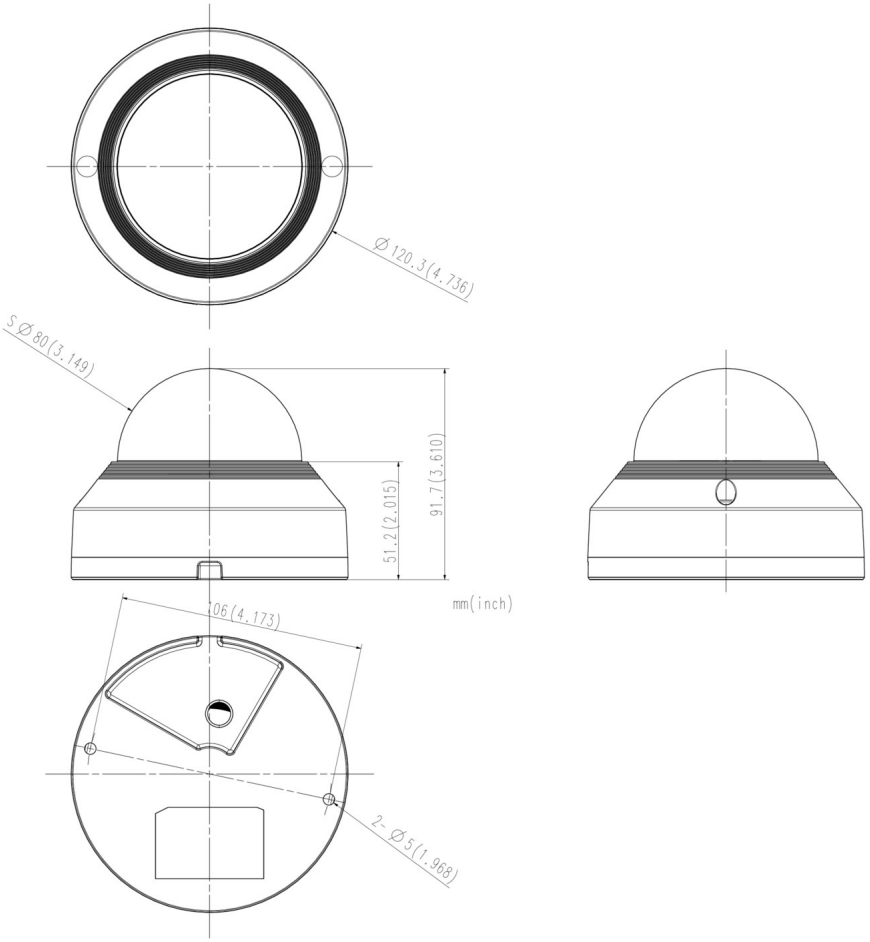

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SBP-300WM



SBP-300WM1



SBP-300KM



SBP-300NB



SBP-300CM



SBP-300LM



SBP-300PM



SBP-300B

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.