



# EMC TEST REPORT For CE

Test Report No. : KES-E1-17T0599-R1

Date of Issue : May. 15, 2019

Product name : CCTV CAMERA

Model/Type No. : HCV-7030R

Variant Model : HCV-7020RP, HCV-7010RP, HCV-7030RP  
HCV-7010R, HCV-7020R

Applicant : Hanwha Techwin Co., Ltd.

Applicant Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, 13488, KOREA

Manufacturer : 1. HANWHA TECHWIN(TIANJIN) CO., LTD  
2. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.  
3. D-TECH CO.,LTD.

Manufacturer Address : 1. No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,  
300385, People's Republic of China  
2. Lot O-2, Que Vo Industrial Zone extended area,  
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam  
3. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do,  
Korea (Suwon Industrial Complex)

Date of Receipt : Aug. 29, 2017

Test date : Sep. 08, 2017

Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dae Hyun, Kim  
EMC Test Engineer

Reviewed by

Dong-Hun, Jang  
EMC Technical Manager

This test report is not related to KOLAS.



## REPORT REVISION HISTORY

| Date          | Test Report No.   | Revision History                                                                                             |
|---------------|-------------------|--------------------------------------------------------------------------------------------------------------|
| Sep. 08, 2017 | KES-E1-17T0599    | Issued                                                                                                       |
| May. 15, 2019 | KES-E1-17T0599-R1 | Changed model name, customer's address, factory addition and variant model addition due to customer request. |
|               |                   |                                                                                                              |
|               |                   |                                                                                                              |
|               |                   |                                                                                                              |
|               |                   |                                                                                                              |
|               |                   |                                                                                                              |
|               |                   |                                                                                                              |
|               |                   |                                                                                                              |
|               |                   |                                                                                                              |

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***



## TABLE OF CONTENTS

|            |                                                                       |    |
|------------|-----------------------------------------------------------------------|----|
| 1.0        | General Product Description .....                                     | 4  |
| 1.1        | Test Voltage & Frequency .....                                        | 6  |
| 1.2        | Variant Model Differences.....                                        | 6  |
| 1.3        | Device Modifications .....                                            | 6  |
| 1.4        | Equipment Under Test.....                                             | 6  |
| 1.5        | Support Equipments .....                                              | 6  |
| 1.6        | External I/O Cabling .....                                            | 6  |
| 1.7        | EUT Operating Mode(s).....                                            | 7  |
| 1.8        | Configuration.....                                                    | 7  |
| 1.9        | Remarks when standards applied .....                                  | 8  |
| 1.10       | Calibration Details of Equipment Used for Measurement.....            | 8  |
| 1.11       | Test Facility .....                                                   | 8  |
| 1.12       | Laboratory Accreditations and Listings .....                          | 8  |
| 2.0        | Test Regulations.....                                                 | 9  |
| 2.1        | Conducted Emissions at Mains Power Ports.....                         | 11 |
| 2.2        | Conducted Emissions at Telecommunication Ports .....                  | 12 |
| 2.3        | Radiated Electric Field Emissions(Below 1 GHz) .....                  | 13 |
| 2.4        | Radiated Electric Field Emissions(Above 1 GHz).....                   | 14 |
| 2.5        | Harmonic Current Emissions.....                                       | 15 |
| 2.6        | Voltage Fluctuations and Flicker .....                                | 16 |
| 3.0        | Criteria for compliance.....                                          | 17 |
| 3.1        | Electrostatic Discharge.....                                          | 19 |
| 3.2        | Radiated Electric Field Immunity .....                                | 23 |
| 3.3        | Electrical Fast Transients/Bursts .....                               | 26 |
| 3.4        | Surge Transients .....                                                | 28 |
| 3.5        | Conducted Disturbance .....                                           | 31 |
| 3.6        | Voltage Dips and Short Interruptions .....                            | 34 |
| APPENDIX A | – TEST DATA.....                                                      | 36 |
|            | Conducted Emissions at Mains Power Ports.....                         | 36 |
|            | Conducted Emissions at Telecommunication Ports .....                  | 38 |
|            | Radiated Electric Field Emissions(Below 1 GHz) .....                  | 40 |
|            | Radiated Electric Field Emissions(Above 1 GHz).....                   | 41 |
|            | Harmonic Current Emissions and Voltage Fluctuations and Flicker ..... | 45 |
|            | Test Setup Photos and Configuration .....                             | 48 |
|            | Conducted Voltage Emissions .....                                     | 48 |
|            | Conducted Telecommunication Emissions .....                           | 49 |
|            | Radiated Electric Field Emissions(Below 1 GHz) .....                  | 50 |
|            | Radiated Electric Field Emissions(Above 1 GHz).....                   | 51 |
|            | Harmonic Current Emissions and Voltage Fluctuations and Flicker ..... | 52 |
|            | Electrostatic Discharge .....                                         | 53 |
|            | Radiated Electric Field Immunity .....                                | 53 |
|            | Electrical Fast Transients/Bursts .....                               | 54 |
|            | Surge Transients.....                                                 | 55 |
|            | Conducted Disturbance.....                                            | 56 |
|            | Voltage Dips and Short Interruptions.....                             | 57 |
|            | EUT External Photographs .....                                        | 58 |
|            | EUT Internal Photographs .....                                        | 59 |



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (4) of (64)

## 1.0 General Product Description

### Main Specifications of E.U.T are:

| Video                            |                                                                                                                                                      |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Imaging Device                   | 1/3" 4M CMOS                                                                                                                                         |
| Total Pixels                     | 2720(H) x 1536(V)                                                                                                                                    |
| Effective Pixels                 | 2688(H) x 1520(V)                                                                                                                                    |
| Scanning System                  | Progressive Scan                                                                                                                                     |
| Min. Illumination                | Color : 0.15Lux (F1.4)<br>B/W : 0Lux(IR LED on)                                                                                                      |
| S / N Ratio                      | 52dB (AGC off, Weight on)                                                                                                                            |
| Video Output                     | BNC(AHD / CVBS<br>Selectable)<br>additional CVBS for                                                                                                 |
| Resolution                       | 2560x1440                                                                                                                                            |
| Max. Framerate                   | 30fps @ 4M                                                                                                                                           |
| Lens Type                        |                                                                                                                                                      |
| Focal Length (Zoom Ratio)        | 8mm fixed                                                                                                                                            |
| Max. Aperture Ratio              | F2.0                                                                                                                                                 |
| Angular Field of View            | H : 49.01° / V : 27.61° / D : 55.6°                                                                                                                  |
| Min. Object Distance             | 0.5m (1.64ft)                                                                                                                                        |
| Focus Control                    | -                                                                                                                                                    |
| Lens Type                        | DC Auto Iris                                                                                                                                         |
| Mount Type                       | Board-in type                                                                                                                                        |
| Operational                      |                                                                                                                                                      |
| IR LED                           | TBD                                                                                                                                                  |
| Viewable length                  | 30m (98.43ft) TBD                                                                                                                                    |
| On Screen Display                | Multi-language Support(16)<br>English, Japanese,<br>Spanish, French,<br>Portuguese, Korean,<br>German, Italian, Russian,<br>Polish, Czech, Romanian, |
| Camera Title                     | Off / On (Displayed 15 characters) -> 미지원                                                                                                            |
| Day & Night                      | Auto (ICR) / Color / B/W                                                                                                                             |
| Backlight Compensation           | Off / User BLC / HLC                                                                                                                                 |
| Wide Dynamic Range               | -                                                                                                                                                    |
| Contrast Enhancement             | -                                                                                                                                                    |
| Digital Noise Reduction          | 2D DNR                                                                                                                                               |
| Defog                            | AUTO / MANUAL / OFF                                                                                                                                  |
| Digital Image Stabilization      | -                                                                                                                                                    |
| Motion Detection                 | Off / On(4 zones)                                                                                                                                    |
| Privacy Masking                  | Off / On (2 zones rectangle)                                                                                                                         |
| Gain Control                     | Off / Low / Middle / High / Very High                                                                                                                |
| White Balance                    | ATW / Outdoor / Indoor / Manual / AWC (1,800K ~ 10,500K)                                                                                             |
| LDC (Lens Distortion Correction) | -                                                                                                                                                    |
| Electronic Shutter Speed         | 1/30sec~ 1/12,000sec                                                                                                                                 |
| Digital Zoom                     | -                                                                                                                                                    |
| Reverse                          | Off / H-Rev / V-Rev / HV-Rev                                                                                                                         |
| Profile                          | -                                                                                                                                                    |
| Alarm                            | MD-output-1                                                                                                                                          |
| Remote control interface         | Coaxial                                                                                                                                              |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (5) of (64)

|                                  |                                                                                               |
|----------------------------------|-----------------------------------------------------------------------------------------------|
| Protocol                         | AHD : ACP (AHD Coax Protocol), CVBS : Pelco-C (Coaxitron)                                     |
| Video Transmission Distance      | 500m(5C2V Coaxial Cable)                                                                      |
| <b>Environmental</b>             |                                                                                               |
| Operating Temperature / Humidity | -30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH<br>* Start up should be done at above -10°C |
| Ingress Protection               | IP66                                                                                          |
| Vandal Resistance                | IK10                                                                                          |
| <b>Electrical</b>                |                                                                                               |
| Input Voltage/Current            | 12V DC ±10%                                                                                   |
| Power Consumption                | TBD                                                                                           |
| <b>Mechanical</b>                |                                                                                               |
| Color / Material                 | Ivory / Aluminum                                                                              |
| Dimension (WxHxD)                | Ø120.3 x 91.7mm                                                                               |
| Weight                           | 510g                                                                                          |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 240 Vac ☐ 100 Vac ☐ 24 Vac ☒ 12 Vdc ☐ PoE  
Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

## 1.2 Variant Model Differences

HCV-7020RP, HCV-7010RP : The difference is a magnification of lens.  
HCV-7030RP, HCV-7010R, HCV-7020R : Add derivative model for vendor management

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

| Description | Model Number | Serial Number | Manufacturer                         | Remarks |
|-------------|--------------|---------------|--------------------------------------|---------|
| CCTV CAMERA | HCV-7030R    | -             | Hanwha Techwin<br>(Tianjin) Co.,Ltd. | E.U.T   |

## 1.5 Support Equipments

| Description   | Model Number | Serial Number   | Manufacturer                           | Remarks          |
|---------------|--------------|-----------------|----------------------------------------|------------------|
| DVR           | HRD-442      | -               | Hanwha Techwin.<br>Co.,Ltd.            | DVR              |
| AC/DC Adapter | FSP040-RHAN2 | -               | FSP GROUP INC.                         | AC/DC<br>Adapter |
| MONITOR       | SMT-2232     | C95V67VF900038B | Weihai Daewoo<br>Electronics Co., Ltd. | MONITOR          |

## 1.6 External I/O Cabling

| Start                  |          | END         |             | Cable Spec. |        |
|------------------------|----------|-------------|-------------|-------------|--------|
| Description            | I/O Port | Description | I/O Port    | Length      | Shield |
| CCTV CAMERA<br>(E.U.T) | BNC      | DVR         | Video Input | 3.5         | S      |
| DVR                    | D-SUB    | MONITOR     | D-SUB       | 1.5         | S      |

\* Unshielded=U, Shielded=S


## 1.7 EUT Operating Mode(s)

| operating |                  |
|-----------|------------------|
| OP        | E.U.T Monitoring |

| E.U.T Test operating S/W |         |                     |
|--------------------------|---------|---------------------|
| Name                     | Version | Manufacture Company |
| -                        | -       | -                   |

## 1.8 Configuration

■ AC Main  
 □ DC Main

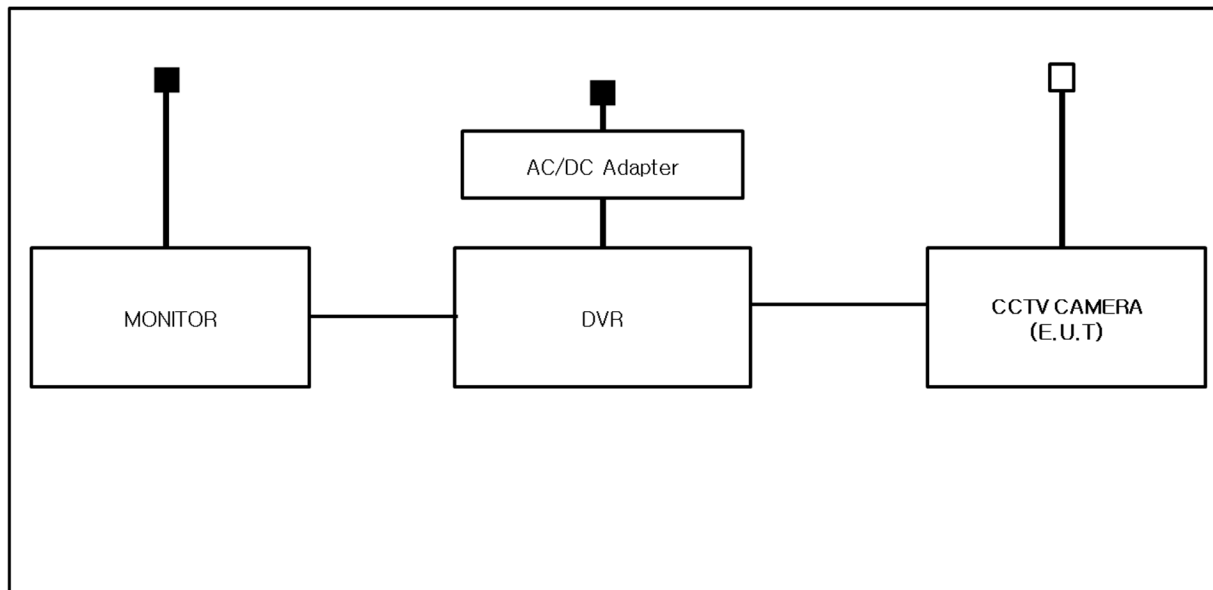

## 1.9 Remarks when standards applied

- N/A

## 1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

## 1.12 Laboratory Accreditations and Listings

| Country       | Agency  | Scope of Accreditation                                                                                                                                                                                     | Logo                                                                                                                      |
|---------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| KOREA         | RRA     | EMI (3 m & 10 m Semi-Aechoic Chamber ,<br>10 m Open Area and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS,<br>Magnetic, Dips and interruptions)                                              | <br>KR0100                             |
| International | KOLAS   | EMI (3 m & 10 m Semi-Aechoic Chamber ,<br>and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS,<br>Magnetic, Dips and interruptions)                                                             | <br>KT489                            |
| USA           | FCC     | 3 m & 10 m Semi-Aechoic Chamber, 10 m<br>Open Area and Conducted test site to<br>perform FCC Part 15/18 measurements.                                                                                      | <br>KR0100                           |
| Canada        | ISED    | 3 m & 10 m Semi-Aechoic Chamber and<br>Conducted test site                                                                                                                                                 | <br>23298-1                          |
| JAPAN         | VCCI    | Mains Ports Conducted Interference<br>Measurement, Telecommunication Ports<br>Conducted Disturbance Measurement and<br>Radiation 10 meter site, Facility for<br>measuring radiated disturbance above 1 GHz | <br>R-4308, C-4798,<br>T-2311, G-914 |
| Europe        | TÜV SÜD | EMI (3 m & 10 m Semi-Aechoic Chamber ,<br>10 m Open Area and conducted test<br>site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS,<br>Magnetic, Dips and interruptions)                                           | <br>CARAT 17 07 01633<br>001         |





## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1  
☐ Class A

☐ Group 2  
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2012/AC:2013

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (10) of (64)

☐ **VCCI V-3 / 2015.04**

☐ Class A

☐ Class B

☐ **AS/NZS CISPR22:2009 +A1:2010**

☐ Class A

☐ Class B

☐ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B

☐ ANSI C63.4-2009

☐ **IC Regulation ICES-003 : 2016**

☐ CAN/CSA CISPR 22-10

☐ Class A

☐ Class B

☐ ANSI C63.4-2014

☐ **RE- Directive 2014/53/EU**

☐ EN 301 489-1 V1.9.2

☐ Equipment for fixed use

☐ Equipment for vehicular use

☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## 2.1 Conducted Emissions at Mains Power Ports

### Test Date

N/A

### Test Location

Electro wave Shieldroom

### Test Equipment

| Used                     | Description       | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|-------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | EMI Test S/W      | EMC32        | R & S        | 9.12.00       | -            |
| <input type="checkbox"/> | EMI TEST RECEIVER | ESR3         | R & S        | 101783        | 04, 27, 2018 |
| <input type="checkbox"/> | LISN              | ENV216       | R & S        | 101137        | 02, 03, 2018 |
| <input type="checkbox"/> | LISN              | ENV216       | R & S        | 101786        | 04, 27, 2018 |
| <input type="checkbox"/> | PULSE LIMITER     | ESH3-Z2      | R & S        | 101914        | 12, 13, 2017 |

### Test Conditions

Temperature: °C  
Relative Humidity: %

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- ☐ PASS  
☐ NOT PASS  
☒ NOT APPLICABLE

### Remarks

=



## 2.2 Conducted Emissions at Telecommunication Ports

### Test Date

N/A

### Test Location

Electro wave Shieldroom

### Test Equipment

| Used                     | Description       | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|-------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | EMI Test S/W      | EMC32        | R & S        | 9.12.00       | -            |
| <input type="checkbox"/> | EMI TEST RECEIVER | ESR3         | R & S        | 101783        | 04, 27, 2018 |
| <input type="checkbox"/> | LISN              | ENV216       | R & S        | 101137        | 02, 03, 2018 |
| <input type="checkbox"/> | LISN              | ENV216       | R & S        | 101786        | 04, 27, 2018 |
| <input type="checkbox"/> | PULSE LIMITER     | ESH3-Z2      | R & S        | 101914        | 12, 13, 2017 |
| <input type="checkbox"/> | 8-WIRE ISN CAT3   | CAT3 8158    | SCHWARZBECK  | 8158-0019     | 03, 29, 2018 |
| <input type="checkbox"/> | 8-WIRE ISN CAT5   | CAT5 8158    | SCHWARZBECK  | 8158-0030     | 03, 29, 2018 |
| <input type="checkbox"/> | 8-WIRE ISN CAT6   | NTFM 8158    | SCHWARZBECK  | 8158-0029     | 08, 11, 2017 |

### Test Conditions

Temperature: °C  
Relative Humidity: %

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- ☐ PASS  
☐ NOT PASS  
☒ NOT APPLICABLE

### Remarks

=



## 2.3 Radiated Electric Field Emissions(Below 1 GHz)

### Test Date

Sep. 08, 2017

### Test Location

☐ OPEN AREA TEST SITE #2 ☒ SAC #4(10 m)

### Test Equipment

| Used                                | Description              | Model Number | Manufacturer     | Serial Number | Cal. Due     |
|-------------------------------------|--------------------------|--------------|------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W             | EP5/RE       | TOYO Corporation | 6.0.0         | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER        | ESU26        | R & S            | 100551        | 04, 18, 2018 |
| <input checked="" type="checkbox"/> | AMPLIFIER                | SCU 01       | R & S            | 100603        | 12, 13, 2017 |
| <input checked="" type="checkbox"/> | TRILOG-BROADBAND ANTENNA | VULB9163     | Schwarzbeck      | 716           | 11, 28, 2018 |

### Test Conditions

Temperature: 24,2 °C  
Relative Humidity: 53,6 %

### Frequency Range of Measurement

30 MHz to 1 GHz

### Instrument Settings

IF Band Width: 120 kHz

### Test Results

The requirements are:

☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.



## 2.4 Radiated Electric Field Emissions(Above 1 GHz)

### Test Date

Sep. 08, 2017

### Test Location

SEMI ANECHOIC CHAMBER #2

### Test Equipment

| Used                                | Description          | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|----------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W         | e3           | AUDIX        | 8.083b        | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER    | ESU26        | R & S        | 100552        | 04, 19, 2018 |
| <input checked="" type="checkbox"/> | PREAMPLIFIER         | 8449B        | AGILENT      | 3008A01729    | 05, 31, 2018 |
| <input type="checkbox"/>            | ATTENUATOR           | 8491A        | HP           | 35496         | 03, 24, 2018 |
| <input checked="" type="checkbox"/> | LOG-PERIODIC ANTENNA | STLP 9149    | SCHWARZBECK  | 9149-255      | 05, 17, 2018 |

### Test Conditions

Temperature: 22,6 °C

Relative Humidity: 51,8 %

### Frequency Range of Measurement

1 GHz to 6 GHz

### Instrument Settings

IF Band Width: 1 MHz

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.



## 2.5 Harmonic Current Emissions

### Test Date

N/A

### Test Location

Electro wave Shieldroom

### Test Equipment

| Used                     | Description            | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|------------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | EMI Test S/W           | dpa.control  | EM TEST      | 5.4.8.0       | -            |
| <input type="checkbox"/> | DIGITAL POWER ANALYZER | DPA 500N     | EM TEST      | V1024106759   | 08, 08, 2017 |
| <input type="checkbox"/> | POWER SOURCE           | ACS 500N6    | EM TEST      | V1024106760   | 08, 08, 2017 |

### Test Conditions

Relative Humidity:                      °C  
                                                         %

### Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

### Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

### Remarks

-





### 3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 +A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

#### Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

#### Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

---

### Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

### Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change,  
and no such flickering of indicators oeuvres at  $U = 130 \text{ dB}\mu\text{V}$ .

For component of CCTV systems, where the status is monitored by observing the TV picture,  
then deterioration of the picture is allowed at  $U = 140 \text{ dB}\mu\text{V}$ , providing:

- (a) there is no permanent damage or change to the EUT  
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at  $U = 130 \text{ dB}\mu\text{V}$ , any deterioration of the picture is so minor that the system could still be used; and
- (c) there in no observable deterioration of the picture at  $U = 120 \text{ dB}\mu\text{V}$ .

### Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.



### 3.1 Electrostatic Discharge

#### Reference Standard

EN 61000-4-2:2009

#### Test Date

Sep. 05, 2017

#### Test Location

EMS-ESD: Electro wave Shieldroom

#### Test Equipment

| Used                                | Description   | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W  | -            | -            | -             | -            |
| <input checked="" type="checkbox"/> | ESD SIMULATOR | ESS-2000     | Noise Ken    | ESS05X4620    | 02, 24, 2018 |
| <input checked="" type="checkbox"/> | HCP           | -            | Noise Ken    | -             | -            |
| <input checked="" type="checkbox"/> | VCP           | -            | Noise Ken    | -             | -            |

#### Test Conditions

Temperature: 22,8 °C  
Relative Humidity: 50,9 %  
Atmospheric Pressure: 99,1 kPa



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (20) of (64)

### Test Specifications

Discharge Factor:  $\geq 1$  s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge  
10 at all locations for Contact discharge

| Discharge Voltage: | Contact                                  | Air                                      | HCP                                      | VCP                                      |
|--------------------|------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|
|                    | <input type="checkbox"/> 2 kV            | <input checked="" type="checkbox"/> 2 kV | <input type="checkbox"/> 2 kV            | <input type="checkbox"/> 2 kV            |
|                    | <input type="checkbox"/> 4 kV            | <input checked="" type="checkbox"/> 4 kV | <input type="checkbox"/> 4 kV            | <input type="checkbox"/> 4 kV            |
|                    | <input checked="" type="checkbox"/> 6 kV | <input type="checkbox"/> 6 kV            | <input checked="" type="checkbox"/> 6 kV | <input checked="" type="checkbox"/> 6 kV |
|                    | <input type="checkbox"/> 8 kV            | <input checked="" type="checkbox"/> 8 kV | <input type="checkbox"/> 8 kV            | <input type="checkbox"/> 8 kV            |
|                    | <input type="checkbox"/> 15 kV           | <input type="checkbox"/> 15 kV           | <input type="checkbox"/> 15 kV           | <input type="checkbox"/> 15 kV           |


Notes: HCP: Horizontal coupling plane

VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

**Location of Discharge:**

|         |
|---------|
| Air     |
| Contact |



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



## Test Data

### Indirect Discharge

| No. | Test Point  | Discharge Method  | Observations | Remarks |
|-----|-------------|-------------------|--------------|---------|
| 1   | HCP Contact | Contact Discharge | Complied     | -       |
| 2   | VCP Contact | Contact Discharge | Complied     | -       |

### Direct Discharge

| No. | Test Point        | Discharge Method  | Observations | Remarks |
|-----|-------------------|-------------------|--------------|---------|
| 1   | E.U.T Enclosure 1 | Contact Discharge | Complied     | -       |
| 2   | E.U.T Enclosure 2 | Contact Discharge | Complied     | -       |

Note: "Blank" = Not performed

Observations:  
Complied – No degradation of function

### Test Results

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

### Remarks

PASS Required Performance Criteria.



## 3.2 Radiated Electric Field Immunity

### Reference Standard

EN 61000-4-3:2006 +A2:2010

### Test Date

Sep. 07, 2017

### Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

### Test Equipment

| Used                                | Description                     | Model Number    | Manufacturer   | Serial Number | Cal. Due     |
|-------------------------------------|---------------------------------|-----------------|----------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W                    | EMC32           | R & S          | 10.10.02      | -            |
| <input checked="" type="checkbox"/> | SIGNAL GENERATOR                | SMB 100A        | R & S          | 177586        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | BROADBAND AMPLIFIER             | BBA100          | R & S          | 101239        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | BROADBAND AMPLIFIER             | 100S1G6M1       | AR             | 579931        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | POWER METER                     | NRP2            | R & S          | 103475        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | AVG POWER SENSOR                | NRP-Z91         | R & S          | 102526        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | AVG POWER SENSOR                | NRP-Z91         | R & S          | 102527        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | STACKED DOUBLE LOG-PER- ANTENNA | STPL9128 E      | Schwarzbeck    | 9128ES-121    | -            |
| <input checked="" type="checkbox"/> | DIRECTIONAL COUPLER             | KYDC-D1070-DX40 | KY TELECOM     | KY150001      | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | DOUBLE RIDGED HORN ANTENNA      | SAS-571         | A.H.SYSTEM,INC | 781           | 05, 02, 2019 |

### Test Conditions

Temperature: 23,2 °C  
Relative Humidity: 50,9 %  
Atmospheric Pressure: 99,1 kPa



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (24) of (64)

### Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m  
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz  
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave  
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

# of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (25) of (64)

**Test Data**

| Side Exposed | Observations |          |
|--------------|--------------|----------|
|              | Horizontal   | Vertical |
| Front        | Complied     | Complied |
| Right        | Complied     | Complied |
| Back         | Complied     | Complied |
| Left         | Complied     | Complied |

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**

PASS Required Performance Criteria.



### 3.3 Electrical Fast Transients/Bursts

#### Reference Standard

EN 61000-4-4:2012

#### Test Date

Sep. 06, 2017

#### Test Location

EMS-EFT: Electro wave Shieldroom

#### Test Equipment

| Used                                | Description               | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W              | iec.control  | EM TEST      | 5.3.9         | -            |
| <input checked="" type="checkbox"/> | ULTRA COMPACT SIMULATOR   | UCS 500N5T   | EM TEST      | P1317117973   | 02, 08, 2018 |
| <input type="checkbox"/>            | MOTOR VARIAC              | MV2616       | EM TEST      | V0936105123   | 02, 08, 2018 |
| <input checked="" type="checkbox"/> | CAPACITIVE COUPLING CLAMP | HFK          | EM TEST      | 070925        | 06, 26, 2018 |
| <input checked="" type="checkbox"/> | CDN                       | CNV 508N1    | EM TEST      | P1551168979   | 04, 26, 2018 |

#### Test Conditions

Temperature: 23,0 °C  
Relative Humidity: 52,4 %  
Atmospheric Pressure: 99,4 kPa

#### Test Specifications

Pulse Amplitude & Polarity:  
(AC Power Lines) ☐ ± 1.0 kV ☐ ± 2.0 kV  
☐ ± 4.0 kV

Pulse Amplitude & Polarity:  
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV  
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 klz ☒ 100 klz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (27) of (64)

**Test Data**☐ Input a.c. power ports – Coupling/Decoupling Network used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| -                   | -              | -              |

☐ Input d.c. power ports – Coupling/Decoupling Network used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| L – N               | Complied       | Complied       |

☒ Signal ports and telecommunication ports – Coupling Clamp used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| BNC                 | Complied       | Complied       |

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**

PASS Required Performance Criteria.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (28) of (64)

### 3.4 Surge Transients

**Reference Standard**

EN 61000-4-5:2014

**Test Date**

Sep. 06, 2017

**Test Location**

EMS-Surge: Electro wave Shieldroom

**Test Equipment**

| Used                                | Description             | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|-------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W            | iec.control  | EM TEST      | 5.3.9         | -            |
| <input checked="" type="checkbox"/> | ULTRA COMPACT SIMULATOR | UCS 500N5T   | EM TEST      | P1317117973   | 02, 08, 2018 |
| <input type="checkbox"/>            | MOTOR VARIAC            | MV2616       | EM TEST      | V0936105123   | 02, 08, 2018 |
| <input checked="" type="checkbox"/> | CDN                     | CNV 508N1    | EM TEST      | P1551168979   | 04, 26, 2018 |
| <input type="checkbox"/>            | CDN                     | CNV 508T5    | EM TEST      | P1549168422   | 04, 26, 2018 |

**Test Conditions**

Temperature: 23,0 °C  
Relative Humidity: 53,4 %  
Atmospheric Pressure: 99,4 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (29) of (64)

### Test Specifications

#### AC Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☐ (0,5 / 1,0) kV

Number of Surges:

☐ 5 surges per angle

Angle:

☐ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☐ Positive & Negative

Repetition Rate:

☐ 1 surge per min    ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ Complied

#### Signal Lines

Source Impedance: 42 ohm for common mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min    ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## Test Data

☐ Line to Line – Differential Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| -                   | -              | -              |

☐ Line to Earth – Common Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| -                   | -              | -              |

## Signal Lines

☒ Line to Earth – Common Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| BNC                 | Complied       | Complied       |

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

## Test Results

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

## Remarks

PASS Required Performance Criteria.



## 3.5 Conducted Disturbance

### Reference Standard

EN 61000-4-6:2014

### Test Date

Sep. 01, 2017

### Test Location

EMS-CS: Electro wave Shieldroom

### Test Equipment

| Used                                | Description               | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W              | icd.control  | EM TEST      | 5.3.7         | -            |
| <input checked="" type="checkbox"/> | CONTINUOUS WAVE SIMULATOR | CWS 500N1    | EM TEST      | V0936105119   | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | ATTENUATOR                | ATT6         | EM TEST      | 1208-34       | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | CDN                       | CDN-M2/M3N   | EM TEST      | 0909-06       | 08, 07, 2018 |
| <input type="checkbox"/>            | CDN                       | CDN T8RJ45   | EM TEST      | 0909-09       | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | EM INJECTION CLAMP        | EM 101       | Liithi       | 35943         | 02, 03, 2018 |

### Test Conditions

Temperature: 23,4 °C  
Relative Humidity: 50,1 %  
Atmospheric Pressure: 99,7 kPa



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (32) of (64)

### Test Specifications

Frequency range:

☒ 150 kHz to 100 MHz

☐ 150 kHz to 80 MHz

Voltage Level:

☐ 1 Vrms

☐ 3 Vrms

☒ 10 Vrms

Modulation:

☒ AM, 80 %, 1 kHz sine wave

☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step:

☒ 1 % step

Dwell Time:

☒ 1 s

☐ 3 s

Required Performance Criteria: ☒ A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (33) of (64)

**Test Data**☐ Input a.c. power ports

| Coupling Location<br>(Line Stressed) | Coupling Method                                                 | Observations |
|--------------------------------------|-----------------------------------------------------------------|--------------|
| -                                    | CDN ( <input type="checkbox"/> M2, <input type="checkbox"/> M3) | -            |

☒ Input d.c. power ports

| Coupling Location<br>(Line Stressed) | Coupling Method                                                            | Observations |
|--------------------------------------|----------------------------------------------------------------------------|--------------|
| L - N                                | CDN ( <input checked="" type="checkbox"/> M2, <input type="checkbox"/> M3) | Complied     |

☒ Signal ports and telecommunication ports

| Coupling Location<br>(Line Stressed) | Coupling Method    | Observations |
|--------------------------------------|--------------------|--------------|
| BNC                                  | EM Injection Clamp | Complied     |

Notes: CDN = Coupling Decoupling Network  
"blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**

PASS Required Performance Criteria.



### 3.6 Voltage Dips and Short Interruptions

#### Reference Standard

EN 61000-4-11:2004

#### Test Date

N/A

#### Test Location

EMS-Voltage dip: Electro wave Shieldroom

#### Test Equipment

| Used                     | Description             | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|-------------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | EMS Test S/W            | iec.control  | EM TEST      | 5.3.9         | -            |
| <input type="checkbox"/> | ULTRA COMPACT SIMULATOR | UCS 500N5T   | EM TEST      | P1317117973   | 02, 08, 2018 |
| <input type="checkbox"/> | MOTOR VARIAC            | MV2616       | EM TEST      | V0936105123   | 02, 08, 2018 |

#### Test Conditions

Temperature: °C  
Relative Humidity: %  
Atmospheric Pressure: kPa



## Test Specifications & Observations/Remarks

(Test Voltage : 50 Hz)

| <u>Test Level</u>                  | <u>Duration [in period/ms (50 Hz)]</u>       | <u>Results</u> |
|------------------------------------|----------------------------------------------|----------------|
| <input type="checkbox"/> 20 % dip  | <input type="checkbox"/> 250 / 5000          | _____          |
| <input type="checkbox"/> 30 % dip  | <input type="checkbox"/> 25 / 500            | _____          |
| <input type="checkbox"/> 60 % dip  | <input checked="" type="checkbox"/> 10 / 200 | _____          |
| <input type="checkbox"/> 100 % dip | <input type="checkbox"/> 250 / 5000          | _____          |

- Voltage variations

|                                      |                                       |       |
|--------------------------------------|---------------------------------------|-------|
| <input type="checkbox"/> Unom + 10 % | <input type="checkbox"/> 253.0 V (ac) | _____ |
| <input type="checkbox"/> Unom - 15 % | <input type="checkbox"/> 195.5 V (ac) | _____ |

Observations:  
Complied – No degradation of function

### Test Results

- ☐ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria  
☒ NOT APPLICABLE

### Remarks

=



---

## **APPENDIX A – TEST DATA**

### **Conducted Emissions at Mains Power Ports**

**[HOT]**

N/A



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (37) of (64)

[ NEUTRAL ]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-17T0599-R1  
Page (38) of (64)

---

**Conducted Emissions at Telecommunication Ports**

**[10 Mbps]**

N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (39) of (64)

---

**[100 Mbps]**

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (40) of (64)

### Radiated Electric Field Emissions(Below 1 GHz)

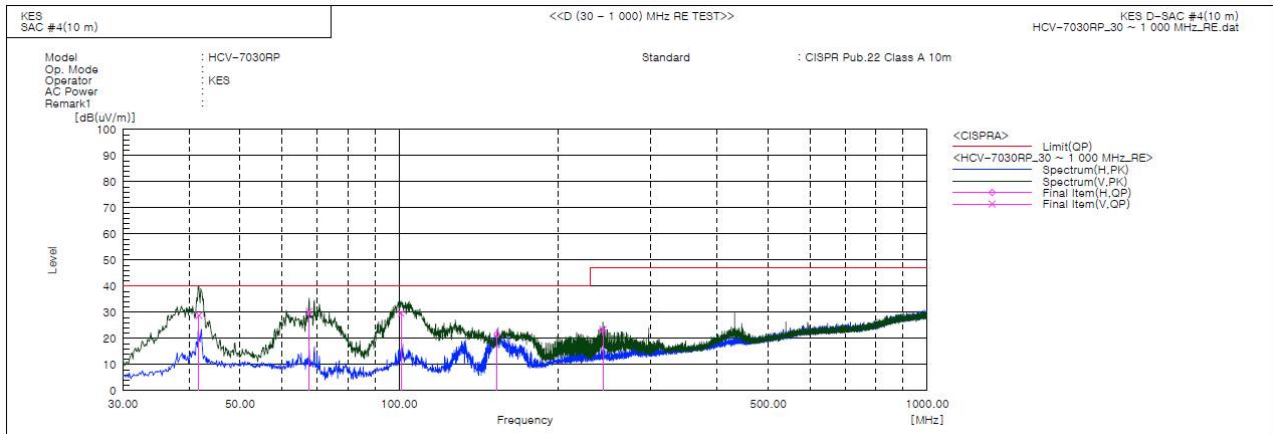

#### Final Result

| No. | Frequency<br>[MHz] | (P) | Reading<br>QP<br>[dB(uV)] | c.f<br>[dB(1/m)] | Result<br>QP<br>[dB(uV/m)] | Limit<br>QP<br>[dB(uV/m)] | Margin<br>QP<br>[dB] | Height<br>[cm] | Angle<br>[deg] | Remark |
|-----|--------------------|-----|---------------------------|------------------|----------------------------|---------------------------|----------------------|----------------|----------------|--------|
| 1   | 41.761             | V   | 57.5                      | -28.7            | 28.8                       | 40.0                      | 11.2                 | 115.0          | 70.0           |        |
| 2   | 67.588             | V   | 61.5                      | -31.1            | 30.4                       | 40.0                      | 9.6                  | 106.0          | 259.0          |        |
| 3   | 100.810            | V   | 57.9                      | -28.3            | 29.6                       | 40.0                      | 10.4                 | 100.0          | 236.0          |        |
| 4   | 153.311            | H   | 52.8                      | -31.1            | 21.7                       | 40.0                      | 18.3                 | 400.0          | 311.0          |        |
| 5   | 243.279            | V   | 48.9                      | -25.5            | 23.4                       | 47.0                      | 23.6                 | 123.0          | 345.0          |        |

#### ◆ Calculation – SAC #4(10 m)

Result(QP) [dB( $\mu$ V/m)] = (Reading(QP)[dB( $\mu$ V)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB( $\mu$ V/m)] - Result(QP) [dB( $\mu$ V/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



## Radiated Electric Field Emissions(Above 1 GHz)

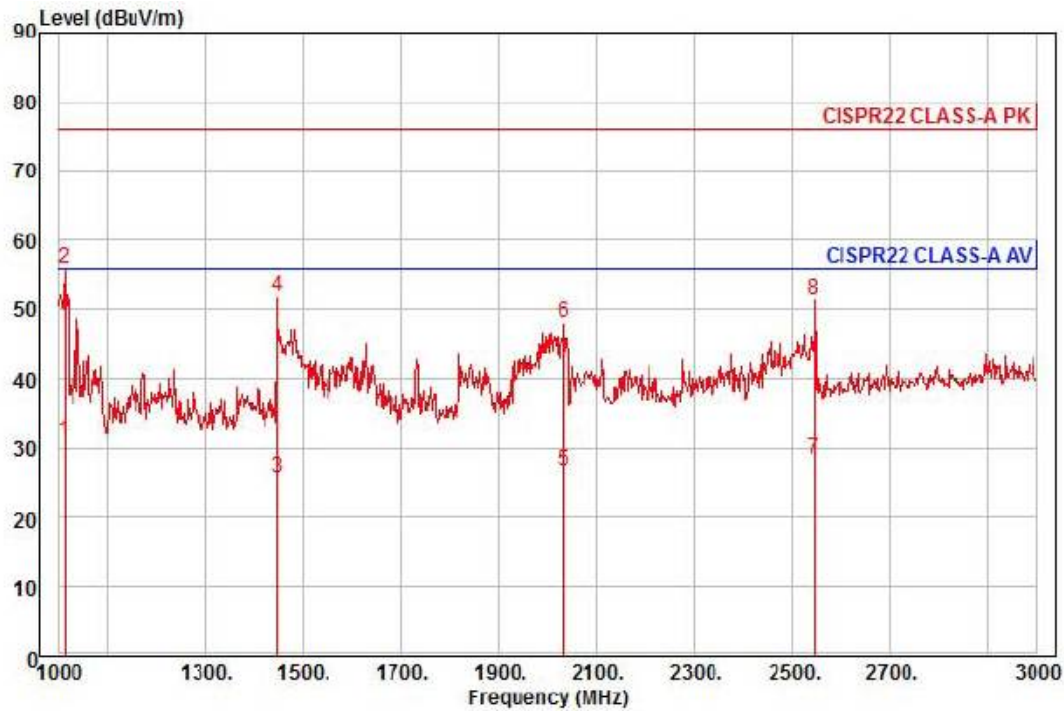

Site : chamber  
 Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) horizontal  
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
 Project :  
 Model : HCV-7030RP  
 Mode :  
 Memo : 1 ~ 3 GHz

|   |      | Read    | Ant    | Cable | Preamp | TPos | Limit  | Over   |            |         |
|---|------|---------|--------|-------|--------|------|--------|--------|------------|---------|
|   | Freq | Level   | Factor | Loss  | Factor |      | Line   | Limit  | Pol/Phase  | Remark  |
|   | MHz  | dBuV    | dB/m   | dB    | dB     | deg  | dBuV/m | dB     |            |         |
| 1 | av   | 1012.00 | 37.89  | 22.54 | 6.68   | 328  | 56.00  | -24.94 | horizontal | Average |
| 2 | pp   | 1012.00 | 62.66  | 22.54 | 6.68   | 328  | 76.00  | -20.17 | horizontal | Peak    |
| 3 |      | 1448.00 | 29.53  | 23.86 | 8.07   | 26   | 56.00  | -30.20 | horizontal | Average |
| 4 |      | 1448.00 | 55.64  | 23.86 | 8.07   | 26   | 76.00  | -24.09 | horizontal | Peak    |
| 5 |      | 2032.00 | 26.10  | 26.11 | 9.72   | 51   | 56.00  | -29.25 | horizontal | Average |
| 6 |      | 2032.00 | 47.53  | 26.11 | 9.72   | 51   | 76.00  | -27.82 | horizontal | Peak    |
| 7 |      | 2546.00 | 25.20  | 27.73 | 10.94  | 63   | 56.00  | -27.51 | horizontal | Average |
| 8 |      | 2546.00 | 48.11  | 27.73 | 10.94  | 63   | 76.00  | -24.60 | horizontal | Peak    |




# KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (42) of (64)

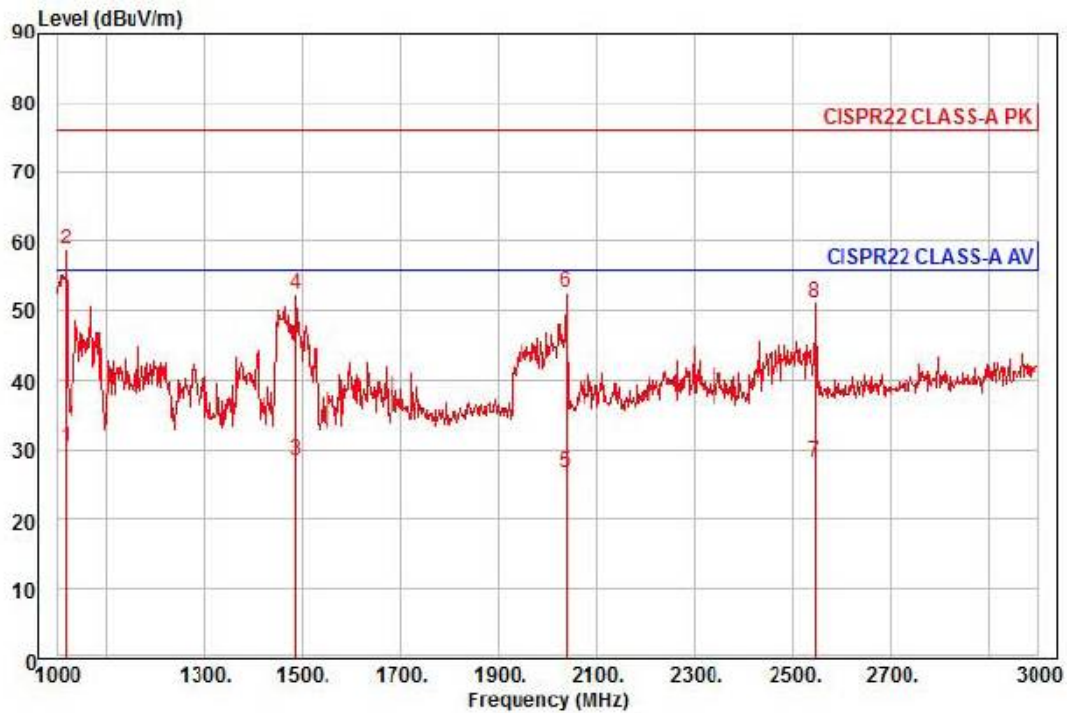

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) vertical  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : HCV-7030RP  
Mode :  
Memo : 1 ~ 3 GHz

|   |    | Read    | Ant   | Cable  | Preamp | TPos   | Limit | Over   |           |          |
|---|----|---------|-------|--------|--------|--------|-------|--------|-----------|----------|
|   |    | Freq    | Level | Factor | Loss   | Factor | Line  | Limit  | Pol/Phase | Remark   |
|   |    | MHz     | dBuV  | dB/m   | dB     | dB     | deg   | dBuV/m | dB        |          |
| 1 | av | 1016.00 | 37.21 | 22.55  | 6.69   | 36.05  | 351   | 56.00  | -25.60    | vertical |
| 2 | pp | 1016.00 | 65.55 | 22.55  | 6.69   | 36.05  | 351   | 76.00  | -17.26    | vertical |
| 3 |    | 1486.00 | 31.83 | 23.98  | 8.18   | 35.63  | 323   | 56.00  | -27.64    | vertical |
| 4 |    | 1486.00 | 55.98 | 23.98  | 8.18   | 35.63  | 323   | 76.00  | -23.49    | vertical |
| 5 |    | 2038.00 | 26.11 | 26.13  | 9.74   | 35.18  | 310   | 56.00  | -29.20    | vertical |
| 6 |    | 2038.00 | 52.08 | 26.13  | 9.74   | 35.18  | 310   | 76.00  | -23.23    | vertical |
| 7 |    | 2546.00 | 24.93 | 27.73  | 10.94  | 35.38  | 312   | 56.00  | -27.78    | vertical |
| 8 |    | 2546.00 | 48.00 | 27.73  | 10.94  | 35.38  | 312   | 76.00  | -24.71    | vertical |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




# KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (43) of (64)

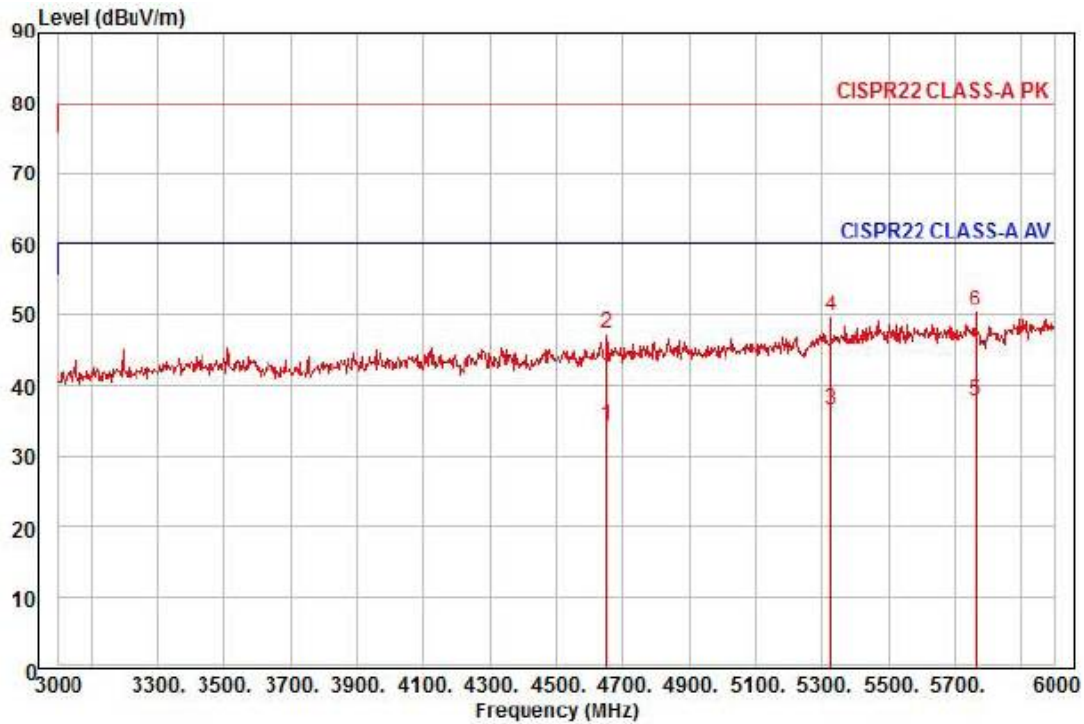

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) horizontal  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : HCV-7030RP  
Mode :  
Memo : 3 ~ 6 GHz

|      | Freq    | Read Level | Ant Factor | Cable Loss | Preamplifier Factor | TPos | Limit Line | Over Limit | Pol/Phase  | Remark  |
|------|---------|------------|------------|------------|---------------------|------|------------|------------|------------|---------|
|      | MHz     | dBuV       | dB/m       | dB         | dB                  | deg  | dBuV/m     | dB         |            |         |
| 1    | 4653.00 | 21.91      | 32.68      | 15.23      | 35.51               | 340  | 60.00      | -25.69     | horizontal | Average |
| 2    | 4653.00 | 34.92      | 32.68      | 15.23      | 35.51               | 340  | 80.00      | -32.68     | horizontal | Peak    |
| 3    | 5325.00 | 21.08      | 34.68      | 16.31      | 35.65               | 199  | 60.00      | -23.58     | horizontal | Average |
| 4    | 5325.00 | 34.45      | 34.68      | 16.31      | 35.65               | 199  | 80.00      | -30.21     | horizontal | Peak    |
| 5 pp | 5760.00 | 20.66      | 35.76      | 16.99      | 35.68               | 166  | 60.00      | -22.27     | horizontal | Average |
| 6 pk | 5760.00 | 33.49      | 35.76      | 16.99      | 35.68               | 166  | 80.00      | -29.44     | horizontal | Peak    |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr






## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (44) of (64)

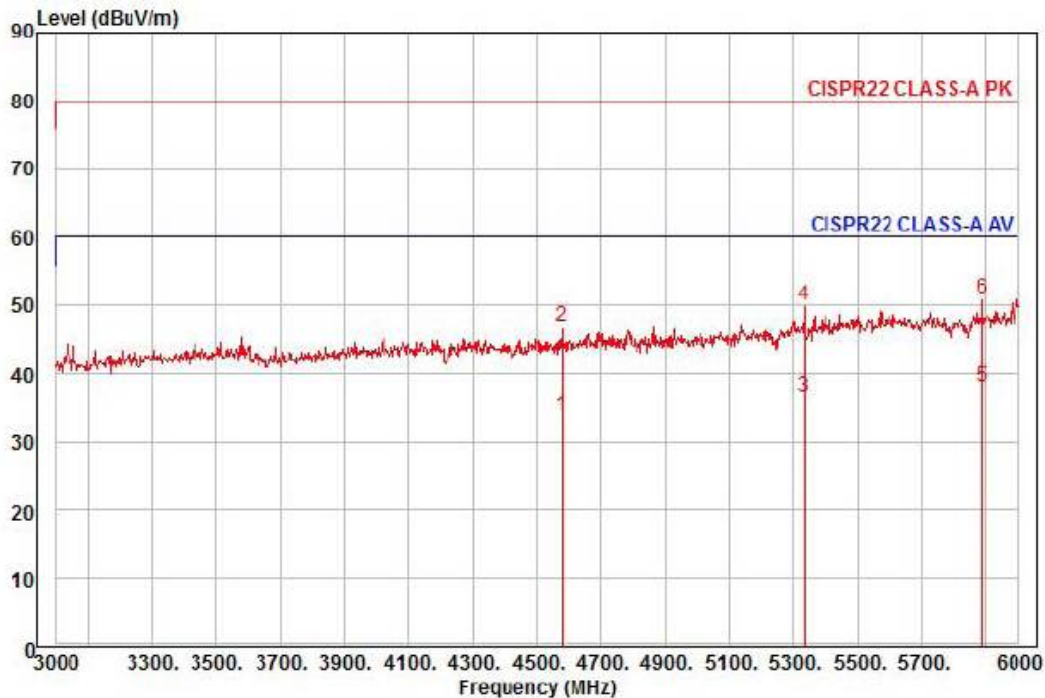

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) vertical  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : HCV-7030RP  
Mode :  
Memo : 3 ~ 6 GHz

|      | Freq    | Read Level | Ant Factor | Cable Loss | Preamp Factor | TPos | Limit Line | Over Limit | Pol/Phase | Remark  |
|------|---------|------------|------------|------------|---------------|------|------------|------------|-----------|---------|
|      | MHz     | dBuV       | dB/m       | dB         | dB            | deg  | dBuV/m     | dB         |           |         |
| 1    | 4578.00 | 21.83      | 32.52      | 15.09      | 35.48         | 282  | 60.00      | -26.04     | vertical  | Average |
| 2    | 4578.00 | 34.80      | 32.52      | 15.09      | 35.48         | 282  | 80.00      | -33.07     | vertical  | Peak    |
| 3    | 5334.00 | 21.10      | 34.72      | 16.33      | 35.65         | 290  | 60.00      | -23.50     | vertical  | Average |
| 4    | 5334.00 | 34.71      | 34.72      | 16.33      | 35.65         | 290  | 80.00      | -29.89     | vertical  | Peak    |
| 5 pp | 5889.00 | 20.49      | 35.95      | 17.31      | 35.68         | 177  | 60.00      | -21.93     | vertical  | Average |
| 6 pk | 5889.00 | 33.53      | 35.95      | 17.31      | 35.68         | 177  | 80.00      | -28.89     | vertical  | Peak    |


### ◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin, Read Level : Reading value, Ant Factor : ANT Factor,

Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr





**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (47) of (64)

**Test Data - Voltage Fluctuations****Maximum Flicker results**

|          | <b>EUT values</b> | <b>Limit</b> | <b>Result</b> |
|----------|-------------------|--------------|---------------|
| Pst      | N/A               |              |               |
| Plt      |                   |              |               |
| dc [%]   |                   |              |               |
| dmax [%] |                   |              |               |
| Tmax [s] |                   |              |               |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (48) of (64)

---

## **Test Setup Photos and Configuration**

### **Conducted Voltage Emissions**

N/A

N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr





**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-17T0599-R1  
Page (49) of (64)

---

**Conducted Telecommunication Emissions**


N/A

N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## Radiated Electric Field Emissions(Below 1 GHz)

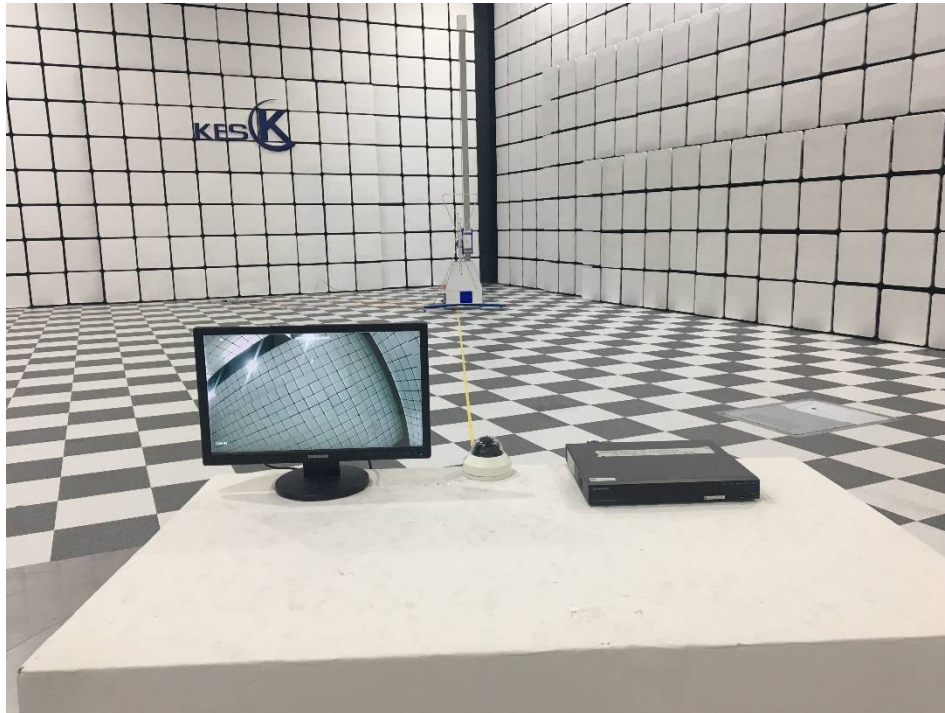

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## **Radiated Electric Field Emissions(Above 1 GHz)**



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-17T0599-R1  
Page (52) of (64)

---

## **Harmonic Current Emissions and Voltage Fluctuations and Flicker**

N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## Electrostatic Discharge




## Radiated Electric Field Immunity




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)

## Electrical Fast Transients/Bursts

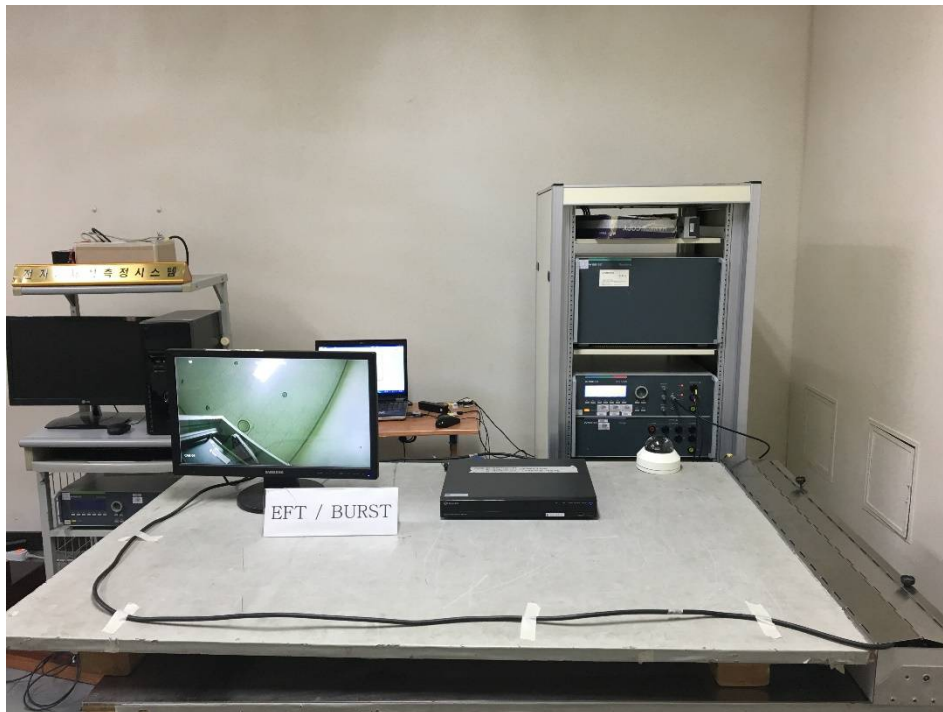

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## Surge Transients

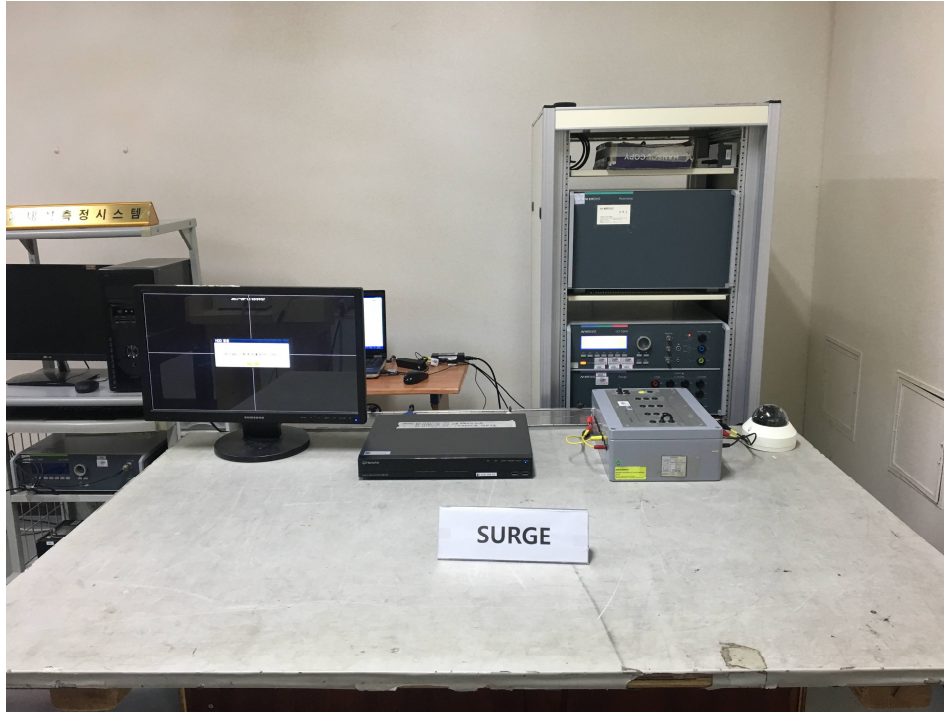



## Conducted Disturbance



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)





## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0599-R1

Page (57) of (64)

---

## Voltage Dips and Short Interruptions

N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr


## EUT Internal Photographs

(Internal View)




## EUT Internal View – Main Board

(Top)

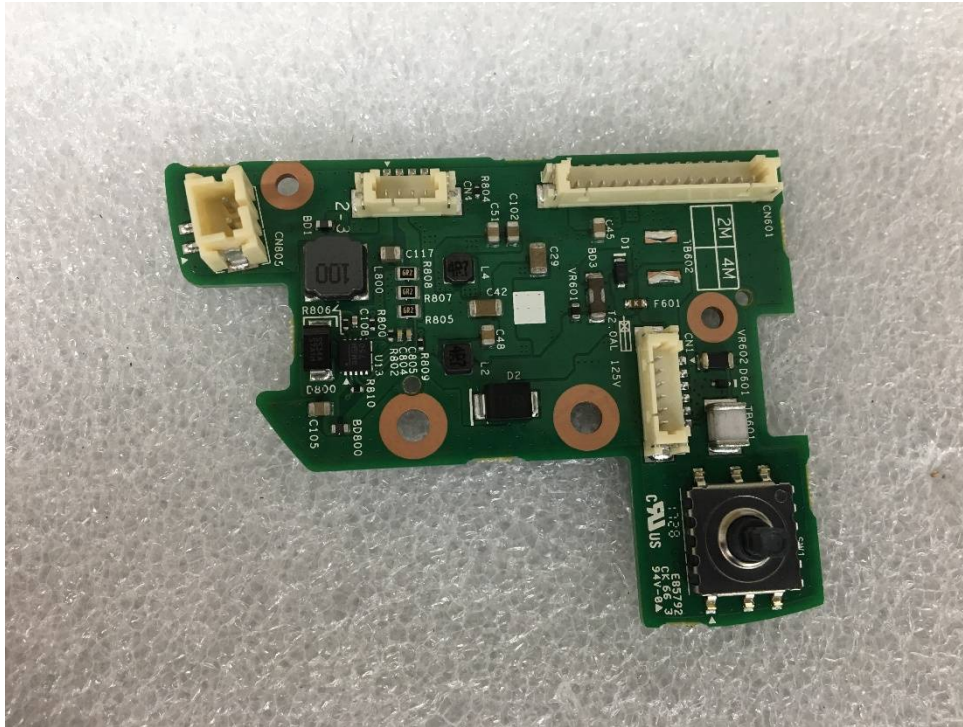

(Bottom)

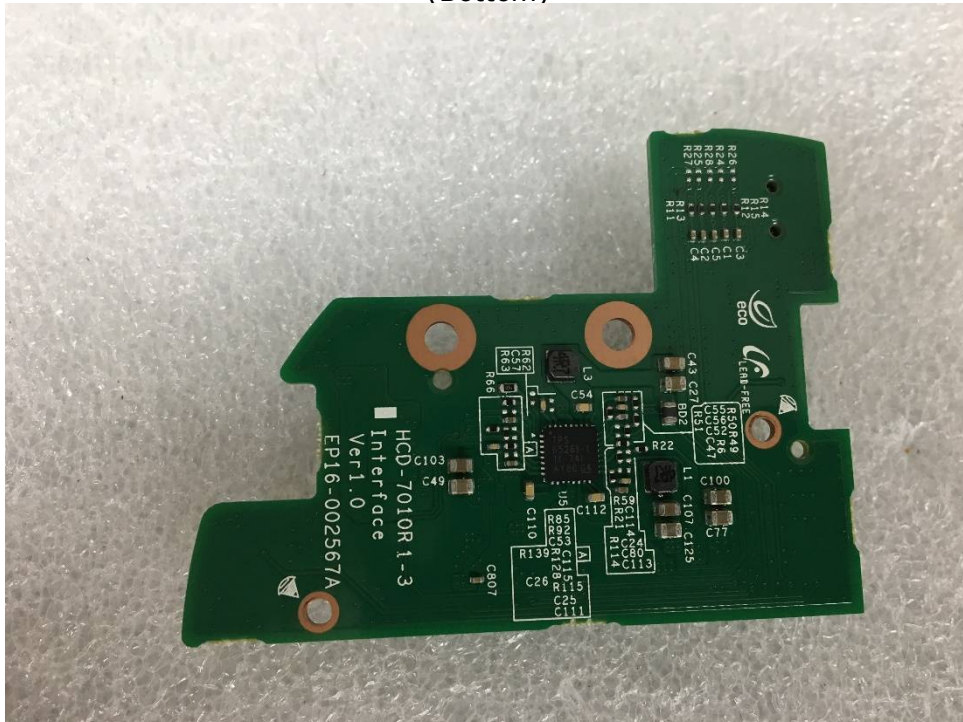

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




## EUT Internal View – IR Board

(Top)



(Bottom)

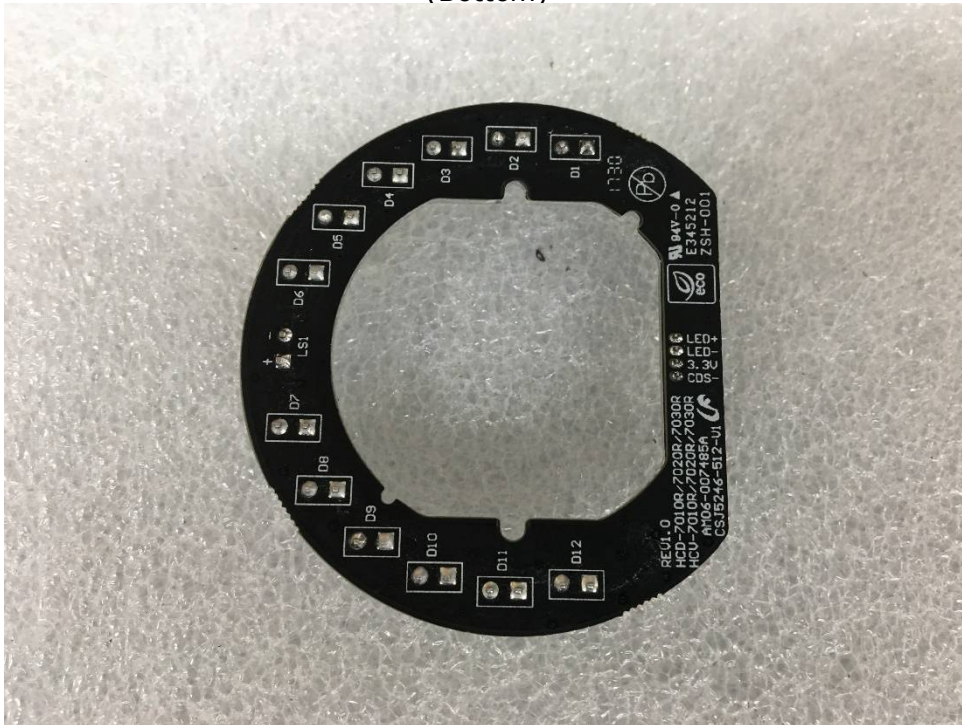


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Lens Board

(Top)



(Bottom)

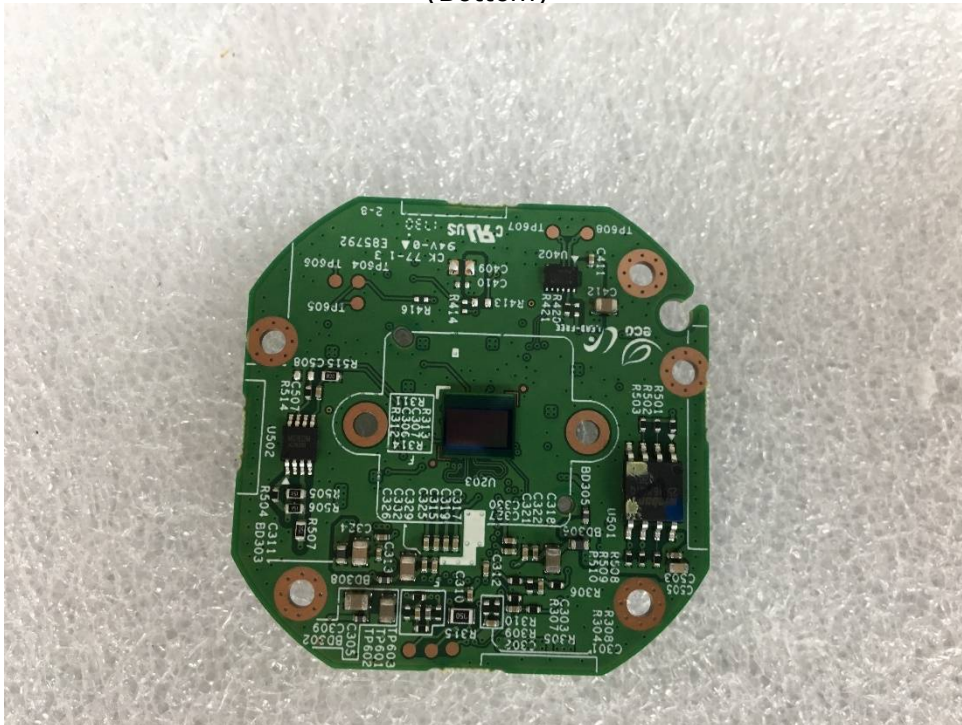

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)



## EUT Internal View – Lens

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)

## Label and Location

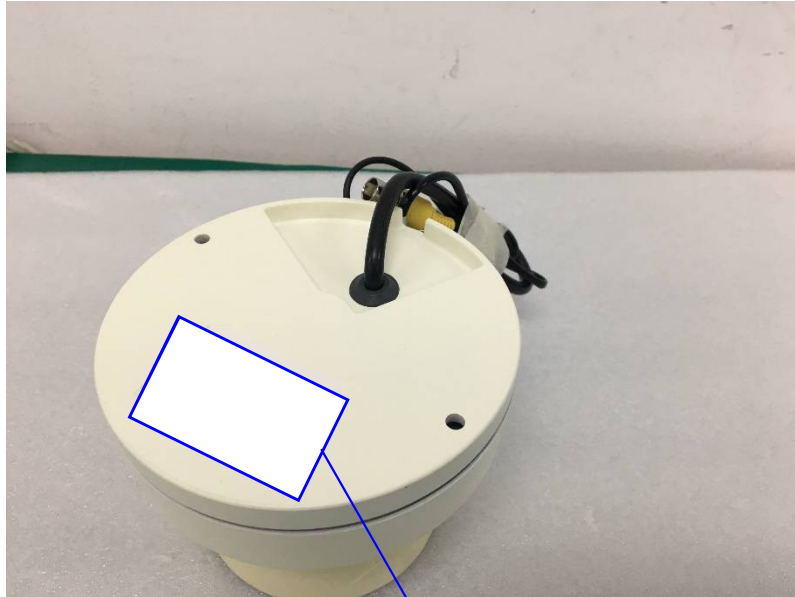

### **CCTV CAMERA**

Model No : HCV-7030R

Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.

Made in China

