

Analog Dome

HCV-7030RA

QHD (4MP) Analog Vandal-Resistant IR Dome Camera

Key Features

- QHD (2560 x 1440, 30fps) resolution
- 0.27 Lux@F2.0 (Color) (HCV-7020R/7030R),0 Lux (B/W : IR LED on)
- Built-in 6.0mm fixed lens (HCV-7030R)
- Day & Night (ICR), DWDR, Motion detection
- IR Viewable Length 30m(7030R)
- Transmission distance max.500m
- Easy installation (Plug & play), IP66, IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCV-7030RA

QHD (4MP) Analog Vandal-Resistant IR Dome Camera



Specifications

Video

Bildgebungsgerät	Größe	1/3"
	Typ	CMOS
Auflösung		2560x1440
Max. Framerate (NTSC/PAL)		30fps/25fps
Min. Beleuchtung	Farbe (1/30 Sekunde, 30 IRE)	0.27
	S/W (1/30 Sekunde, 30 IRE)	0.027
Video-Ausgang		CVBS: 1.0Vp-p / 75Ω composite,720x480(N),720x576(P) for installation, BNC: AHD
Videoübertragungsentfernung		500m(5C2V Coaxial Cable)

Linse

Brennweite (mm)		6.0
Max. Öffnungsverhältnis (F-Zahl)	Breit	2.0
Winkel-Sichtfeld	Horizontal	49.01°
	Vertikal	27.61°
	Diagonal	55.60°
Min. Objektabstand		0.5m(1.64ft)

Schwenken / Neigen / Drehen

Schwenk- / Neigungs- / Drehbereich	Schwenken	0°~350°
	Neigung	0°~67°
	Drehen	0°~355°

Operativ

Tag & Nacht		Auto(ICR)
Hintergrundbeleuchtungskompensation		BLC, HLC, DWDR
Digitale Rauschunterdrückung		2DDNR
Bewegungserkennung	Menge	4ea
Datenschutzmaskierung	Menge	2ea

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Operativ

Verstärkung		Low, Middle, High, Very High
Weißabgleich		ATW, AWC, Manual, Indoor, Outdoor
Elektronischer Verschluss	Geschwindigkeitsbereich	1/30~1/12,000sec(N), 1/25~1/12,000sec(P)
Videodrehung		Flip, Mirror
IR sichtbare Länge		30m(98.43ft)
Koaxialprotokoll		ACP, CVBS

Analysen

Analyseereignisse	Normal	Motion detection

Umwelt & Elektrik

Betriebsbedingung	Temperatur	-30°C~+55°C(-22°F~+131°F)
	Luftfeuchtigkeit	0~90% RH(non-condensing)
	Andere	Start up should be done at above -10°C
Eingangsspannung		12VDC
Stromverbrauch	12VDC	Max 5W

Mechanisch

Farbe	Ivory
Material	Aluminum
Produktabmessungen	Ø120.3x91.7mm(4.74x3.61")
Produktgewicht	510g(1.12lb)

Zertifizierungen & Standards

Umwelt	IEC 60529 IP66, IEC 62262 IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCV-7030RA

QHD (4MP) Analog Vandal-Resistant
IR Dome Camera



CAD

Unit: mm [inch]

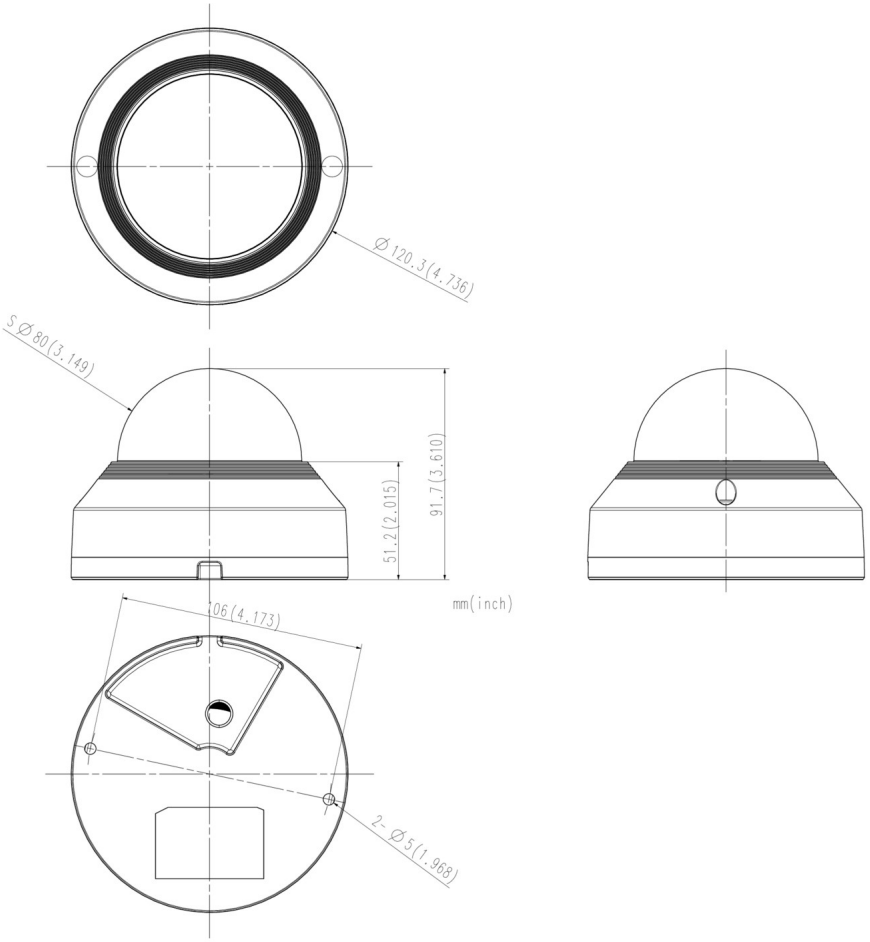

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SBP-300WM



SBP-300WM1



SBP-300KM



SBP-300NB



SBP-300CM



SBP-300LM



SBP-300PM



SBP-300B

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.