

Analog Dome

HCV-7030RA

QHD (4MP) Analog Vandal-Resistant IR Dome Camera

Key Features

- QHD (2560 x 1440, 30fps) resolution
- 0.27 Lux@F2.0 (Color) (HCV-7020R/7030R),0 Lux (B/W : IR LED on)
- Built-in 6.0mm fixed lens (HCV-7030R)
- Day & Night (ICR), DWDR, Motion detection
- IR Viewable Length 30m(7030R)
- Transmission distance max.500m
- Easy installation (Plug & play), IP66, IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCV-7030RA

QHD (4MP) Analog Vandal-Resistant IR Dome Camera



Specifications

Vídeo

Dispositivo de imagen	Tamaño	1/3"
	Tipo	CMOS
Resolución		2560x1440
Máx. Frecuencia de imágen (NTSC/PAL)		30fps/25fps
Mín. Iluminación	Color(1/30seg., 30IRE)	0.27
	B/N(1/30seg., 30IRE)	0.027
Salida de vídeo		CVBS: 1.0Vp-p / 75Ω composite,720x480(N),720x576(P) for installation, BNC: AHD
Distancia de transmisión de vídeo		500m(5C2V Coaxial Cable)

Objetivo

Longitud focal (mm)		6.0
Ratio de apertura máx. (número F)	Gran angular	2.0
Campo de visión angular	Horizontal	49.01°
	Vertical	27.61°
	Diagonal	55.60°
Mín. Distancia al objeto		0.5m(1.64ft)

Desplazamiento / inclinación / rotación

Rango de desplazamiento / inclinación / rotación	Desplazamiento horizontal	0°~350°
	Inclinación	0°~67°
	Rotación	0°~355°

Operativo

Día / Noche		Auto(ICR)
Compensación de luz de fondo		BLC, HLC, DWDR
Reducción Digital de Ruido		2DDNR
Detección de movimiento	Cantidad	4ea

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Operativo

Máscara de privacidad	Cantidad	2ea
Control de ganancia		Low, Middle, High, Very High
Balance de blanco		ATW, AWC, Manual, Indoor, Outdoor
Obturador electrónico	Rango de velocidad	1/30~1/12,000sec(N), 1/25~1/12,000sec(P)
Rotación de vídeo		Flip, Mirror
Longitud visible IR		30m(98.43ft)
Protocolo coaxial		ACP, CVBS

Analíticas

Eventos de analíticas	Normal	Motion detection

Medioambiental y eléctrico

Condición de funcionamiento	Temperaturas	-30°C~+55°C(-22°F~+131°F)
	Humedad	0~90% RH(non-condensing)
	Otros	Start up should be done at above -10°C
Voltaje de entrada		12VDC
Consumo de corriente	12 VCC	Max 5W

Mecánico

Color	Ivory
Material	Aluminum
Dimensiones del producto	Ø120.3x91.7mm(4.74x3.61")
Peso del producto	510g(1.12lb)

Certificaciones y estándares

Medioambiente	IEC 60529 IP66, IEC 62262 IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCV-7030RA

QHD (4MP) Analog Vandal-Resistant
IR Dome Camera



CAD

Unit: mm [inch]

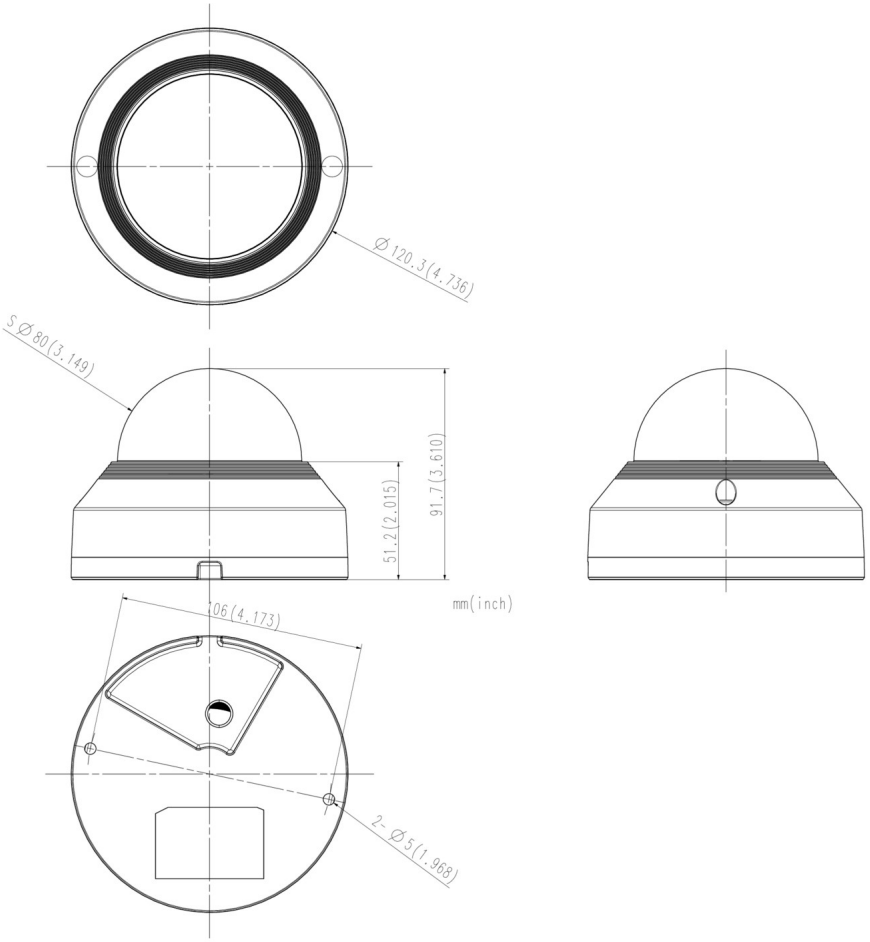

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SBP-300WM



SBP-300WM1



SBP-300KM



SBP-300NB



SBP-300CM



SBP-300LM



SBP-300PM



SBP-300B

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.