

Analog Dome

HCV-7030RA

QHD (4MP) Analog Vandal-Resistant IR Dome Camera

Key Features

- QHD (2560 x 1440, 30fps) resolution
- 0.27 Lux@F2.0 (Color) (HCV-7020R/7030R),0 Lux (B/W : IR LED on)
- Built-in 6.0mm fixed lens (HCV-7030R)
- Day & Night (ICR), DWDR, Motion detection
- IR Viewable Length 30m(7030R)
- Transmission distance max.500m
- Easy installation (Plug & play), IP66, IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCV-7030RA

QHD (4MP) Analog Vandal-Resistant IR Dome Camera



Specifications

Video

Dispositivo di imaging	Dimensioni	1/3"
	Tipo	CMOS
Risoluzione		2560x1440
Max. Framerate (NTSC/PAL)		30fps/25fps
Min. Illuminazione	Colore (1/30 sec, 30IRE)	0.27
	B/N (1/30 sec, 30IRE)	0.027
Uscita video		CVBS: 1.0Vp-p / 75Ω composite,720x480(N),720x576(P) for installation, BNC: AHD
Distanza di trasmissione video		500m(5C2V Coaxial Cable)

Ottica

Lunghezza focale (mm)		6.0
Rapporto di apertura massimo (numero F)	Grandangolo	2.0
Campo visivo angolare	Orizzontale	49.01°
	Verticale	27.61°
	Diagonale	55.60°
Min. Distanza oggetto		0.5m(1.64ft)

Panoramica / Inclina / Ruota

Intervallo panoramica / Inclina / Ruota	Panoramica	0°~350°
	Inclina	0°~67°
	Ruota	0°~355°

Efficienza

Giorno e notte		Auto(ICR)
Compensazione retroilluminazione		BLC, HLC, DWDR
Riduzione digitale del rumore		2DDNR
Rilevamento movimento	Quantità	4ea
Mascheramento della privacy	Quantità	2ea

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Efficienza

Controllo guadagno		Low, Middle, High, Very High
Bilanciamento del bianco		ATW, AWC, Manual, Indoor, Outdoor
Otturatore elettronico	Intervallo di velocità	1/30~1/12,000sec(N), 1/25~1/12,000sec(P)
Rotazione video		Flip, Mirror
Lunghezza visibile a infrarossi		30m(98.43ft)
Protocollo coassiale		ACP, CVBS

Analisi

Eventi analitici	Normale	Motion detection

Ambientale ed elettrico

Condizione operativa	Temperatura	-30°C~+55°C(-22°F~+131°F)
	Umidità	0~90% RH(non-condensing)
	Altri	Start up should be done at above -10°C
Tensione di ingresso		12VDC
Consumo energetico	12 V DC	Max 5W

Meccanico

Colore	Ivory
Materiale	Aluminum
Dimensioni del prodotto	Ø120.3x91.7mm(4.74x3.61")
Peso del prodotto	510g(1.12lb)

Certificazioni e standard

Ambientale	IEC 60529 IP66, IEC 62262 IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCV-7030RA

QHD (4MP) Analog Vandal-Resistant
IR Dome Camera



CAD

Unit: mm [inch]

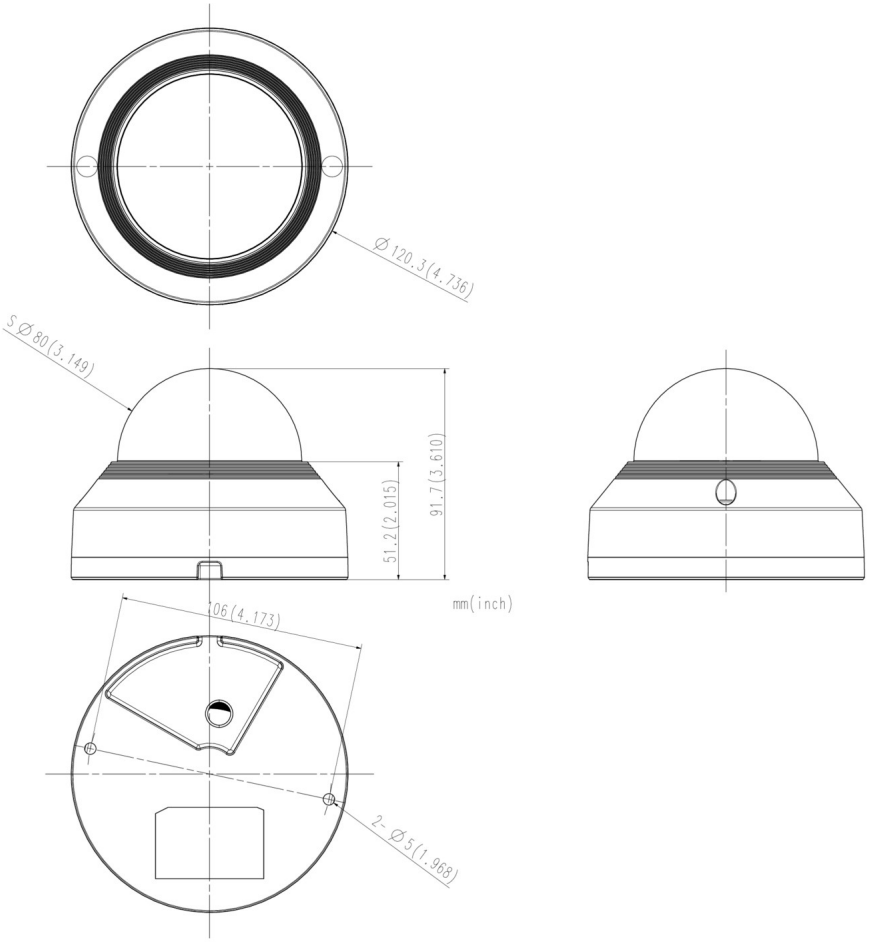

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SBP-300WM



SBP-300WM1



SBP-300KM



SBP-300NB



SBP-300CM



SBP-300LM



SBP-300PM



SBP-300B

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.