

Analog Dome

HCV-7030RA

QHD (4MP) Analog Vandal-Resistant IR Dome Camera

Key Features

- QHD (2560 x 1440, 30fps) resolution
- 0.27 Lux@F2.0 (Color) (HCV-7020R/7030R),0 Lux (B/W : IR LED on)
- Built-in 6.0mm fixed lens (HCV-7030R)
- Day & Night (ICR), DWDR, Motion detection
- IR Viewable Length 30m(7030R)
- Transmission distance max.500m
- Easy installation (Plug & play), IP66, IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCV-7030RA

QHD (4MP) Analog Vandal-Resistant IR Dome Camera



Specifications

Wideo

Przetwornik obrazu	Rozmiar	1/3"
	Typ	CMOS
Rozdzielczość		2560x1440
Maks. liczba klatek na sekundę (NTSC/PAL)		30fps/25fps
Min. oświetlenie	Kolor (1/30 s, 30 IRE)	0.27
	BW (1/30 s, 30 IRE)	0.027
Wyjście wideo		CVBS: 1.0Vp-p / 75Ω composite,720x480(N),720x576(P) for installation, BNC: AHD
Odległość transmisji wideo		500m(5C2V Coaxial Cable)

Obiektyw

Ogniskowa (mm)		6.0
Maksymalny współczynnik apertury (wartość F)	Szeroki	2.0
Kąt widzenia	Poziomo	49.01°
	Pionowo	27.61°
	Po przekątnej	55.60°
Min. odległość od obiektu		0.5m(1.64ft)

Obracanie / pochylanie / obrót

Zakres obrotu/pochylenia/obrotu	Obrót	0°~350°
	Pochylenie	0°~67°
	Obrót	0°~355°

Operacyjne

Dzień i noc		Auto(ICR)
Kompensacja odświetlenia tylnego		BLC, HLC, DWDR
Cyfrowa redukcja szumów		2DDNR
Wykrywanie ruchu	Ilość	4ea

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Operacyjne

Maskowanie prywatności	Ilość	2ea
Kontrola wzmocnienia		Low, Middle, High, Very High
Balans bieli		ATW, AWC, Manual, Indoor, Outdoor
Elektroniczna migawka	Zakres prędkości	1/30~1/12,000sec(N), 1/25~1/12,000sec(P)
Obrót obrazu		Flip, Mirror
Długość widzialna w podczerwieni		30m(98.43ft)
Protokół współosiowy		ACP, CVBS

Analityka

Zdarzenia analityczne	Normalne	Motion detection

Parametry środowiskowe i elektryczne

Warunki pracy	Temperatura	-30°C~+55°C(-22°F~+131°F)
	Wilgotność	0~90% RH(non-condensing)
	Inne	Start up should be done at above -10°C
Napięcie wejściowe		12VDC
Pobór mocy	12 V DC	Max 5W

Mechaniczny

Kolor	Ivory
Materiał	Aluminum
Wymiary produktu	Ø120.3x91.7mm(4.74x3.61")
Waga produktu	510g(1.12lb)

Certyfikaty i normy

Środowisko	IEC 60529 IP66, IEC 62262 IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCV-7030RA

QHD (4MP) Analog Vandal-Resistant
IR Dome Camera



CAD

Unit: mm [inch]

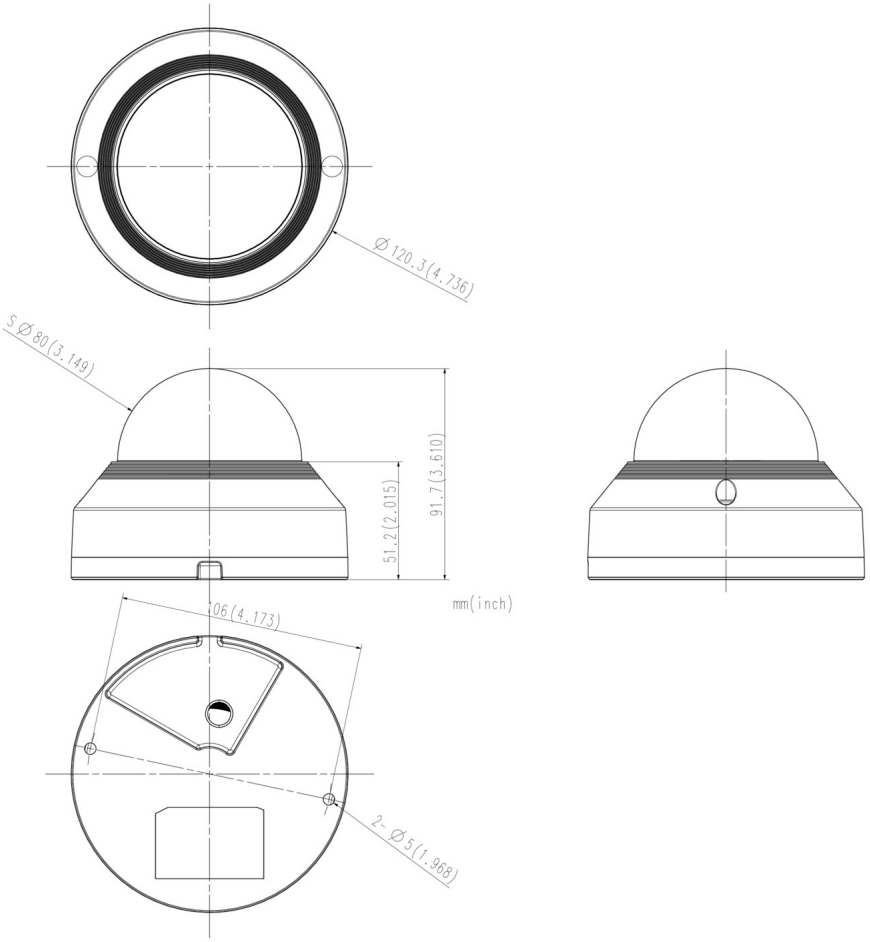

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SBP-300WM



SBP-300WM1



SBP-300KM



SBP-300NB



SBP-300CM



SBP-300LM



SBP-300PM



SBP-300B

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.