

Analog Dome

HCV-7030RA

QHD (4MP) Analog Vandal-Resistant IR Dome Camera

Key Features

- QHD (2560 x 1440, 30fps) resolution
- 0.27 Lux@F2.0 (Color) (HCV-7020R/7030R),0 Lux (B/W : IR LED on)
- Built-in 6.0mm fixed lens (HCV-7030R)
- Day & Night (ICR), DWDR, Motion detection
- IR Viewable Length 30m(7030R)
- Transmission distance max.500m
- Easy installation (Plug & play), IP66, IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCV-7030RA

QHD (4MP) Analog Vandal-Resistant IR Dome Camera



Specifications

Video

Görüntüleme Aygıtı	Boyut	1/3"
	Tür	CMOS
Çözünürlük		2560x1440
En Fazla Kare hızı (NTSC/PAL)		30fps/25fps
Min. Aydınlatma	Renk(1/30sn, 30IRE)	0.27
	SB(1/30sn, 30IRE)	0.027
Video Çıkışı		CVBS: 1.0Vp-p / 75Ω composite,720x480(N),720x576(P) for installation, BNC: AHD
Video İletim Mesafesi		500m(5C2V Coaxial Cable)

Lens

Odak Uzunluğu (mm)		6.0
Maks. Diyafram Açıklığı Oranı (F numarası)	Geniş	2.0
Açısal Görüş Alanı	Yatay	49.01°
	Dikey	27.61°
	Diyagonal	55.60°
Min. Nesne Mesafesi		0.5m(1.64ft)

Pan / Tilt / Döndürme

Pan / Tilt / Döndürme Aralığı	Pan	0°~350°
	Tilt	0°~67°
	Döndürme	0°~355°

İşletimsel

Gündüz ve Gece		Auto(ICR)
Arka Işık Dengeleme		BLC, HLC, DWDR
Dijital Gürültü Azaltma		2DDNR
Hareket Algılama	Miktar	4ea
Gizlilik Maskesi	Miktar	2ea

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

İşletimsel

Kazanç Kontrolü		Low, Middle, High, Very High
Beyaz Dengesi		ATW, AWC, Manual, Indoor, Outdoor
Elektronik Obtüratör	Hız Aralığı	1/30~1/12,000sec(N), 1/25~1/12,000sec(P)
Video Döndürme		Flip, Mirror
IR Görüntülenebilir Uzunluk		30m(98.43ft)
Koaksiyel Protokolü		ACP, CVBS

Analiz Araçları

Analiz Araçları Olayları	Normal	Motion detection

Çevresel ve Elektriksel

Çalışma Koşulu	Sıcaklık	-30°C~+55°C(-22°F~+131°F)
	Nemlilik	0~90% RH(non-condensing)
	Diğer	Start up should be done at above -10°C
Giriş Voltajı		12VDC
Güç Tüketimi	12VDC	Max 5W

Mekanik

Renk	Ivory
Malzeme	Aluminum
Ürün Boyutları	Ø120.3x91.7mm(4.74x3.61")
Ürün Ağırlığı	510g(1.12lb)

Sertifikasyonlar ve Standartlar

Ortam	IEC 60529 IP66, IEC 62262 IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCV-7030RA

QHD (4MP) Analog Vandal-Resistant
IR Dome Camera



CAD

Unit: mm [inch]

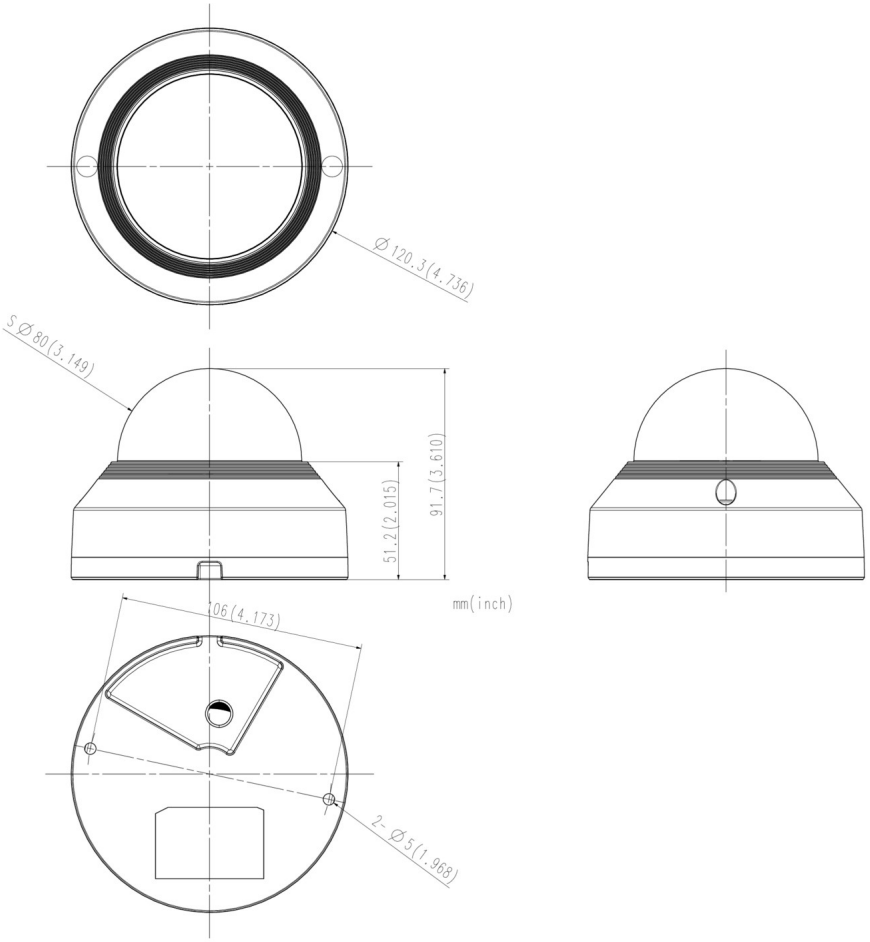

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SBP-300WM



SBP-300WM1



SBP-300KM



SBP-300NB



SBP-300CM



SBP-300LM



SBP-300PM



SBP-300B

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.