

Analog Dome

HCV-7070RA

4MP アナログ IR付 耐衝撃ドームカメラ

Key Features

- 4MP (2560 x 1440、30fps) の解像度
- 0.16Lux@F1.6 (カラー) 、0Lux (白黒：IR LEDオン)
- 3.2 ~ 10mm (3.1倍) バリフォーカルレンズ
- デイナイト (ICR) 、DWDR、モーション検知
- 最大伝送距離 500m
- 簡単設置、DC12V&AC24Vの2電源
- IP66、IK10対応

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCV-7070RA

4MP アナログ IR付 耐衝撃ドームカメラ



Specifications

映像

Imaging Device	サイズ	1/3"
	タイプ	CMOS
解像度		2560x1440
Max. Framerate(NTSC/PAL)		30fps/25fps
Min. Illumination	Color(1/30sec, 30IRE)	0.16
	BW(1/30sec, 30IRE)	0.016
Video Out		CVBS: 1.0Vp-p / 75Ω composite,720x480(N),720x576(P) for installation, BNC: AHD
Video Transmission Distance		500m(5C2V Coaxial Cable)

レンズ

Focal Length (mm)		3.2~10
Optical Zoom Ratio		3.1x
Max Aperture Ratio (F number)	Wide	1.6
視野角度	Horizontal	93.48°~29.44°
	Vertical	50.47°~16.64°
	Diagonal	112.53°~33.7°
Min. Object Distance		0.5m(1.64ft)
Focus Control		手動
Lens Type		DC auto iris(IR corrected)

Pan / Tilt / Rotate

Pan / Tilt / Rotate Range	Pan	0°~350°
	Tilt	0°~63°
	回転	0°~355°

技能

Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC , DWDR
Digital Noise Reduction	2DDNR

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

技能

モーション検知	Quantity	4ea
Privacy Masking	Quantity	2ea
ゲイン制御		低, 中, 高, 最高
ホワイトバランス		ATW, AWC, 手動, 室内, 屋外
Electronic Shutter	Speed Range	1/30~1/12,000sec(N), 1/25~1/12,000sec(P)
ビデオ回転		FLIPモード, ミラー
Alarm Interface	In/Out	Output 1ea
Alarm Triggers		分析
Alarm Events When Alarm Trigger Occurred		アラーム出力
IR Viewable Length		30m(98.43ft)
Coaxial Protocol		ACP, CVBS

分析

分析イベント	通常	モーション検知

Environmental & Electrical

動作条件	温度	-10°C~+55°C(+14°F~+131°F)
	湿度	0~90% RH(non-condensing)
Input Voltage		24VAC, 12VDC
消費電力	12VDC	Max 5.8W
	24VAC	Max 5.8W

Mechanical

カラー	Ivory
材料	アルミニウム
Product Dimensions	ø137.0x106.1mm(ø5.39x4.18")
Product Weight	715g(1.58lb)

Certifications & Standards

環境	IEC 60529 IP66, IEC 62262 IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCV-7070RA

4MP アナログ IR付 耐衝撃ドームカメラ



CAD

Unit: mm [inch]

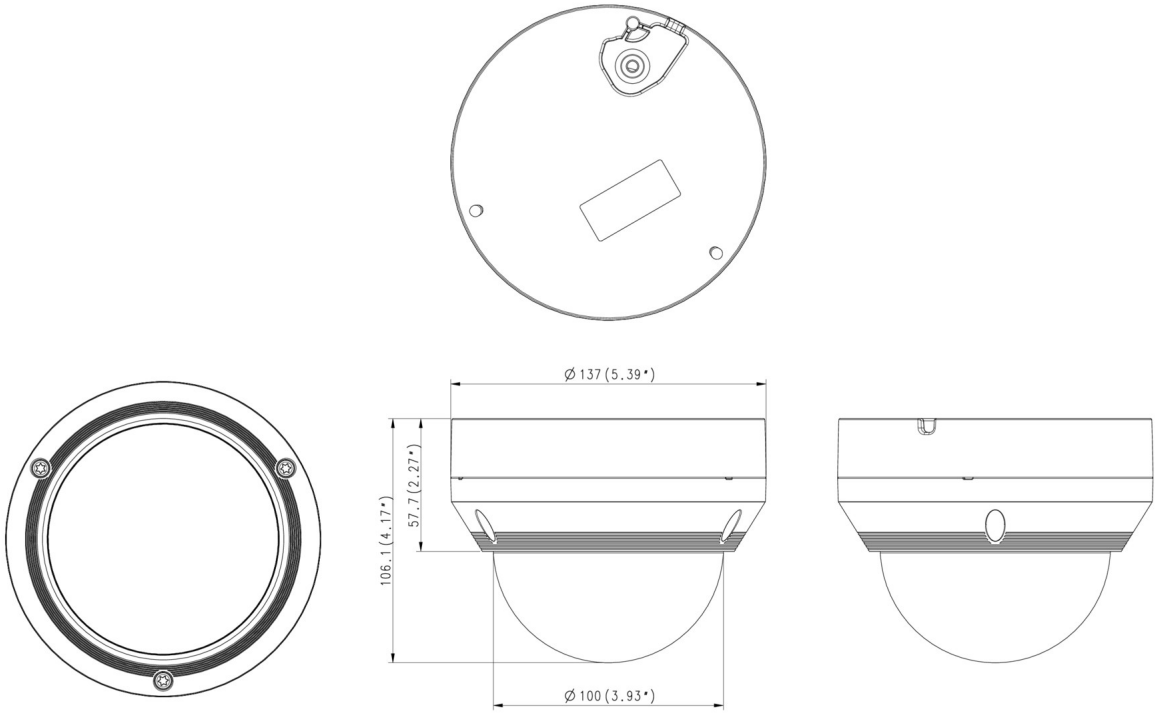

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SBP-300CM



SBV-136B



SBP-300PM



SBP-300KM



SBP-300WM1



SBP-300LM



SBP-390WM2



SBP-300WM



SPB-VAN72



SBP-300B



SHD-1408FW



SBP-301HM5



SBP-300NB

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.