

Analog Dome

HCV-8080RVP

5MP アナログ HD 耐衝撃ドームカメラ

Key Features

- 5MP解像度
- 0.11 Lux @ F1.6 (カラー), 0 Lux (白黒: IR LEDオン)
- デイ/ナイト (ICR), WDR (120dB)
- SSNRIV, 動体検知
- 最大500mの伝送距離
- 簡単なインストール
- VPコントローラー(SPV-401/801)と互換性あり

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HCV-8080RVP

5MP アナログ HD 耐衝撃ドームカメラ



Specifications

映像

Imaging Device	サイズ	1/2.8"
	タイプ	CMOS
解像度		2592x1944, 2560x1440
Max. Framerate(NTSC/PAL)		30fps (@5MP Max. 20fps)
Min. Illumination	Color(1/30sec, 30IRE)	0.11Lux
	BW(1/30sec, 30IRE)	0.011Lux(IR LED off)
Video Out		BNC(AHD/TVI selectable) AHD: 5M/4M/2M, TVI: 2M
Video Transmission Distance		500m(5C2V Coaxial Cable)

レンズ

Focal Length (mm)		3.47~10mm(2.88x) motorized varifocal
Max Aperture Ratio (F number)	Wide	1.6
	Tele	2.9
視野角度	Horizontal	90.92˚(Wide) ~ 31.2˚(Tele)
	Vertical	66.27˚(Wide) ~ 23.5˚(Tele)
	Diagonal	119.14˚(Wide) ~ 38.8˚(Tele)
Min. Object Distance		0.5m(1.64ft)
Focus Control		シンプルフォーカス, 手動
Lens Type		DC auto iris(IR corrected)

Pan / Tilt / Rotate

Pan / Tilt / Rotate Range	Pan	0° ~ 350°
	Tilt	0° ~ 67°
	回転	0° ~ 355°

技能

Camera Title	Displayed up to 15 characters
Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC , WDR

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

技能

Wide Dynamic Range (dB)		120
Digital Noise Reduction		SSNRIV
曇り除去		サポート
モーション検知	Quantity	4ea
Privacy Masking	Color / Option	16ea Rectangular zones / 8ea Polygonal zones
ゲイン制御		低, 中, 高, オフ
ホワイトバランス		ATW, AWC, 手動, 室内, 屋外
Electronic Shutter	Speed Range	1~1/12,000sec
ビデオ回転		FLIPモード, ミラー
Alarm Interface	In/Out	Output 1ea
	その他	MD output
Alarm Triggers		分析
Alarm Events When Alarm Trigger Occurred		アラーム出力
IR Viewable Length		30m (98.43ft)
Coaxial Protocol		ACP, TCP

Environmental & Electrical

動作条件	温度	-30°C~+55°C(-22°F~+131°F)
	湿度	0~90% RH(non-condensing)
	その他	Start up should be done at above -10°C
Input Voltage		Compatible with VP controller(SPV-401/801)
消費電力	33VDC	Max 8.3W

Mechanical

カラー	Ivory
材料	アルミニウム
Product Dimensions	Ø137.0 x 106.1mm(Ø5.39" x 4.18")
Product Weight	711g

Certifications & Standards

環境	IEC 60529 IP66, IEC 62262 IK10

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HCV-8080RVP

5MP アナログ HD 耐衝撃ドームカメラ



CAD

Unit: mm [inch]

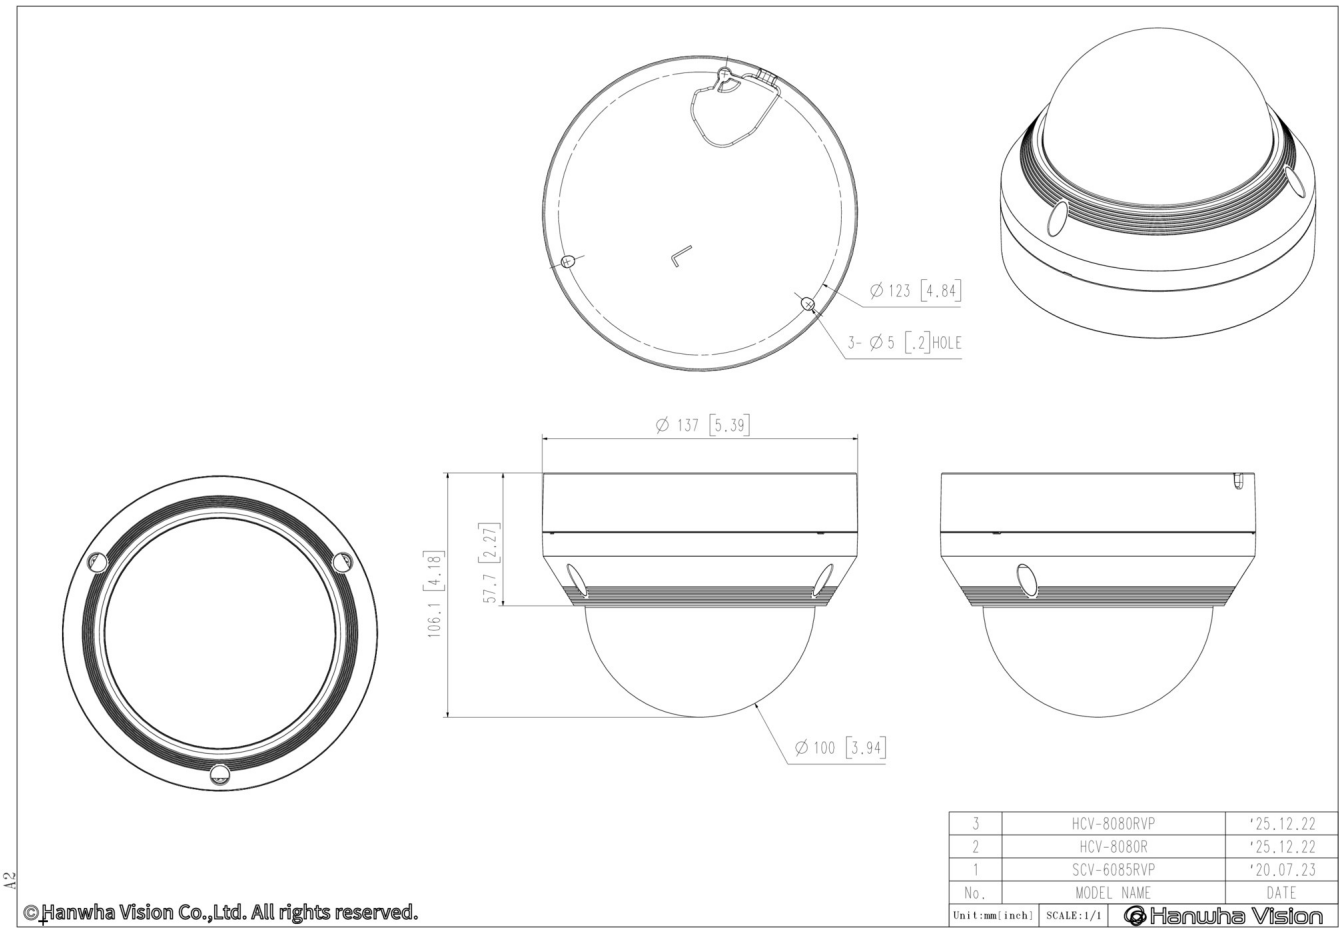

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.