



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0167
Page (1) of (32)

EMC TEST REPORT For IC

Test Report No. : KES-E1-17T0167
Date of Issue : Feb. 27, 2017
Product name : DVR
Model/Type No. : HRD-842N
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 1204, Changwon-daero, Seongsan-gu Changwon-si,
Gyeongsangnam-do, Korea
Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, people's Republic of China
Date of Receipt : Feb, 13, 2017
Test date : Feb, 20, 2017
Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Young Suk, Song
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0167
Page (2) of (32)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Feb, 27, 2017	KES-E1-17T0167	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences.....	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s)	8
1.8	Configuration	9
1.9	Calibration Details of Equipment Used for Measurement.....	10
1.10	Test Facility	10
1.11	Laboratory Accreditations and Listings	10
2.0	Test Regulations	11
2.1	Conducted Emissions Mains Power Ports	13
2.2	Radiated Electric Field Emissions(Below 1 GHz)	14
2.3	Radiated Electric Field Emissions(Above 1 GHz)	15
APPENDIX A	– TEST DATA	16
	Conducted Emissions at Mains Power Ports.....	16
	Radiated Electric Field Emissions(Below 1 GHz)	18
	Radiated Electric Field Emissions(Above 1 GHz)	19
	Test Setup Photos and Configuration.....	23
	Conducted Voltage Emissions	23
	Radiated Electric Field Emissions(Below 1 GHz)	24
	Radiated Electric Field Emissions(Above 1 GHz)	25
	EUT External Photographs.....	26
	EUT Internal Photographs	27



1.0 General Product Description

Main Specifications of EUT are:

HRD-842		
Video	Inputs	8channel BNC : AHD(~4MP), TVI(~2MP), CVI(~2MP), NTSC/PAL
	Resolution	2560x1440, 1920 x 1080, 1280 x 720, 960 x 480, 704 x 480 / 960 x 576, 704 x 576
Live	Frame rate	240fps, 200fps
	Resolution	2560x1440, 1920 x 1080, 1280 x 720, 960 x 480, 704 x 480 / 960 x 576, 704 x 576
	Multi Screen display	1/4/7/9/PIP/Sequence
Performance		
Operating System	Embedded	Linux
Recording	Compression	H.264, Wisestream
		NTSC : Up to 120fps@4MP / PAL : Up to 100fps@4MP
		-
	Record Rate(Analog)	NTSC : Up to 240fps@1920 x 1080 / PAL : Up to 200fps@1920 x 1080
		NTSC: Up to 240fps @ 1280 x 720, 928x480, 704x480, 704x240, 352x240 PAL: Up to 200fps @ 1280 x 720, 928x576, 704x576, 704x288, 352x288
	Mode	Manual, Schedule (Continuous/Event), Event/Pre/Post, Time lapse (1~30 fps(N), 1~25fps(P))
	Event	Video Loss, Motion(Level 1~10), Alarm Input(16), Tampering(Level Low/Medium, High)
	Overwrite modes	Continuous
	Pre-alarm	Up to 30 sec (5,10,20,30 Sec)
	Post-Alarm	Up to 6 hour (5,10,20,30 sec,1,3,5,10,20 min,1,2,3,4,5,6 hour)
Search & Playback	Search mode	Date/time, Event, Backup, POS(SD Signal only), Motion (※ All Search Included Preview Function)
	Playback function	Fast Forward/Backward (x2,x4,x8,x16,x32,x64) ※ Backward Play with I-frame Only, Slow Forward/Backward (x1/2,x1/4,x1/8) Step Forward/Backward ※ Backward Play with I-frame Only
	Simultaneous playback	8CH(Local Monitor, CMS)
Network(IPv4)		
	Transmission speed	Record(Main) Stream) 4MP : 15fps/CH, 1080p/720p/WD1/4CIF/CIF : 30fps/CH(N), 25fps/CH(P) Network(Sub) Stream) WD1/4CIF : 12fps/CH, 2CIF/CIF/QVGA/QCIF : 30fps/CH(N), 25fps/CH(P)
	Transmission Bandwidth	Up to 64Mbps
	Bandwidth control	Selectable
	Stream	Record Stream and Network Stream Selectable (at monitoring Viewer)
	Remote users Maximum	Search(3)/Live Unicast(10)/Live Multicast(20)
	Protocol support	TCP/IP,DHCP,PPPoE,SMTP,NTP,HTTP,DONs,RTP,RTSP,SNMP,(SUNAPI 2017.07)
	Web Browser	Windows OS : Internet Explorer 8, 9, 10, Firefox 3.6 or higher, Chrome 12 or higher Mac OS : Safari 5 or higher, Firefox 3.6 or higher
	Viewer Software	SSM, Webviewer, SmartViewer, IPOLIS mobile viewer, WiseNet Mobile (~7. 2017)
Smart phone		
	Platform	Android, iOS
	Protocol support	RTP, RTSP, HTTP,CGI(SUNAPI 2017.07)
	Control	Live(8ch) : Multi-Profile Support Playback(1ch)
	Remote users Maximum	Search (3), Live Unicast (10), Multicast (20)
Storage	Internal	Up to 4 SATA HDDs (0~8TB HDD)
	External (e-SATA Interface)	e-SATA, USB(for Backup)
	File Format (Back-up)	BU(DVR Player), SEC(include Player), AVI
Security	Password Protection	1 Admin, 10 Group, 10 User per 1 Group
	Data Authentication	Watermark
Easy Configuration	Easy Configuration	P2P (TUTK) (~7. 2017)
Interface		
Monitors	VGA	1 VGA (1920x1080, 1280x1024, 1280x720)
	HDMI	1 HDMI (4K(3840 x 2160), 2K(2560 x 1440), 1920x1080, 1280x1024, 1280x720)
	Compositer(Spot)	BNC(1CH) ※ Included OSD On Screen, Multi mode Support
Audio	Loop Outputs	
	Inputs/Output	8CH line in (Built in 4CH, Option : Audio Extension Cable) 1CH line out
	Compression	G.711
	Sampling rate	8KHz
Alarm	Inputs/Outputs	Terminal 8 Inputs (NO/NC) / Terminal 4 relay Outputs (NO/NC), Rating : 30V DC/2A, 250V AC/0.25A
	Remote notification	Notification via e-mail
Connections	Ethernet	1 RJ45 10/100/1000 Base-T
	Serial Interface	RS-485(Full Duplex) for PTZ, Samsung System Keyboard
	USB	1 ports(USB 3.0, Rear), 1 ports(USB 2.0, Front)
	e-SATA	2 External SATA ports
	Application Support	Mouse, Remote Controller, SPC-2000 (RS-485 protocol)
	Protocol support(RS-485)	Samsung-E/Samsung-T/Peico-D/Peico-p/Panasonic/ Phillips/ AD/ DIAMOND/ ERNA/ KALATEL/ VCL TP/VICON/ ELMO/GE
	Protocol support(Coaxial)	NTSC/PAL : Peico-C (Coaxitron) AHD : ACP(AHD Coax Protocol)
General		
Electrical	Input Voltage/Current	100 ~ 240 VAC ±10%; 50/60 Hz
	Power consumption	Max. 25W (1x2T HDD)
Environmental	Operating Temperature/Humidity	+0°C to +40°C (+32°F to +104°F) / 20% to 85% RH
Mechanical	Dimension (W x H x D)	W440 x H88 x D384.8(17.32" x 3.46" x 15.14")
	Weight (with hard disks)	5.665kg
Lauguage		
	GUI	English, French, German, Spanish, Italian, Russian, Polish, Czech, Turkish, Netherlands Portuguese, Swedish, Danish, Rumania, Serbia, Croatia, Hungary, Greek, Finnish, Norwegian, Korean, Japanese, Chinese(Traditional), Thai, Taiwanese(25 Language)
	Web Browser	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese(Simplified), Japanese, Thai



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230 Vac ☒ 120 Vac ☐ 24 Vac ☐ 12 Vdc ☐ PoE

Frequency ☐ 50 Hz ☒ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
DVR	HRD-842N	-	Hanwha Techwin (Tianjin) Co.,Ltd	E.U.T
Mouse 1	MOEIUOA	PMX-MMOEIUA	PRIMAX ELECTRONICS LTD.	-
Remote Controller	EP10-000329A	-	Samsung Techwin (Sta)	-
HDD	WD10PURX	WCC4J7TS2NSC	WD Purple	1 TB
Switching Power Supply	FSP250-50GUB	-	FSP	-

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0167
Page (6) of (32)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
MONITOR 1	W2261VT	005NDCRDV451	LG Electronics NanJing Display Co., Ltd	-
MONITOR 1 Adaptor	S24E370DL	0NTWHTPH200179Y	Samsung Electronics Co., Ltd	-
MONITOR 2	A3514_FPN	CN07BN4400832ASK2 8GCTR235 R.D	POWERNET Technologies Crop.	-
MONITOR 3	SMT-2232	C95V67VF900025B	Weiha Daewoo Electronics Co., Ltd.	-
Notebook	X56K	HN11N5151FJ0045W	HANSUNG	-
Notebook Adaptor	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
CAMERA	SDC-8440BC	-	Hanwha Techwin (Tianjin) Co.,Ltd	-
CAMERA AC/ DC Adapter	EO-1210	-	EO Electronics	-
Speaker	BR-100A	-	Britz International Co., Ltd.	-
Microphone 1	CMK-303	-	CAMAC	-
Microphone 2	CMK-303	-	CAMAC	-
Mouse 2	SMB-400	0DJM010118	SEJIN ELECTRON INC.	-
External hard disk drives	MDY-US2528	-	Q-DRIVER	-
Alarm 1	-	-	-	-
Alarm 2	-	-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.6 External I / O Cabling

Start		END		Cable Spec.	
Description	I / O Port	Description	I / O Port	Length	Shield
DVR (E.U.T)	RJ 45	Notebook	RJ 45	3.0	U
	HDMI	MONITOR 1	HDMI	1.5	S
	D-SUB	MONITOR 2	D-SUB	1.5	S
	BNC	MONITOR 3	BNC	3.0	S
	BNC	CAMERA	BNC	10	S
	Audio out	Speaker	Audio in	1.4	U
	Audio in	Microphone 1	Audio out	1.2	U
	Audio in	Microphone 2	Audio out	1.7	U
	USB	Mouse 1	USB	1.2	U
	RS 232	Mouse 2	RS 232	1.4	U
	e sata	External hard disk drives	e sata	0.15	U
	2 Pin	Alarm 1	2 Pin	3.0	U
	2 Pin	Alarm 2	2 Pin	3.0	U

* Unshielded = U, Shielded = S

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0167
Page (8) of (32)

1.7 EUT Operating Mode(s)


Test mode	operating
AC 230 V	E.U.T Monitoring, Ping test, 1 kHz

E.U.T Test operating S/W		
Name	Version	Manufacture Company
SmartViewer	-	Hanwha Techwin Co., Ltd.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.8 Configuration

■ AC Main
□ DC Main

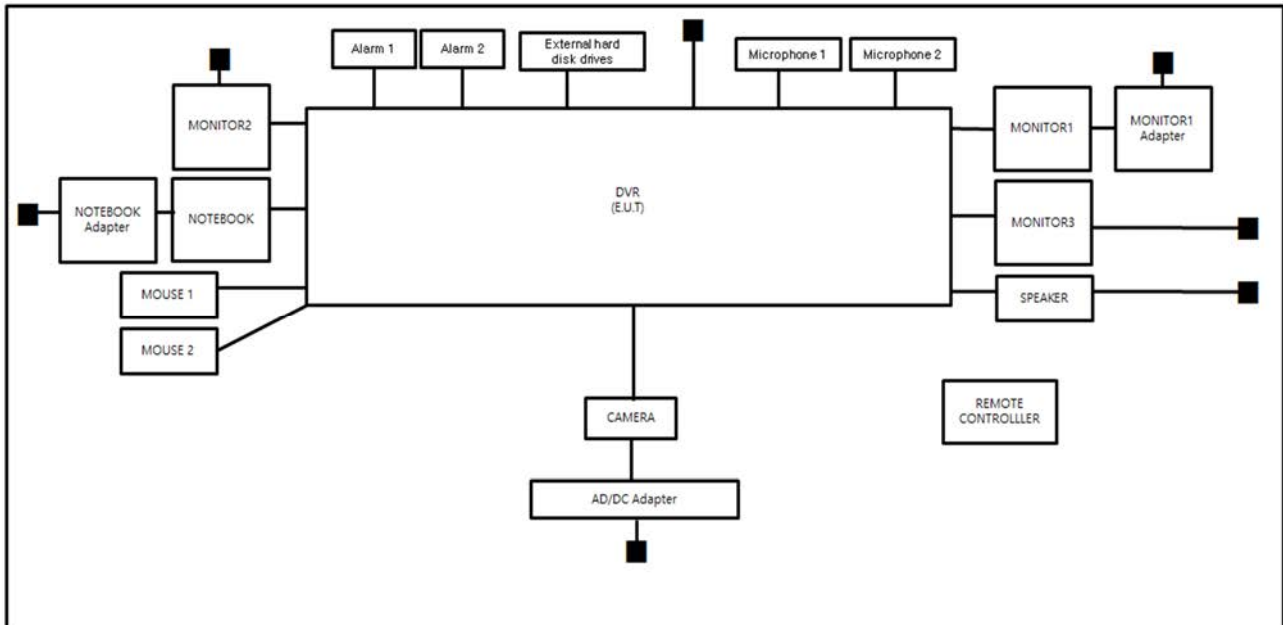

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547 :2009

☐ EN 55032:2012

☐ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0167
Page (12) of (32)

-
- | | | |
|--|---|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR22:2009 + A1:2010 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 + A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
| ☒ IC Regulation ICES-003 : 2016 | | |
| ☒ CAN/CSA CISPR 22-10 | ☒ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
 | | |
| ☐ RE- Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.1 Conducted Emissions Mains Power Ports

Test Date

Feb, 20, 2017

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02, 03, 2018
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	PULSE LIMITER	ESH3-Z2	R & S	101914	12, 13, 2017
☒	Shield Room #3	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R & S	9.12.00	-

Test Conditions

Temperature: 20,9 °C

Relative Humidity: 40,4 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Feb, 20, 2017

Test Location

☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101781	05, 03, 2017
☒	Trilog-Broadband Antenna	VULB 9163	SCHWARZBECK	715	04, 14, 2018
☒	Open Area Test Site	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-
☒	EMI Test S/W	-	-	-	-

Test Conditions

Temperature: 2,1 °C
Relative Humidity: 42,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Feb, 20, 2017

Test Location

Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Log-Periodic Antenna	STLP 9149	SCHWARZBECK	9149-255	05, 17, 2018
☒	EMI Test Receiver	ESU26	R & S	100552	04, 24, 2017
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 14, 2017
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-
☒	EMI Test S/W	e3	AUDIX	8.083b	-

Test Conditions

Temperature: 20,9 °C

Relative Humidity: 40,4 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

Common Information

Test Description: Conducted Emission
Model No.: HRD-842N
Mode
Operator Name: KES

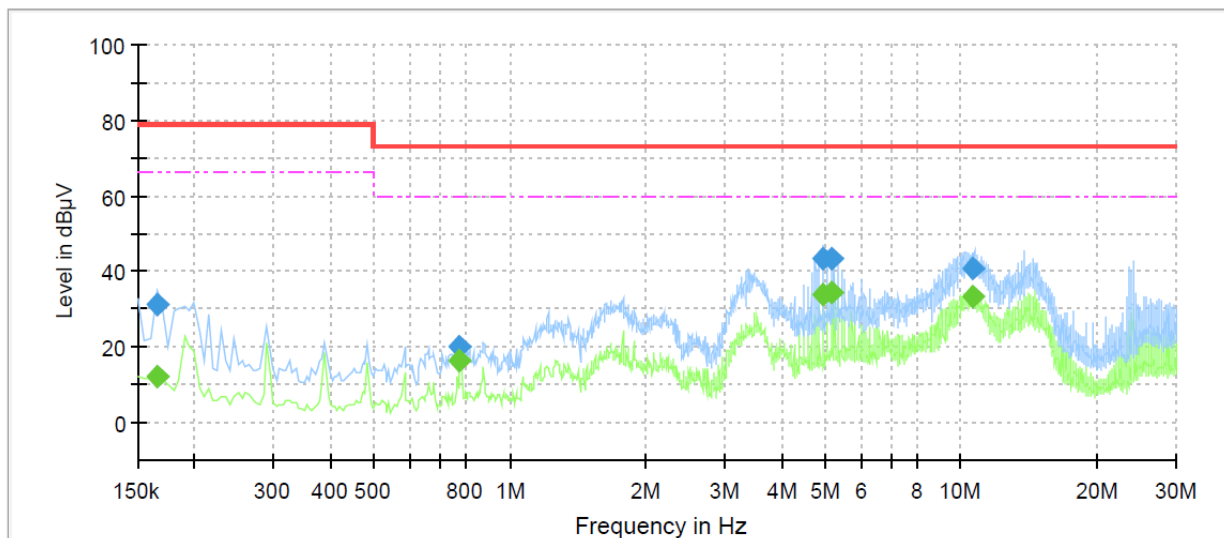

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.165000	---	12.27	66.00	53.73	1000.0	9.000	L1	21.0
0.165000	31.28	---	79.00	47.72	1000.0	9.000	L1	21.0
0.775000	---	16.66	60.00	43.34	1000.0	9.000	L1	20.3
0.775000	20.15	---	73.00	52.85	1000.0	9.000	L1	20.3
4.955000	---	33.64	60.00	26.36	1000.0	9.000	L1	19.7
4.955000	43.39	---	73.00	29.61	1000.0	9.000	L1	19.7
5.150000	---	34.43	60.00	25.57	1000.0	9.000	L1	19.8
5.150000	43.18	---	73.00	29.82	1000.0	9.000	L1	19.8
10.630000	---	33.27	60.00	26.73	1000.0	9.000	L1	19.9
10.630000	40.85	---	73.00	32.15	1000.0	9.000	L1	19.9

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



[NEUTRAL]

Common Information

Test Description: Conducted Emission
Model No.: HRD-842N
Mode
Operator Name: KES

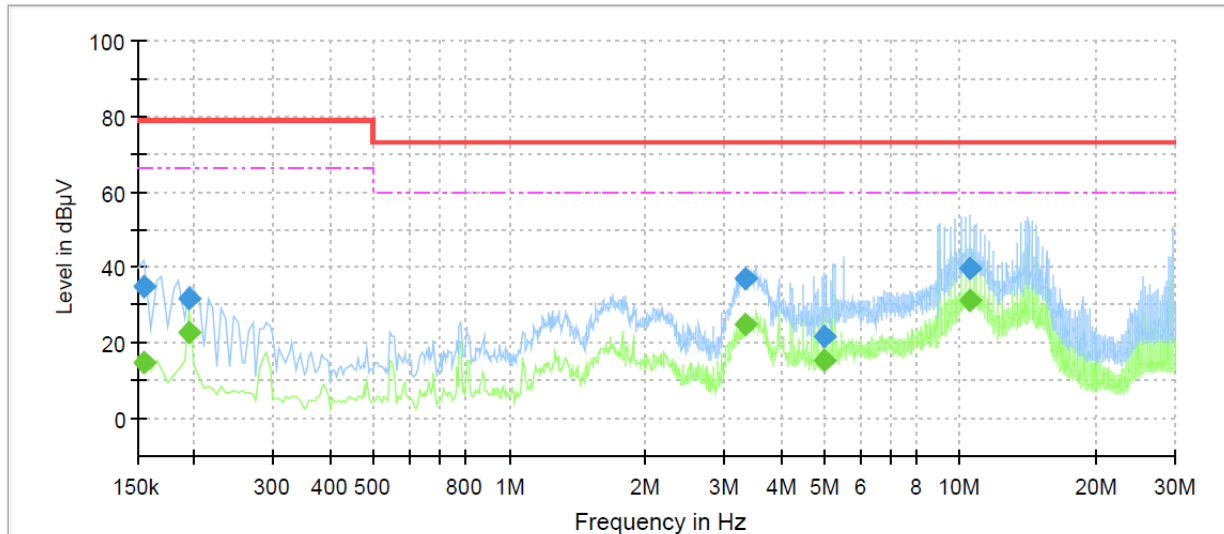

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	14.71	66.00	51.29	1000.0	9.000	N	21.0
0.155000	34.77	---	79.00	44.23	1000.0	9.000	N	21.0
0.195000	---	22.68	66.00	43.32	1000.0	9.000	N	20.8
0.195000	31.95	---	79.00	47.05	1000.0	9.000	N	20.8
3.330000	---	24.72	60.00	35.28	1000.0	9.000	N	19.7
3.330000	37.08	---	73.00	35.92	1000.0	9.000	N	19.7
4.995000	---	15.45	60.00	44.55	1000.0	9.000	N	19.7
4.995000	21.66	---	73.00	51.34	1000.0	9.000	N	19.7
10.545000	---	31.14	60.00	28.86	1000.0	9.000	N	19.9
10.545000	39.66	---	73.00	33.34	1000.0	9.000	N	19.9

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



Radiated Electric Field Emissions(Below 1 GHz)

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin [dB]
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	
251.78	13.65	H	3.98	12.58	4.16	30.39	47.00	16.61
252.31	13.14	V	1.01	12.59	4.17	29.90	47.00	17.10
371.88	11.83	V	1.00	14.96	5.08	31.87	47.00	15.13
446.31	13.93	H	3.99	16.37	6.00	36.30	47.00	10.70
594.01	13.84	V	1.01	19.15	6.79	39.78	47.00	7.22
630.96	9.84	H	4.00	19.40	7.06	36.30	47.00	10.70

* H : Horizontal, V : Vertical


◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dB μ V] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

Radiated Electric Field Emissions(Above 1 GHz)

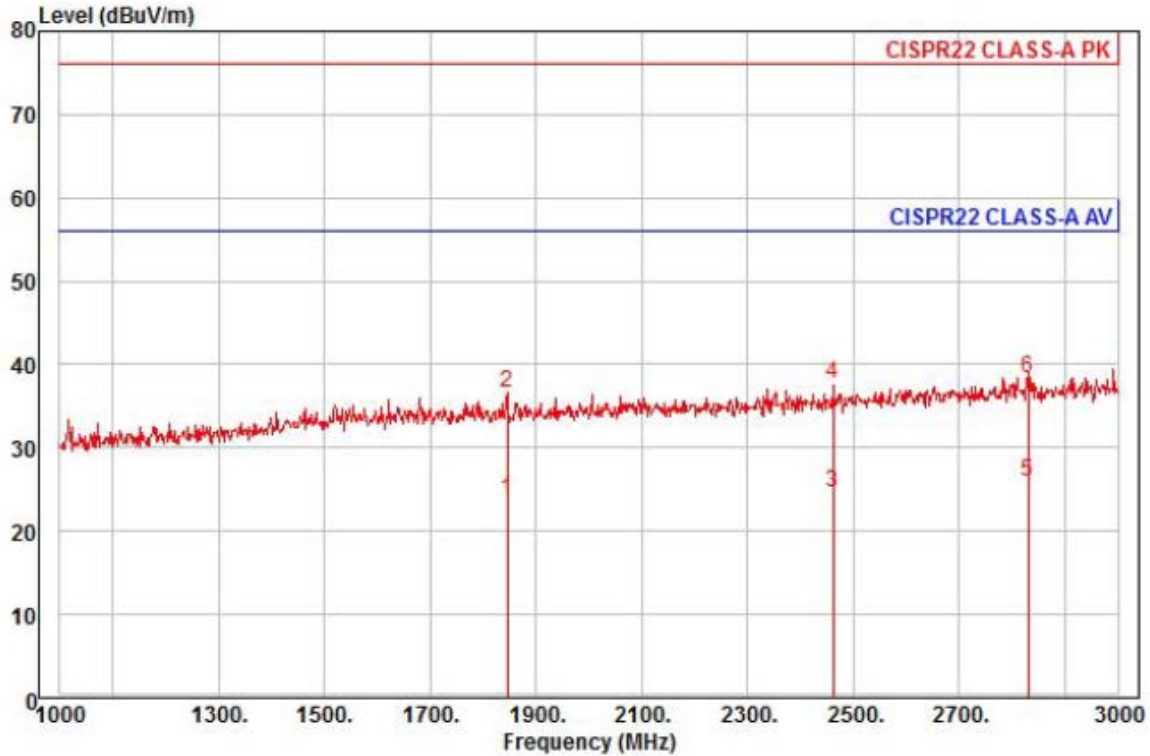


Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HRD-842N
Mode :
Memo : 1 ~ 3 GHz

	Read Freq	Level dBuV	Ant Factor dB/m	Cable Loss dB	Preamp Factor dB	TPos deg	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1846.00	29.15	25.05	8.94	39.34	214	56.00	-32.20	horizontal	Average
2	1846.00	42.02	25.05	8.94	39.34	214	76.00	-39.33	horizontal	Peak
3	2462.00	26.31	27.42	10.45	39.49	247	56.00	-31.31	horizontal	Average
4	2462.00	39.25	27.42	10.45	39.49	247	76.00	-38.37	horizontal	Peak
5 pp	2830.00	25.48	29.04	11.30	39.91	142	56.00	-30.09	horizontal	Average
6 pk	2830.00	38.02	29.04	11.30	39.91	142	76.00	-37.55	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

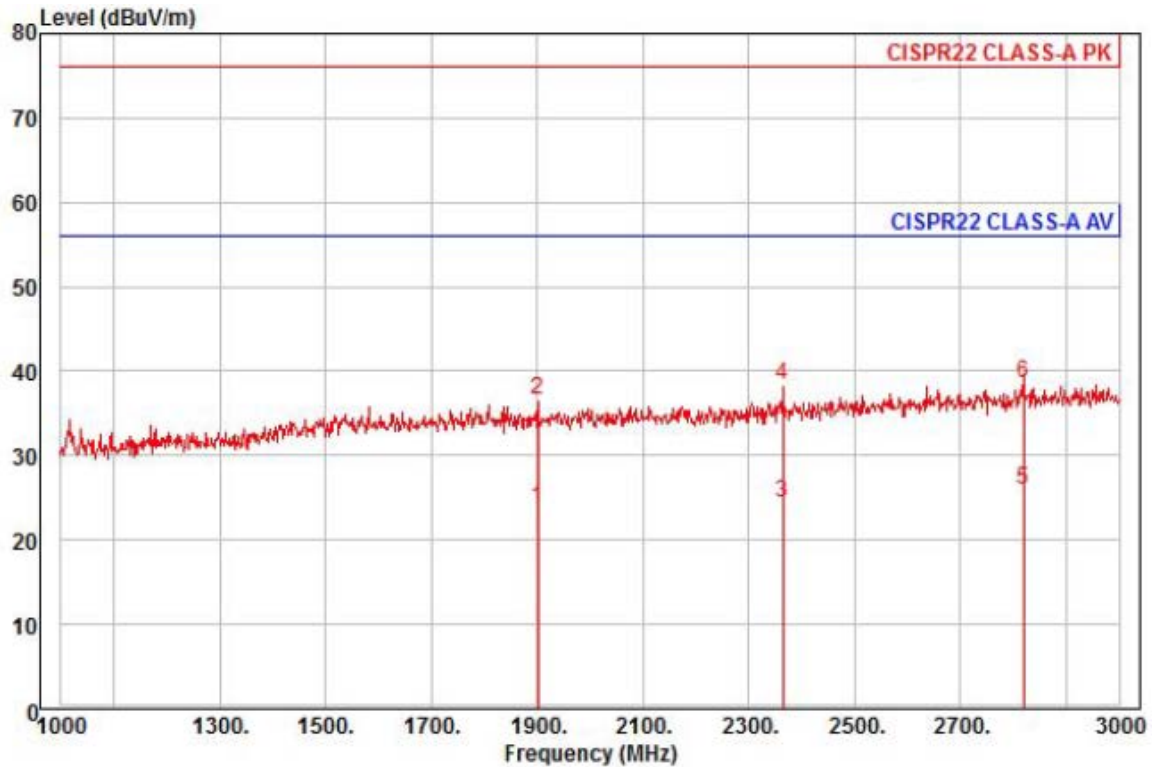

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HRD-842N
Mode :
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1902.00	28.77	25.25	9.09	39.36	270	56.00	-32.25	vertical	Average
2	1902.00	41.71	25.25	9.09	39.36	270	76.00	-39.31	vertical	Peak
3	2364.00	26.62	27.03	10.23	39.42	281	56.00	-31.54	vertical	Average
4	2364.00	40.52	27.03	10.23	39.42	281	76.00	-37.64	vertical	Peak
5 pp	2820.00	25.46	28.99	11.28	39.90	84	56.00	-30.17	vertical	Average
6 pk	2820.00	38.28	28.99	11.28	39.90	84	76.00	-37.35	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]


Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0167
Page (21) of (32)

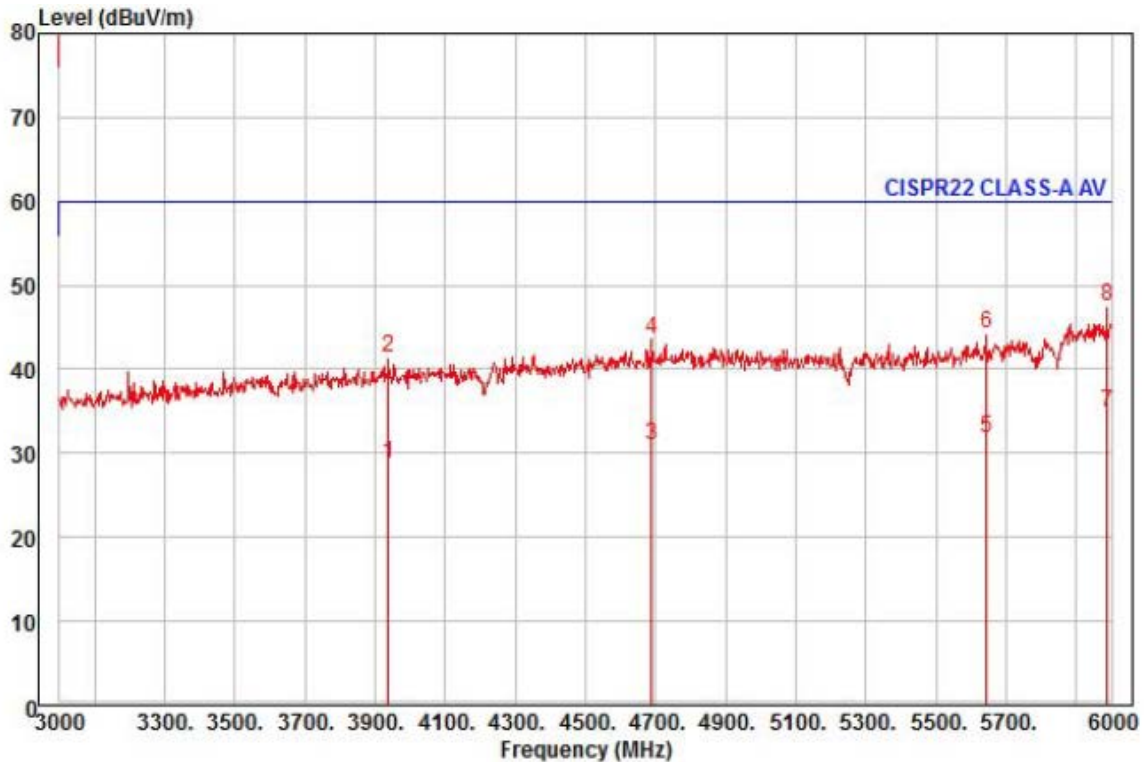

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HRD-842N
Mode :
Memo : 3 ~ 6 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3939.00	24.69	31.26	13.45	40.72	322	60.00	-31.32	horizontal	Average
2	3939.00	37.43	31.26	13.45	40.72	322	80.00	-38.58	horizontal	Peak
3	4689.00	23.64	32.96	14.85	40.58	248	60.00	-29.13	horizontal	Average
4	4689.00	36.43	32.96	14.85	40.58	248	80.00	-36.34	horizontal	Peak
5	5643.00	21.96	34.40	16.42	40.91	282	60.00	-28.13	horizontal	Average
6	5643.00	34.45	34.40	16.42	40.91	282	80.00	-35.64	horizontal	Peak
7 pp	5988.00	21.73	36.48	17.05	40.45	197	60.00	-25.19	horizontal	Average
8 pk	5988.00	34.55	36.48	17.05	40.45	197	80.00	-32.37	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

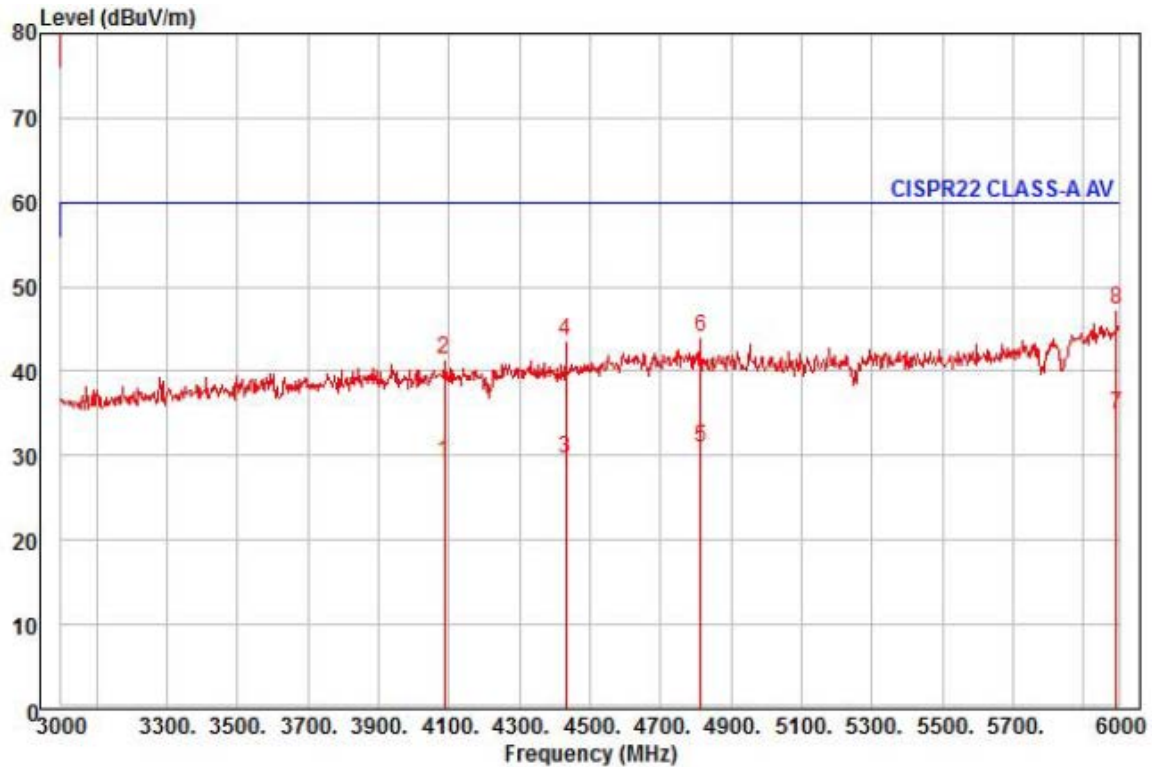

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(9149-255,2016-05-17) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HRD-842N
Mode :
Memo : 3 ~ 6 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4086.00	24.46	31.63	13.73	40.71	260	60.00	-30.89	vertical	Average
2	4086.00	36.87	31.63	13.73	40.71	260	80.00	-38.48	vertical	Peak
3	4431.00	23.57	32.61	14.33	40.76	247	60.00	-30.25	vertical	Average
4	4431.00	37.36	32.61	14.33	40.76	247	80.00	-36.46	vertical	Peak
5	4815.00	23.19	33.07	15.11	40.46	186	60.00	-29.09	vertical	Average
6	4815.00	36.30	33.07	15.11	40.46	186	80.00	-35.98	vertical	Peak
7 pp	5994.00	21.80	36.51	17.06	40.44	166	60.00	-25.07	vertical	Average
8 pk	5994.00	34.26	36.51	17.06	40.44	166	80.00	-32.61	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

Test Setup Photos and Configuration Conducted Voltage Emissions

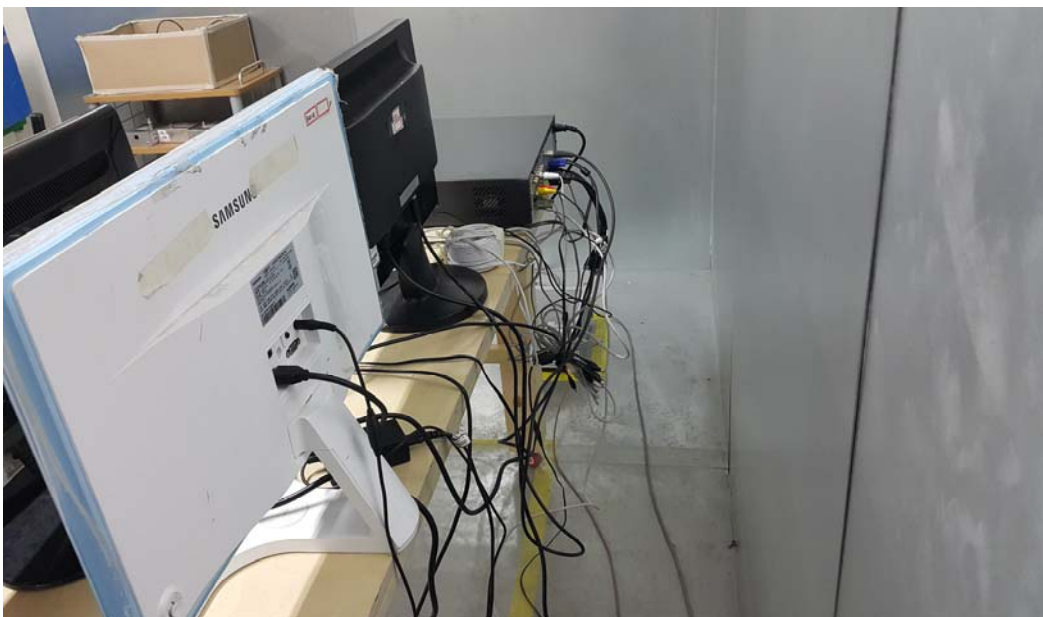


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 GHz)

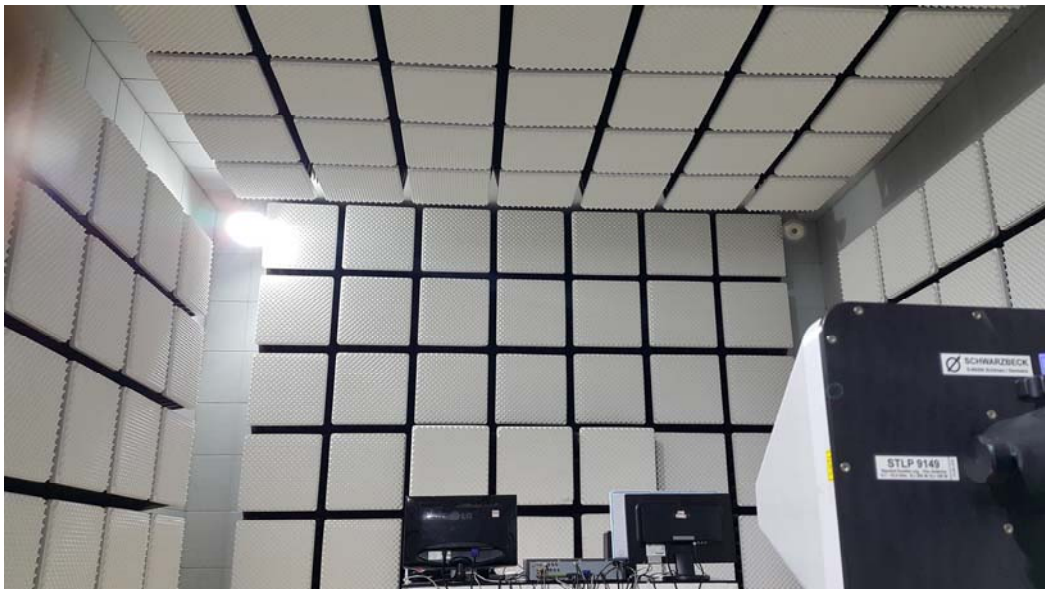

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Main Board

(Top)

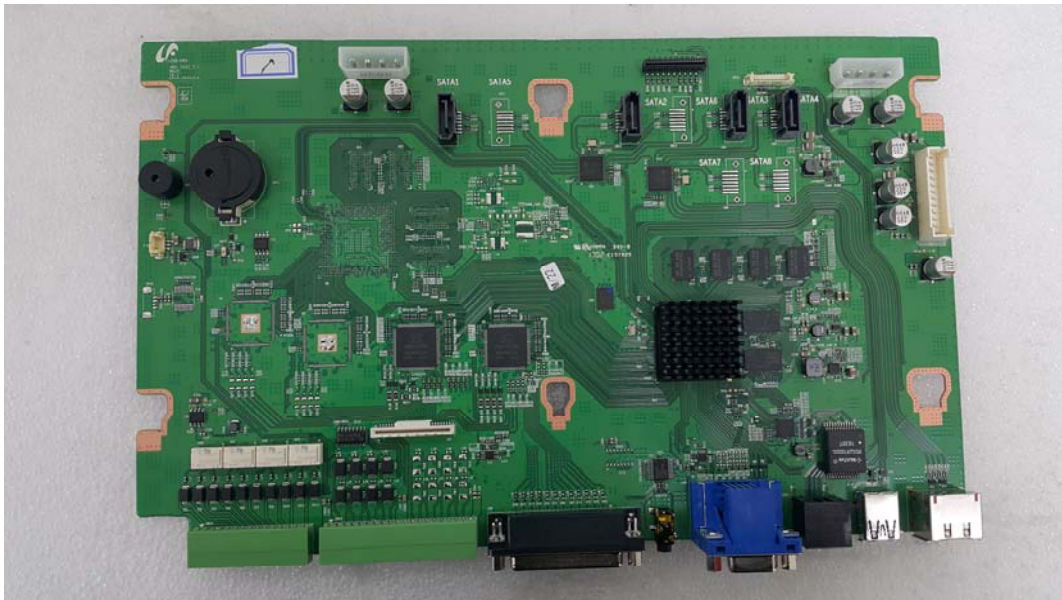

(Bottom)

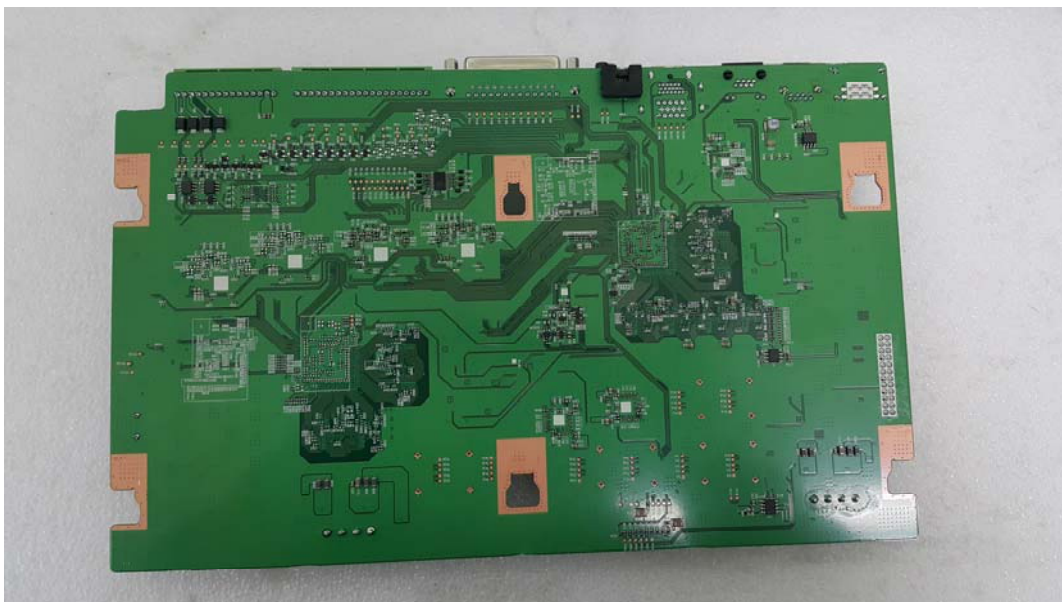

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 1

(Top)



(Bottom)

EUT Internal View – Board 2

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 3

(Top)

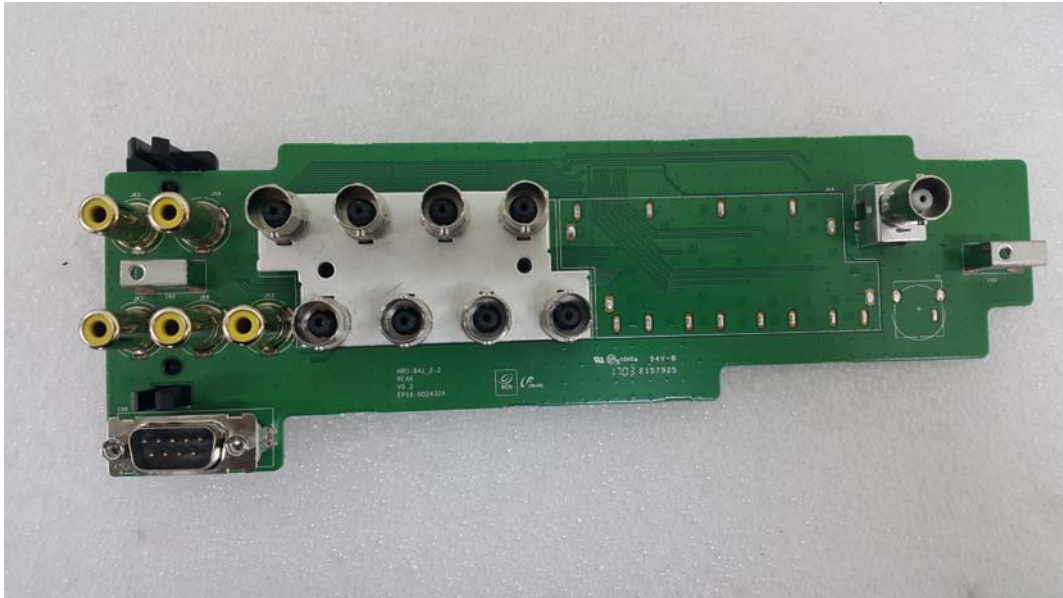

(Bottom)

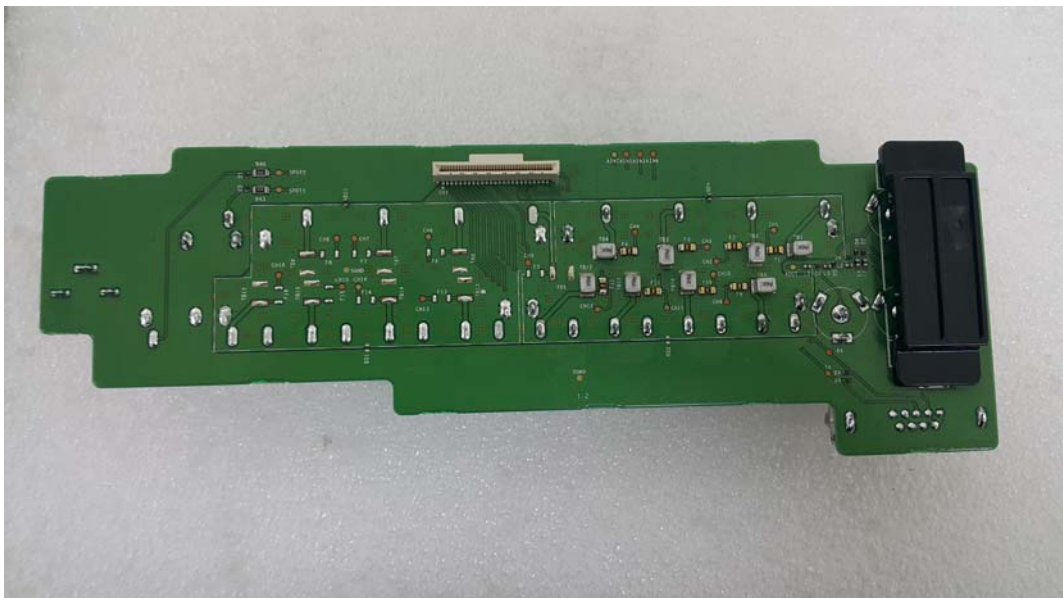

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Label Photographs



CAN ICES-3 (A)/NMB-3(A)

[LABEL VIEW]