

HRX-1634

16CH Pentabrid DVR

Key Features

- 5-in-1 16CH Pentabrid DVR
- AHD/HDTVI/HDCVI/CVBS/IP inputs
- Total 18CH(Analog Maximum 16CH and Network Maximum 18CH), up to 8MP
- H.265, H.264, MJPEG
- 8fps@8MP, 12fps@5MP, 15/12fps@4MP, 30/25fps@2MP recording
- Coaxial control
- Smart search(only Network camera)
- Up to 2 SATA HDDs(6TB/HDD)
- HDMI/VGA Dual monitor (Expand mode)
- P2P service(QR code connect)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

HRX-1634

16CH Pentabrid DVR



Specifications

Display

Analog camera	Inputs	16CH(1Vp-p 75ohm, BNC)
	Signal Type	AHD(8MP, 5MP, 4MP, 1080p, 720p) HDTVI(8MP, 5MP, 4MP, 1080p, 720p) HDCVI(8MP, 5MP, 4MP, 1080p, 720p) CVBS(NTSC/PAL)
Network camera	Inputs	Additional 2CH (Up to 18CH)
	Resolution	8MP ~ CIF
	Protocols	SUNAPI(Wisenet), ONVIF
Live	Local Display	1x HDMI, 1x VGA (Dual monitor) HDMI: 3840 x 2160, 2560x1440, 1920x1080, 1280x1024, 1280x720 VGA: 1920x1080, 1280x1024, 1280x720, 1024x768
	Resolution	[Analog Camera(NTSC/PAL)] - 8MP(15/12fps), 5MP(20/12fps), 4MP(30/25fps), 2MP(30/25fps),1MP(30/25fps), 960H(or 720H)(30/25fps) * per CH [Network Camera] - 2MP(up to 30fps/CH)

Performance

Record	Compression	H.265, H.264, MJPEG
	Record Rate(Analog)	(Main Stream, NT/PAL) 8M 8/8fps, 5M 12/12fps, 4M 15/12fps, 2M 30/25fps, 720p 30/25fps, Under 960H 30/25fps/CH (Sub Stream) 720p/CH or Higher : 640x368 Full fps, SD : up to SD Full fps, * The maximum recording frame rate depends on the frame rate of the input camera.
	Recording Bandwidth	Max. 128Mbps
	Resolution	8MP ~ CIF
	Mode	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark
	Event Trigger	Alarm Input, Video Loss Analog Camera : Video Loss, Motion Detection, Tampering Network Camera : Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event, User Event
	Event Action	e-Mail, Event Push, PTZ Preset, Alarm Out, Buzzer, Monitor Out, FTP, SUNAPI Command, Shutdown

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Performance

Search & Play	Playback Bandwidth	Max. 32Mbps (18CH simultaneously)
	User	Max. 4 Users (Local 1, Remote 3)
	Simultaneous playback	18CH(Local Monitor),18Ch (CMS), 4Ch (Wisenet Mobile), 1Ch(Web)
	Fisheye Dewarping	CMS (only N/W Camera)
Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA 2ea(Max 12TB)
Backup	File backup	Set : Recorder, SEC, AVI Webviewer : AVI
	Function	Max. 16 CH play, Date-time/title display

Function

PTZ	Control	Via GUI, Webviewer, SSM, SmartViewer, Wisenet Mobile Viewer, System Controller
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live(16ch): Multi-Profile Support Playback(4Ch Multi Playback, Max 2MP) Event push
	Max, Remote Users	Search(3), Live Unicast(10)
Redundancy	ARB	Support
Easy configuration		Setup Wizard (Language Date/Time, Password, Network, Auto Camera Configuration), P2P (QR code)
Coaxial Control		CVBS(Pelco-C)/AHD/CVI/TVI

Interface

HDMI	1 EA
VGA	1 EA
BNC	16CH In / 1CH Out(Spot Output)
Audio	Out(1EA, RCA, Line)
Ethernet	RJ-45(10/100/1000BASE-T)
Alarm	In 16EA, Out 4EA - Relay Out1(NO/NC/COM) - Relay Out2~4(NO/COM)
USB	3EA(Front USB2.0 2ea , Rear USB 3.0 1ea)
Serial(Protocols)	RS-485 (Samsung-T/Pelco-D/Pelco-p) * for PTZ
Power inlet	1EA AC

System

System Control	Mouse, Webviewer, System Controller(SPC-7000, SPC-6000, SPC-2000, SPC-2001)
Language	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Romanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Environmental

Operating Temperature	0°C to +40°C(+32°F to +104°F)
Operating Humidity	20% ~ 85% RH
Certification	UL, CE, FCC, KC, UKCA

Electrical

Power Input	DC12V
Power Consumption	Max. 40W (6TB HDD 2ea)

Mechanical

Color / Material	Black / Metal
Dimension	370.0 x 44.0 x 320.0 mm (14.57 x 1.73 x 12.6 inch)
Weight	Approx. 2.9Kg (6.4 lb, 4TB HDD 1ea)

Network

Protocol		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS		Hanwha DDNS
Transmission speed		- Analog Camera(NTSC/PAL) (Main Stream) 8MP 8/8fps CH, 5M 12/12fps CH, 4M 15/12fps CH, 2M 30/25fps CH, 720p 30/25fps/CH, SD 30/25fps/CH (Sub Stream) 720p or higher : 640x368 full fps/CH, SD signal : up to CIF full fps/CH, * The maximum recording frame rate depends on the frame rate of the input camera.
Transmission Bandwidth		Max. 100Mbps
Audio	Input/Output	4 Lline in / 1 Line out
	Compression	G.711 (N/W Camera G.711, 726)
	Audio Communication	2-Way
Max Remote Users		Search(3), Live Unicast(10), Multicast(20)
Security		IP address filtering, User access log, 802.1x Authentication, Encryption (ID/PW, Recording, Transmission, Backup) Device Certificate(Hanwha Vision Root CA)
Viewer Software		SSM, Webviewer, SmartViewer, Wisenet Mobile Viewer, Wisenet Viewer

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


HRX-1634

16CH Pentabrid DVR



CAD

Unit: mm [inch]

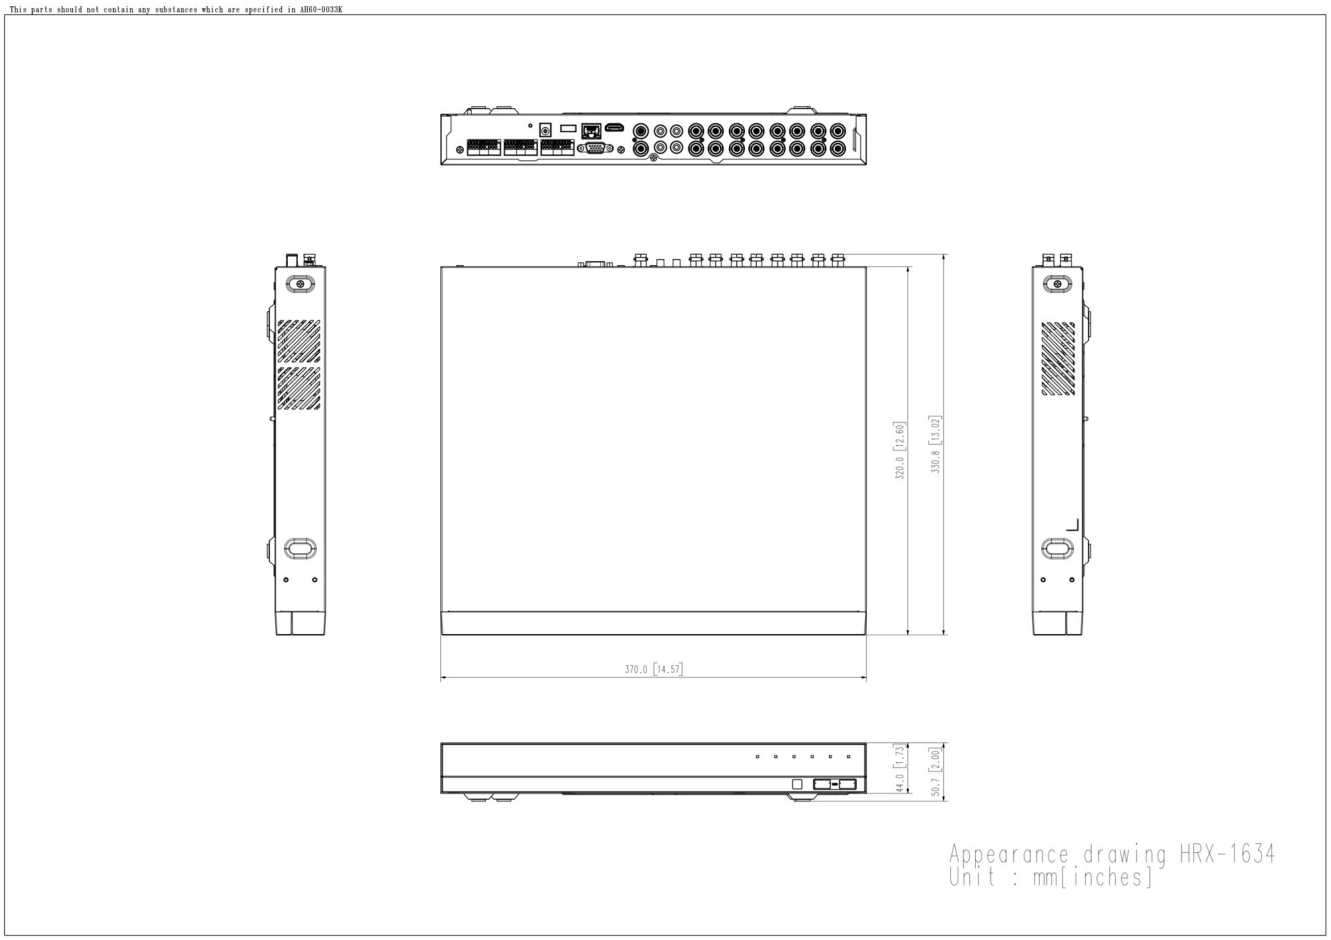

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.