



HRX-835

8CH Pentabrid DVR



Key Features

- 5-in-1 8CH Pentabrid DVR
- AHD/HDTVI/HDCVI/CVBS/IP inputs
- Total 10CH (Analog Max. 8CH and Network Max. 8CH supported), up to 8MP
- H.265, H.264, MJPEG codec
- 8/8fps@8MP, 12/12fps@5MP recording
- Coaxial control
- Up to 4 SATA HDDs(6TB/HDD)
- HDMI/VGA Dual monitor
- P2P service (QR code connect)

HRX-835

8CH Pentabrid DVR



Specifications

Display		
Analog camera	Inputs	8CH(1Vp-p 75ohm, BNC)
	Signal Type	AHD(8MP, 5MP, 4MP, 1080p, 720p) HDTVI(8MP, 5MP, 4MP, 1080p, 720p) HDCVI(8MP, 5MP, 4MP, 1080p, 720p) CVBS(NTSC/PAL)
Network camera	Inputs	Additional 2CH (Up to 10CH)
	Resolution	8MP ~ CIF
	Protocols	SUNAPI(Wisenet), ONVIF
Live	Local Display	1x HDMI, 1x VGA (Dual monitor) HDMI: 3840 x 2160,2560x1440,1920x1080,1280x1024, 1280x720 VGA: 1920x1080,1280x1024,1280x720,1024x768
	Resolution	[Analog Camera(NTSC/PAL)] - 8MP(15/12fps), 5MP(20/12fps), 4MP(30/25fps), 2MP(30/25fps),1MP(30/25fps), 960H(or 720H)(30/25fps) * per CH [Network Camera] - Typ. 2MP(240fps)
Performance		
Record	Compression	H.265, H.264, MJPEG
	Record Rate(Analog)	(Main Stream) 8MP 8/8fps,5M 12/12fps,4M 15/12fps,2M 30/25fps,720p 30/25fps, 960H/640H 30/25fps (NTSC/PAL per CH) (Sub Stream) 720p or higher : 640x368 full fps/CH, SD signal : upto CIF full fps/CH,* The maximum recording frame rate depends on the frame rate of the input camera.
	Recording Bandwidth	Max. 50Mbps
	Resolution	8MP ~ CIF
	Mode	Manual, Schedule (Continuous/Event), Event(Pre/Post), Dual Track
	Event Trigger	Alarm Input Analog Camera : Video Loss,Motion Detection,Tampering, Network Camera : Camera Event (Sensor,MD,Video analytics),VA event (Tampering,Enter / Exit,Passing,Virtual- line,(Dis)Appear,Face Detection,Audio detection),Defocus camera event,Dynamic camera event
	Event Action	e-mail, PTZ preset, Alarm out, Buzzer, Monitor out
Search & Play	Playback Bandwidth	Max. 32Mbps (10CH simultaneously)
	User	Max. 4 Users (Local 1, Remote 3)
	Simultaneous playback	10CH(Local Monitor), 8CH(CMS), 4CH(Wisenet Mobile) 1CH(Web)
	Fisheye Dewarping	WEB/CMS
Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA 4ea(Max 24TB)

Performance

Backup	File backup	BU, EXE(Include Player), AVI(Webviewer only)
	Function	Max. 10 CH play, Date-time/title display

Function

PTZ	Control	Via GUI, Webviewer, SSM, SmartViewer, Wisenet Mobile Viewer, System Controller
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live(8ch): Multi-Profile Support Playback(4Ch Multi Playback, Max 2MP) Event push
	Max, Remote Users	Search(3), Live Unicast(10)
Redundancy	ARB	Support
Easy configuration		Setup Wizard (Language Date/Time, Password, Network, Auto Camera Configuration), P2P (QR code)
Coaxial Control		CVBS(Pelco-C)/AHD/CVI/TVI

Interface

HDMI	1 EA
VGA	1 EA
BNC	8CH In / 1CH Out(Spot Output)
Audio	Out(1EA, RCA, Line)
Ethernet	RJ-45(10/100/1000BASE-T)
Alarm	In 8EA, Out 4EA - Relay Out1(NO/NC/COM) - Relay Out2~4(NO/COM)
USB	2EA(Front USB2.0, Rear USB 3.0)
Serial(Protocols)	RS-485 (Samsung-T/Pelco-D/Pelco-p) * for PTZ
Power inlet	1EA AC

System

System Control	Mouse, Webviewer, System Controller(SPC-7000, SPC-6000, SPC-2000)
Language	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Romanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai

Environmental

Operating Temperature	0°C to +40°C(+32°F to +104°F)
Operating Humidity	20% ~ 85% RH
Certification	UL, CE, FCC, KC

Electrical

Power Input	100~240 VAC±10%, 50/60 Hz
Power Consumption	Max. 120W (6TB HDD 4ea) TBD

Mechanical

Color / Material	Black / Metal
------------------	---------------

Mechanical

Dimension	440.0 x 88 x 384.8 mm (17.32 x 3.46 x 15.15 inch)
Weight	Approx. 4.6Kg (10.14 lb, 4TB HDD 1ea)

Network

Protocol	TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)	
DDNS	Hanwha DDNS	
Transmission speed	Analog Camera) (Main Stream) 8MP 8/8fps,5M 12/12fps,4M 15/12fps,2M 30/25fps,720p 30/25fps, 960H/640H 30/25fps (NTSC/PAL per CH) (Sub Stream) 720p or higher : 640x368 full fps/CH, SD signal : upto CIF full fps/CH,* The maximum recording frame rate depends on the frame rate of the input camera.	
Transmission Bandwidth	Max. 64Mbps	
Audio	Input/Output	8 Line in / 1 Line out
	Compression	G.711 (N/W Camera G.711, 726)
	Audio Communication	2-Way
Max Remote Users	Search(3), Live Unicast(10), Multicast(20)	
Security	IP address filtering, User access log, 802.1x Authentication, Encryption (ID/PW, Recording, Transmission, Backup) Device Certificate(Hanwha Vision Root CA)	
Viewer Software	SSM, Webviewer, Smart Viewer, Wisenet mobile Support SDK/CGI(SUNAPI) for integration to 3'rd party VMS	

HRX-835


8CH Pentabrid DVR



CAD

Unit: mm [inch]

This parts should not contain any substances which are specified in MSD-0038

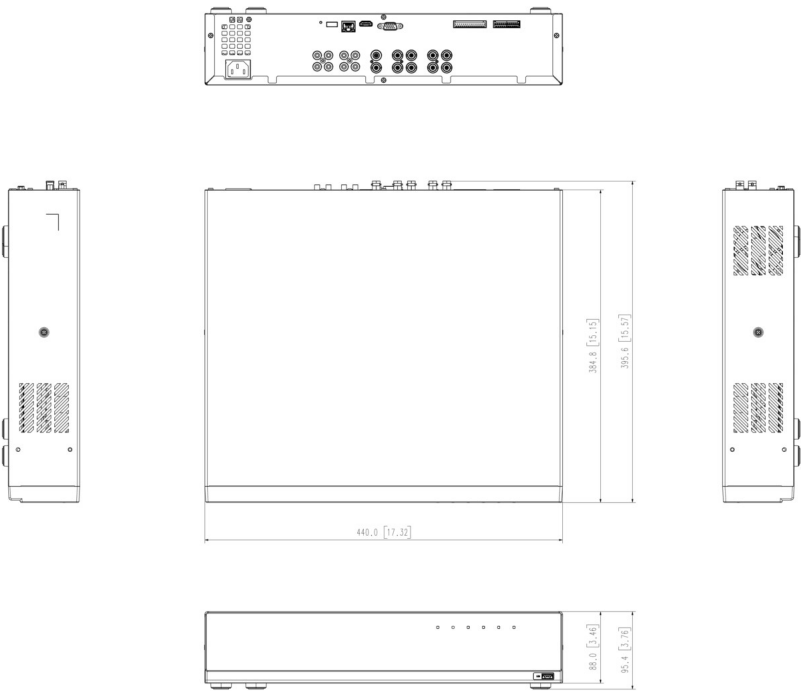

Appearance drawing HRX-835
Unit : mm [inches]