

Network

PNM-8082VT

2MP x 3ch Multi-directional Camera

Key Features

- 2MP x 3ch Multi-directional camera
- Max. 30fps (H.265, H.264, MJPEG)
- 3.0~6.0mm(2x) motorized varifocal lens
- H.265, H.264, MJPEG codec, Multi streaming
- Video analytics, WiseStream II
- IP66, IK10, NEMA4X

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

PNM-8082VT

2MP x 3ch Multi-directional Camera



Specifications

映像

Imaging Device	サイズ	1/2.8"
	タイプ	CMOS
解像度		1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264	30fps/25fps(60Hz/50Hz)
	MJPEG	30fps
Min. Illumination (Lux)	Color(1/30sec, 30IRE)	0.04
	BW(1/30sec, 30IRE)	0.004
Video Out		CVBS: 1.0 Vp-p / 75Ω composite for installation

レンズ

Focal Length (mm)		3~6
Zoom Ratio	Optical	2x
Max Aperture Ratio (F number)	Wide	2.2
	Tele	3.1
視野角度	Horizontal	107°~56°
	Vertical	57°~31°
	Diagonal	126°~64°
Min. Object Distance		0.5m(1.64ft)
Focus Control		シンプルフォーカス
Lens Type		Fixed iris

Pan / Tilt / Rotate

Pan / Tilt / Rotate Range	Pan	0°~360°
	Tilt	0°~73°
	回転	0°~90°

技能

Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC , WDR, SSDR

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

技能

Wide Dynamic Range (dB)		150
Digital Noise Reduction		SSNR V
Digital Image Stabilization		サポート
曇り除去		サポート
モーション検知	Quantity	8ea
	Shape	8point Polygonal zones
Privacy Masking	Quantity	32ea
	Shape	Polygonal zones
	Color / Option	灰色, 緑, Red, 青, 黒, 白, モザイク
ゲイン制御		低, 中, 高
ホワイトバランス		ATW, AWC, 手動, 室内, 屋外
LDC		サポート
Electronic Shutter	モード	最小, 最大, アンチフリッカー
	Speed Range	2~1/12,000sec
ビデオ回転		FLIPモード, ミラー
Alarm Triggers		分析, ネットワーク切断
Alarm Events When Alarm Trigger Occurred		File upload(image): e-mail/FTP, Notification: e-mail, Recording: SD/SDHC/SDXC or NAS recording at event triggers, Handover: PTZ preset

分析

分析イベント	通常	焦点ぼけ検知, モーション検知, タンパリング, Virtual area(Lotering, Intrusion, Enter/Exit, Appear/Disappear), Virtual line(Crossing, Direction)

ネットワーク

Ethernet		Metal shielded RJ-45(10/100/1000BASE-T)
映像圧縮		H.265/H.264: Main/Baseline/High, MJPEG
Smart codec		手動, WiseStream II
ビットレートコントロール		H.265/H.264: CBR or VBR, MJPEG: VBR
Streaming	Unicast	最大 20ユーザー
	マルチキャスト	サポート
	Multiple Streaming	最大 10プロファイル
プロトコル		IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP(TCP, UDP Unicast), PIM-SM
Application Programming Interface	ONVIF	s, G, T
	その他	SUNAPI(HTTP API)
Direct Cloud Connection		Optional (needs gateway)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

セキュリティ

ユーザー認証		ダイジェスト認証
Network authentication		IEEE 802.1X(EAP-TLS, EAP-LEAP)
Secure Communication		HTTPS, SRTP
Access Control		IP-based access control
Data Protect		Encryption credentials, Encrypt compress for live recording file export
Audit		Access / System / Event Log management
デバイスID		Device certificate(Hanwha Vision Root CA)
Secure Storage		SDcard partition encrypt(AES-256)

一般

メモリ	RAM	4GB
	フラッシュ	512MB
Edge Storage	Micro SD/SDHC/SDXC	Max. 256GB x 2slot(Total 512GB)

Environmental & Electrical

動作条件	温度	-40°C~+55°C(-40°F~+131°F)
	湿度	0~95% RH(non-condensing)
保管条件	温度	-50°C~+60°C(-58°F~+140°F)
	湿度	0~90% RH(non-condensing)
Input Voltage		PoE+(IEEE802.3at, Class4)
消費電力	PoE	Max : 16.5W, Typical : 8.2W

Mechanical

カラー	白
材料	アルミニウム
RAL Code	RAL9003
Product Dimensions	Ø251x116.5mm
Product Weight	3,000g(6.61lb)
Compatible Conduit Hole	19.1mm(3/4")(M25)
Compatible Gang Box	シングル, Double, 4" Octagon, 正方形

Certifications & Standards

環境	IEC 60529 IP66, IEC 62262 IK10, NEMA 250 type 4X

DORI (EN62676-4 standard)

Detect (25PPM/ 8PPF)	Wide	28.4m(11.18ft)
	Tele	71.8m(28.27ft)
Observe (63PPM/ 19PPF)	Wide	11.4m(4.49ft)
	Tele	28.7m(11.30ft)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

DORI (EN62676-4 standard)

Recognize (125PPM/ 38PPF)	Wide	5.7m(2.24ft)
	Tele	14.4m(5.67ft)
Identify (250PPM/ 76PPF)	Wide	2.8m(1.10ft)
	Tele	7.8m(3.07ft)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


PNM-8082VT

2MP x 3ch Multi-directional Camera



CAD

Unit: mm [inch]

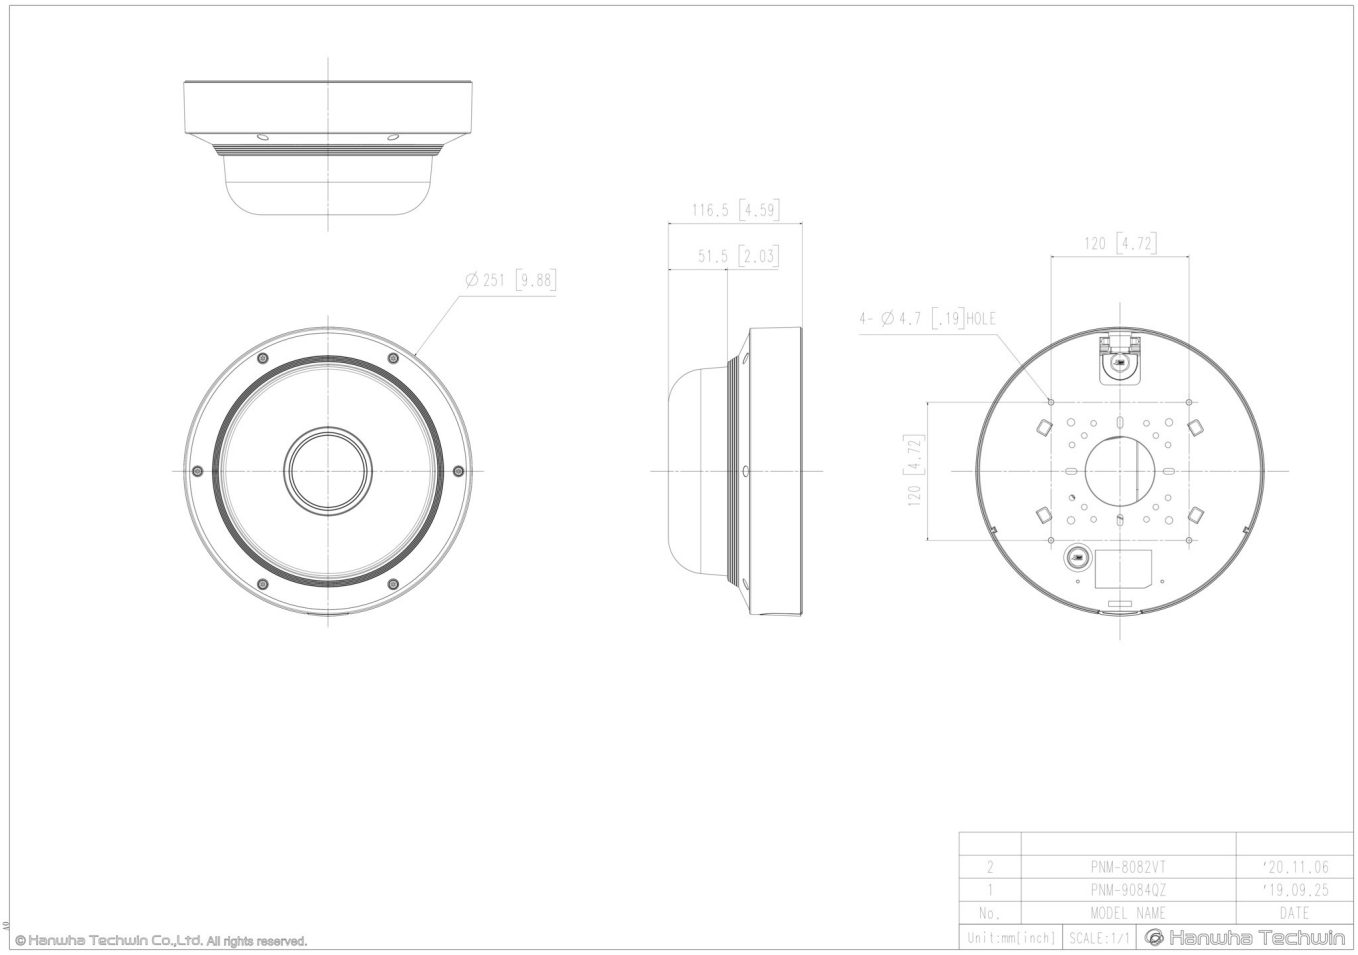


Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SBP-300LMW



SHD-2510FPW



SBP-300WMW1



SBP-300KMW



SBP-300BW



SBP-300PMW



SBP-276HMW



SBP-300WMW



SBP-390WMW2



SBP-300NBW



SBP-300CMW

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.