

PNM-9000VQ



Network

PNM-9000VQ

2MP/5MP x 4CH Multi-directional Camera



Key Features

- Exchangeable 4ea x 2MP / 5MP lens modules
- 8MP to 20MP resolution
(depend on the combination of lens modules)
- Max. 60fps@2M, Max. 30fps@5M (H.265 / H.264)
- WDR 150dB with 2MP, 120dB with 5MP lens module
- 2.4mm, 2.8mm, 3.6mm, 6mm fixed lens (2MP module)
- 3.7mm, 4.6mm, 7mm fixed lens (5MP module)
- H.265, H.264, MJPEG codec, Multi streaming support
- Video analytics, WiseStream II
- IP66, IK10, SD / SDHC / SDXC memory 4 slots

Compatible lenses

[the specifications for lenses](#)



SLA-2M2800Q



SLA-5M7000Q



SLA-2M2400Q



SLA-2M6000Q



SLA-2M3600Q



SLA-5M3700Q



SLA-5M4600Q

PNM-9000VQ


2MP/5MP x 4CH Multi-directional
Camera



CAD

Unit: mm [inch]

PNM-9000VQ
UNIT : mm[inch]

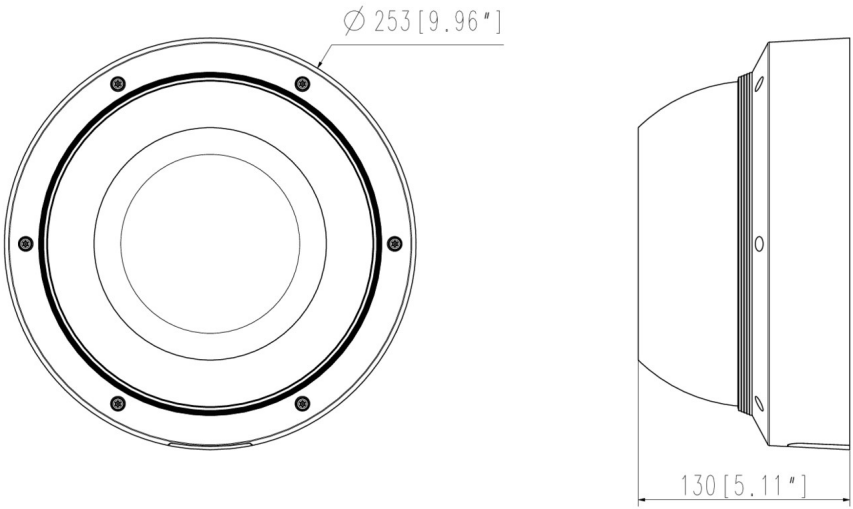

Compatible Devices



SBP-300CM



SBP-300PM



SBP-300KM



SBP-300WM1



SBP-300LM



SBP-390WM2



SBP-300WM



SBP-276HM



SBP-300B



SHD-3000F5



SBP-300NB