

Network

PNM-9322VQP

2MP/5MP x 5CH Multi-directional Camera

Key Features

- Exchangeable 4ea x 2M / 5M lens modules
- 10M to 22M resolution (depend on the combination of lens modules)
- Max. 60fps@2M, Max. 30fps@5M (H.265 / H.264)
- WDR 150dB with 2M, 120dB with 5M lens module
- 2.4mm, 2.8mm, 3.6mm, 6mm, 12mm fixed lens (2M module)
- 3.7mm, 4.6mm, 7mm fixed lens (5M module)
- H.265, H.264, MJPEG codec,WiseStream II
- IP66, IK10, SD / SDHC / SDXC memory 5 slots
- 4.44~142.6mm(Optical 32x) lens, Day & Night (ICR)
- New install base design

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

PNM-9322VQP

2MP/5MP x 5CH Multi-directional Camera



Specifications

映像		1Channel	2Channel	3Channel	4Channel	PTZ
Imaging Device	サイズ					1/2.8"
	タイプ					CMOS
解像度		2560x1920, 2560x1440, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240	2560x1920, 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240	2560x2560, 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240	2560x1920, 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264	30fps/25fps(60Hz/50Hz)				60fps/50fps(60Hz/50Hz)
	MJPEG	30fps				

レンズ

Focal Length (mm)						4.44~142.6
Zoom Ratio	Optical					32x
Max Aperture Ratio (F number)	Wide					1.6
	Tele					4.4
視野角度	Horizontal					61.8°~2.19°
	Vertical					36.2°~1.24°
Min. Object Distance						Wide:1.5m, Tele:2m
Focus Control						Oneshot AF
Optional Lens		SLA-2M2400P(2MP 2.4mm) SLA-2M2800P(2MP 2.8mm) SLA-2M3600P(2MP 3.6mm) SLA-2M6000P(2MP 6.0mm) SLA-2M1200P(2MP 12mm) SLA-5M3700P(5MP 3.7mm) SLA-5M4600P(5MP 4.6mm) SLA-5M7000P(5MP 7.0mm)				

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Pan / Tilt / Rotate

Pan / Tilt / Rotate Range	Pan					360° Endless
	Tilt					190° (-5°~185°)
Pan Speed	プリセット					Max. 700°/sec
	手動					0.024°/sec~200°/sec
Tilt Speed	プリセット					Max. 700°/sec
	手動					0.024°/sec~200°/sec
シーケンス						Preset(300ea), スイング, Group(6ea), 追跡, ツアー, オートラン, スケジュール
Preset Accuracy						±0.2°

技能

Day & Night		Auto(Electrical)			Auto(ICR)
Backlight Compensation		BLC, HLC , WDR, SSDR			
Wide Dynamic Range (dB)		120			
Digital Noise Reduction		SSNR V			
Digital Image Stabilization		サポート			
曇り除去		サポート			
モーション検知	Quantity	8ea			
	Shape	8point Polygonal zones			
Privacy Masking	Quantity	32ea	6ea	32ea	
	Shape	4point Quadrangle zones	Rectangular zones	4point Quadrangle zones	Rectangular zones
	Color / Option	灰色, 緑, Red, 青, 黒, 白	灰色, 黒, 白	灰色, 緑, Red, 青, 黒, 白	灰色, 緑, Red, 青, 黒, 白, モザイク
Electronic Shutter	モード	最小, 最大, アンチフリッカー			
	Speed Range	2~1/12,000sec			
ビデオ回転		FLIPモード, ミラー, Hallway view(90°/270°) - Each channel separately			Flip&Mirror
Alarm Interface	In/Out	Input 1ea, Output 1ea			
Alarm Triggers		分析, ネットワーク切断			
Alarm Events When Alarm Trigger Occurred		File upload(image): e-mail/FTP, Notification: e-mail, Recording: SD/SDHC/SDXC or NAS recording at event triggers,アラーム出力			
オーディオ入力		Selectable(mic in/line in)			
オーディオ出力		Line out			

分析

分析イベント	通常	焦点ぼけ検知, モーション検知, フォグ検出, 顔検出, Virtual area(Lotering, Intrusion, Enter/Exit, Appear/Disappear), Virtual area(Appear/Disappear), Virtual line(Crossing, Direction)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

ネットワーク

Ethernet		Metal shielded RJ-45(10/100BASE-T)
映像圧縮		H.265/H.264: Main/Baseline/High, MJPEG
Audio Compression		G.711 u-law /G.726 selectable,G.726(ADPCM) 8kHz,G.711 8kHz, G.726: 16kbps,24kbps,32kbps,40kbps, AAC-LC: 48kbps at 16kHz
Smart codec		手動, WiseStream II
ビットレートコントロール		H.265/H.264: CBR or VBR, MJPEG: VBR, MJPEG: VBR
プロトコル		IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, PIM-SM
Application Programming Interface	ONVIF	s, T
	その他	SUNAPI(HTTP API)

セキュリティ

ユーザー認証	ダイジェスト認証
Network authentication	IEEE 802.1X(EAP-TLS, EAP-LEAP)
Secure Communication	HTTPS
Access Control	IP-based access control
Audit	Access / System / Event Log management

一般

Edge Storage	Micro SD/SDHC/SDXC	Max. 256GB x 4slot(Total 1TB)

Environmental & Electrical

動作条件	温度	-40°C~+55°C(-40°F~+131°F)
	湿度	0~90% RH(non-condensing)
保管条件	温度	-50°C~+60°C(-58°F~+140°F)
	湿度	0~90% RH(non-condensing)
Input Voltage		HPoE(IEEE802.3bt type4, Class8)
消費電力	PoE	HPoE: Max 65W, Typical 34W

Mechanical

カラー	白
材料	アルミニウム
RAL Code	RAL9003
Product Dimensions	ø367.8x335.7mm(ø144.8"x132.2")
Product Weight	7.05kg(15.54lb

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible lenses

the specifications for lenses



SLA-2M2800P



SLA-2M2400P



SLA-2M3600P



SLA-2M1200P



SLA-5M3700P



SLA-5M4600P



SLA-5M7000P



SLA-2M6000P

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


PNM-9322VQP

2MP/5MP x 5CH Multi-directional Camera



CAD

Unit: mm [inch]

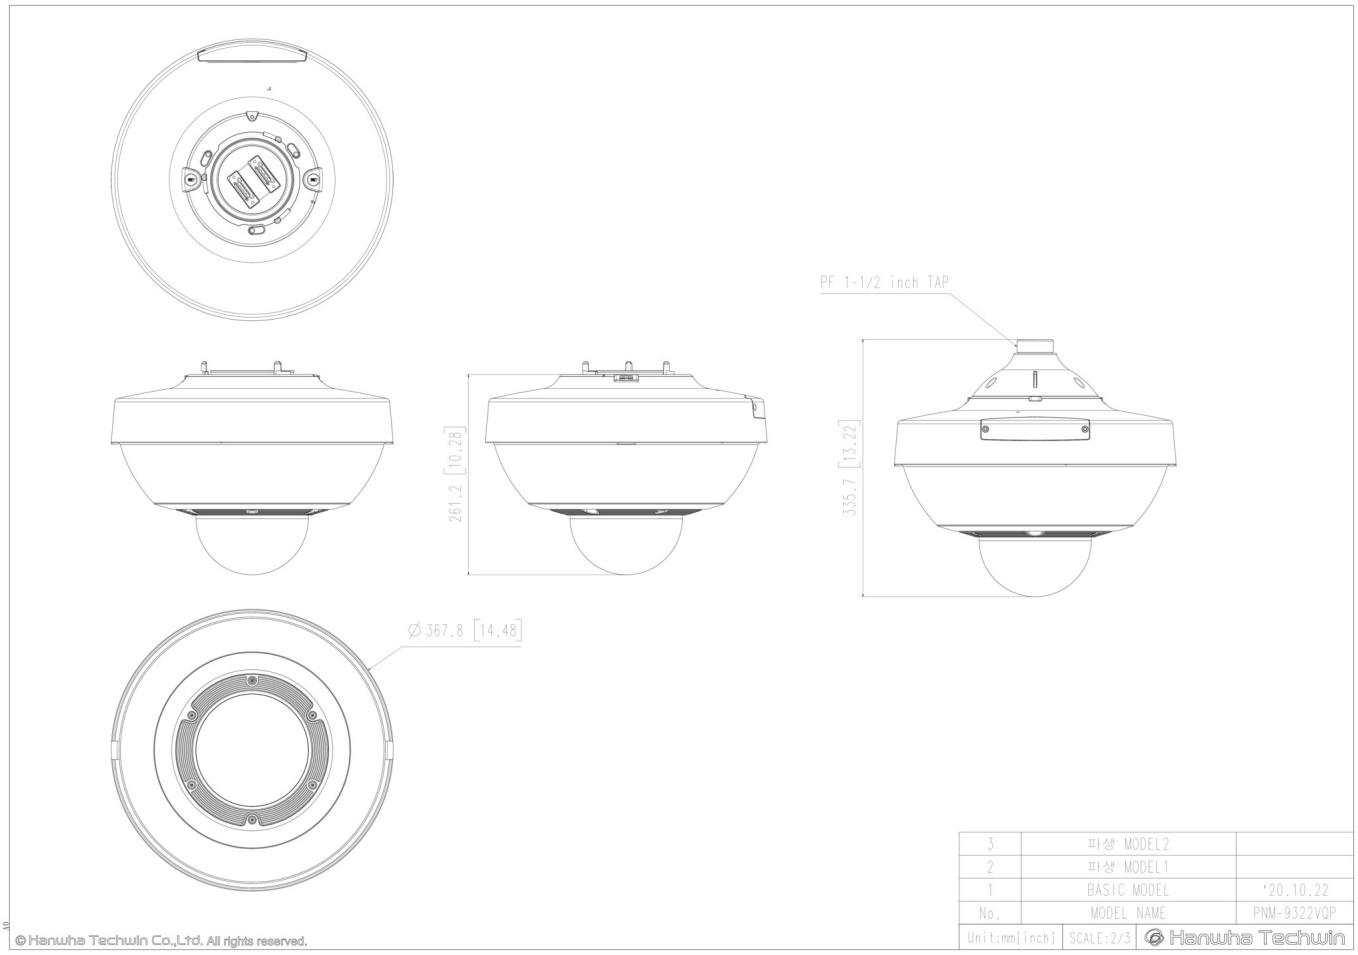

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SBP-300PM



SBP-300KM



SBP-390WM2

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.