

TEST REPORT

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (1) / (25) pages	
---	--	--	--

1. Applicant

- Name: Hanwha Techwin Co., Ltd.
- Address: 6 Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, 13488 KOREA
- Date of Receipt: 2021-05-17

2. Manufacturer

- Name: HANWHA TECHWIN SECURITY VIETNAM CO.,LTD
- Address: Lot O-2, Que Vo Industrial Zone extended area, Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam

3. Use of Report : Quality Control

4. Test sample / Model: NETWORK CAMERA / PNM-9031RV

5. Date(s) of test: 2021-05-17 to 2021-05-24

6. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing

Address: (5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea)

7. Test Standard (Method) used: NEMA 250-2014 Enclosures for Electrical Equipment (1000 Volts Maximum)

8. Testing Environment : Temperature: (25.0 ± 5.0) °C, Humidity: (40.0 ± 5.0) %

9. Results: Pass

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
This report shall not be reproduced except in full without the written approval of CTK

Approval	Tested by:	Technical Manager:
	Min-Gi Mun  (Signature)	WonHyeon Choi  (Signature)

Remark, this report is not related to KOLAS accreditation and relevant regulation

2022-09-14

CTK Co., Ltd.



 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (2) / (25) pages	
---	--	--	--

Test item description :	NETWORK CAMERA
Trade Mark :	
Manufacturer	Lot O-2, Que Vo Industrial Zone extended area, Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
Model/Type reference :	PNM-9031RV
Ratings :	Electrical PNM-9031RV: DC 12 V  1.7 A, PoE (53 V ) 0.45 A PNM-C9022RV DC 12 V  1.83 A, PoE (53 V ) 0.47 A Dimension: Ø 132.4 mm by 415.7 mm, Ø 253 mm by 794.4 mm, Ø 10 mm by 314 mm, Ø 25 mm by 78.5 mm

List of Attachments (including a total number of pages in each attachment):
Attachment 1: 11-12 pages (Construction Diagram including installation method)
Attachment 2: 13-21 pages (Parts List)
Attachment 3: 22-25 pages (photographs)

Summary of testing:

Tests performed (name of test and test clause): Clause 5.7(Hose Down Test)	Testing location: CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea
---	---

Copy of marking plate: The artwork above may be only a draft.	
 NETWORK CAMERA MODEL: PNM-9031RV DC 12V  1.7A / PoE(53V ) 0.45A M/C: PNM-9031RV/KUS Fac. ID: D  2021.06 S/N: Serial No. MAC ADDRESS: XX-XX-XX-XX-XX-XX CAN ICES-3(A)/NMB-3(A) HANWHA TECHWIN CO.,LTD. MADE IN KOREA 	 NETWORK CAMERA, PNM-C9022RV DC 12V  1.83A / PoE(53V ) 0.47A M/C: PNM-C9022RV/KEX Fac.ID:D  2022.09 S/N: Serial No. MAC ADDRESS: XX-XX-XX-XX-XX-XX CAN ICES-3(A)/NMB-3(A) HANWHA TECHWIN CO.,LTD. Made in Korea Rainproof/ Étanche IP66

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (3) / (25) pages	
---	--	--	--

Test item particulars..... :	NETWORK CAMERA
Classification of installation and use	Outdoor (Watertight/Corrosion Resistant)
Possible test case verdicts:	
- test case does not apply to the test object..... :	N/A
- test object does meet the requirement	P (Pass)
- test object does not meet the requirement..... :	F (Fail)
- test case does not evaluated to the test object :	N/E

General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a ☐ comma / ☒ point is used as the decimal separator. Clause numbers between brackets refer to clauses in NEMA 250-2014	
Name and address of factory (ies):	
1. HANWHA TECHWIN SECURITY VIETNAM CO., LTD Lot O-2, Que Vo Industrial Zone extended area, Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam 2. D-TECH CO., LTD. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex)	
General product information:	
Applied NEMA Rating: 4X	
Model PNM-9031RV is basic model which was tested.	
Basic Model	PNM-9031RV
Series Model	PNM-C9022RV
Model differences:	
PNM-9031RV and PNM-C9022RV The model differences are only product sensor/lens	
Type 4X	Enclosures constructed for either indoor or outdoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt and windblown dust); to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (rain, sleet, snow, splashing water, and hose directed water); that provides an increased level of protection against corrosion; and that will be undamaged by the external formation of ice on the enclosure.



CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.
CTK-2022-02222
Page (4) / (25) pages

Table 2-1
Comparison of Specific Applications of Enclosures for Indoor Nonhazardous
(Unclassified) Locations

Provides a Degree of Protection against the Following Conditions	Type of Enclosure									
	1	2	4	4X	5	6	6P	12	12K	13
Access to hazardous parts	X	X	X	X	X	X	X	X	X	X
Ingress of solid foreign objects (falling dirt)	X	X	X	X	X	X	X	X	X	X
Ingress of water (dripping and light splashing)	...	X	X	X	X	X	X	X	X	X
Ingress of solid foreign objects (circulating dust, lint, fibers, and flyings **)	...	...	X	X	...	X	X	X	X	X
Ingress of solid foreign objects (settling airborne dust, lint, fibers, and flyings **)	...	...	X	X	X	X	X	X	X	X
Ingress of water (hosedown and splashing water)	...	...	X	X	...	X	X	...	...	...
Oil and coolant seepage	...	...	...	...	...	...	...	X	X	X
Oil or coolant spraying and splashing	...	...	...	...	...	...	...	...	...	X
Corrosive agents	...	...	...	X	...	...	X	...	...	...
Ingress of water (occasional temporary submersion)	...	...	...	...	...	X	X	...	...	...
Ingress of water (occasional prolonged submersion)	...	...	...	...	...	...	X	...	...	...

** These fibers and flyings are not considered Class III type ignitable fibers or combustible flyings. For Class III type ignitable fibers or flyings see the *National Electrical Code®*, Article 500.5(D).

Table 2-2
Comparison of Specific Applications of Enclosures for Indoor & Outdoor Nonhazardous
(Unclassified) Locations

Provides a Degree of Protection Against the Following Conditions	Type of Enclosure									
	3	3X	3R	3RX	3S	3SX	4	4X	6	6P
Access to hazardous parts	X	X	X	X	X	X	X	X	X	X
Ingress of solid foreign objects (falling dirt)	X	X	X	X	X	X	X	X	X	X
Ingress of water (dripping and light splashing)	X	X	X	X	X	X	X	X	X	X
Ingress of water (rain, snow, and sleet **)	X	X	X	X	X	X	X	X	X	X
Sleet ***	...	...	...	...	X	X	...	...	...	...
Ingress of solid foreign objects (windblown dust, lint, fibers, and flyings****)	X	X	...	...	X	X	X	X	X	X
Ingress of water (hosedown and splashing water)	...	...	...	...	...	...	X	X	X	X
Corrosive agents	...	X	...	X	...	X	...	X	...	X
Ingress of water (occasional temporary submersion)	...	...	...	...	...	...	...	...	X	X
Ingress of water (occasional prolonged submersion)	...	...	...	...	...	...	...	...	...	X

** External operating mechanisms are not required to be operable when the enclosure is ice covered.

*** External operating mechanisms are operable when the enclosure is ice covered. See subsection 5.6.

**** These fibers and flyings are not considered Class III type ignitable fibers or combustible flyings. For Class III type ignitable fibers or flyings see the *National Electrical Code®*, Article 500.5(D).

Table 5-1A
Degrees of Protection Against Access to Hazardous Parts

Enclosure Type	Test Conditions	Degree of Protection		Corresponding IP First Characteristic Numeral
		Brief Description	Definition	
4X	5.7	Protected against access to hazardous parts with a wire	An access probe of 1.0 mm shall not penetrate	6

Table 5-1B
Degrees of Protection Against Solid Foreign Objects

Enclosure Type	Test Conditions	Degree of Protection		Corresponding IP First Characteristic Numeral
		Brief Description	Definition	
4X	<u>Non-vented</u> 5.7	Windblown dust protected	No ingress of dust	6
	<u>Vented</u> 5.5.1 Dust Blast Method			

Table 5-1C
Degrees of Protection against Water

Enclosure Type	Test Conditions	Degree of Protection		Corresponding IP Second Characteristic Numeral
		Brief Description	Definition	
4X	5.7	Protected against hose directed water	Water projected against the enclosure in any direction shall not enter	6 No Ingress Allowed*

Table 5-1D
Additional Protection

Enclosure Type	Test Conditions	Additional Protection		Corresponding IP Second Characteristic Numeral
		Brief Description	Definition	
4X	5.6 5.9 5.10	Special corrosion protection and undamaged by the external formation of ice	Enclosure provides increased corrosion protection and is not damaged by ice that forms on the outside	None

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (6) / (25) pages	
---	--	--	--

NEMA 250-2014			
Clause	Requirement + Test	Result - Remark	Verdict
3	CONSTRUCTION		

3.1	General		P
3.2	Units of Measurement		P
3.3	Materials-General	Enclosures are made of metal or polymeric materials	P
3.4	Materials-Polymeric	More than 650 mm ² (1 in ²) in area Polymeric Materials used is declared as Min. V-2 Used to UL certified material. (See the attachment 2)	N/E
3.5	Corrosion Protection	Stainless steel and/or aluminium are declared as the materials used (See the attachment 2)	N/E
3.6	Openings	No openings in Product	N/A
3.7	Mounting	Mounting means are external to the equipment cavity (See the attachment 1)	P
3.8	Conduit Connection	No conduit connection (See the attachment 1)	N/A
3.9	Hubs and Fittings	No Hubs and Fittings	N/A
3.10	Knockouts	No Knockouts	N/A
3.11	External Operating Mechanisms	No External Operating Mechanisms	N/A
3.12	Access to Interior	Needs tool to open unit	P
3.13	Closing Hardware	No closing Hardware	N/A
3.14	Gaskets	Gaskets made of a silicone Sponge Rubber (no Elastomeric or Thermoplastic used) (See clause 5.14 and the attachment 2)	P
3.15	Observation Windows	No Observation Window	N/A

4	MARKING		
----------	----------------	--	--

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (7) / (25) pages	
---	--	--	--

NEMA 250-2014			
Clause	Requirement + Test	Result - Remark	Verdict
4.1	Type Designations	"Type 4X" Marking is declared to be on the product before on the market	P
4.2	Supplemental Markings	Supplemental Marking (watertight/ corrosion resistant) is declared to be used when it is on the market. The required marking shall be added on the product)	P
4.3	Location of Markings	See the Attachment 3	P
4.4	Enclosure Orientation	No Particular Mounting Orientation	N/A
4.5	Conduit Hubs and Closure Plates	No Conduit Hubs and Closure Plates	N/A
4.6	Equipment Openings	No Openings on Unit	N/A
4.7	Drainage Openings	No Drain Openings	N/A

5	DESIGN TESTS	
----------	---------------------	--

5.1	General	See Table 5-1A to 5-1D and 5.1.5 in the General product information	P
5.2	Tests For Protection Against Access to Hazardous Parts	Rated 4X	N/A
5.3	Tests for Protection Against Ingress of Water (Dripping and Light Splashing)	Rated 4X	N/A
5.4	Tests for Protection Against Ingress of Water (Rain)	Rated 4X	N/A
5.5	Tests for Protection Against Ingress of Solid Foreign Objects (Setting Airborne Dust, Lint, Fibers, And Flings)	Non-vented (See clause 5.7)	N/A
5.6	External Icing Test	No external cavities to trap water when mounted in the normal position.	N/A
5.7	Tests for Protection Against Ingress of Water (Hosedown)	No entry of water See the test information	P
5.8	Indoor Corrosion Protection (Rust-Resistance Test (24-Hour Salt Spray Test))	See clause 3.5	N/E
5.9	Outdoor Corrosion Protection	See clause 3.5	N/E
5.10	Corrosion Protection-Type 3X, 3RX, 3SX, 4X Or 6P Enclosures	See clause 3.5	N/E

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (8) / (25) pages	
---	--	--	--

NEMA 250-2014			
Clause	Requirement + Test	Result - Remark	Verdict
5.11	Test for Protection Against Ingress of Water (Temporary Submersion)	Rated 4X	N/A
5.12	Test for Protection Against Ingress of Water (Prolonged Submersion)	Rated 4X	N/A
5.13	Oil Exclusion Test	Rated 4X	N/A
5.14	GASKET MATERIAL TESTS	The product itself(including gaskets) was conditioned at 70 °C for 168 hrs according to 5.14.3(Alternate Evaluation) before performing relevant required tests.	P
5.15	Test for Sharpness of Edges	No sharp edges	P

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (9) / (25) pages	
---	--	--	--

NEMA 250-2014			
Clause	Requirement + Test	Result - Remark	Verdict

Test Information

	Hose Down Test: Clause 5.7	P
--	-----------------------------------	----------

<u>Description of Test</u> The enclosure and its external mechanisms were subjected to a stream of water from a hose that has a 25.4 mm (1 in) inside diameter nozzle and delivers at least 240 L (65 gal) per minute. The nozzle was held from 3.0 to 3.5 m (10 to 12 feet) from the enclosure, and the spray of water was directed at all points of potential water entry such as seams, joints, external operating mechanisms, and such. The nozzle was moved along each test point one time at a uniform rate of 6 mm/sec(1/4 in/sec). Sample Dimension (Ø 132.4 mm by 415.7 mm, Ø 253 mm by 794.4 mm, Ø 10 mm by 314 mm, Ø 25 mm by 78.5 mm) Test Duration = 224.77 secs			
<u>Acceptance conditions:</u> The enclosure shall be considered to have met the requirements if at the conclusion of the test no water has entered the enclosure			
<u>Test Results</u>			
Sample No (Model)	Water Flow	Presence of water inside	Result
PNM-9031RV	240 LPM	No	Pass

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (10) / (25) pages	
---	--	---	--

List of test equipment used:

Instr. Code	Instrument Type	Range Used	Mfr./Model	Calibration Date	
				Last	Due
S3-IP18	25.4mm Nozzle	25.4 mm	CTK/S3-IP18	-	Checked by calliper below before using
S1-SW2	Stop Watch	0.01 s	CASIO/ NONE	2021-03-03	2023-03-03
C-S1-D09	Steel Measuring Tape	5 m	KOMELON/KMC-74N	2019-07-02	2021-07-02
S3-IP23	Water flow meter	250LPM	Nuri tech/ Z-6504	2020-07-01	2021-07-01
C-S1-D03	DIGITAL VERNIER CALIPER	200 mm	MITUTOYO	2021-03-03	2022-03-03




CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


Report No.

CTK-2022-02222
Page (11) / (25) pages


Attachment 1 – Construction Diagram and installation method

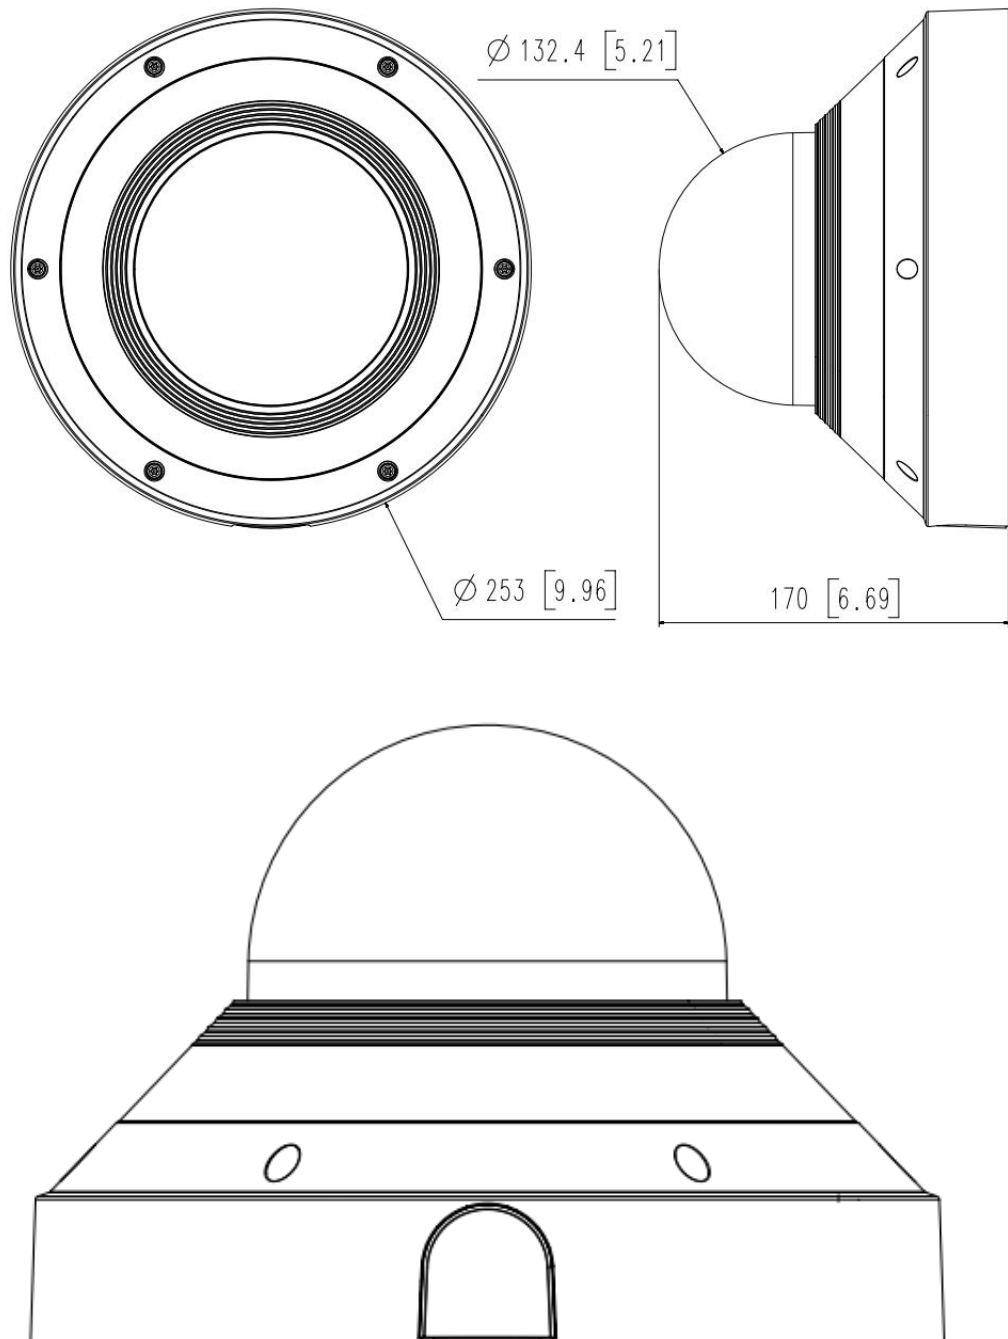

Attachment 1 – Construction Diagram and installation method

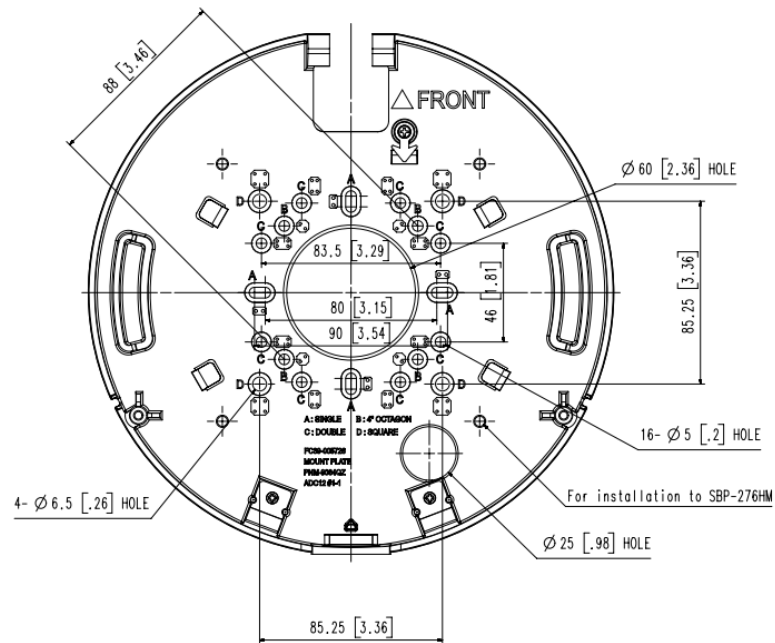

Attachment 2 – Parts List

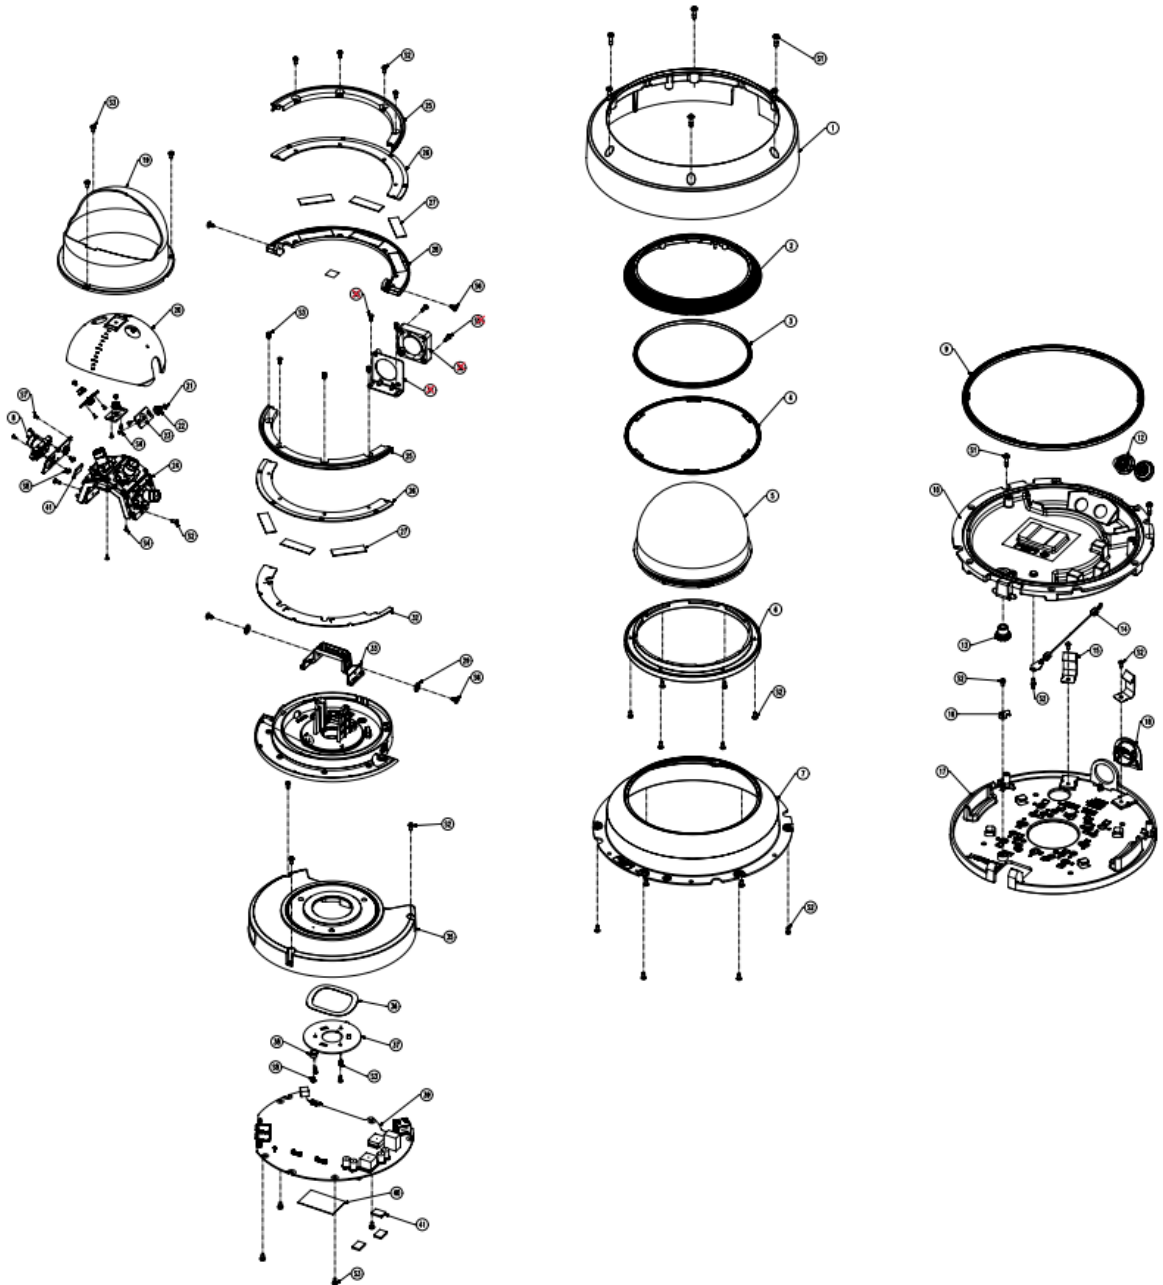

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (14) / (25) pages	
---	---	---	--

Attachment 2 – Parts List

No.	Part No.	Part Name	Q'ty
1	FC29-013952A	CASE-TOP-PNM-9031RV-WN;ADC12	1
2	FC29-013950A	CASE-DOME-PNM-9031RV;ADC12	1
3	FC10-001221A	RUBBER-DOME-PNM-9031RV;SILICON	1
4	FC10-001222A	RUBBER-IR-PNM-9031RV;SILICON	1
5	FC15-007580B	COVER-OPTICAL_HC;DOME-INDOOR-PTZ	1
6	FC09-012378A	BRACKET-IR-PNM-9031RV;ADC12	1
7	FC15-008209A	COVER-IR-PNM-9031RV;PC	1
8	FC36-001358A	SHEET-PROTECT-DOME-280MM	1
9	FC10-001134A	RUBBER-GASKET_PNM-9000VQ;-	1
10	FC29-013951A	CASE-BOTTOM-PNM-9031RV;ADC12	1
11	MC06-001082A	BUSHING-CABLE FLEXIBLE;SILICON,GRAY	1
12	MC06-001042A	BUSHING-CABLE SET;SILICON,PNV-9080R	1
13	HP06-001187	VENT-GORE-PMF100585;MEMBRANE,SCREW IN,PM	1
14	RM01-004164A	WIRE,METALIC-SAFETY_9080VQ;STS304	1
15	FC38-001138A	SPRING,ETC-FIXED_9080VQ;SUS CSP	2
16	FC09-006670A	BRACKET-WIRE-SNO-8081R;SUS304,1.2	1
17	FC15-006682B	COVER-BOT-XNV-6081Z;PC	1
18	FC39-005726A	MOUNT-PLATE_PNM-9084QZ;ADC12,WHITE	1
19	FC29-013949A	CASE-SHIELD-PNM-9031RV;PC	1
20	FC15-008210A	COVER-INNER-PNM-9031RV;PC	1
21	FC15-008208A	COVER-CDS-PNM-9031RV;PC	2
22	FC10-001220A	RUBBER-CDS-PNM-9031RV;SILICON	2
23	AM06-009914A	ASSY,PCB-PNM-9031RV LIGHT SENSOR	2
24	AM08-006791A	ASSY-FRAME-LENS-PNM-9031RV	1
25	FC28-003349A	REFLECTOR-IR-PNM-9031RV;-	2
26	AM06-009911A	ASSY,PCB-PNM-9031RV IR LED	2
27	FC28-003373A	PAD-THERMAL-PNM-9031RV	6
28	FC15-008211A	COVER-DOOR-PNM-9031RV;ADC12	1
29	FC10-001068A	RUBBER-TILT_9020;SILICON	2
30	EP07-002670	FAN,ELECTRIC-HT-04010D12M;DC12V,REVISION	0
31	FC09-012379A	BRACKET-BLOWER-PNM-9031RV;SECC	0
32	EP07-001615A	SINK,HEAT-IR-PNM-9031RV;C5210P	1
33	FC09-012380A	BRACKET-TILT-PNM-9031RV;ADC12	1
34	FC39-006481A	FRAME-PAN-PNM-9031RV;PC	1

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (15) / (25) pages	
---	---	---	--

Attachment 2 – Parts List

35	FC39-006482A	FRAME-MAIN-PNM-9031RV;PC	1
36	FC18-003696A	WASHER,WAVE-WW,46,D47,D61,T0.4,H5.5,SK-5	1
37	FC30-004990A	PLATE-PAN FIXED 9020	1
38	FC29-011838A	STOPPER-PAN_XNV-6081R;AL	1
39	AM06-009907A	ASSY,PCB-PNM-9031RV MAIN	1
40	FC28-003047A	PAD-THERMAL-48X30XT1,K=7W/M-K	1
41	FC28-002489A	PAD-THERMAL_1014T2_V6430BNH	3

No.	Part No.	Part Name	Q'ty
S1	FC18-004000A	SCREW-BUILT-IN_TORX20;0.7,15,NO,4	8
S2	Z9642306007	MACHINE SCREW(M3xL6,Zn-B,땀비머리)	24
S3	Z6003012701A	TSPH_M3L6_BL	12
S4	Z6003019801A	SCREW-TAPTYPE;6003-001440,BH,+,B,M2,L4,	6
S5	Z9642308001	SCREW-TAPTITE;BH,M3,0.5,L6,S,1,1,BLACK	0
S6	Z6009001301A	TAPPING SCREW(M3xL6,와샤붙이형머리,Zn-B)	4
S7	FC18-001254A	SCREW-FLAT HEAD ,M3L8;M3,0.5,L8,MIG,MIG,	3
S8	FC18-005043A	SCREW,TAPPING-M2L4-PWH-WHITE;TAPPING,4,P	1

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (16) / (25) pages	
---	--	--	--

Attachment 2 – Parts List

	PNM-9031RV
10. Thermal pad 재질 정보	KGP-1
11. Internal Plastic 재질 정보	NH-1035
12. 외부 Enclosure	
Top Enclosure (Metal)	Aluminum min. 2.0 mm
Bottom Enclosure (Metal)	Aluminum min. 2.0 mm
Mounted bracket Enclosure	Aluminum min. 2.0 mm
Cover dome 재질정보	S-3000(&6)(f1) min 1.8 mm

	PNM-9031RV
투명 Dome	S-3000(&6)(f1) min 1.8 mm
외부 Metal 사이에 있는 검정 plastic enclosure	QC-1220UR min 1.5 mm
내부 검정 plastic enclosure	HN-1068 min 1.5 mm
내부 은색 deco enclosure	HN-1068 min 1.5 mm Al+Sn 진공증착

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (17) / (25) pages	
---	---	---	--

Attachment 2 – Parts List



LOTTE CHEMICAL CORPORATION
56 GOSAN-RO
UIWANG-SI, GYEONGGI-DO 16073 Republic of Korea



INFINO: HN-1068(+)(f1)

Polycarbonate (PC), pellets

(+) - May be replaced by one, two, or three numbers and/or letter(s)

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

Flammability	Value	Test Method
Flame Rating		UL 94
1.5 mm, ALL	V-0	IEC 60695-11-10, -20
3.0 mm, ALL	V-0	
Glow Wire Flammability Index		IEC 60695-2-12
1.5 mm	960 °C	IEC 60695-2-13
3.0 mm	960 °C	
Glow Wire Ignition Temperature		
1.5 mm	825 °C	IEC 60695-2-13
3.0 mm	825 °C	
Electrical	Value	Test Method
Hot-wire Ignition (HWI) (1.5 mm)	PLC 3	UL 746
High Amp Arc Ignition (HAI) (1.5 mm)	PLC 3	UL 746
Comparative Tracking Index (CTI)	PLC 3	UL 746
Dielectric Strength	32 kV/mm	ASTM D149
Volume Resistivity	1.0E+17 ohms-cm	ASTM D257 IEC 60093
Thermal	Value	Test Method
RTI Elec		UL 746
1.5 mm	130 °C	UL 746
3.0 mm	130 °C	
RTI Imp		UL 746
1.5 mm	130 °C	UL 746
3.0 mm	130 °C	
RTI Str		UL 746
1.5 mm	130 °C	UL 746
3.0 mm	130 °C	
Ball Pressure Test (130°C)	Pass	IEC 60695-10-2
Physical	Value	Test Method
Outdoor Suitability	f1	UL 746C

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (18) / (25) pages	
---	---	---	--

Attachment 2 – Parts List

QMFZ2.E245303 - Plastics - Component

페이지 1 / 2



ONLINE CERTIFICATIONS DIRECTORY

QMFZ2.E245303
Plastics - Component

For enhanced search functionality, please visit UL's [iQ™ Family of Databases](#).
Click on a product designation for complete information.

[Page Bottom](#)

Plastics - Component

[See General Information for Plastics - Component](#)

KOMOTECH CO LTD

E245303

992-2 GUMSAN-RI

WAEGWAN-EUP

CHILGOK-GUN, KYOUNGSANGBUK-DO REPUBLIC OF KOREA

		Min.		H	H	RTI		H	D	
		Thk	Flame	W	A	Elec	Mech	T	9	C
Material Dsg	Color	mm	Class	I	I		Imp	Str	R	5
PET with silicone adhesive, furnished as sheets.										
JC-01(#)	SN	GY	0.18-1.02	-	-	50	50	50	-	-
Silicone "Room Temperature Vulcanizing" (RTV), furnished as sheets.										
RM-2	NC	0.2 - 1.5	V-0	-	-	150	150	150	-	-
Silicone (SI), with adhesive, furnished as sheets.										
GP-1	NC	0.35	V-0	-	-	150	150	150	-	0
		3.2	V-0	-	-	150	150	150		
TR-F	NC	0.35	V-0	-	-	150	150	150	-	0
		3.2	V-0	-	-	150	150	150		
Silicone (SI), furnished as Sheet or Roll.										
KGP-Z	NC	2.0	V-0	-	-	105	105	105	-	-
		3.0	V-0	-	-	105	105	105		
Silicone (SI), furnished as sheets.										
\$GEL COH-1307	NC	0.45	V-0	-	-	105	105	105	-	-
		1.0	V-0	-	-	105	105	105		
		3.0	V-0	-	-	105	105	105		
KGP-1	NC	0.2	V-0	-	-	105	105	105	-	-
		3.0	V-0	-	-	105	105	105		
TR-E	NC	0.5	V-1	-	-	150	150	150	-	-
		0.9	V-1	-	-	150	150	150		
		3.0	V-0	-	-	150	150	150		
TR-EA-1	NC	0.9	V-1	-	-	150	150	150	-	-
		3.0	V-0	-	-	150	150	150		
TR-EA-2	NC	0.9	V-0	-	-	150	150	150	-	-
		3.0	V-0	-	-	150	150	150		
TR-H	NC	1.8	V-1	-	-	150	150	150	-	-
		0.2-1.5	V-0	-	-	150	150	150		
TR-M	NC	0.4	V-0	-	-	150	150	150	-	-
		0.9	V-0	-	-	150	150	150		

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?na...> 2014-10-17

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (19) / (25) pages	
---	--	--	--

Attachment 2 – Parts List

QMFZ2.E245303 - Plastics - Component

페이지 2 / 2

		3.2	V-0	-	-	150	150	150			
TR-S	GY	0.7	V-1	-	-	150	150	150	-	-	-
	GY, BK	3.0	V-0	-	-	150	150	150			
TR-V	NC	0.5 - 1.7	V-0	-	-	150	150	150	-	-	-
TR-W	NC	0.5 - 1.7	V-0	-	-	150	150	150	-	-	-
TR-ZA-1	NC	1.1	HBF	-	-	150	150	150	-	-	-
Silicone Rubber, furnished as sheets.											
KTR-H40	NC, GY, BK	0.2	V-0	-	-	105	105	105	-	-	-
		3.0	V-0	-	-	105	105	105			
Silicone with Polyurethane, furnished as sheets.											
TR-Z	NC	0.8-2.2	V-0	-	-	50	50	50	-	-	-
Urethane, furnished as sheets.											
TR-ZA-2	NC	0.8	V-1	-	-	50	50	50	-	-	-
		1.0	V-1, HBF	-	-	50	50	50			
		3.0	V-0	-	-	50	50	50			

(#) - Replaced by three digits numbers representing thickness.

Marking: Company name and material designation on container, wrapper or finished part.
Last Updated on 2013-12-20

[Questions?](#) [Print this page](#) [Terms of Use](#) [Page Top](#)

© 2014 UL LLC

When the UL Leaf Mark is on the product, or when the word "Environment" is included in the UL Mark, please search the [UL Environment database](#) for additional information regarding this product's certification.

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2014 UL LLC".

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?na...> 2014-10-17



CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.

CTK-2022-02222
Page (20) / (25) pages

Attachment 2 – Parts List



UL Certification

INFINO

Grade

QC-1220UR

Component - Plastics							E115797
Guide Information							
LOTTE ADVANCED MATERIALS CO LTD							
56 Gosan-ro, Uiwang-si Gyeonggi-do 437-711 KR							
QC-122(+)(f1)							
Polycarbonate (PC) "INFINO", furnished as pellets							
Color	Min. Thk (mm)	Flame Class	HVI	HA	RTI Elec	RTI Imp	RTI Str
ALL	1.6	V-2	3	0	130	125	125
	3.2	V-2	2	0	130	130	130
Comparative Tracking Index (CTI): 0							Inclined Plane Tracking (IPT) KV: -
Dielectric Strength (kV/mm): -							Volume Resistivity (10 ⁹ ohm-cm): 16
High-Voltage Arc Tracking Rate (HVRT): 2							High Volt, Low Current Arc Resis (D495): 5
Dimensional Stability (%): -							
(*) - May be replaced by one, two, or three numbers and/or letter(s)							
(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.							
ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.							
Report Date: 2008-10-17							
Last Revised: 2019-12-11							
© 2019 UL LLC							

IEC and ISO Test Methods				
Test Name	Test Method	Units	Thk (mm)	Value
Flammability	IEC 60695-11-10	Class (color)	1.6	V-2 (ALL)
			3.2	V-2 (ALL)
Glow-Wire Flammability (GWFI)	IEC 60695-2-12	°C	1.6	850
			3.2	850
Glow-Wire Ignition (GWIT)	IEC 60695-2-13	°C	1.6	900
			3.2	875
IEC Comparative Tracking Index	IEC 60112	Volts (Max)	-	-
IEC Ball Pressure	IEC 60695-10-2	°C	-	-
ISO Heat Deflection (1.80 MPa)	ISO 75-2	°C	-	-
ISO Tensile Strength	ISO 527-2	MPa	-	-
ISO Flexural Strength	ISO 178	MPa	-	-
ISO Tensile Impact	ISO 6256	kJ/m ²	-	-
ISO Izod Impact	ISO 180	kJ/m ²	-	-
ISO Charpy Impact	ISO 179-2	kJ/m ²	-	-

Component - Plastics							E115797
Guide Information							
LOTTE ADVANCED MATERIALS CO LTD							
56 Gosan-ro, Uiwang-si Gyeonggi-do 437-711 KR							
QC-122(+)(f2)							
Polycarbonate (PC) "INFINO", furnished as pellets							
Color	Min. Thk (mm)	Flame Class	HVI	HA	RTI Elec	RTI Imp	RTI Str
NC	0.8	V-2	-	-	80	80	80
ALL	1.6	V-2	3	0	130	125	125
	3.2	V-2	2	0	130	130	130
Comparative Tracking Index (CTI): 0							Inclined Plane Tracking (IPT) KV: -
Dielectric Strength (kV/mm): -							Volume Resistivity (10 ⁹ ohm-cm): 16
High-Voltage Arc Tracking Rate (HVRT): 2							High Volt, Low Current Arc Resis (D495): 5
Dimensional Stability (%): -							
(*) - May be replaced by one, two, or three numbers and/or letter(s)							
(f2) - Subjected to one or more of the following tests: Ultraviolet Light, Water Exposure or Immersion in accordance with UL 746C, where the acceptability for outdoor use is to be determined by UL.							
ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.							
Report Date: 2008-10-17							
Last Revised: 2019-07-31							
© 2019 UL LLC							

IEC and ISO Test Methods				
Test Name	Test Method	Units	Thk (mm)	Value
Flammability	IEC 60695-11-10	Class (color)	0.8	V-2 (NC)
			1.6	V-2 (ALL)
			3.2	V-2 (ALL)
Glow-Wire Flammability (GWFI)	IEC 60695-2-12	°C	1.6	850
			3.2	850
Glow-Wire Ignition (GWIT)	IEC 60695-2-13	°C	1.6	900
			3.2	875
IEC Comparative Tracking Index	IEC 60112	Volts (Max)	-	-
IEC Ball Pressure	IEC 60695-10-2	°C	-	-
ISO Heat Deflection (1.80 MPa)	ISO 75-2	°C	-	-
ISO Tensile Strength	ISO 527-2	MPa	-	-
ISO Flexural Strength	ISO 178	MPa	-	-
ISO Tensile Impact	ISO 6256	kJ/m ²	-	-
ISO Izod Impact	ISO 180	kJ/m ²	-	-
ISO Charpy Impact	ISO 179-2	kJ/m ²	-	-

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (21) / (25) pages	

Attachment 2 – Parts List

Component - Plastics

E41179

MITSUBISHI ENGINEERING-PLASTICS CORP
ENVIRONMENT & QUALITY ASSURANCE DEPT, DIV 1, SHIODOME SUMITOMO-BLDG 25TH FL., 1-9-2 HIGASHI-SHINBASHI, MINATO-KU TOKYO 105-0021 JP
S-2000V+(f1), S-2001V+(f1), S-2003V+(f1)
Polycarbonate (PC), unreinforced, furnished as pellets

Color	Min Thk (mm)	Flame Class	HMM	HAI	RTI Elec	RTI Imp	RTI Str
ALL	0.38	V-2	-	-	80	80	80
	1.5	V-2	3	0	125	115	125
	3.0	V-2	3	0	125	115	125

Comparative Tracking Index (CTI): 2

Dielectric Strength (kV/mm): 20

High-Voltage Arc Tracking Rate (HvTR): 0

Dimensional Stability (%): 0

Inclined Plane Tracking (PT): -

Volume Resistivity (10⁸ ohm-cm): 7

High Volt, Low Current Arc Resis (D495): 5

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.
+ - Suffix optional, exceptions: The following cannot be used as optional suffixes: "T" for grade 2830, "A" for 1501, 1502, 1511, 1521 & 2502, "N" for NXG5050, NXG5030, NXG5001, & CGF-(v)(u), "S1" for F20-54.
ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1992-10-01

Last Revised: 2004-03-23

Underwriters Laboratories Inc®



IEC and ISO Test Methods

Test Name	Test Method	Units	Thickness Tested (mm)	Value
Flammability	IEC 60695-11-10	Class (color)	0.38	V-2 (ALL)
			1.5	V-2 (ALL)
			3.0	V-2 (ALL)
Glow-Wire Flammability (GWI)	IEC 60695-2-12	C	-	-
Glow-Wire Ignition (GWI)	IEC 60695-2-13	C	-	-
IEC Comparative Tracking Index	IEC 60112	Volts (Max)	-	-
IEC Ball Pressure	IEC 60695-10-2	C	-	-
ISO Heat Deflection (1.88 MPa)	ISO 75-2	C	-	-
ISO Tensile Strength	ISO 527-2	MPa	-	-
ISO Flexural Strength	ISO 178	MPa	-	-
ISO Tensile Impact	ISO 8256	kJ/m ²	-	-
ISO Izod Impact	ISO 180	kJ/m ²	-	-
ISO Charpy Impact	ISO 179-2	kJ/m ²	-	-

Underwriters Laboratories Inc®



CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.

CTK-2022-02222
Page (22) / (25) pages

Attachment 3 – Photographs

Test Unit



 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (23) / (25) pages	
---	---	---	--

Attachment 3 – Photographs

Hose down test





CTK Co., Ltd.


5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.

CTK-2022-02222
Page (24) / (25) pages

Attachment 3 – Photographs

Test Result

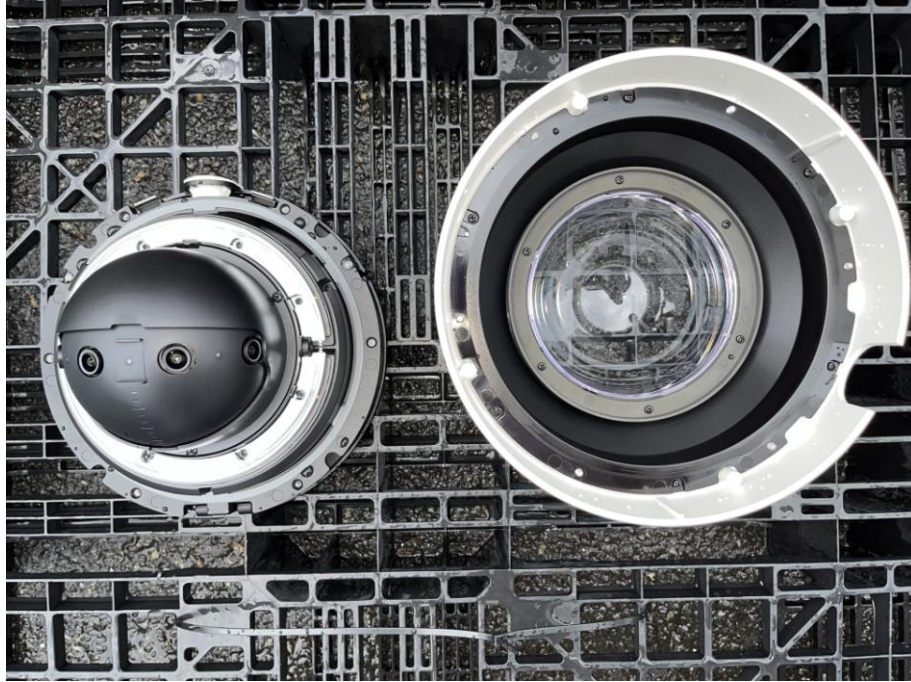

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No. CTK-2022-02222 Page (25) / (25) pages	
---	---	---	--

Attachment 3 – Photographs

Test Result



- END -