

Network Dome

PNV-A6081R-E1T

2MP Camera with built-in 1TB Rugged SSD

Key Features

- Designed around energy-saving principles, the SolidEDGE camera delivers a sustainable approach for security and monitoring needs
- The first VMS on the edge, Its serverless setup significantly reduces energy consumption and total cost of ownership
- Truly edge based recording solution with embedded SSD storage, pre-installed WAVE VMS and 1 Channel VMS License.
- Features WAVE VMS, providing a simple, yet powerful and intuitive user experience for anyone
- Powerful hardware means SolidEdge is capable of recording up to 5 additional cameras for a total recording solution of 6 cameras
- Flexible architecture, SolidEdge can be offline standalone or cloud managed and form part of a larger WAVE VMS system
- Free Cloud Video Management with WAVE sync, no need for occurring cloud subscription costs
- Go Mobile, view SolidEdge system through WAVE Mobile app, available on android or apple
- Easy and secure remote access, Free WAVE sync Cloud Video Management negates need for complex IT and Network Firewall setups

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

PNV-A6081R-E1T

2MP Camera with built-in 1TB Rugged SSD



Specifications

Video

Görüntüleme Aygıtı	Boyut	1/2"
	Tür	CMOS
Çözünürlük		1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360
En Fazla Kare hızı	H.265/H.264	120fps/100fps(60Hz/50Hz)
	MJPEG	15fps
Min. Aydınlatma (Lüks)	Renk(1/30sn, 30IRE)	0.007
	SB(1/30sn, 30IRE)	0.0007
Video Çıkışı		CVBS: kurulum için 1.0 Vp-p / 75Ω kompozit

Lens

Odak Uzunluğu (mm)		4.38~9.33
Yakınlaştırma Oranı	Optik	2.13x
Maks. Diyafram Açıklığı Oranı (F numarası)	Geniş	1.3
	Tele	2.15
Açısal Görüş Alanı	Yatay	104°~44°
	Dikey	55°~24°
	Diyagonal	124°~51°
Min. Nesne Mesafesi		0.5m(1.64ft)
Odak Kontrolü		Kolay odak
Lens Tipi		P iris (IR düzeltmeli)

Pan / Tilt / Döndürme

Pan / Tilt / Döndürme Aralığı	Pan	0°~360°
	Tilt	0°~85°
	Döndürme	0°~355°

İşletimsel

Gündüz ve Gece	Otom. (ICR)
Arka Işık Dengeleme	BLC, WDR, SSDR

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

İşletimsel

Geniş Dinamik Aralık (dB)		120
Dijital Gürültü Azaltma		WiseNR II (YZ motoru bazında), SSNR V
Hareket Algılama	Miktar	8
	Şekil	8 nokta Poligonal bölge
Gizlilik Maskesi	Miktar	6
	Şekil	Dikdörtgen bölge
	Renk / Seçenek	Gri, Siyah, Beyaz
Kazanç Kontrolü		Düşük, Orta, Yüksek
Beyaz Dengesi		ATW, AWC, Manuel, İç Mekan, Dış Mekan
LDC		Destek
Elektronik Obtüratör	Mod	Minimum, Maksimum, Kırpışma Önleme, Tercihli obtüratör kontrolü (YZ motoruna dayalı)
	Hız Aralığı	1/5~1/12.000 sn
Video Döndürme		Çevirme, Ayna, Koridor görünümü (90°/270°)
Alarm Arayüzü	Giriş/Çıkış	Giriş 1, Çıkış 1
Alarm Tetikleyiciler		Analiz Araçları, Ağ bağlantısı kesme, Alarm girişi, Uygulama olayı, Zaman programı, MQTT aboneliği
Alarm Tetikleyici Gerçekleştiğinde Alarm Olayları		Dosya yükleme(resim): e-posta/FTP, Bildirim: e-posta,Alarm çıkışı, Devir: PTZ önayar,HTTP/HTTPS/TCP ile mesaj gönderme,Ses klibi oynatma, MQTT: yayınlama
Ses Girişi		Seçilebilir (mik. girişi/hat girişi)
Ses Çıkışı		Hat çıkışı
Işık Türü		IR LED
Işık Görüntülenebilir Uzunluğu	IR	40m(131.23ft)
IR Dalga Boyu		850 nm

Analiz Araçları

Sınıflandırılmış Nesne Türü		Kişi, Yüz, Araç, Araç plakası
Öznitelikler	Kişi	Üst/alt giysi rengi, Cinsiyet, Çanta
	Araç	Tür(araba, otobüs, kamyon, motosiklet, bisiklet), Renk
	Yüz	Yaş, Cinsiyet, Yüz maskesi, Gözlükler
Küçük resim		BestShot
Analiz Araçları Olayları	AI Motoru Bazında	Nesne algılama, Sanal çizgi(Geçme/Yön), Sanal alan(Aylak Dolaşma/İzinsiz giriş/Giriş/Çıkış), Yüz maskesi algılama, Sosyal mesafe algılama
	Normal	Odak bozukluğu algılama, Hareket algılama, Kurcalama, Ses algılama, Ses sınıflandırması, Darbe algılama, Sanal alan(Görünme/Kaybolma)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Ağ

Ethernet		Metal kılıflı RJ-45 (10/100/1000BASE-T)
Video Sıkıştırma		H.265/H.264: Ana/Yüksek, MJPEG
Ses Sıkıştırma		G.711 u-law /G.726 seçilebilir,G.726(ADPCM) 8kHz,G.711 8kHz, G.726: 16kbps,24kbps,32kbps,40kbps, AAC-LC: 16 kHz'de 48 kbps
Smart Codec		Manuel, WiseStreamIII
Bit Hızı Kontrolü		H.265/H.264: CBR veya VBR, MJPEG: VBR
Yayın akışı	Unicast	6 kullanıcıya kadar
	Multicast	Destek
	Çoklu Yayın Akışı	5 profile kadar
Protokol		IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP(TCP, UDP Unicast), MQTT
Uygulama Programlama Arayüzü	ONVIF	S, T, M
	Diğer	SUNAPI(HTTP API)

Güvenlik

İS / Yerleşik Yazılım Koruması	Şifrelenen yerleşik yazılım, Güvenli önyükleme, İmzalı yerleşik yazılım
Kullanıcı kimlik doğrulaması	Digest kimlik doğrulaması, Kaba kuvvet saldırılarını önleme
Ağ kimlik doğrulaması	IEEE 802.1X(EAP-TLS, EAP-LEAP)
Güvenli İletişim	HTTPS, WSS(WebSocket Güvenli), SRTP
Erişim Denetimi	IP bazlı erişim denetimi
Veri Koruması	Şifreleme kimlik bilgileri, Canlı kayıt dosya dışa aktarımı için şifreleme sıkıştırma
Denetim	Erişim / Sistem / Olay Günlüğü yönetimi
Aygıt Kimliği	Cihaz sertifikası(Hanwha Vision Root CA)
Güvenli Depolama	TPM (Güvenilir platform modülü), SDcard bölme şifreleme (AES-256)
Güvenlik Sertifikası	FIPS 140-2 düzey2 ile TPM 2.0

Genel

Bellek	RAM	4GB
	Flaş	512MB
Kenar Depolama	SSD	1TB dahil (WAVE ön kurulumlu), 6'ya kadar kamera kaydedilebilir (Ana makine+5 kamera)

Çevresel ve Elektriksel

Çalışma Koşulu	Sıcaklık	-30°C~+55°C(-22°F~+131°F)
	Nemlilik	%0~95 BN(yoğuşmayan)
	Diğer	-20°C'nin üzerinde çalıştırılmalıdır, Havalandırmayla nemlilik kontrolü

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Çevresel ve Elektriksel

Depolama Koşulu	Sıcaklık	-50°C~+60°C(-58°F~+140°F)
	Nemlilik	%0~90% BN(yoğuşmayan)
Giriş Voltajı		PoE+(IEEE802.3at, Sınıf4), 12VDC
Güç Tüketimi	PoE	Max. 19.2W, typical 14.4W
	12VDC	Max. 17.5W, typical 12.7W
Güç Yedeklilik Devir		Destek

Mekanik

Renk	Beyaz
Malzeme	Alüminyum, Sert kaplamalı dome
RAL Kodu	RAL9003
Ürün Boyutları	ø180x130mm(7.09x5.12")
Ürün Ağırlığı	1,900g(4.19lb)
Uyumlu Kanal Deliği	19,1 mm (3/4")(M25)
Uyumlu Çoklu Kutu	Tek, Çift, 4" Sekizgen, Kare

Sertifikasyonlar ve Standartlar

EMC	FCC 47 CFR 15 Alt Bölüm B Sınıf A, ICES-3(A)/NMB-3(A), CE/UKCA - EN55032 Sınıf A, EN 50130-4, EN 61000-3-2, EN 61000-3-3, VCCI CISPR 32 Sınıf A, RCM AS-NZS CISPR 32 Sınıf A, KS C 9832 Sınıf A, KS C 9835
Emniyet	UL 62368-1, CAN/CSA C22.2 NO. 62368-1, IEC 62471
Ortam	IEC/EN 63000, IEC 60529 IP66, IEC 60529 IP67, ISO 20653 IP6K9K, IEC 62262 IK10, NEMA 250 type 4X

DORI (EN62676-4 standardı)

Algılama (25PPM/ 8PPF)	Geniş	30.0m(98.43ft)
	Tele	95.0m(311.82ft)
Gözlemleme (63PPM/ 19PPF)	Geniş	12.0m(39.37ft)
	Tele	38.0m(124.73ft)
Tanıma (125PPM/ 38PPF)	Geniş	6.0m(19.69ft)
	Tele	19.0m(62.36ft)
Tanımlama (250PPM/ 76PPF)	Geniş	3.0m(9.84ft)
	Tele	9.5m(31.18ft)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


PNV-A6081R-E1T

2MP Camera with built-in 1TB Rugged SSD



CAD

Unit: mm [inch]

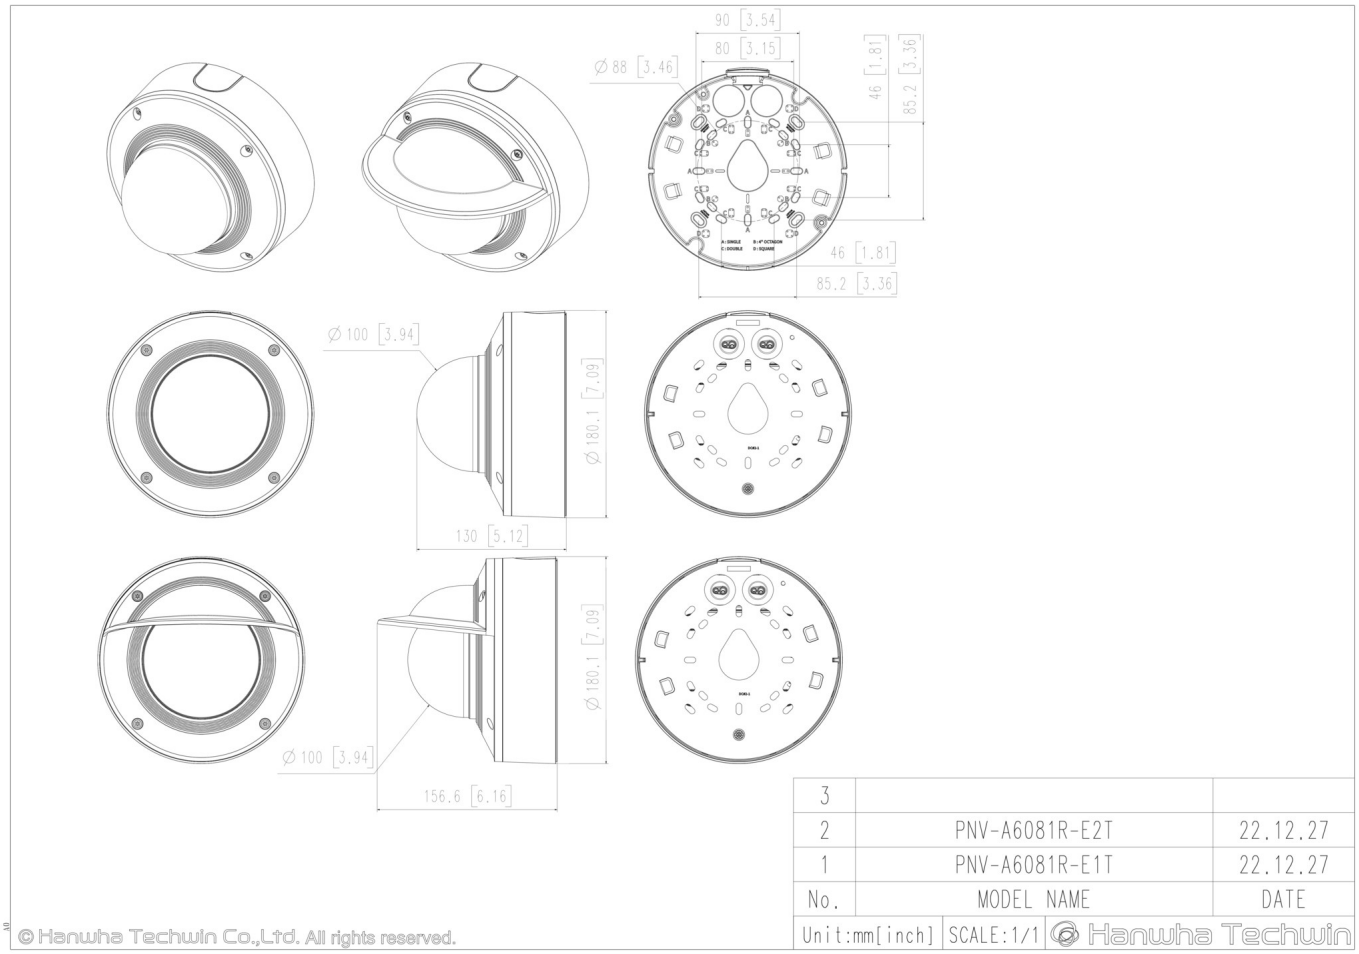

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.