Network Dome

PNV-A9081RLP

4K AI IR Vandal Dome Camera with Wisenet Road AI application and SD card

Key Features

- All in one solution with ANPR, Make/Model/Colour Recognition (MMCR) and vehicle classification analytics, pre-installed and licensed
- Edge-based negating need for server
- Ideal for city traffic surveillance with coverage of up to 1 traffic lane at speeds of up to 70kmh (45mph)
- Access control and licence plate list management for stop and go installations such as car parks and toll roads
- Web-based user-friendly interface, no need for a dedicated client software
- Search smarter and quicker with multiple inputs
- Gain insights into the road usage by vehicle type, make and model
- Choose from key Integrated VMS such as Genetec, Milestone and WAVE
- Installation aids such as Wi-Fi dongle (optional), CVBS output and in-app licence plate alignment assistant

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

PNV-A9081RLP

4K AI IR Vandal Dome Camera with Wisenet Road AI application and SD card

Specifications

Vídeo

Dispositivo de imagen	Tamaño	1/1.8"
	Tipo	CMOS
Resolución		3840x2160, 3072x1728, 2688x1520, 2592x1944, 2560x1440, 2048x1536, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360
Máx. Frecuencia de cuadro	H.265 / H.264	30 ips / 25 ips (60Hz/50Hz)
	MJPEG	30 ips
Mín. Iluminación (Lux)	Color (1/30 seg., 30 IRE)	0.05
	B/N (1/30 seg., 30 IRE)	0.005
Salida de vídeo		CVBS: 1,0 Vp-p / 75Ω vídeo compuesto para instalación, USB: Micro USB Tipo B

Objetivo

Longitud focal (mm)		4.5~10
Proporción de zoom	Óptico	2.2x
Proporción de apertura máx. (número F)	Gran angular	1.6
	Tele	2.65
Campo de visión angular	Horizontal	101.4°~45.5°
	Vertical	53.6°~25.5°
	Diagonal	120.7°~52.3°
Mín. Distancia al objeto		0.5m(1.64ft)
Control de enfoque		Simple Focus
Tipo de lente		P iris (corregido para IR)

Desplazamiento / inclinación / rotación

Rango de desplazamiento / inclinación / rotación	Desplazamiento horizontal	0˚~360˚
	Desplazamiento vertical	-45˚~85˚
	Rotación	0˚~355˚

Operativo

Día / Noche	Automático (ICR)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Operativo

Compensación de luz de fondo		BLC, WDR, SSDR
Rango Dinámico Amplio (dB)		120
Reducción de ruido digital		SSNR V
Estabilización de imagen digital		Soporte (sensor giroscópico integrado)
Detección de movimiento	Cantidad	8
	Forma	Zonas poligonales de 8 puntos
Máscara de privacidad	Cantidad	6
	Forma	Zonas rectangulares
	Color / opción	Gris, Negro, Blanco
Control de ganancia		Bajo, Media, Alto
Balance de blanco		ATW, AWC, Manual, Interior, Exterior
LDC		Soporte
Obturador electrónico	Modo	Mínimo, Máximo, Antiparpadeo
	Rango de velocidad	1/5 ~ 1/12,000 seg.
Rotación de vídeo		Volteo, Espejo, Visualización pasillo (90˚/270˚)
Interfaz de alarma	Entrada / Salida	Entrada 1 / salida 1
	Otros	Salida 12 VCC
Activadores de alarma		Analíticas, Desconectar de la red, Entrada de alarma
Eventos de alarma cuando se ha producido activación de alarma		Carga de archivo (imagen): por email / FTP, Notificación: e-mail,Salida de alarma, Transferencia: Preajuste PTZ,enviar mensaje mediante HTTP/HTTPS/TCP,Reproducción de secuencia de vídeo,Grabación NAS en activaciones de eventos
Entrada de audio		Seleccionable (entrada de micrófono / entrada de línea)
Salida de audio		Salida de línea
Tipo de luz		LED IR
Longitud visible de luz	IR	30m(98.42ft)
Longitud de onda IR		850 nm

Analíticas

Eventos de analíticas	Normal	Detección de desenfoque, Detección de movimiento, Manipulación, Detección de audio, Clasificación de sonidos, Detección de impactos

Red

Ethernet	RJ-45 con blindaje metálico (10 / 100 / 1000BASE-T)
Compresión de vídeo	H.265 / H.264: Principal / Alta, MJPEG
Compresión de audio	G.711 u-law / G.726 seleccionable,G.726 (ADPCM) 8 KHz,G.711 8 KHz, G.726: 16 kbps,24 kbps,32 kbps,40 kbps, AAC-LC: 48 Kbps a 16 KHz
Códec inteligente	Manual, WiseStream II

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Red

Control del Bitrate		H.265 / H.264: CBR o VBR, MJPEG: VBR
Flujos	Unicast	Hasta 10 usuarios
	Multicast	Soporte
	Múltiples flujos	Hasta 5 perfiles
Protocolo		IPv4, IPv6, TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP(TCP, UDP Unicast)
Interfaz de programación de la aplicación	ONVIF	S, G, T
	Otros	SUNAPI (API HTTP)
Conexión directa en la nube		Soporte

Seguridad

S.O. / Protección de firmware	Firmware cifrado, Arranque seguro, Firmware firmado
Autenticación del usuario	Autenticación Digest, Prevención ataque fuerza bruta
Autenticación de red	IEEE 802.1X(EAP-TLS, EAP-LEAP, EAP-PEAP, MSCHAPv2)
Comunicación segura	HTTPS, WSS(WebSocket Seguro), SRTP
Control de acceso	Control de acceso por IP
Protección de datos	Credenciales de cifrado, Cifrar y comprimir para exportar archivos de grabación en directo
Auditoría	Acceso / Sistema / gestión de registro de eventos
ID del dispositivo	Certificado de dispositivo (Hanwha Vision Root CA)
Certificado de seguridad	Ninguno, Ninguno

General

Memoria	RAM	4 GB
	Flash	512 MB
Almacenamiento local	MicroSD/SDHC/SDXC	1slot (32GB card preinstalled) dedicated to strong LPR images from Wisenet Road AI app only (not for video recording)

Medioambiental y eléctrico

Condición de funcionamiento	Temperaturas	-40°C~+55°C(-40°F~+131°F)
	Humedad	0 ~ 90 % HR (sin condensación)
	Otros	La puesta en marcha debe realizarse a una temperatura superior a -30 °C.
Condición de almacenamiento	Temperaturas	-50°C~+60°C(-58°F~+140°F)
	Humedad	0 ~ 90 % HR (sin condensación)
Voltaje de entrada		PoE+(IEEE802.3at, Class4), 12 VCC
Consumo de corriente	PoE	Max 20.00W, typical 17.00W
	12 VCC	Max 18.70W, typical 15.00W

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Mecánico

Color	Blanco
Material	Aluminio
Código RAL	RAL9003
Dimensiones del producto	Ø180x125mm(7.09x4.92")
Peso del producto	1,900g(4.19lb)
Orificio de tubo compatible	19,1 mm (3/4") (M25)
Caja de conexiones compatible	Único, Doble, Octágono de 4", Cuadrado

Wisenet Road AI LPR/ANPR/MMCR

App Type		CNN (Convolutional Neural Network) AI
LPR Usage Condition	NA	Community Traffic, Parking Application
	EU	Community Traffic, Parking Application
Speed Description by Region	NA	Low to Moderate Speed
	EU	Low to Moderate Speed
Lane Coverage_NA	1 Lane	3.6m/12ft wide (with built in IR)
	2 Lanes	8.1m/26ft wide (with built in IR)
Lane Coverage_EU	1 Lane	3.6m/12ft wide (with built in IR)
	2 Lanes	8.1m/26ft wide (with built in IR)
	3 Lanes	16.2m/53ft wide (with built in IR)
Plate Capture Resolution_NA	1 Lane	4K
	2 Lanes	4K
Plate Capture Resolution_EU	1 Lane	4K
	2 Lanes	4K
	3 Lanes	4K
Speed Limit_NA	1 Lane	Up to 90km/h (56mph)
	2 Lanes	Up to 70km/h (43mph)
Speed Limit_EU	1 Lane	Up to 110km/h (68mph)
	2 Lanes	Up to 100km/h (62mph)
	3 Lanes	Up to 45km/h (28mph)
Min. Forward Distance_NA	1 Lane	6m (19.7ft)
	2 Lanes	8m (26.2ft)
Min. Forward Distance_EU	1 Lane	6m (19.7ft)
	2 Lanes	6m (19.7ft)
	3 Lanes	9m (29.5ft)
Max. Forward Distance_NA	1 Lane	15m (49.2ft)
	2 Lanes	15m (49.2ft)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Wisenet Road AI LPR/ANPR/MMCR

Max. Forward Distance_EU	1 Lane	20m (65.6ft)
	2 Lanes	20m (65.6ft)
	3 Lanes	20m (65.6ft)
Max. Horizontal Angle by Region	NA	30° for highway, 45° for traffic observation
	EU	30° for highway, 45° for traffic observation
Max. Vertical Angle by Region	NA	30°
	EU	30°
Reconocimiento del vehículo		Make: 100+ makes Model: 4700+ models Color: 11 colors
Países disponibles		Albania, Armenia, Austria, Bielorrusia, Bélgica, Bosnia y Herzegovina, Bulgaria, Chipre, Chequia, Dinamarca, Estonia, Finlandia, Francia, Grecia, Alemania, Hungría, Irlanda, Islandia, Italia, Lituania, Luxemburgo, Letonia, Montenegro, Macedonia de Norte, Malta, Países Bajos, Noruega, Polonia, Portugal, Rumanía, Serbia, Eslovenia, Eslovaquia, España, Suiza, Turquía, Reino Unido, Estados Unidos de América, Canadá, Federación Rusa, Azerbaiyán, Uzbekistan, Ucrania, Kirguistán, Kazajstán, Tayikistán, Georgia, Turkmenistán, Vietnam, Indonesia, Baréin, Kuwait, Omán, Katar, Arabia Saudita, Emiratos Árabes Unidos, Sudáfrica, Hongkong / Taiwán (solo LPR), Australia/Nueva Zelanda (solo LPR), Perú / Colombia (solo LPR), Liechtenstein, México, Moldavia, Mónaco, San Marino, Suecia, Croacia, República Checa, Gibraltar, Israel, Kosovo, Macedonia, Mongolia
Integration Options		JSON over HTTP, UTMC 1, UTMC 2, NVR, Wisenet WAVE
VMS Support		Wisenet WAVE, Wisenet SSM, Genetec Security Center, Milestone Xprotect, Genetec AutoVu

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

PNV-A9081RLP

4K AI IR Vandal Dome Camera with Wisenet Road AI application and SD card

CAD

Unit: mm [inch]

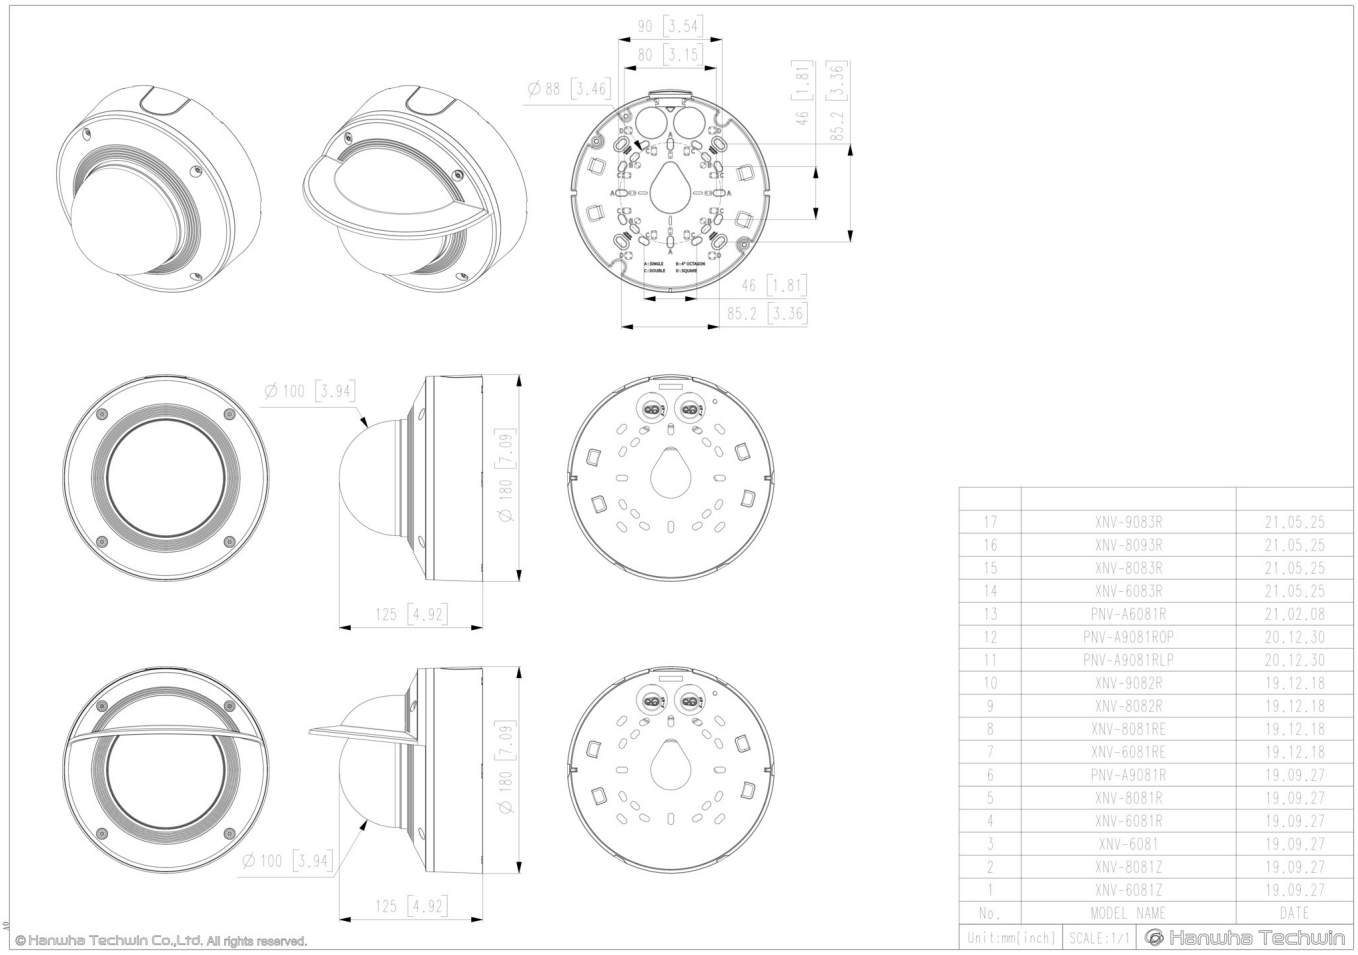

No.	MODEL NAME	DATE
17	XNV-9083R	21.05.25
16	XNV-8093R	21.05.25
15	XNV-8083R	21.05.25
14	XNV-6083R	21.05.25
13	PNV-A6081R	21.02.08
12	PNV-A9081ROP	20.12.30
11	PNV-A9081RLP	20.12.30
10	XNV-9082R	19.12.18
9	XNV-8082R	19.12.18
8	XNV-8081RE	19.12.18
7	XNV-6081RE	19.12.18
6	PNV-A9081R	19.09.27
5	XNV-8081R	19.09.27
4	XNV-6081R	19.09.27
3	XNV-6081	19.09.27
2	XNV-8081Z	19.09.27
1	XNV-6081Z	19.09.27

Unit:mm[inch] | SCALE:1/1 | Hanwha Techwin

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.