

EMC TEST REPORT For C-TICK

Test Report No. : KES-E1-16T0208-R1
Date of Issue : Jul. 21, 2021
Product name : NETWORK CAMERA
Model/Type No. : QND-7030R
Variant Model : QND-7020R, QND-7010R
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : May. 02, 2016
Test date : Apr. 09, 2016
Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by



Yeong Suk, Song
EMC Test Engineer

Reviewed by



Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0208-R1

Page (2) of (43)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
May. 13, 2016	KES-E1-16T0208	Issued
Jul. 21, 2021	KES-E1-16T0208-R1	Model name/Variant Model name /Address/Manufacturer change at customer's request

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	8
1.8	Configuration.....	9
1.9	Calibration Details of Equipment Used for Measurement.....	10
1.10	Test Facility	10
1.11	Laboratory Accreditations and Listings	10
2.0	Test Regulations.....	10
2.1	Conducted Emissions at Mains Power Ports	13
2.2	Conducted Emissions at Telecommunication Ports.....	14
2.3	Radiated Electric Field Emissions(Below 1 GHz)	15
2.4	Radiated Electric Field Emissions(Above 1 GHz)	16
APPENDIX A – TEST DATA.....		17
Conducted Emissions at Mains Power Ports.....		17
Conducted Emissions at Telecommunication Ports		19
Radiated Electric Field Emissions(Below 1 GHz)		23
Radiated Electric Field Emissions(Above 1 GHz)		24
Test Setup Photos and Configuration		32
Conducted Voltage Emissions		32
Conducted Telecommunication Emissions		33
Radiated Electric Field Emissions(Below 1 GHz)		35
Radiated Electric Field Emissions(Above 1 GHz)		37
EUT External Photographs		39
EUT Internal Photographs		40



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0208-R1

Page (4) of (43)

1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/3" 4M CMOS
Total Pixels	2720x1536
Effective Pixels	2688x1520
Scanning System	Progressive
Min. Illumination	Color : 0.3Lux, B/W : 0Lux
Lens	
Focal Length (Zoom Ratio)	Fixed 6mm (F2.2)
Max. Aperture Ratio	F2.2
Angular Field of View	D 62° / H 53° / V 31°
Min. Object Distance	-
Lens Type	Fixed
Mount Type	Board type
Pan / Tilt / Rotate	
Pan Range	0~350°
Tilt Range	0~67°
Rotate Range	0~355°
Operational	
IR Viewable Length	20m
Camera Title	Off / On (Displayed up to 20 characters per line) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	True Day & Night
Backlight Compensation	Off / BLC
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR(Off / On)
Motion Detection	Off / On (4ea polygon zones)
Privacy Masking	Off / On (6ea rectangler zones)
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC(Lens distortion control)	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker
Flip / Mirror	Flip / Mirror / Hallway view
Intelligent Video Analytics	Motion Detection with metadata, Tampering, Defocus
Alarm I/O	Input 1 / Output 1
Alarm Triggers	Motion detection, Tampering Detection, SD card error, NAS error, Alarm input, Defocus detection
Alarm Events	File upload via FTP and E-Mail Local storage recording at Event Notification via E-Mail External output

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EI-16T0208-R1
Page (5) of (43)

Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265, H.264, MJPEG
Resolution	2592x1520, 2560x1440(16:9) / 2304x1296 / 1920x1080 / 1280x1024 / 1280x960 / 1280x720 / 1024x768 / 800x600 / 800x450 / 720x576 / 720x480 / 640x480 / 640x360 / 320x240
Max. Framerate	H.265 : Max 20fps at 4M, Max 30fps at 2M all resolutions H.264 : Max 20fps at 4M, Max 30fps at 2M all resolutions MJPEG : Max 15fps @ all resolution.
Smart codec	Wise Stream
Video Quality Ajustment	H.265 : Target Bitrate Level Control H.264 : Target Bitrate Level Control MJPEG : Quality Level Control
Bitrate control method	H.265 : CBR or VBR H.264 : CBR or VBR MJPEG : VBR
Streaming Capability	Multiple Streaming(Up to 3 Profiles)
Audio I/O	Built-in MIC
Audio Compression Format	G.711 u-law /G.726 Selectable G.726(ADPCM) : 8KHz, G.711 : 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps
Audio Communication	Uni-directional
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TSL, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication
Streaming Method	Unicast / Multicast
Max. User Access	6 users at Unicast Mode
Edge storage	Micro SD/SDHC/SDXC Max 128G, NAS - Motion images recorded in the SD memory card can be downloaded - Manual recording at Local PC
Application Programming Inte	ONVIF Profile S, G SUNAPI(HTTP API)
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Denish, Portuguese, Turkish, Polish, Czech, Rumanian, Serbian, Dutch, Croatia, Hungary, Greek, Finnish, Norwegian
Web Viewer	Supported OS: Windows 7, 8, 10, Mac OS X 10.8, 10.9, 10.10, 10.11 [Non-plugin Webviewer] Supported Browser: Google Chrome 47, MS Edge 20 Support Codec : Video-H.264, MJPEG (Max. 1M 15fps), Audio-G.711 [Plug-in Webviewer] Supported Browser : MS Explore 11 , Mozilla Firefox 43, Apple Safari 9 * Mac OS X only

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0208-R1

Page (6) of (43)

Central Management Software	SmartViewer
Pixel Counter	Support (plug-in viewer only)
Environmental	
Operating Temperature / Humidity	-10°C ~ +55°C / Less than 90% RH
Storage Temperature / Humidity	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	-
Vandal Resistance	-
Electrical	
Input Voltage / Current	PoE(IEEE802.3af, Class3), DC 12V
Power Consumption	Max.6.5W(PoE), Max.5.43W(DC12V)
Mechanical	
Color / Material	Ivory / Plastic
Dimension (WxHxD)	φ110xH86mm
Weight	290g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 100 Vac ☐ 110 Vac ☐ 230 Vac ☒ PoE ☒ 12 Vdc
Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Variant Model	Remarks
QND-7020R	Focus Length differences
QND-7010R	

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	QND-7030R	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE	HICC-P-2100XIRV	15030100002	Honeywell	-
Notebook	NT630Z5J	JK9091EF400142M	Samsung Electronics Suzhou Computer Co., Ltd.	-
NotebookK Adapter	A13-040N2A	CN60BA4400313ADON 843K0200	Chicony Power Technology (suzhou)Co., Ltd.	-
Alarm	SIE-0001 DO	C54167JB601268 F	SAMSUNG TECHWIN CO., LTD.	-
Micro SD card	-	-	Transcend	4 GB

1.6 External I/O Cabling

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	Alarm IN	Alarm	Alarm IN	3.0	U
	RJ-45	Notebook	RJ-45	4.0	U

- PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	Alarm IN	Alarm	Alarm IN	3.0	U
	RJ-45	PoE	RJ-45	4.0	U
PoE	RJ-45	Notebook	RJ-45	4.0	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:


Test mode	Normal operating
OP	MONITORING Network ping test

- Input power condition during the measurements was 12 V (dc) , PoE


1.8 Configuration

■ AC Main
 □ DC Main

- DC 12 V Mode

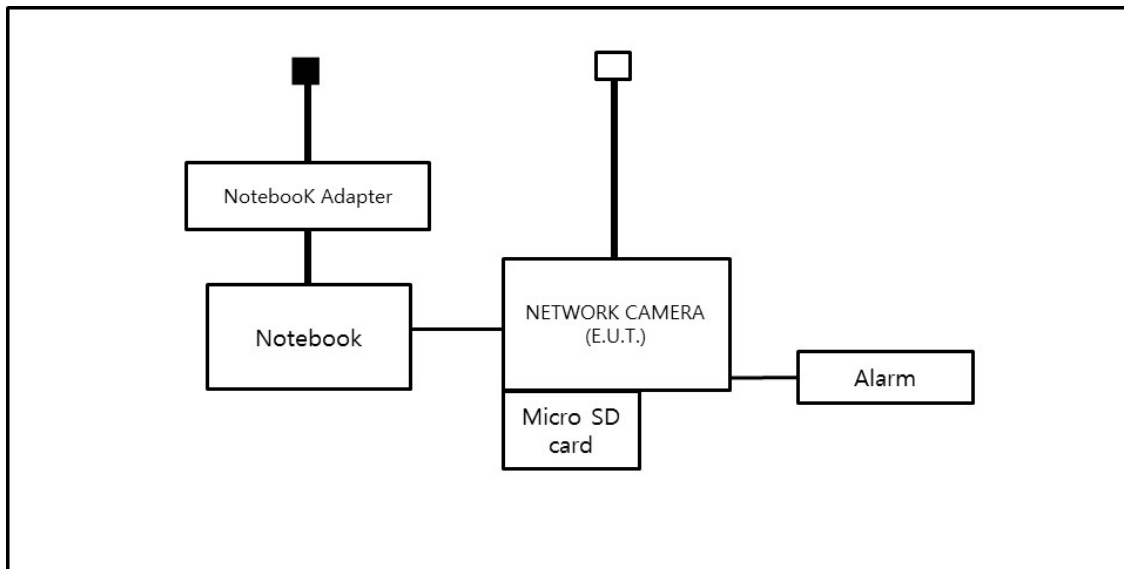

- PoE Mode

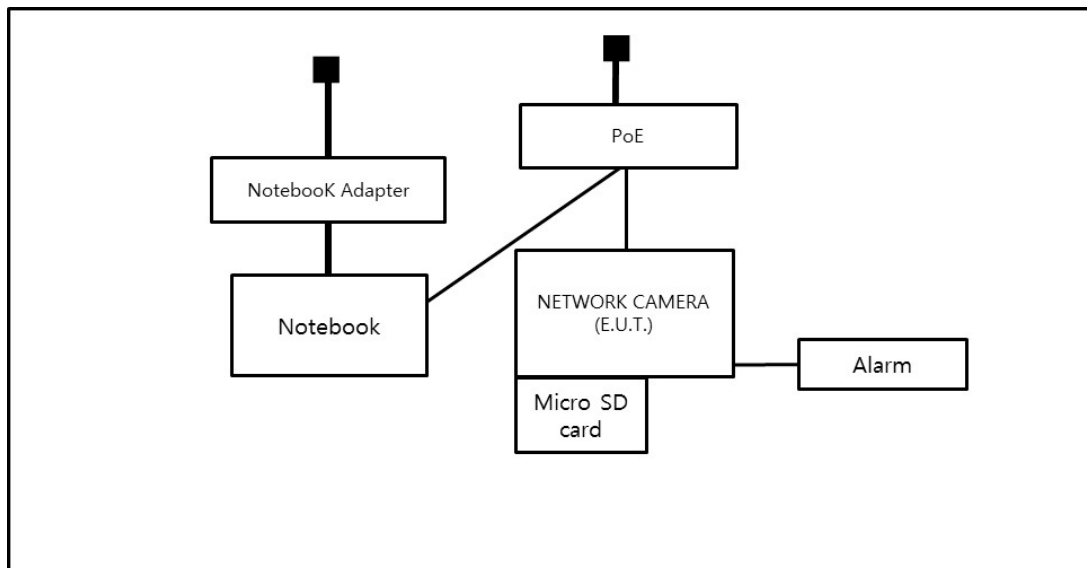

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2019

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55022:2010

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013

☐ VCCI V-3/2013.04

☐ Class A

☐ Class B

☒ AS/NZS CISPR22:2009 +A1:2010

☒ Class A

☐ Class B

☐ 47 CFR Part 15, Subpart B / ANSI C63.4-2009

☐ Class A

☐ Class B

☐ IC Regulation ICES-003 : 2012
/ ANSI C63.4-2014

☐ Class A

☐ Class B

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0208-R1

Page (12) of (43)

☐ **R&TTE- Directive 1999/5/EC**

☐ EN 301 489-1 V1.9.2

- ☐ Equipment for fixed use
- ☐ Equipment for vehicular use
- ☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☐	LISN	ENV216	R & S	101137	02, 04, 2017
☐	LISN	ENV216	R & S	101786	05, 02, 2017
☐	Electro wave Shieldroom	-	AONE SHIELD	-	-

Test Conditions

Temperature: °C
Relative Humidity: %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

Beacause the E.U.T power is 12 V (dc) power and PoE, limits are not specified

2.2 Conducted Emissions at Telecommunication Ports

Test Date

May. 09, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02. 04. 2017
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04. 01. 2017
☒	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04. 01. 2016
☐	8-Wire ISN CAT6	NTFM 8158	Schwarzbeck Mess	8158-0029	08. 14. 2016
☒	Electro wave Shieldroom	-	SEMITEC	-	-

Test Conditions

Temperature: 25,7 °C

Relative Humidity: 39,7 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

May. 09, 2016

Test Location

☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R&S	101781	05, 03, 2017
☒	Trilog-Broadband Antenna	VULB 9163	SCHWARZBECK	9168-713	05, 15, 2017
☒	Open Area Test Site	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-

Test Conditions

Temperature: 27,4 °C
Relative Humidity: 28,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

May. 09, 2016

Test Location

Semi Anchoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESU26	R&S	100551	04, 18, 2017
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10. 23. 2016
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05. 07. 2017
☒	Semi Anchoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-

Test Conditions

Temperature: 25,7 °C
Relative Humidity: 39,7 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-16T0208-R1
Page (18) of (43)

[NEUTRAL]

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Conducted Emissions at Telecommunication Ports

- DC 12 V Mode

[10 Mbps]

Common Information

Test Description: Telecommunication Emission
 Model No.: QND-7030RP
 Mode: DC-10M-C-TICK
 Operator Name: KES

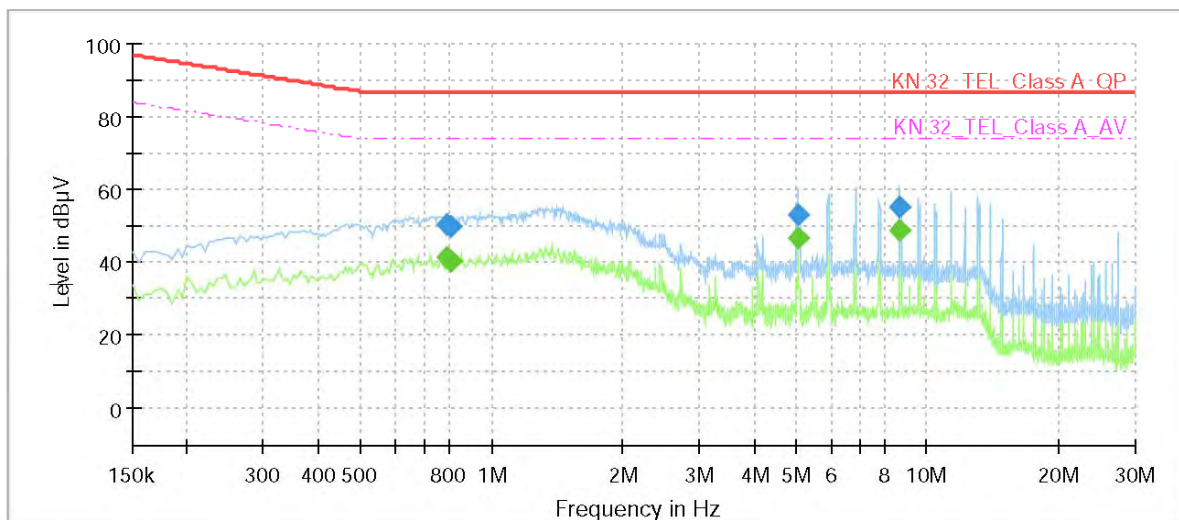


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.790000	---	41.07	74.00	32.93	1000.0	9.000	Single Line	9.9
0.790000	50.08	---	87.00	36.92	1000.0	9.000	Single Line	9.9
0.810000	---	40.34	74.00	33.66	1000.0	9.000	Single Line	9.9
0.810000	49.92	---	87.00	37.08	1000.0	9.000	Single Line	9.9
5.055000	---	46.76	74.00	27.24	1000.0	9.000	Single Line	9.9
5.055000	52.93	---	87.00	34.07	1000.0	9.000	Single Line	9.9
8.640000	---	48.72	74.00	25.28	1000.0	9.000	Single Line	10.0
8.640000	54.85	---	87.00	32.15	1000.0	9.000	Single Line	10.0

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	QND-7030RP
Mode	DC-100M-C-TICK
Operator Name:	KES

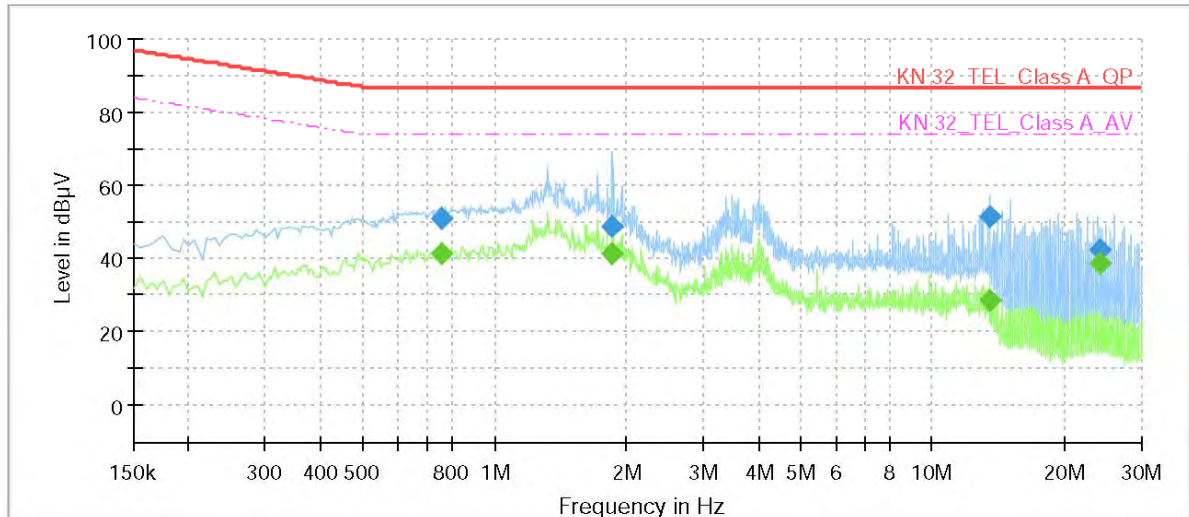

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.755000	---	41.18	74.00	32.82	1000.0	9.000	Single Line	9.4
0.755000	50.80	---	87.00	36.20	1000.0	9.000	Single Line	9.4
1.860000	---	41.08	74.00	32.92	1000.0	9.000	Single Line	9.3
1.860000	48.73	---	87.00	38.27	1000.0	9.000	Single Line	9.3
13.555000	---	28.73	74.00	45.27	1000.0	9.000	Single Line	9.6
13.555000	51.49	---	87.00	35.51	1000.0	9.000	Single Line	9.6
24.000000	---	38.40	74.00	35.60	1000.0	9.000	Single Line	9.5
24.000000	42.37	---	87.00	44.63	1000.0	9.000	Single Line	9.5

- PoE Mode

[10 Mbps]

Common Information

Test Description:

Telecommunication Emission

Model No.:


QND-7030RP

Mode

POE-10M-C-TICK

Operator Name:

KES

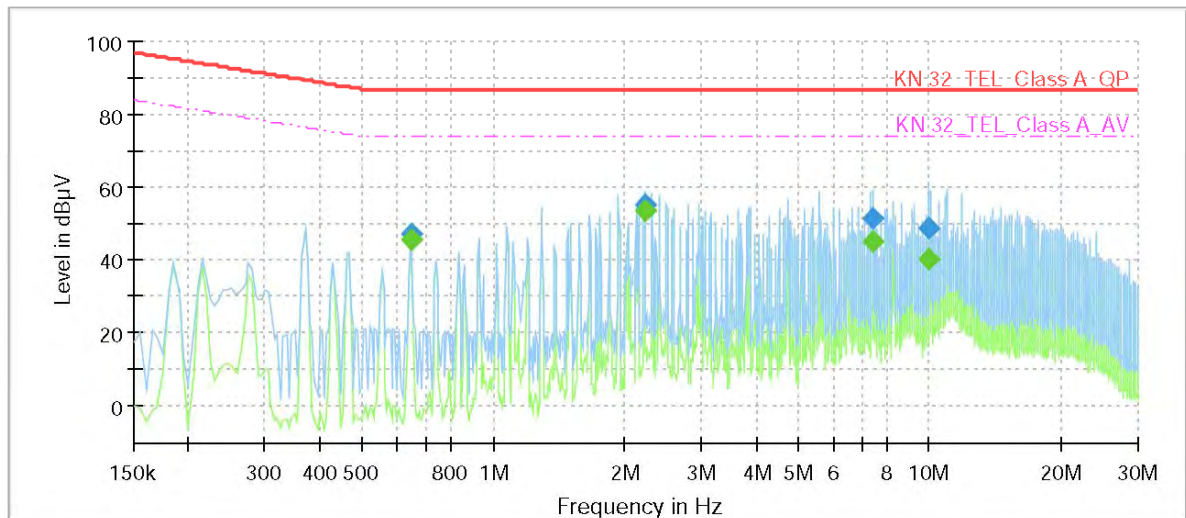


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.645000	---	45.78	74.00	28.22	1000.0	9.000	Single Line	9.9
0.645000	47.23	---	87.00	39.77	1000.0	9.000	Single Line	9.9
2.220000	---	53.37	74.00	20.63	1000.0	9.000	Single Line	9.8
2.220000	54.93	---	87.00	32.07	1000.0	9.000	Single Line	9.8
7.390000	---	45.25	74.00	28.75	1000.0	9.000	Single Line	10.0
7.390000	51.38	---	87.00	35.62	1000.0	9.000	Single Line	10.0
9.995000	---	40.33	74.00	33.67	1000.0	9.000	Single Line	10.1
9.995000	48.89	---	87.00	38.11	1000.0	9.000	Single Line	10.1

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	QND-7030RP
Mode	POE-100M-C-TICK
Operator Name:	KES

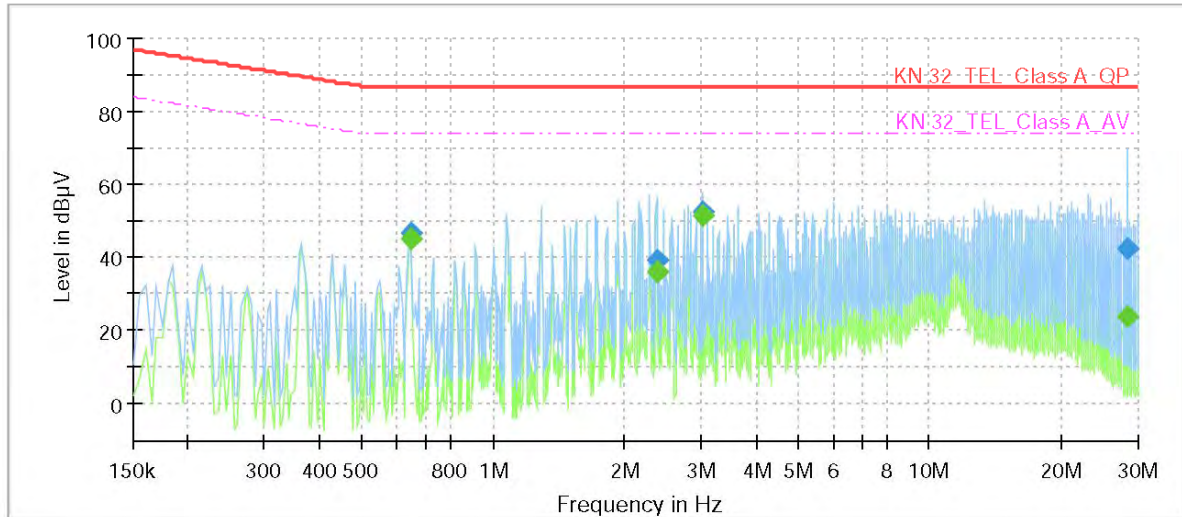

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.645000	---	45.21	74.00	28.79	1000.0	9.000	Single Line	9.4
0.645000	46.69	---	87.00	40.31	1000.0	9.000	Single Line	9.4
2.370000	---	35.75	74.00	38.25	1000.0	9.000	Single Line	9.3
2.370000	39.15	---	87.00	47.85	1000.0	9.000	Single Line	9.3
3.010000	---	51.56	74.00	22.44	1000.0	9.000	Single Line	9.3
3.010000	52.60	---	87.00	34.40	1000.0	9.000	Single Line	9.3
28.410000	---	23.89	74.00	50.11	1000.0	9.000	Single Line	9.4
28.410000	42.49	---	87.00	44.51	1000.0	9.000	Single Line	9.4



Radiated Electric Field Emissions(Below 1 GHz)

- DC 12 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
168.73	12.20	V	2.60	8.93	2.93	24.06	40.00	15.94
216.19	8.67	H	1.84	11.66	3.44	23.77	40.00	16.23
263.99	15.34	V	2.54	12.68	3.91	31.93	47.00	15.07
264.71	12.87	H	1.87	12.70	3.92	29.49	47.00	17.51
312.20	11.98	H	2.33	13.66	4.32	29.96	47.00	17.04
360.64	10.28	H	1.25	14.79	4.74	29.81	47.00	17.19
360.68	11.87	V	3.01	14.79	4.74	31.40	47.00	15.60
408.39	9.87	V	1.99	15.82	5.10	30.79	47.00	16.21

* H : Horizontal, V : Vertical


- PoE Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
138.67	12.92	V	2.30	7.96	2.70	23.58	40.00	16.42
168.72	10.39	H	1.87	8.93	2.93	22.25	40.00	17.75
263.99	15.38	V	2.95	12.68	3.91	31.97	47.00	15.03
270.47	11.38	H	1.88	12.81	3.97	28.16	47.00	18.84
312.16	9.36	H	2.96	13.66	4.32	27.34	47.00	19.66
312.20	10.21	V	2.36	13.66	4.32	28.19	47.00	18.81
360.71	11.87	V	1.90	14.79	4.74	31.40	47.00	15.60
408.38	9.37	H	1.07	15.82	5.10	30.29	47.00	16.71

* H : Horizontal, V : Vertical

Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode

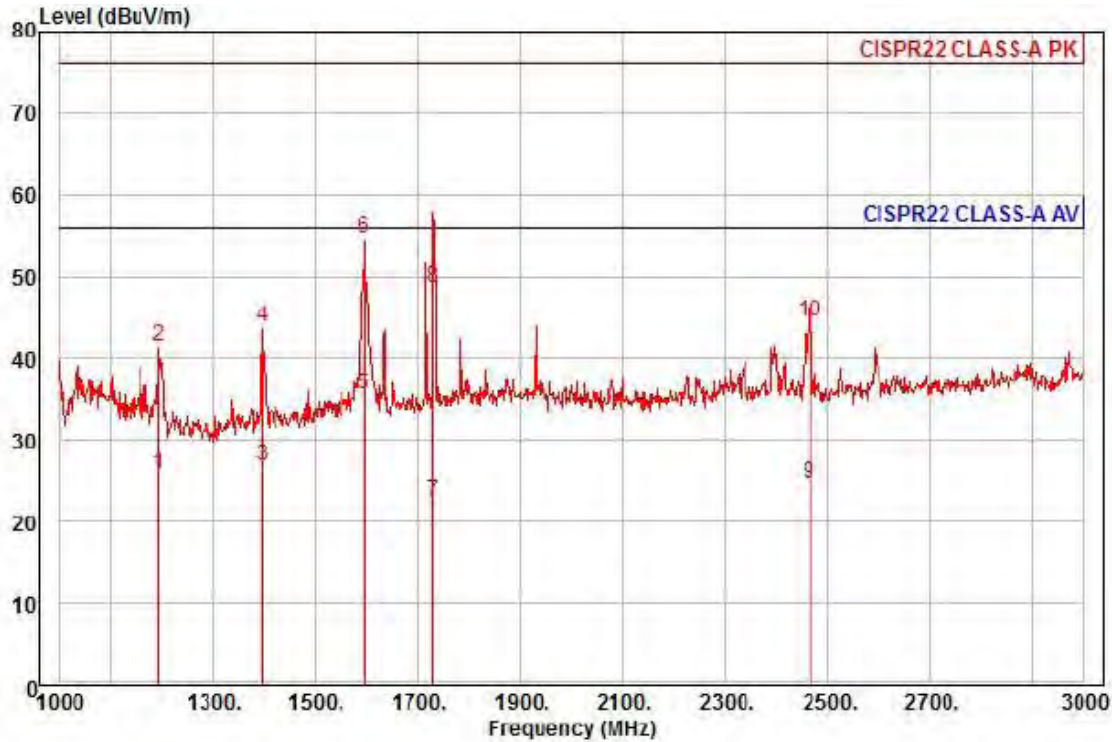

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : QND-7030RP
 Mode : DC 12V_C-TICK
 Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1194.00	33.92	24.68	7.07	40.02	89	56.00	-30.35	horizontal	Average
2	1194.00	49.60	24.68	7.07	40.02	89	76.00	-34.67	horizontal	Peak
3	1396.00	33.56	25.48	7.66	39.93	111	56.00	-29.23	horizontal	Average
4	1396.00	50.62	25.48	7.66	39.93	111	76.00	-32.17	horizontal	Peak
5 pp	1596.00	40.82	26.28	8.24	39.83	86	56.00	-20.49	horizontal	Average
6 pk	1596.00	60.09	26.28	8.24	39.83	86	76.00	-21.22	horizontal	Peak
7	1730.00	26.70	26.81	8.61	39.76	63	56.00	-33.64	horizontal	Average
8	1730.00	52.86	26.81	8.61	39.76	63	76.00	-27.48	horizontal	Peak
9	2466.00	25.48	29.02	10.06	39.90	315	56.00	-31.34	horizontal	Average
10	2466.00	45.38	29.02	10.06	39.90	315	76.00	-31.44	horizontal	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EI-16T0208-R1

Page (25) of (43)

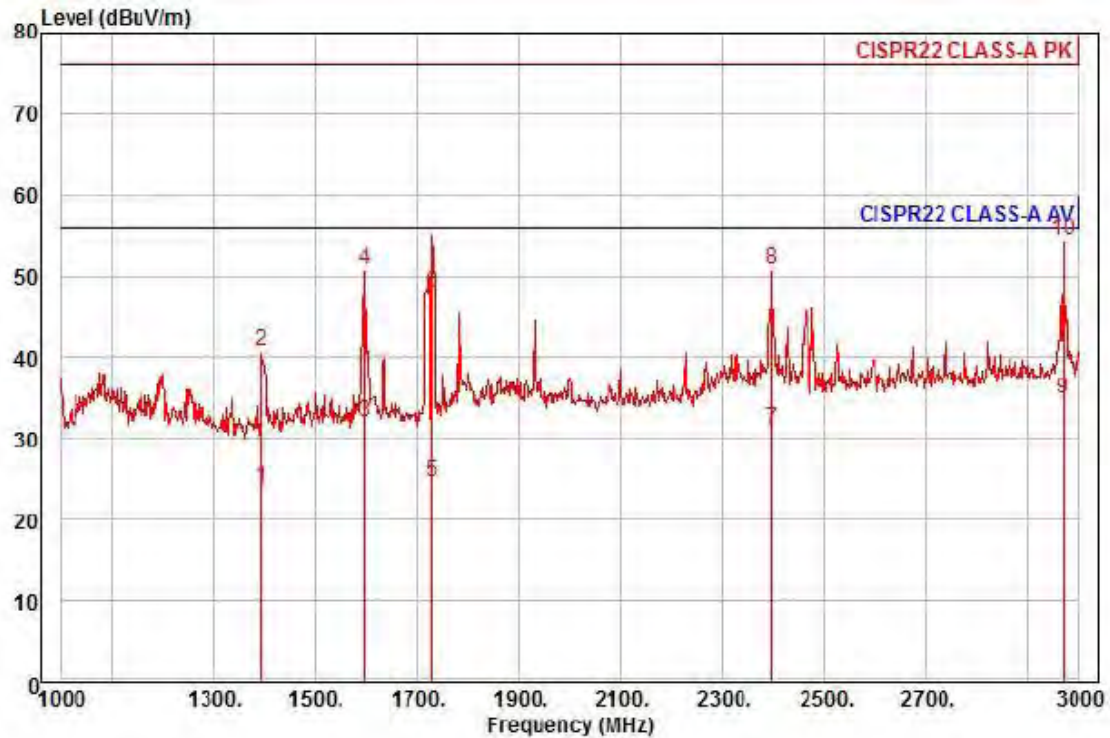

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : QND-7030RP
Mode : DC 12V_C-TICK
Memo : 1 ~ 3 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1392.00	30.76	25.47	7.65	39.93	214	56.00	-32.05	vertical	Average
2	1392.00	47.54	25.47	7.65	39.93	214	76.00	-35.27	vertical	Peak
3	1598.00	37.44	26.28	8.24	39.83	55	56.00	-23.87	vertical	Average
4	1598.00	56.02	26.28	8.24	39.83	55	76.00	-25.29	vertical	Peak
5	1730.00	28.94	26.81	8.61	39.76	343	56.00	-31.40	vertical	Average
6	1730.00	52.25	26.81	8.61	39.76	343	76.00	-28.09	vertical	Peak
7	2398.00	32.26	28.85	9.96	39.86	226	56.00	-24.78	vertical	Average
8	2398.00	51.90	28.85	9.96	39.86	226	76.00	-25.14	vertical	Peak
9 pp	2970.00	33.66	30.26	11.15	40.19	337	56.00	-21.12	vertical	Average
10 pk	2970.00	53.20	30.26	11.15	40.19	337	76.00	-21.58	vertical	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-16T0208-R1
Page (26) of (43)

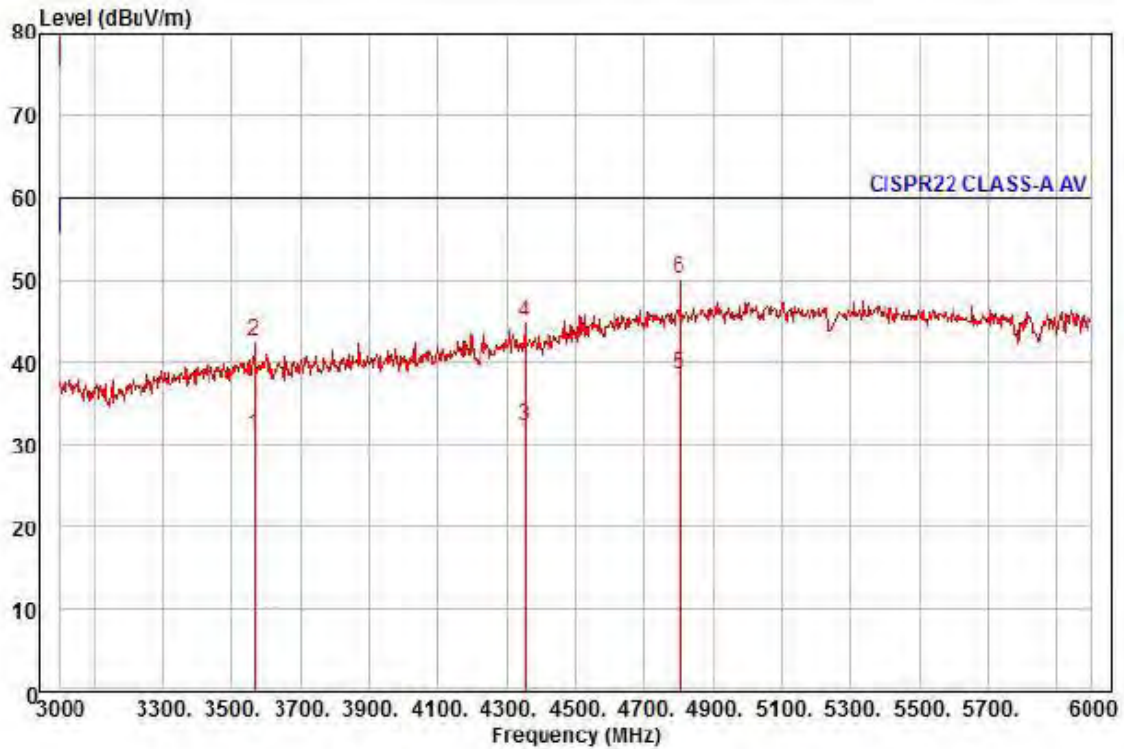

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : QND-7030RP
Mode : DC 12V_C-TICK
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamplifier Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3564.00	27.51	31.28	12.64	40.32	338	60.00	-28.89	horizontal	Average
2	3564.00	38.96	31.28	12.64	40.32	338	80.00	-37.44	horizontal	Peak
3	4353.00	24.41	34.03	14.16	40.41	154	60.00	-27.81	horizontal	Average
4	4353.00	37.13	34.03	14.16	40.41	154	80.00	-35.09	horizontal	Peak
5 pp	4800.00	27.41	36.58	14.97	40.41	330	60.00	-21.45	horizontal	Average
6 pk	4800.00	36.91	36.58	14.97	40.41	330	80.00	-29.95	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EI-16T0208-R1
Page (27) of (43)

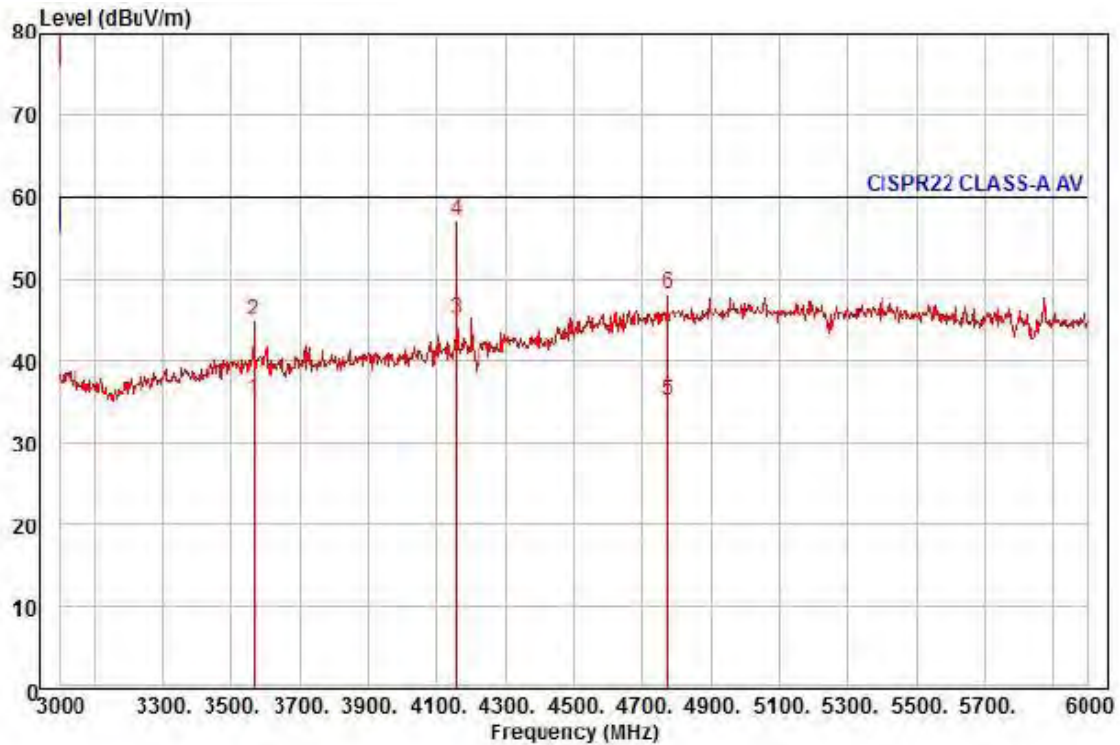


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : QND-7030RP
Mode : DC 12V_C-TICK
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3564.00	31.69	31.28	12.64	40.32	331	60.00	-24.71	vertical	Average
2	3564.00	41.33	31.28	12.64	40.32	331	80.00	-35.07	vertical	Peak
3 pp	4158.00	38.91	32.91	13.80	40.41	275	60.00	-14.79	vertical	Average
4 pk	4158.00	50.73	32.91	13.80	40.41	275	80.00	-22.97	vertical	Peak
5	4773.00	24.21	36.42	14.92	40.41	266	60.00	-24.86	vertical	Average
6	4773.00	37.34	36.42	14.92	40.41	266	80.00	-31.73	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- PoE Mode

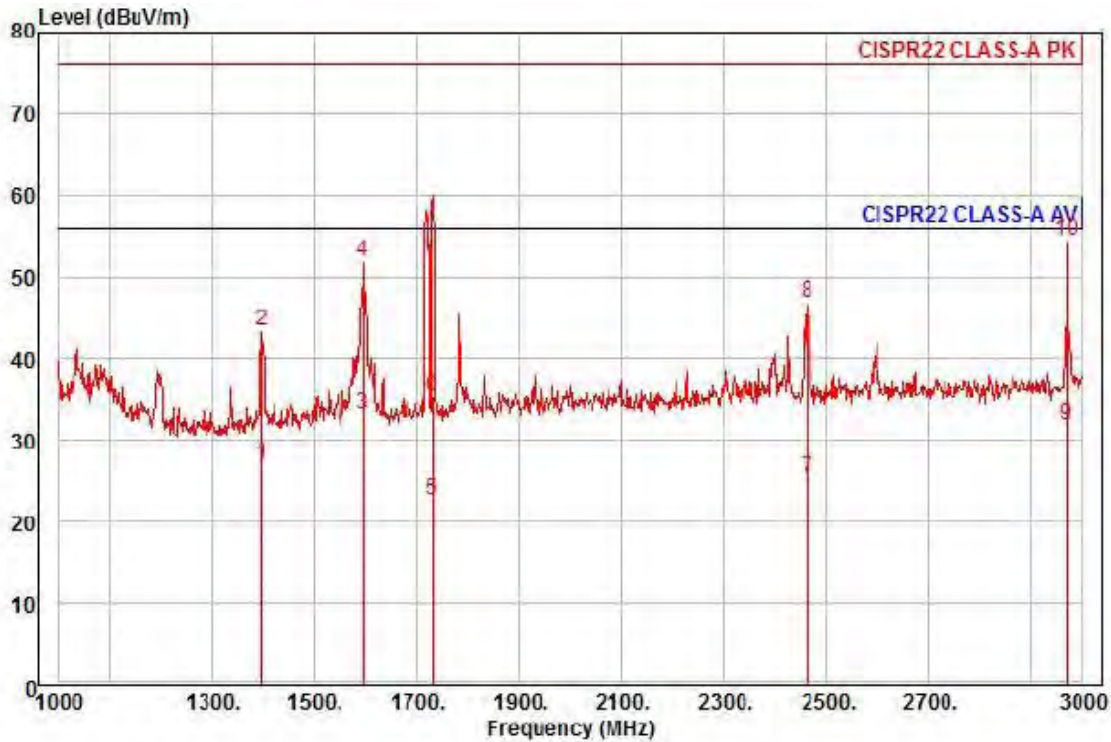

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : QND-7030RP
Mode : POE_C-TICK
Memo : 1 ~ 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamplifier Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1396.00	33.89	25.48	7.66	39.93	211	56.00	-28.90	horizontal	Average
2	1396.00	50.13	25.48	7.66	39.93	211	76.00	-32.66	horizontal	Peak
3 av	1596.00	38.37	26.28	8.24	39.83	164	56.00	-22.94	horizontal	Average
4	1596.00	57.23	26.28	8.24	39.83	164	76.00	-24.08	horizontal	Peak
5	1732.00	27.04	26.82	8.61	39.76	60	56.00	-33.29	horizontal	Average
6	1732.00	39.74	26.82	8.61	39.76	60	76.00	-40.59	horizontal	Peak
7	2464.00	26.08	29.02	10.06	39.90	225	56.00	-30.74	horizontal	Average
8	2464.00	47.78	29.02	10.06	39.90	225	76.00	-29.04	horizontal	Peak
9	2970.00	30.61	30.26	11.15	40.19	341	56.00	-24.17	horizontal	Average
10 pp	2970.00	53.24	30.26	11.15	40.19	341	76.00	-21.54	horizontal	Peak



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EI-16T0208-R1
Page (29) of (43)

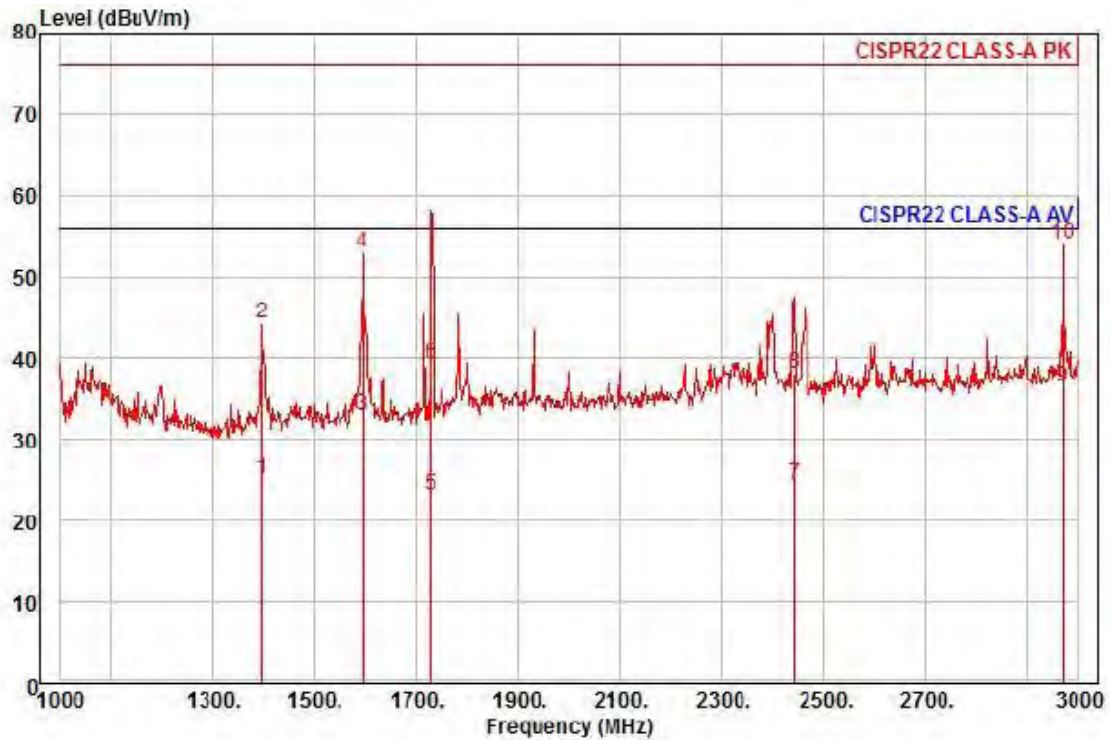

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : QND-7030RP
Mode : POE_C-TICK
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1396.00	31.93	25.48	7.66	39.93	220	56.00	-30.86	vertical	Average
2	1396.00	50.97	25.48	7.66	39.93	220	76.00	-31.82	vertical	Peak
3	1596.00	38.28	26.28	8.24	39.83	44	56.00	-23.03	vertical	Average
4	1596.00	58.34	26.28	8.24	39.83	44	76.00	-22.97	vertical	Peak
5	1730.00	27.48	26.81	8.61	39.76	137	56.00	-32.86	vertical	Average
6	1730.00	43.67	26.81	8.61	39.76	137	76.00	-36.67	vertical	Peak
7	2442.00	25.34	28.96	10.03	39.89	336	56.00	-31.56	vertical	Average
8	2442.00	39.04	28.96	10.03	39.89	336	76.00	-37.86	vertical	Peak
9 pp	2970.00	35.11	30.26	11.15	40.19	264	56.00	-19.67	vertical	Average
10 pk	2970.00	52.80	30.26	11.15	40.19	264	76.00	-21.98	vertical	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-16T0208-R1
Page (30) of (43)

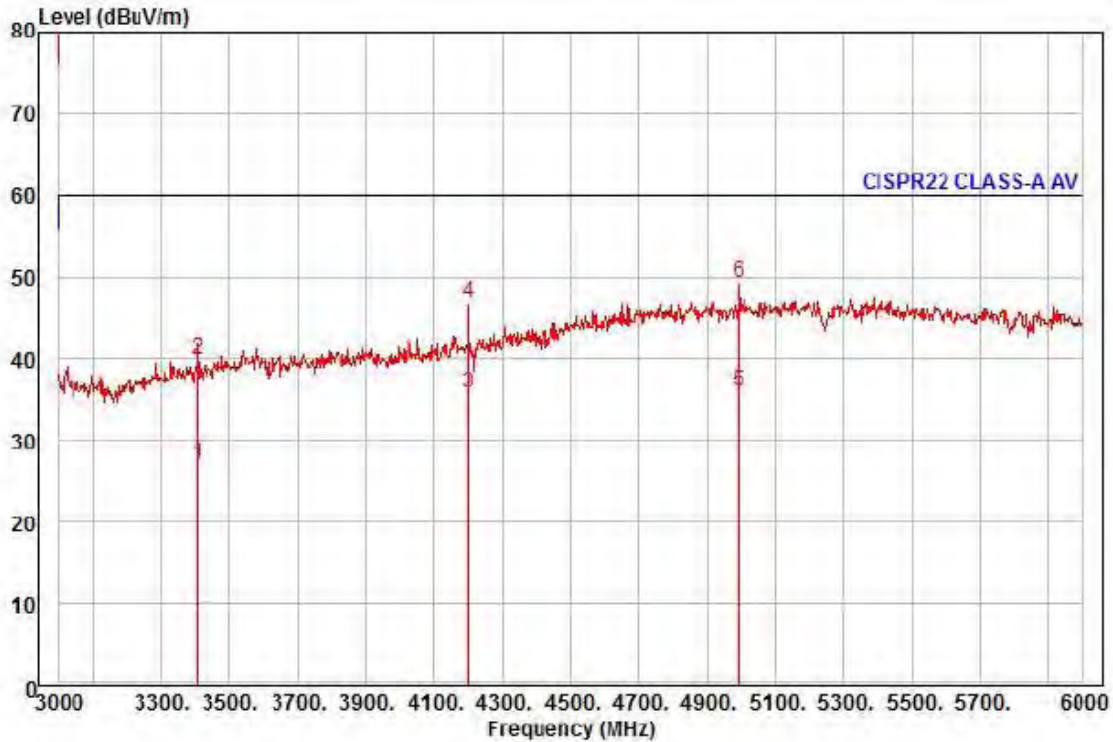

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : QND-7030RP
Mode : POE_C-TICK
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3405.00	24.13	31.01	12.26	40.29	202	60.00	-32.89	horizontal	Average
2	3405.00	36.92	31.01	12.26	40.29	202	80.00	-40.10	horizontal	Peak
3	4200.00	29.11	33.15	13.88	40.41	345	60.00	-24.27	horizontal	Average
4	4200.00	40.21	33.15	13.88	40.41	345	80.00	-33.17	horizontal	Peak
5 pp	4992.00	23.44	37.67	15.32	40.41	34	60.00	-23.98	horizontal	Average
6 pk	4992.00	36.68	37.67	15.32	40.41	34	80.00	-30.74	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-16T0208-R1
Page (31) of (43)

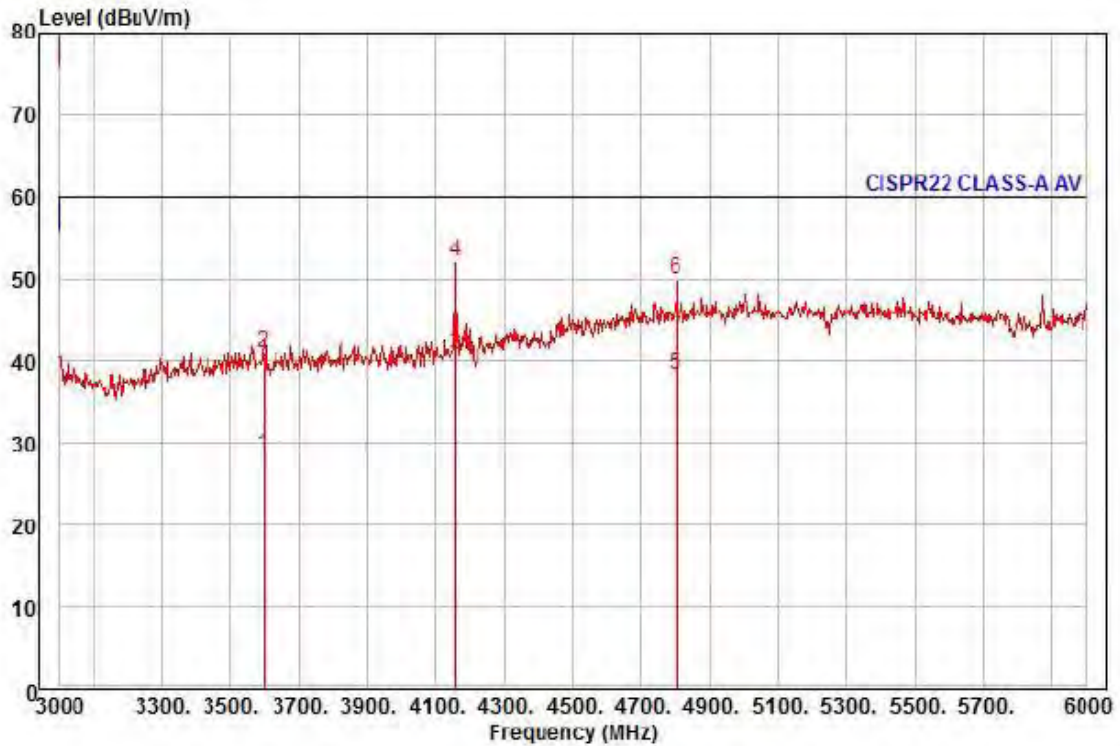

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : QND-7030RP
Mode : POE_C-TICK
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3597.00	24.87	31.33	12.70	40.33	338	60.00	-31.43	vertical	Average
2	3597.00	37.39	31.33	12.70	40.33	338	80.00	-38.91	vertical	Peak
3 pp	4158.00	34.53	32.91	13.80	40.41	224	60.00	-19.17	vertical	Average
4 pk	4158.00	45.74	32.91	13.80	40.41	224	80.00	-27.96	vertical	Peak
5	4800.00	27.33	36.58	14.97	40.41	341	60.00	-21.53	vertical	Average
6	4800.00	38.68	36.58	14.97	40.41	341	80.00	-30.18	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Test Setup Photos and Configuration


Conducted Voltage Emissions

N/A

N/A


Conducted Telecommunication Emissions

- DC 12 V Mode

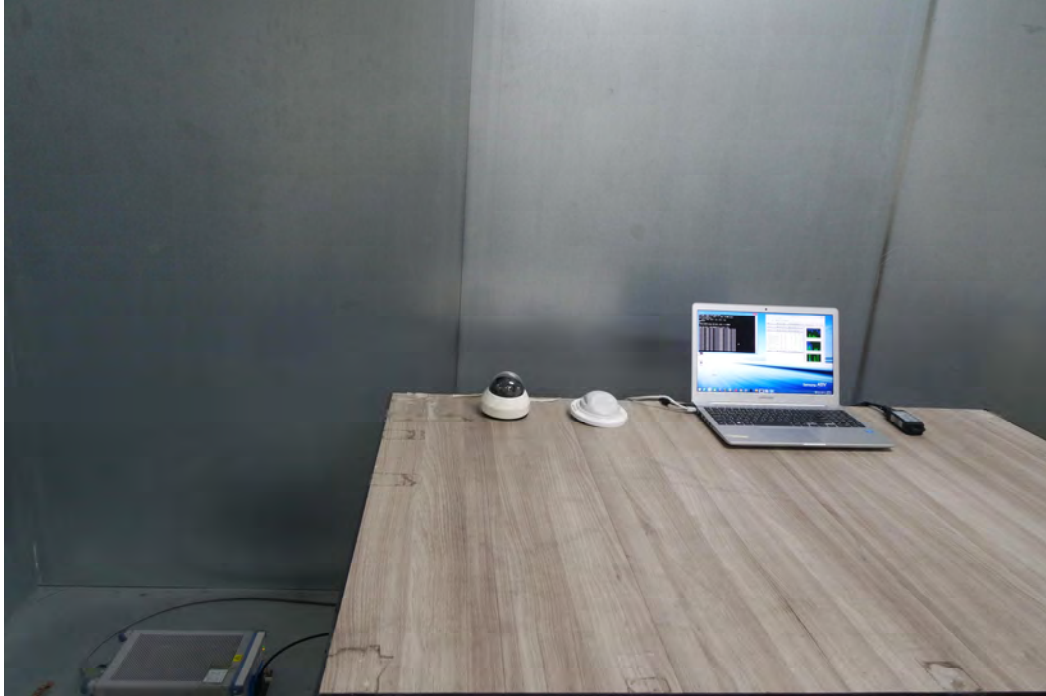

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- PoE Mode

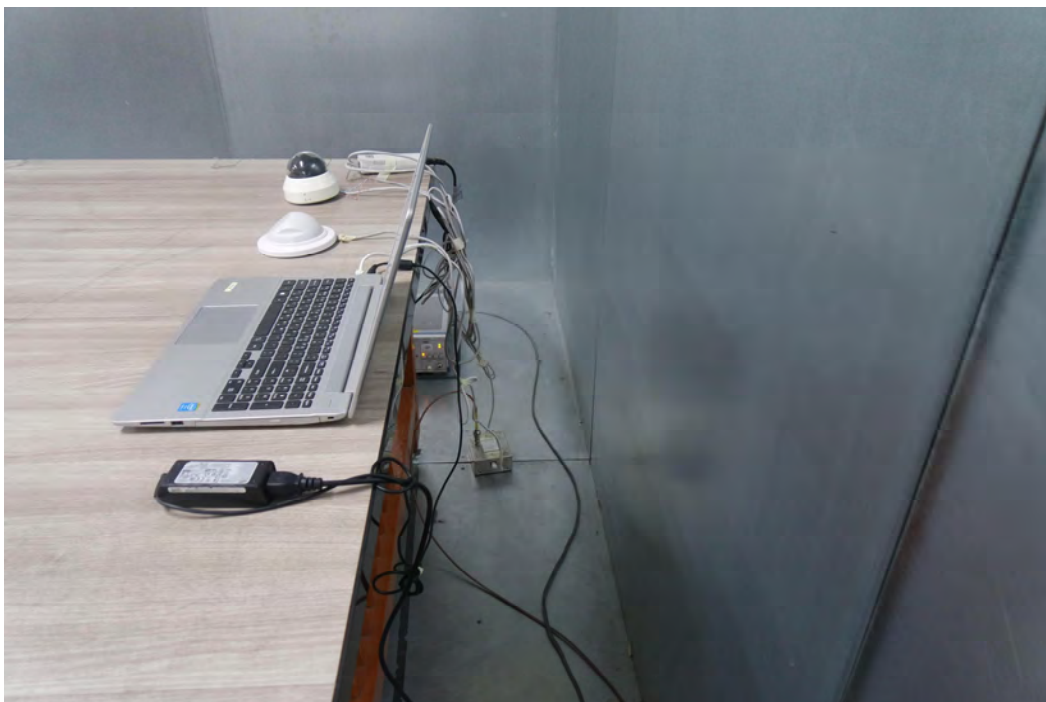

Radiated Electric Field Emissions(Below 1 GHz)

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- PoE Mode


Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- PoE Mode

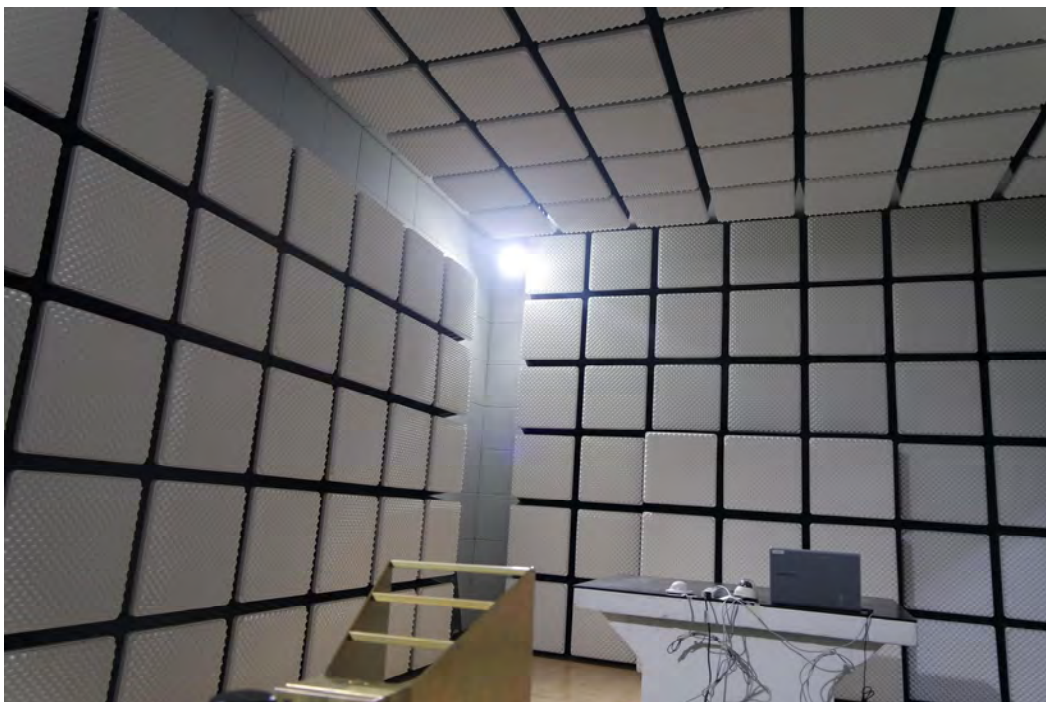

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs

(Internal View)




Main Board EUT Internal View – Main Board

(Top)



(Bottom)

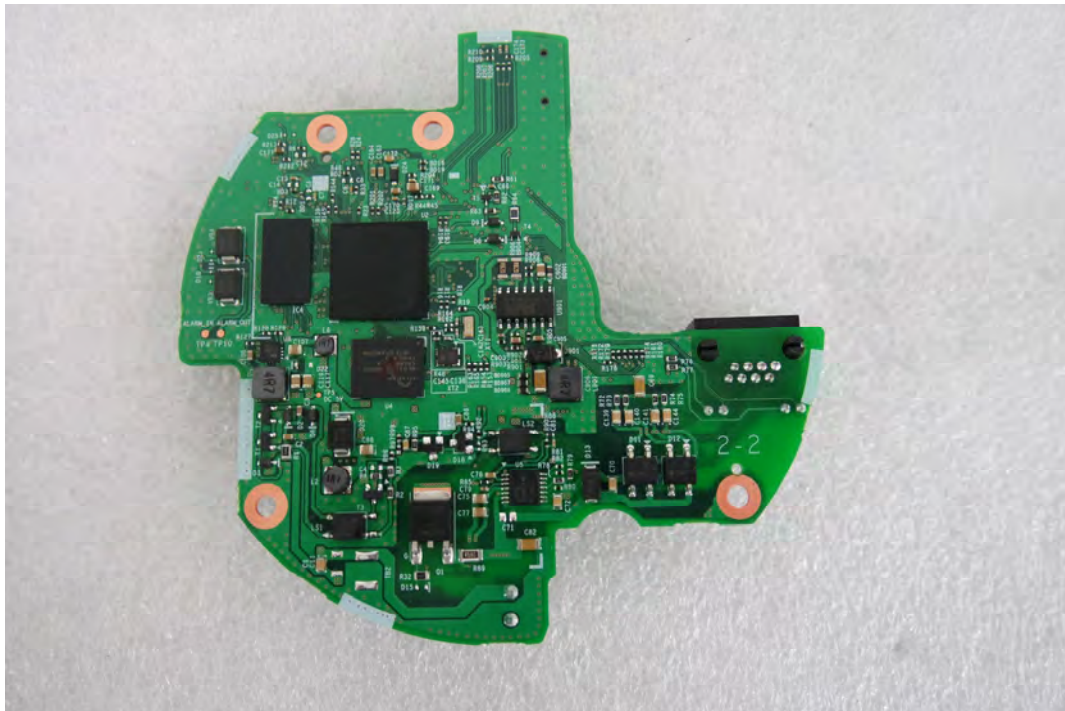


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Main Board EUT Internal View – Camera lens

(Top)



(Bottom)

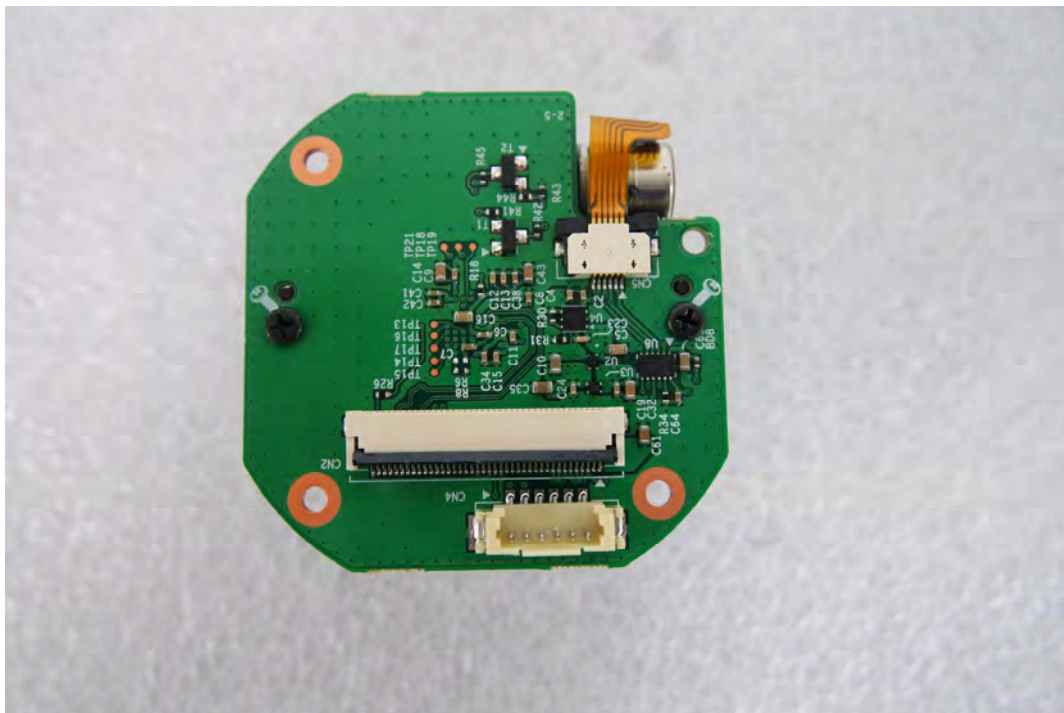

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Main Board EUT Internal View – LED

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr