



## EMC TEST REPORT For VCCI

Test Report No. : KES-E1-19T0239  
Date of Issue : Apr. 18, 2019  
Product name : NETWORK CAMERA  
Model/Type No. : QND-8030R  
Variant Model : QND-8020R, QND-8010R  
Applicant : Hanwha Techwin Co., Ltd.  
Applicant Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, 13488, KOREA  
Manufacturer : 1. Hanwha Techwin (Tianjin) Co.,Ltd.  
2. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.  
3. D-TECH CO.,LTD.  
Manufacturer Address : 1. No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,  
300385, People's Republic of China  
2. Lot O-2, Que Vo Industrial Zone extended area,  
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam  
3. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do,  
Korea (Suwon Industrial Complex)  
Date of Receipt : Apr. 09, 2019  
Test date : Apr. 13, 2019  
Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Dong In, Kim  
EMC Test Engineer

Reviewed by

Dong-Hun, Jang  
EMC Technical Manager

This test report is not related to KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-E1-19T0239  
Page (2) of (32)

---

**REPORT REVISION HISTORY**

| Date          | Test Report No. | Revision History |
|---------------|-----------------|------------------|
| Apr. 18, 2019 | KES-E1-19T0239  | Issued           |
|               |                 |                  |
|               |                 |                  |
|               |                 |                  |
|               |                 |                  |
|               |                 |                  |
|               |                 |                  |
|               |                 |                  |
|               |                 |                  |
|               |                 |                  |

*This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.*

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## TABLE OF CONTENTS

|                                                      |                                                             |    |
|------------------------------------------------------|-------------------------------------------------------------|----|
| 1.0                                                  | General Product Description.....                            | 4  |
| 1.1                                                  | Test Voltage & Frequency .....                              | 6  |
| 1.2                                                  | Variant Model Differences .....                             | 6  |
| 1.3                                                  | Device Modifications .....                                  | 6  |
| 1.4                                                  | Equipment Under Test.....                                   | 6  |
| 1.5                                                  | Support Equipments .....                                    | 6  |
| 1.6                                                  | External I/O Cabling .....                                  | 7  |
| 1.7                                                  | EUT Operating Mode(s) .....                                 | 7  |
| 1.8                                                  | Configuration .....                                         | 8  |
| 1.9                                                  | Remarks when standards applied .....                        | 9  |
| 1.10                                                 | Calibration Details of Equipment Used for Measurement ..... | 9  |
| 1.11                                                 | Test Facility .....                                         | 9  |
| 1.12                                                 | Laboratory Accreditations and Listings .....                | 9  |
| 2.0                                                  | Test Regulations.....                                       | 10 |
| 2.1                                                  | Conducted Emissions Mains Power Ports.....                  | 12 |
| 2.2                                                  | Conducted Emissions at Telecommunication Ports.....         | 13 |
| 2.3                                                  | Radiated Electric Field Emissions(Below 1 GHz) .....        | 14 |
| 2.4                                                  | Radiated Electric Field Emissions(Above 1 GHz) .....        | 15 |
| APPENDIX A – TEST DATA.....                          |                                                             | 16 |
| Conducted Emissions at Mains Power Ports.....        |                                                             | 16 |
| Conducted Emissions at Telecommunication Ports ..... |                                                             | 18 |
| Radiated Electric Field Emissions(Below 1 GHz) ..... |                                                             | 20 |
| Radiated Electric Field Emissions(Above 1 GHz) ..... |                                                             | 21 |
| Test Setup Photos and Configuration .....            |                                                             | 22 |
| Conducted Voltage Emissions .....                    |                                                             | 22 |
| Conducted Telecommunication Emissions .....          |                                                             | 23 |
| Radiated Electric Field Emissions(Below 1 GHz) ..... |                                                             | 24 |
| Radiated Electric Field Emissions(Above 1 GHz) ..... |                                                             | 25 |
| EUT External Photographs .....                       |                                                             | 26 |
| EUT Internal Photographs .....                       |                                                             | 27 |



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-E1-19T0239  
Page (4) of (32)

## 1.0 General Product Description

Main Specifications of EUT are:

| Video                       |                                                                                                                              |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Imaging Device              | 1/2.8" 5MP CMOS                                                                                                              |
| Effective Pixels            | 2592(H)x1944(V)                                                                                                              |
| NETD                        | None                                                                                                                         |
| Pixel Size                  | None                                                                                                                         |
| Min. Illumination           | Color: 0.2Lux(F2.0, 1/30sec) (TBD)<br>BW: 0Lux(IR LED on)                                                                    |
| Video Out                   | CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation                                                      |
| Lens                        |                                                                                                                              |
| Focal Length (Zoom Ratio)   | 6.0mm fixed focal                                                                                                            |
| Max. Aperture Ratio         | F2.0                                                                                                                         |
| Angular Field of View       | H: 49.4° / V: 37.4° / D: 61.0°                                                                                               |
| Min. Object Distance        | None                                                                                                                         |
| Focus Control               | Fixed                                                                                                                        |
| Lens Type                   | None                                                                                                                         |
| Mount Type                  | None                                                                                                                         |
| Optional Lens               | None                                                                                                                         |
| Pan / Tilt / Rotate         |                                                                                                                              |
| Pan / Tilt / Rotate Range   | 0°~350° / 0°~67° / 0°~355°                                                                                                   |
| Pan Range                   | None                                                                                                                         |
| Pan Speed                   | None                                                                                                                         |
| Tilt Range                  | None                                                                                                                         |
| Tilt Speed                  | None                                                                                                                         |
| Rotate Range                | None                                                                                                                         |
| Sequence                    | None                                                                                                                         |
| Preset Accuracy             | None                                                                                                                         |
| Azimuth                     | None                                                                                                                         |
| Auto Tracking               | None                                                                                                                         |
| Operational                 |                                                                                                                              |
| IR Viewable Length          | 20m(65.62ft)                                                                                                                 |
| Camera Title                | Displayed up to 85 characters                                                                                                |
| Day & Night                 | Auto(ICR)                                                                                                                    |
| Backlight Compensation      | BLC, WDR, SSSR                                                                                                               |
| Wide Dynamic Range          | 120dB                                                                                                                        |
| Digital Noise Reduction     | SSNR                                                                                                                         |
| Digital Image Stabilization | None                                                                                                                         |
| Defog                       | None                                                                                                                         |
| Motion Detection            | 4ea, polygonal zones                                                                                                         |
| Privacy Masking             | 6ea, rectangular zones                                                                                                       |
| Gain Control                | Low / Middle / High                                                                                                          |
| White Balance               | ATW / AWC / Manual / Indoor / Outdoor                                                                                        |
| LDC                         | Support                                                                                                                      |
| Electronic Shutter Speed    | Minimum / Maximum / Anti flicker (1/5~1/12,000sec)                                                                           |
| Digital PTZ                 | None                                                                                                                         |
| Video Rotation              | Flip, Mirror, Hallway view(90°/270°)                                                                                         |
| Analytics                   | Defocus detection, Directional detection, Motion detection, Enter/Exit, Tampering, Virtual line                              |
| Business Intelligence       | None                                                                                                                         |
| Serial Interface            | None                                                                                                                         |
| Alarm I/O                   | Input 1ea / Output 1ea                                                                                                       |
| Alarm Triggers              | Analytics, Network disconnect, Alarm input                                                                                   |
| Alarm Events                | File upload via FTP and e-mail<br>Notification via e-mail<br>SD/SDHC/SDXC or NAS recording at event triggers<br>Alarm output |
| Audio In                    | None                                                                                                                         |
| Audio Out                   | None                                                                                                                         |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-E1-19T0239  
Page (5) of (32)

|                                   |                                                                                                                                                                                                                    |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IR Illuminator (Optional)         | None                                                                                                                                                                                                               |
| Wiper                             | None                                                                                                                                                                                                               |
| Coaxial Protocol                  | None                                                                                                                                                                                                               |
| Video Transmission Distance       | None                                                                                                                                                                                                               |
| <b>Radiometry</b>                 |                                                                                                                                                                                                                    |
| Temperature detect range          | None                                                                                                                                                                                                               |
| Temperature accuracy              | None                                                                                                                                                                                                               |
| Temperature detection             | None                                                                                                                                                                                                               |
| Additional                        | None                                                                                                                                                                                                               |
| <b>Network</b>                    |                                                                                                                                                                                                                    |
| Ethernet                          | RJ-45(10/100BASE-T)                                                                                                                                                                                                |
| Video Compression                 | H.265/H.264; Main/High, MJPEG                                                                                                                                                                                      |
| Resolution                        | 2592x1944, 2592x1464, 2560x1920, 2560x1440, 1920 x 1080, 1280 x 960, 1280 x 720, 800 x 600, 800 x 448, 720 x 576, 720 x 480, 640 x 480, 640 x 360                                                                  |
| Max. Framerate                    | H.265/H.264: Max. 30fps/25fps(60Hz/50Hz)<br>MJPEG: Max. 15fps/12fps(60Hz/50Hz)                                                                                                                                     |
| Smart Codec                       | WiseStream II                                                                                                                                                                                                      |
| Video Quality Adjustment          | H.264/H.265: Target bitrate level control<br>MJPEG: Quality level control                                                                                                                                          |
| Bitrate Control                   | H.264/H.265: CBR or VBR<br>MJPEG: VBR                                                                                                                                                                              |
| Streaming                         | Unicast(8 users) / Multicast<br>Multiple streaming (Up to 3 profiles)                                                                                                                                              |
| Audio Compression                 | None                                                                                                                                                                                                               |
| Protocol                          | IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP                                 |
| Security                          | HTTPS(SSL) Login Authentication<br>Digest Login Authentication<br>IP Address Filtering<br>User access log<br>802.1X Authentication(EAP-TLS, EAP-LEAP)<br>Device Certificate(Hanwha Techwin Root CA)                |
| Edge Storage                      | Micro SD/SDHC/SDXC 1slot 256GB (TBD)                                                                                                                                                                               |
| Application Programming Interface | ONVIF Profile S/G/T<br>SUNAPI(HTTP API)<br>Wisenet open platform                                                                                                                                                   |
| Webpage Language                  | English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch                                                                                  |
| Web Viewer                        | Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12<br>Recommended Browser: Google Chrome<br>Supported Browser: MS Explorer11, MS Edge, Mozilla Firefox(Window 64bit only), Apple Safari(Mac OS X only) |
| Memory                            | 512MB RAM, 256MB Flash                                                                                                                                                                                             |
| <b>Environmental</b>              |                                                                                                                                                                                                                    |
| Operating Temperature / Humidity  | -10°C ~ +40°C (+14°F ~ +104°F) / Less than 90% RH (TBD)                                                                                                                                                            |
| Storage Temperature / Humidity    | -30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH (TBD)                                                                                                                                                            |
| Certification                     | IP42 (TBD) , IK08                                                                                                                                                                                                  |
| <b>Electrical</b>                 |                                                                                                                                                                                                                    |
| Input Voltage                     | PoE(IEEE802.3af, Class3)                                                                                                                                                                                           |
| Power Consumption                 | TBD                                                                                                                                                                                                                |
| <b>Mechanical</b>                 |                                                                                                                                                                                                                    |
| Color / Material                  | White / Plastic                                                                                                                                                                                                    |
| RAL Code                          | RAL9003                                                                                                                                                                                                            |
| Product dimensions / weight       | Ø110.0x86.0mm(Ø4.33x3.39"), TBD                                                                                                                                                                                    |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230 Vac ☐ 100 Vac ☐ 24 Vac ☐ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

## 1.2 Variant Model Differences

A simple derivative for each vendor's management model.

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

| Description    | Model Number | Serial Number | Manufacturer                      | Remarks |
|----------------|--------------|---------------|-----------------------------------|---------|
| NETWORK CAMERA | QND-8030R    | -             | Hanwha Techwin (Tianjin) Co.,Ltd. | EUT     |

## 1.5 Support Equipments

| Description      | Model Number   | Serial Number | Manufacturer                               | Remarks |
|------------------|----------------|---------------|--------------------------------------------|---------|
| POE Adaptor      | POE 36U-1AT-R  | P90215791A1   | PHIHONG                                    | -       |
| Notebook         | ProBook4430s   | -             | HP                                         | -       |
| Notebook Adaptor | SeriesPPP0009H | -             | CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD, | -       |
| Alarm            | SIP-1201DD D0  | -             | SAMSUNG TECHWIN CO., LTD.                  | -       |
| Button Alarm     | -              | -             | -                                          | -       |



## 1.6 External I/O Cabling

| Start                |            | END          |            | Cable Spec. |        |
|----------------------|------------|--------------|------------|-------------|--------|
| Description          | I / O Port | Description  | I / O Port | Length      | Shield |
| NETWORK CAMERA (EUT) | RJ-45      | POE Adaptor  | RJ-45      | 3.0         | U      |
|                      | 2 Pin      | Alarm        | 2 Pin      | 3.0         | U      |
|                      | 2 Pin      | Button Alarm | 2 Pin      | 3.0         | U      |
| POE Adaptor          | RJ-45      | Notebook     | RJ-45      | 2.0         | U      |

\* Unshielded=U, Shielded=S


## 1.7 EUT Operating Mode(s)

|           |                           |
|-----------|---------------------------|
| Test mode | operating                 |
| OPERATION | EUT Monitoring, Ping Test |

| EUT Test operating S/W |         |                          |
|------------------------|---------|--------------------------|
| Name                   | Version | Manufacture Company      |
| Web Viewer             | -       | Hanwha Techwin Co., Ltd. |

## 1.8 Configuration

■ AC Main  
□ DC Main

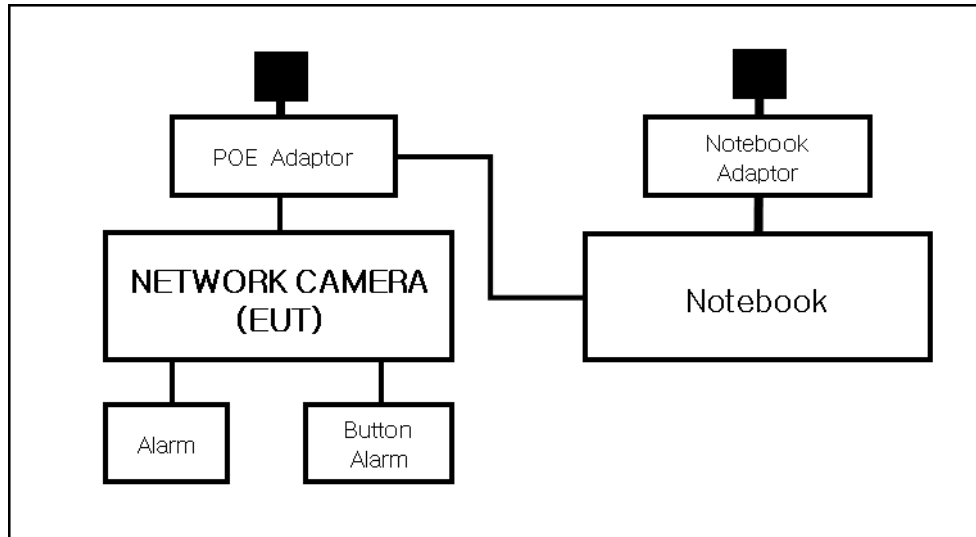



## 1.9 Remarks when standards applied

N/A

## 1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

## 1.12 Laboratory Accreditations and Listings

| Country       | Agency  | Scope of Accreditation                                                                                                                                                                                     | Logo                                                                                                                      |
|---------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| KOREA         | RRA     | EMI (3 m & 10 m Semi-Anechoic Chamber ,<br>10 m Open Area and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS,<br>Magnetic, Dips and interruptions)                                             | <br>KR0100                             |
| International | KOLAS   | EMI (3 m & 10 m Semi-Anechoic Chamber ,<br>and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS,<br>Magnetic, Dips and interruptions)                                                            | <br>KT489                            |
| USA           | FCC     | 3 m & 10 m Semi-Anechoic Chamber, 10 m<br>Open Area and Conducted test site to<br>perform FCC Part 15/18 measurements.                                                                                     | <br>KR0100                           |
| Canada        | ISED    | 3 m & 10 m Semi-Anechoic Chamber and<br>Conducted test site                                                                                                                                                | <br>23298-1                          |
| JAPAN         | VCCI    | Mains Ports Conducted Interference<br>Measurement, Telecommunication Ports<br>Conducted Disturbance Measurement and<br>Radiation 10 meter site, Facility for<br>measuring radiated disturbance above 1 GHz | <br>R-4308, C-4798,<br>T-2311, G-914 |
| Europe        | TÜV SÜD | EMI (3 m & 10 m Semi-Anechoic Chamber ,<br>10 m Open Area and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS,<br>Magnetic, Dips and interruptions)                                             | <br>CARAT 17 07 01633<br>001         |

## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ EMC – Directive 2014/30/EU

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1  
☐ Class A

☐ Group 2  
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547 :2009

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-E1-19T0239  
Page (11) of (32)

- 
- |                                                        |                                             |                                  |
|--------------------------------------------------------|---------------------------------------------|----------------------------------|
| <input checked="" type="checkbox"/> VCCI-CISPR 32:2016 | <input checked="" type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> AS/NZS CISPR32:2015           | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input type="checkbox"/> 47 CFR Part 15, Subpart B     |                                             |                                  |
| <input type="checkbox"/> CISPR 22:2009 +A1:2010        | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2009               |                                             |                                  |
| <input type="checkbox"/> IC Regulation ICES-003 : 2016 |                                             |                                  |
| <input type="checkbox"/> CAN/CSA CISPR 22-10           | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2014               |                                             |                                  |
| <br>                                                   |                                             |                                  |
| <input type="checkbox"/> RE- Directive 2014 / 53 / EU  |                                             |                                  |
| <br>                                                   |                                             |                                  |
| <input type="checkbox"/> EN 301 489-1 V1.9.2           |                                             |                                  |
| <input type="checkbox"/> Equipment for fixed use       |                                             |                                  |
| <input type="checkbox"/> Equipment for vehicular use   |                                             |                                  |
| <input type="checkbox"/> Equipment for portable use    |                                             |                                  |
| <input type="checkbox"/> EN 301 489-3 V1.6.1           |                                             |                                  |
| <input type="checkbox"/> EN 301 489-17 V2.2.1          |                                             |                                  |
| <input type="checkbox"/> EN 60945:2002                 |                                             |                                  |

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## 2.1 Conducted Emissions Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom #6

Test Equipment

| Used                     | Description       | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|-------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | EMI Test S/W      | EMC32        | R & S        | 9.12.00       | -            |
| <input type="checkbox"/> | EMI TEST RECEIVER | ESR3         | R & S        | 101781        | 04, 25, 2019 |
| <input type="checkbox"/> | LISN              | ENV216       | R & S        | 101787        | 01, 04, 2020 |
| <input type="checkbox"/> | LISN              | ESH2-Z5      | R & S        | 100450        | 04, 25, 2019 |
| <input type="checkbox"/> | PULSE LIMITER     | ESH3-Z2      | R & S        | 101915        | 11, 26, 2019 |

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

☐ PASS

☐ NOT PASS

☒ NOT APPLICABLE

Remarks

It is not tested apply because it is powered by PoE.



## 2.2 Conducted Emissions at Telecommunication Ports

Test Date

Apr. 13, 2019

Test Location

Electro wave Shieldroom #6

Test Equipment

| Used                                | Description       | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|-------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W      | EMC32        | R & S        | 9.12.00       | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER | ESR3         | R & S        | 101781        | 04, 25, 2019 |
| <input checked="" type="checkbox"/> | LISN              | ENV216       | R & S        | 101787        | 01, 04, 2020 |
| <input checked="" type="checkbox"/> | LISN              | ESH2-Z5      | R & S        | 100450        | 04, 25, 2019 |
| <input checked="" type="checkbox"/> | PULSE LIMITER     | ESH3-Z2      | R & S        | 101915        | 11, 26, 2019 |
| <input checked="" type="checkbox"/> | 8-WIRE ISN CAT3,5 | ENY81        | R & S        | 100174        | 01, 07, 2020 |

Test Conditions

Temperature: 22,0 °C

Relative Humidity: 43,9 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



## 2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Apr. 13, 2019

Test Location

☐ OPEN AREA TEST SITE #2

☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

| Used                                | Description              | Model Number | Manufacturer     | Serial Number | Cal. Due     |
|-------------------------------------|--------------------------|--------------|------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W             | EP5/RE       | TOYO Corporation | 6.0.0         | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER        | ESU26        | R & S            | 100551        | 04, 09, 2020 |
| <input checked="" type="checkbox"/> | AMPLIFIER                | SCU 01       | R & S            | 100603        | 11, 26, 2019 |
| <input checked="" type="checkbox"/> | TRILOG-BROADBAND ANTENNA | VULB9163     | Schwarzbeck      | 715           | 11, 29, 2020 |
| <input checked="" type="checkbox"/> | ATTENUATOR               | 8491A        | HP               | 32173         | 03, 11, 2020 |

Test Conditions

Temperature: 23,1 °C

Relative Humidity: 42,9 % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS

☐ NOT PASS

☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



## 2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Apr. 13, 2019

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

| Used                                | Description                | Model Number | Manufacturer     | Serial Number | Cal. Due     |
|-------------------------------------|----------------------------|--------------|------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W               | EP5/RE       | TOYO Corporation | 6.0.0         | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER          | ESR7         | R & S            | 101190        | 08, 06, 2019 |
| <input checked="" type="checkbox"/> | PREAMPLIFIER               | 8449B        | AGILENT          | 3008A01967    | 05, 31, 2019 |
| <input type="checkbox"/>            | ATTENUATOR                 | 8491A        | HP               | 35496         | 03, 11, 2020 |
| <input checked="" type="checkbox"/> | DOUBLE RIDGED HORN ANTENNA | SAS-571      | A.H.SYSTEM, INC  | 781           | 03, 12, 2021 |

Test Conditions

Temperature: 23,1 °C

Relative Humidity: 43,1 % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-E1-19T0239  
Page (16) of (32)

---

## APPENDIX A – TEST DATA

### Conducted Emissions at Mains Power Ports

HOT LINE

N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr





**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-E1-19T0239  
Page (17) of (32)

---

NEUTRAL LINE

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

---


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## Conducted Emissions at Telecommunication Ports

[10 Mbps]

### Common Information

|                   |                            |
|-------------------|----------------------------|
| Test Description: | Telecommunication Emission |
| Model No.:        | QND-8030R                  |
| Mode              | 10 Mbps                    |
| Operator Name:    | KES                        |

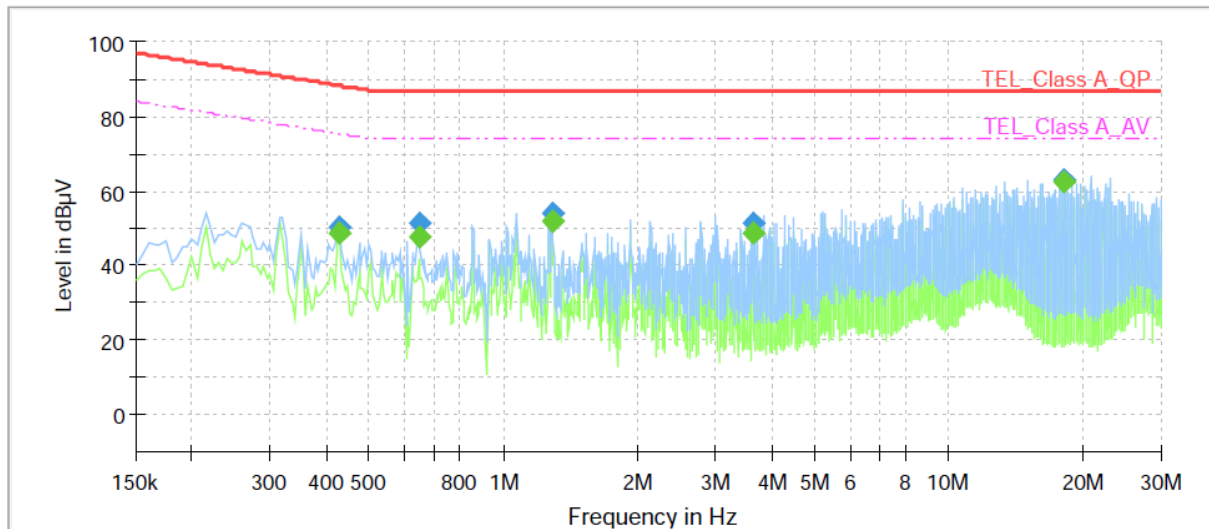

### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.430000        | ---              | 48.58           | 75.25        | 26.67       | 1000.0          | 9.000           | Single Line | 19.8       |
| 0.430000        | 50.11            | ---             | 88.25        | 38.14       | 1000.0          | 9.000           | Single Line | 19.8       |
| 0.645000        | ---              | 47.38           | 74.00        | 26.62       | 1000.0          | 9.000           | Single Line | 19.8       |
| 0.645000        | 51.32            | ---             | 87.00        | 35.68       | 1000.0          | 9.000           | Single Line | 19.8       |
| 1.285000        | ---              | 51.65           | 74.00        | 22.35       | 1000.0          | 9.000           | Single Line | 19.7       |
| 1.285000        | 53.98            | ---             | 87.00        | 33.02       | 1000.0          | 9.000           | Single Line | 19.7       |
| 3.645000        | ---              | 48.74           | 74.00        | 25.26       | 1000.0          | 9.000           | Single Line | 19.7       |
| 3.645000        | 51.48            | ---             | 87.00        | 35.52       | 1000.0          | 9.000           | Single Line | 19.7       |
| 18.245000       | ---              | 62.33           | 74.00        | 11.67       | 1000.0          | 9.000           | Single Line | 20.2       |
| 18.245000       | 62.85            | ---             | 87.00        | 24.15       | 1000.0          | 9.000           | Single Line | 20.2       |



## KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-E1-19T0239  
Page (19) of (32)

[100 Mbps]

### Common Information

Test Description: Telecommunication Emission  
Model No.: QND-8030R  
Mode: 100 Mbps  
Operator Name: KES

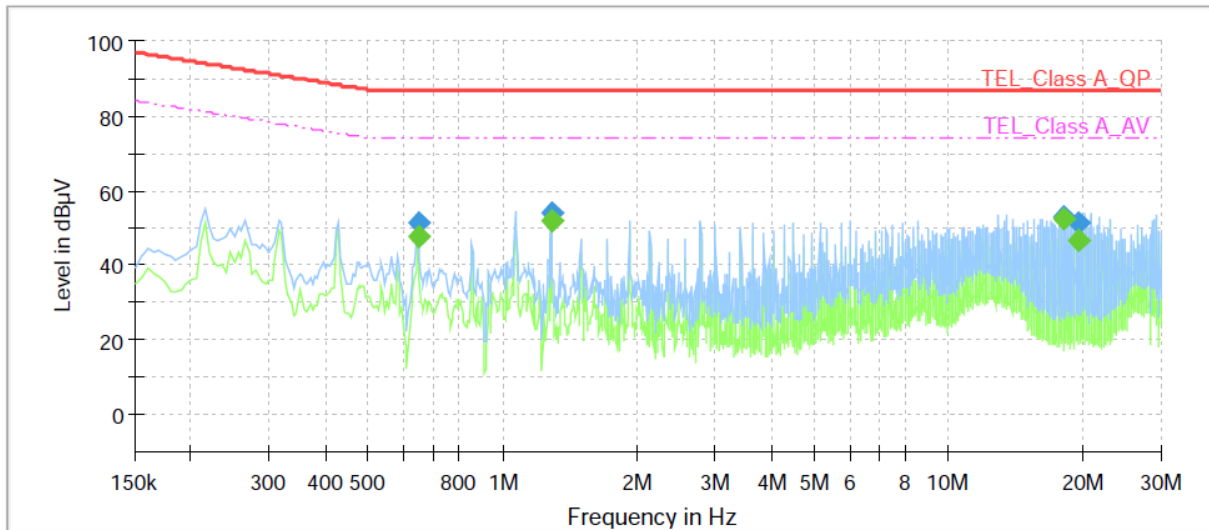

### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.645000        | ---              | 47.54           | 74.00        | 26.46       | 1000.0          | 9.000           | Single Line | 19.7       |
| 0.645000        | 51.41            | ---             | 87.00        | 35.59       | 1000.0          | 9.000           | Single Line | 19.7       |
| 1.285000        | ---              | 51.84           | 74.00        | 22.16       | 1000.0          | 9.000           | Single Line | 19.6       |
| 1.285000        | 54.11            | ---             | 87.00        | 32.89       | 1000.0          | 9.000           | Single Line | 19.6       |
| 18.245000       | ---              | 52.17           | 74.00        | 21.83       | 1000.0          | 9.000           | Single Line | 20.0       |
| 18.245000       | 53.16            | ---             | 87.00        | 33.84       | 1000.0          | 9.000           | Single Line | 20.0       |
| 19.590000       | ---              | 46.47           | 74.00        | 27.53       | 1000.0          | 9.000           | Single Line | 20.1       |
| 19.590000       | 51.09            | ---             | 87.00        | 35.91       | 1000.0          | 9.000           | Single Line | 20.1       |

#### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-E1-19T0239

Page (20) of (32)

### Radiated Electric Field Emissions(Below 1 GHz)

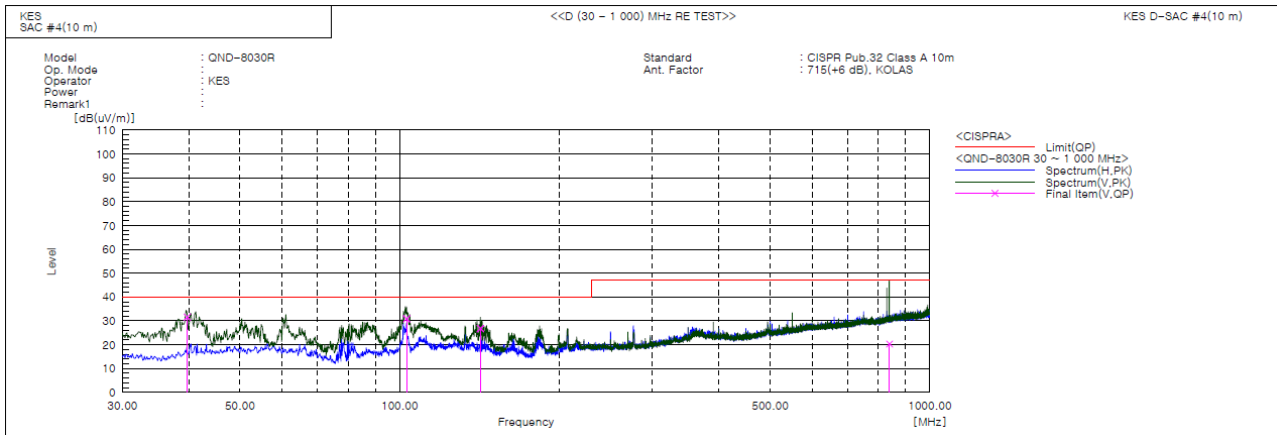

#### Final Result

| No. | Frequency<br>[MHz] | (P) | Reading<br>QP<br>[dB(uV)] | c.f<br>[dB(1/m)] | Result<br>QP<br>[dB(uV/m)] | Limit<br>QP<br>[dB(uV/m)] | Margin<br>QP<br>[dB] | Height<br>[cm] | Angle<br>[deg] | Remark |
|-----|--------------------|-----|---------------------------|------------------|----------------------------|---------------------------|----------------------|----------------|----------------|--------|
| 1   | 39.747             | V   | 54.8                      | -23.2            | 31.6                       | 40.0                      | 8.4                  | 100.0          | 318.0          |        |
| 2   | 103.084            | V   | 53.5                      | -22.6            | 30.9                       | 40.0                      | 9.1                  | 111.0          | 228.0          |        |
| 3   | 142.083            | V   | 52.9                      | -26.1            | 26.8                       | 40.0                      | 13.2                 | 108.0          | 88.0           |        |
| 4   | 839.477            | V   | 27.1                      | -6.8             | 20.3                       | 47.0                      | 26.7                 | 150.0          | 136.0          |        |

#### ◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-E1-19T0239

Page (21) of (32)

### Radiated Electric Field Emissions(Above 1 GHz)

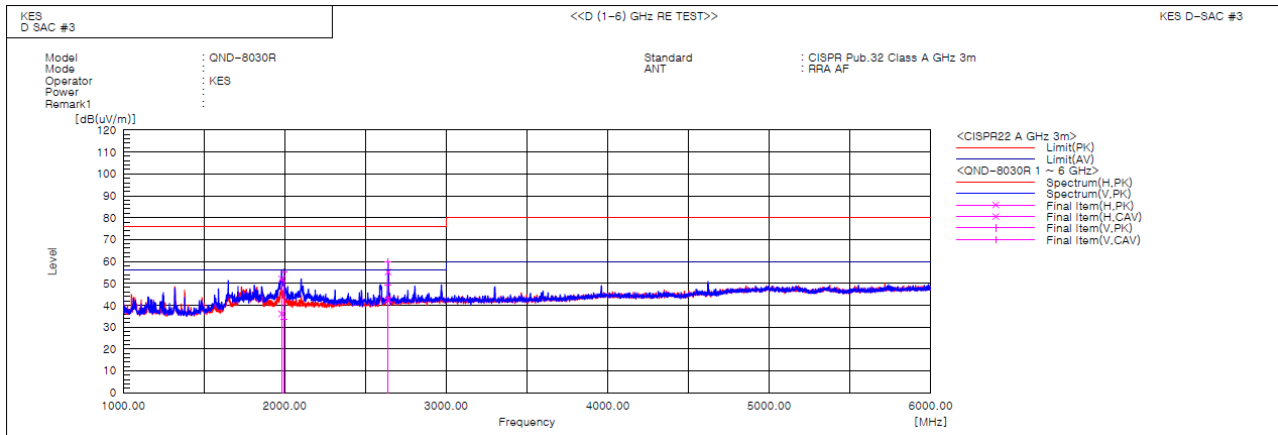

#### Final Result

| No. | Frequency [MHz] | (P) | Reading PK [dB(uV)] | Reading CAV [dB(uV)] | c.f [dB(1/m)] | Result PK [dB(uV/m)] | Result CAV [dB(uV/m)] | Limit PK [dB(uV/m)] | Margin PK [dB] | Margin CAV [dB] | Height [cm] | Angle [deg] | Remark |
|-----|-----------------|-----|---------------------|----------------------|---------------|----------------------|-----------------------|---------------------|----------------|-----------------|-------------|-------------|--------|
| 1   | 1993.077        | V   | 57.1                | 35.4                 | -2.1          | 55.0                 | 33.3                  | 76.0                | 21.0           | 22.7            | 100.0       | 99.5        |        |
| 2   | 1980.960        | H   | 54.2                | 38.3                 | -2.2          | 52.0                 | 36.1                  | 76.0                | 24.0           | 19.9            | 100.0       | 351.3       |        |
| 3   | 2640.780        | H   | 54.9                | 42.3                 | 0.3           | 55.2                 | 42.6                  | 76.0                | 20.8           | 13.4            | 100.0       | 159.9       |        |
| 4   | 2639.690        | V   | 59.6                | 48.9                 | 0.3           | 59.9                 | 49.2                  | 76.0                | 16.1           | 6.8             | 100.0       | 214.6       |        |

#### ◆ Calculation

Result(PK/CAV) [dB( $\mu$ V/m)] = (Reading(PK/CAV)[dB( $\mu$ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB( $\mu$ V/m)] - Result(PK/CAV) [dB( $\mu$ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



---

## Test Setup Photos and Configuration

### Conducted Voltage Emissions

N/A


## Conducted Telecommunication Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




## Radiated Electric Field Emissions(Below 1 GHz)

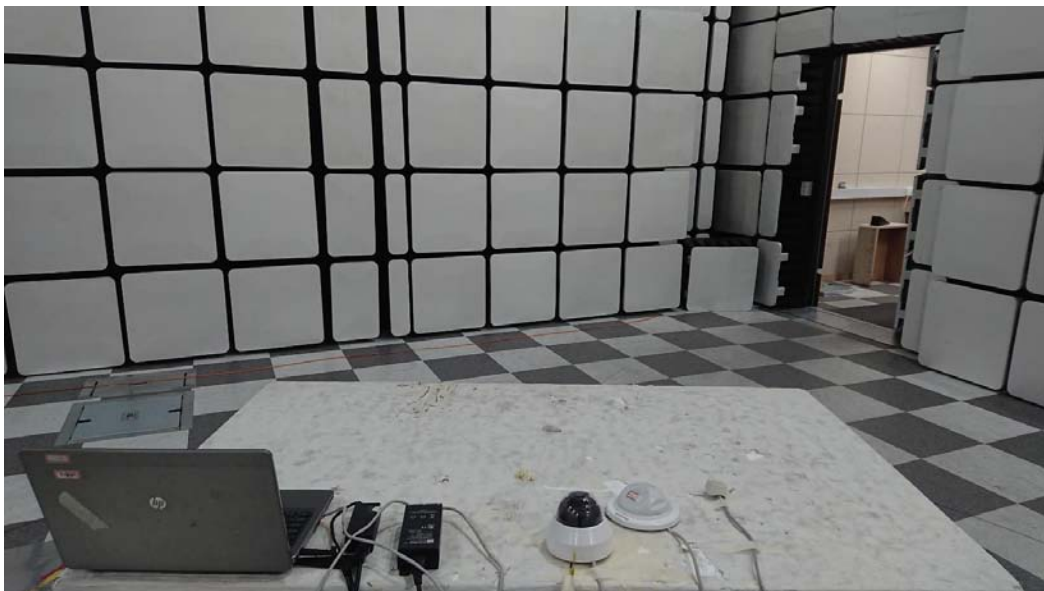

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## Radiated Electric Field Emissions(Above 1 GHz)

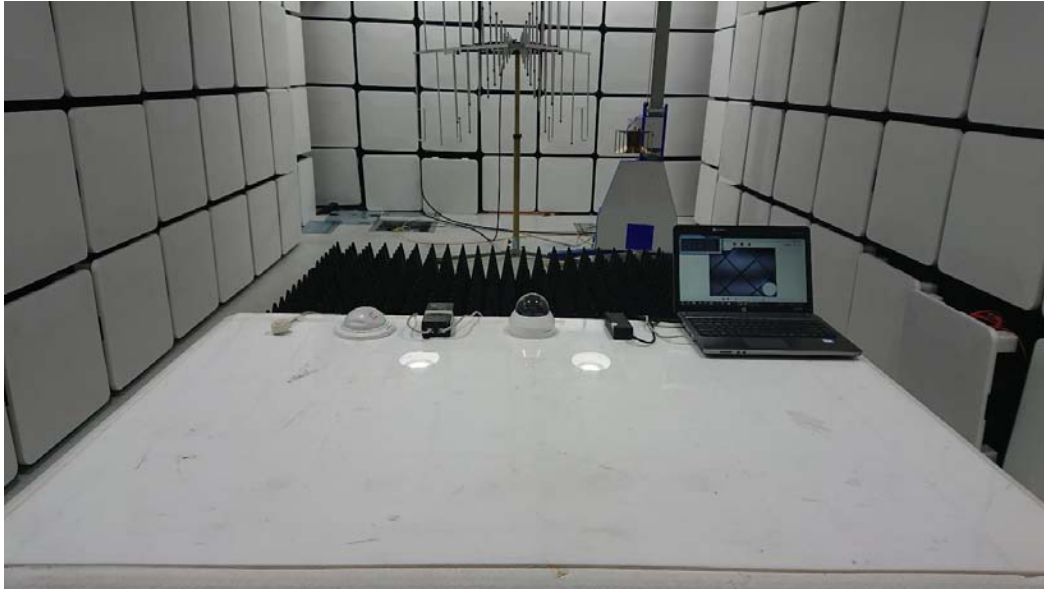

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal Photographs

(Internal View)



## EUT Internal View – Main Board

(Top)



(Bottom)





## EUT Internal View – Lens

(Top)



(Bottom)



## EUT Internal View – Lens Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – IR Board

(Top)



(Bottom)



## Label Photographs



この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI-A