Network

QNE-C8013RL

5MP AIデュアルライトフラットアイカメラ

Key Features

- 最大5メガピクセル (2592x1944) 解像度
- 3.0mm 固定レンズ
- カラー: 0.022Lux (F1.2, 1/30秒) /
白黒: 0.0022Lux (F1.2, 1/30秒, 30IRE), 0Lux(IR LEDオン)
- 最大30fps@5MP (H.265 / H.264)
- H.265, H.264, MJPEG コーデック,
WiseStreamIII(AIエンジンに基づく), 複数ストリーミング
- 昼夜, WDR (120dB), WiseNR II (AIエンジン使用)
- オブジェクト分類, 属性と検出ショット
- Micro SD / SDHC / SDXC メモリースロット (最大256GB)
- 廊下ビュー, WiseStreamIII(AIエンジンに基づく)
- ONVIF プロファイル S/G/T/M, SUNAPI(HTTP API)
- LDC, PoE
- IR視認距離
- 白色LED : 30m(98.42ft)
- IR : 30m(98.42ft)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

QNE-C8013RL

5MP AIデュアルライトフラットアイカメラ

Specifications

映像

Imaging Device	サイズ	1/2.8"
	タイプ	CMOS
解像度		2592x1944, 2560x1440, 1920x1080, 1280x960, 1280x720, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264	30fps/25fps(60Hz/50Hz)
	MJPEG	30fps(@5MP Max. 5fps)
Min. Illumination (Lux)	Color(1/30sec, 30IRE)	0.022
	BW(1/30sec, 30IRE)	0.0022

レンズ

Focal Length (mm)		3.0
Max Aperture Ratio (F number)	Wide	1.2
視野角度	Horizontal	97°
	Vertical	71°
	Diagonal	130°
Min. Object Distance		2.0m(6.56ft)
Focus Control		Fixed
Lens Type		Fixed iris
Mount Type		M12

Pan / Tilt / Rotate

Pan / Tilt / Rotate Range	Pan	0°~350°
	Tilt	0°~75°
	回転	0°~360°

技能

Day & Night	Auto(ICR)
Backlight Compensation	BLC, WDR, SSDR
Wide Dynamic Range (dB)	120
Digital Noise Reduction	WiseNR II (Based on AI engine), SSNR V

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

技能

モーション検知	Quantity	8ea
	Shape	8point Polygonal zones
Privacy Masking	Quantity	32ea
	Shape	4point Quadrangle zones
	Color / Option	灰色, 緑, Red, 青, 黒, 白, モザイク
	Dynamic Privacy Masking: Color / Option	モザイク
ゲイン制御		低, 中, 高
ホワイトバランス		ATW, AWC, 手動, 室内, 屋外
LDC		サポート
Electronic Shutter	モード	最小, 最大, アンチフリッカー, Prefer shutter control(Based on AI engine)
	Speed Range	1/5~1/25,000sec
ビデオ回転		FLIPモード, ミラー, Hallway view(90°/270°)
Alarm Triggers		分析, ネットワーク切断, MQTT購読
Alarm Events When Alarm Trigger Occurred		File upload(image): e-mail/FTP, Notification: e-mail, Recording: SD/SDHC/SDXC or NAS recording at event triggers, Handover: PTZ preset,send message by HTTP/HTTPS/TCP, MQTT: publication,ライトアラーム
Light Type		Warm color, IR LED
Light Viewable Length	Warm Light	30m(98.42ft)
	IR	30m(98.42ft)
IR Wavelength		850nm

分析

Classified Object Type		人, 車両
属性	人	Upper/Lower clothes color
	車両	Type(car, bus, truck, motorcycle, bicycle), カラー
サムネイル		ベストショット
分析イベント	Based on AI Engine	対象物検知, 仮想線 (交差·方向) , 仮想領域 (ロータリング、侵入、Enter、Exit) , モーション検知
	通常	焦点ぼけ検知, タンパリング, Virtual area(Appear/Disappear)
Business Intelligence	Based on AI Engine	人数カウント, キュー管理, ヒートマップ, 車両カウント

ネットワーク

Ethernet	RJ-45(10/100BASE-T)
映像圧縮	H.265/H.264: Main/High, MJPEG
Smart codec	手動, WiseStreamIII
ビットレートコントロール	H.265/H.264: CBR or VBR, MJPEG: VBR

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

ネットワーク

Streaming	Unicast	最大 20ユーザー
	マルチキャスト	サポート
	Multiple Streaming	最大 5プロファイル
プロトコル		IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SFTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, CDP, SRTP(TCP, UDP Unicast), MQTT
Application Programming Interface	ONVIF	s, G, T, M
	その他	SUNAPI(HTTP API), Hanwha Vision Open Platform
Direct Cloud Connection		サポート

セキュリティ

OS / Firmware Protect	Encrypted firmware, Secure boot, Signed firmware
ユーザー認証	ダイジェスト認証, Prevent brute-force attack
Network authentication	IEEE 802.1X(EAP-TLS, EAP-LEAP, EAP-PEAP, MSCHAPv2)
Secure Communication	HTTPS, WSS(WebSocket Secure), SRTP
Access Control	IP-based access control
Data Protect	Encryption credentials, Encrypt compress for live recording file export
Audit	Access / System / Event Log management
デバイスID	Device certificate(Hanwha Vision Root CA)
Secure Storage	SDcard partition encrypt(AES-256)

一般

メモリ	RAM	2GB
	フラッシュ	1GB
Edge Storage	Micro SD/SDHC/SDXC	Max. 256GB x 1slot
Edge Storage(OnCloud)	Micro SD/SDHC/SDXC	Max. 1TB x 1slot *Hanwha Vision branded microSD cards have been certified and recommended for OnCloud edge recording.

Environmental & Electrical

動作条件	温度	-40°C~+60°C(-40°F~+140°F)
	湿度	0~100% RH(condensing)
	その他	Start up should be done at above -30°C, Humidity control with AIR vent
保管条件	温度	-50°C~+60°C(-58°F~+140°F)
	湿度	0~95% RH(non-condensing)
Input Voltage		PoE(IEEE802.3af, Class3)
消費電力	PoE	Max. 10.0W, typical 4.5W

Mechanical

カラー	白
材料	アルミニウム

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Mechanical

RAL Code	RAL9003
Product Dimensions	ø140.0x99.6mm(ø5.51x3.92")
Product Weight	790g(1.74lb)
Compatible Gang Box	シングル, Double, 4" Octagon

Certifications & Standards

EMC	FCC 47 CFR 15 Subpart B Class A, ICES-3(A)/NMB-3(A), CE/UKCA - EN55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3, VCCI CISPR 32 Class A, RCM AS-NZS CISPR 32 Class A
Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1, IEC 62471
環境	IEC/EN 63000, IEC 60529 IP66, IEC 60529 IP67, IEC 62262 IK10

DORI (EN62676-4 standard)

Detect (25PPM/ 8PPF)	Wide	45.9m(150.49ft)
Observe (63PPM/ 19PPF)	Wide	18.3m(60.19ft)
Recognize (125PPM/ 38PPF)	Wide	9.2m(30.09ft)
Identify (250PPM/ 76PPF)	Wide	4.6m(15.05ft)

© Hanwha Vision CO., LTD. All rights reserved.

QNE-C8013RL

5MP AIデュアルライトフラットアイカメラ

CAD

Unit: mm [inch]

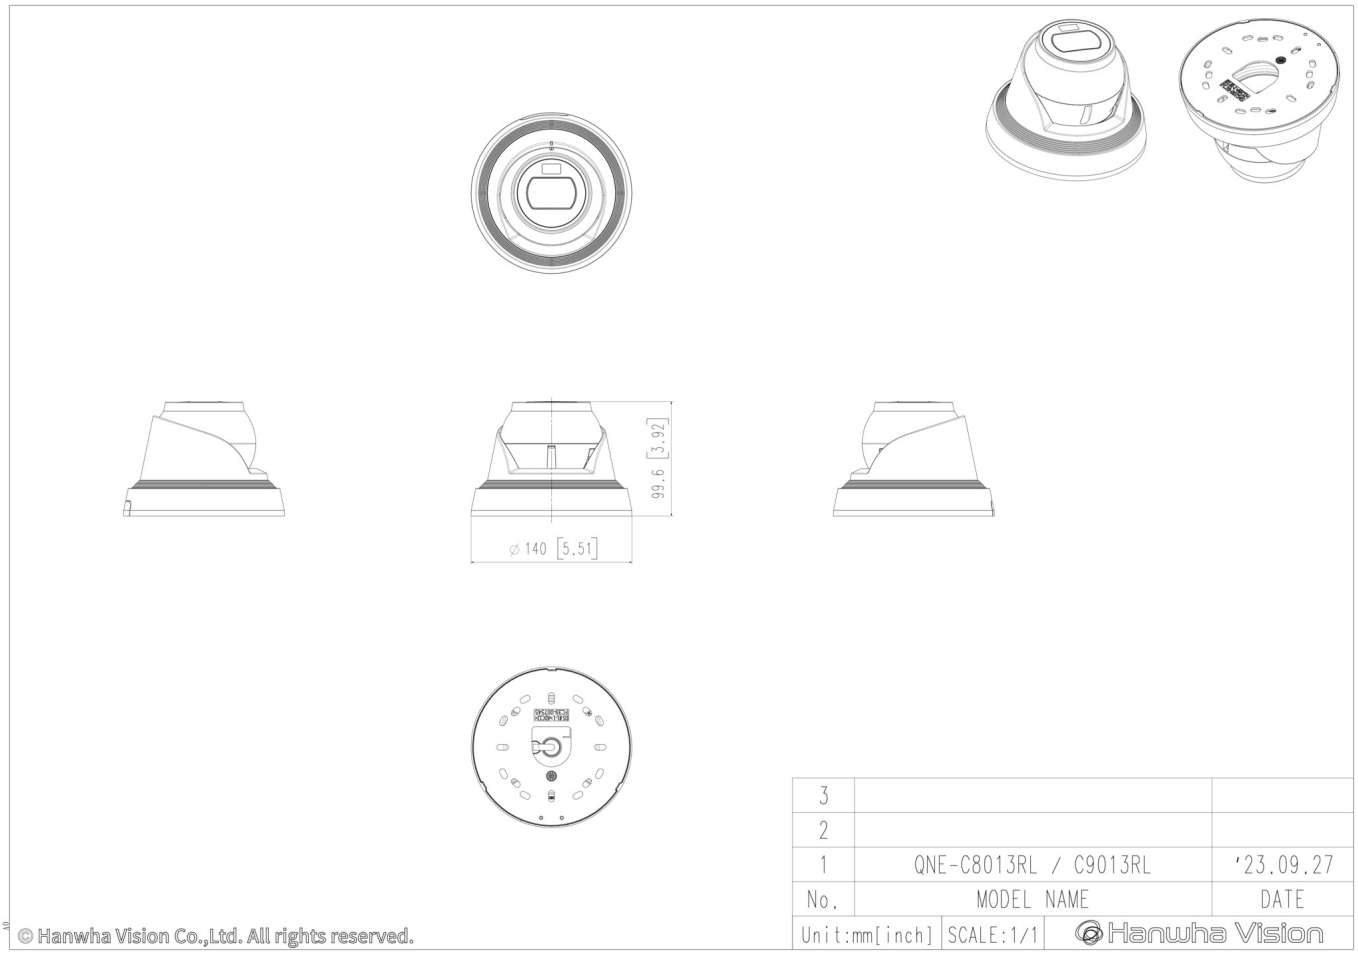

© Hanwha Vision Co.,Ltd. All rights reserved.

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.