



EMC TEST REPORT For IC

Test Report No. : KES-E1-16T0324
Date of Issue : Jul. 06, 2016
Product name : NETWORK CAMERA
Model/Type No. : QNO-6070RN
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 1204, Changwon-daero, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Manufacturer : Tianjin Samsung Techwin Opto-Electronic Co., Ltd.
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA,
Tianjin, 300385, People's Republic of China
Date of Receipt : Jun. 16, 2016
Test date : Jun. 30, 2016 ~ Jul. 01, 2016
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dea Jung, choi
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0324
Page (2) of (37)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jul. 06, 2016	KES-E1-16T0324	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Jun be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences.....	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	5
1.6	External I/O Cabling	6
1.7	EUT Operating Mode(s)	6
1.8	Configuration.....	7
1.9	Calibration Details of Equipment Used for Measurement	8
1.10	Test Facility	8
1.11	Laboratory Accreditations and Listings	8
2.0	Test Regulations.....	9
2.1	Conducted Emissions at Mains Power Ports	11
2.2	Radiated Electric Field Emissions(Below 1 GHz)	12
2.3	Radiated Electric Field Emissions(Above 1 GHz)	13
APPENDIX A – TEST DATA.....		14
Conducted Emissions at Mains Power Ports.....		14
Radiated Electric Field Emissions(Below 1 GHz)		16
Radiated Electric Field Emissions(Above 1 GHz)		17
Test Setup Photos and Configuration		25
EUT External Photographs		30
EUT Internal Photographs		31



1.0 General Product Description

Main Specifications of EUT are:

Video		Video	
Imaging Device	1/2.9" 2.19M CMOS	Imaging Device	1/2.9" 2.19M CMOS
Total Pixels	2,000(H) x 1,121(V)	Total Pixels	2,000(H) x 1,121(V)
Effective Pixels	1,984(H) x 1,105(V)	Effective Pixels	1,984(H) x 1,105(V)
Scanning System	Progressive	Scanning System	Progressive
Min. Illumination	Color : 0.095Lux, B/W : 0Lux	Min. Illumination	Color : 0.095Lux, B/W : 0Lux
Lens		Lens	
Focal Length (Zoom Ratio)	Manual 2.8~12mm	Focal Length (Zoom Ratio)	Manual 2.8~12mm
Max. Aperture Ratio	F1.4	Max. Aperture Ratio	F1.4
Angular Field of View	H 103.8~32.4° / V 53.7~18.4° / D 121.9~37.1°	Angular Field of View	H 103.8~32.4° / V 53.7~18.4° / D 121.9~37.1°
Min. Object Distance	-	Min. Object Distance	-
Lens Type	Manual	Lens Type	Manual
Focus control	DC auto iris	Focus control	DC auto iris
Mount Type	Board type	Mount Type	Board type
Pan / Tilt / Rotate		Pan / Tilt / Rotate	
Pan Range	0	Pan Range	0
Tilt Range	0	Tilt Range	0
Rotate Range	0	Rotate Range	0
Operational		Operational	
IR Viewable Length	30m	IR Viewable Length	30m
Camera Title	Off / On (Displayed up to 20 characters per line) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-Line (Max 5). Color (Grey/Green/Red/Blue/Black/White). Transparency, Auto Scale by Resolution	Camera Title	Off / On (Displayed up to 20 characters per line) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-Line (Max 5). Color (Grey/Green/Red/Blue/Black/White). Transparency, Auto Scale by Resolution
Day & Night	True Day & Night	Day & Night	True Day & Night
Backlight Compensation	Off / BLC	Backlight Compensation	Off / BLC
Wide Dynamic Range	120dB	Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR(Off / On)	Digital Noise Reduction	SSNR(Off / On)
Motion Detection	Off / On (4ea polygon zones)	Motion Detection	Off / On (4ea polygon zones)
Privacy Masking	Off / On (6ea rectangular zones)	Privacy Masking	Off / On (6ea rectangular zones)
Gain Control	Off / Low / Middle / High	Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor	White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC(Lens distortion control)	On/Off (5 levels with Min/Max)	LDC(Lens distortion control)	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker	Electronic Shutter Speed	Minimum / Maximum / Anti flicker
Flip / Mirror	Flip / Mirror / Halfway view	Flip / Mirror	Flip / Mirror / Halfway view
Intelligent Video Analytics	Motion Detection with metadata, Tampering, Defocus	Intelligent Video Analytics	Motion Detection with metadata, Tampering, Defocus
Alarm I/O	Input 1 / Output 1	Alarm I/O	Input 1 / Output 1
Alarm Triggers	Motion detection, Tampering Detection, SD card error, NAS error, Alarm input, Defocus detection	Alarm Triggers	Motion detection, Tampering Detection, SD card error, NAS error, Alarm input, Defocus detection
Alarm Events	File upload via FTP and E-Mail Local storage recording at Event Notification via E-Mail External output	Alarm Events	File upload via FTP and E-Mail Local storage recording at Event Notification via E-Mail External output
Pixel Counter	Support (plug-in viewer only)	Pixel Counter	Support (plug-in viewer only)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 100 Vac ☐ 110 Vac ☐ 120 Vac ☒ PoE ☒ 12 Vdc
Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	QNO-6070RN	-	Tianjin Samsung Techwin Opto-Electronic Co., Ltd.	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook	RT3290LE	5CD242B043	HP	-
Notebook Adapter	Series PPP009L-E	WCNWVOA3U3G31S	LITE-ON TECHNOLOGY (CHANGZHOU) Co., Ltd.	-
Alarm Jig	-	-	-	-
PoE Adapter	PD3001GC/AC	RD9356082016964200	Power Dsine	-
MIC	CMK-303	-	CAMAC	-
Micro SD Card	-	-	SanDisk	

1.6 External I/O Cabling

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	Audio IN	MIC	Audio IN	1.7	U
	Alarm	Alarm Jig	Alarm	3.0	U
	Micro SD Card slot	Micro SD Card	-	-	-

- PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	PoE adapter	RJ-45	3.0	S
	Audio In	MIC	Audio Out	1.7	U
	Alarm	Alarm Jig	-	3.0	U
	Micro SD Card slot	Micro SD Card	-	-	-
PoE adapter	RJ-45	Notebook	RJ-45	3.0	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:


Test mode	Normal operating
OP	MONITORING PING TEST

- Input power condition during the measurements was POE, 12 V(dc)


1.8 Configuration

■ AC Main
 □ DC Main

- DC 12 V Mode

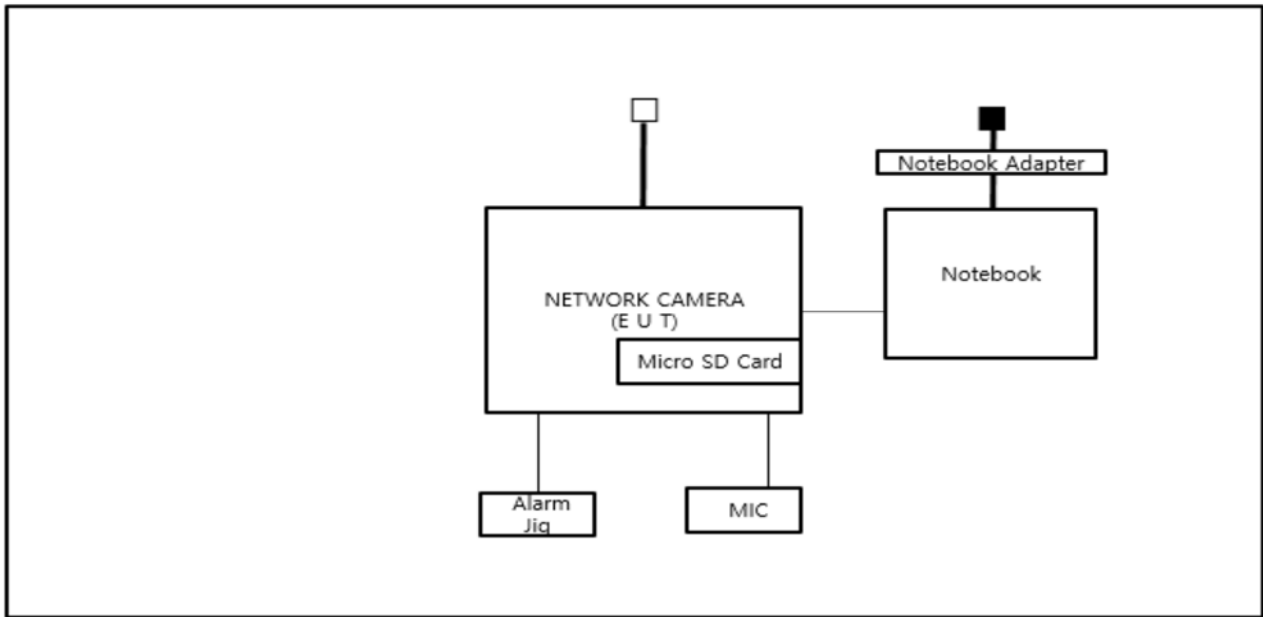

- PoE Mode

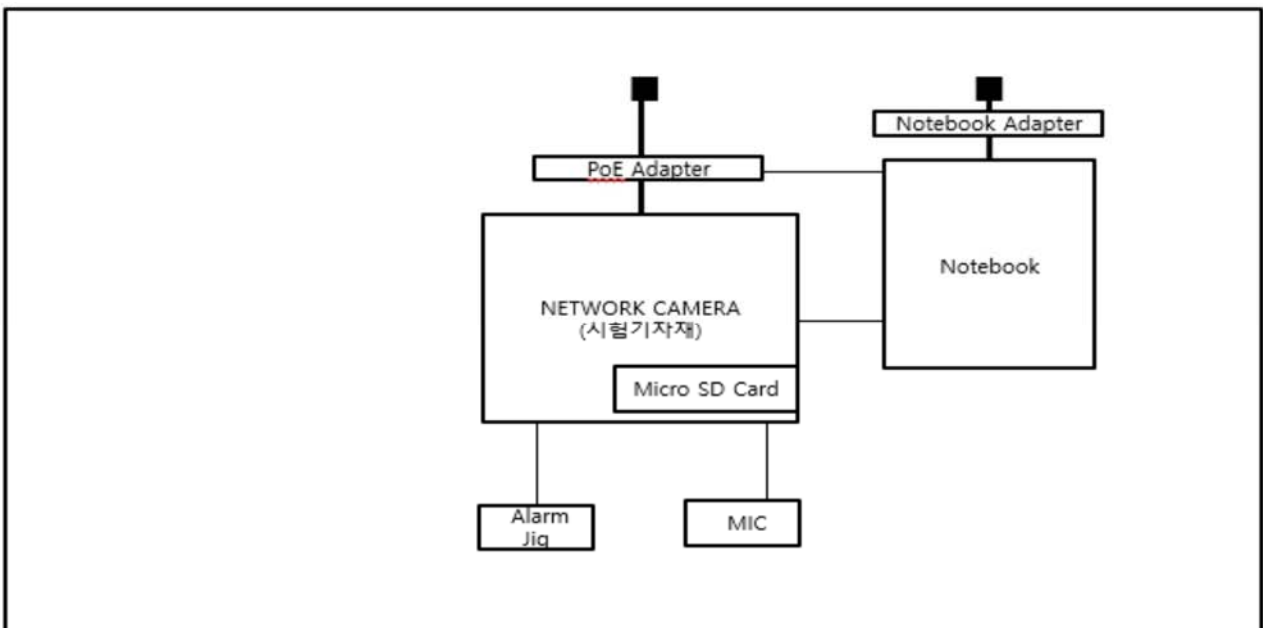

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-29 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55022:2010

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0324
Page (10) of (37)

-
- | | | |
|--|---|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
| ☒ IC Regulation ICES-003 : 2016 | | |
| ☒ CAN/CSA-CISPR 22-10 | ☒ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
 | | |
| ☐ RE- Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test Receiver	ESR3	R&S	101783	05, 03, 2017
☐	LISN	ENV216	R&S	101137	02, 04, 2017
☐	LISN	ENV216	R&S	101786	05, 02, 2017
☐	Electro wave Shieldroom	-	SEMITEC	-	-

Test Conditions

Temperature: °C
Relative Humidity: %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

Beacause the E.U.T power is 12 V (dc) power and PoE, limits are not specified



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jun. 30, 2016

Test Location

☒ Open Area Test Site #1 ☐ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI TEST Receiver	ESU26	R&S	100551	04, 18, 2017
☒	Trilog-Broadband ANT	VULB 9163	Schwarzbeck	9163-715	04, 14, 2018
☒	Open Area Test Site	-	KES	-	-
☒	Antenna Mast	1070/1080	EMCO	-	-
☒	Turn Table	-	DAEIL EMC	-	-

Test Conditions

Temperature: 21,3 °C

Relative Humidity: 67,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jul. 01, 2016

Test Location

Semi Anchoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 07, 2017
☒	EMI Test Receiver	ESU26	R&S	100552	04, 24, 2017
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 23, 2016
☒	Semi Anchoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-

Test Conditions

Temperature: 21,3 °C
Relative Humidity: 54,8 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0324
Page (14) of (37)

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0324
Page (15) of (37)

[NEUTRAL]

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**Radiated Electric Field Emissions(Below 1 GHz)**

- DC 12 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
222.74	20.65	V	1.00	11.96	3.08	35.69	40.00	4.31
297.03	20.46	H	3.96	13.35	3.69	37.50	47.00	9.50
371.25	19.96	V	1.12	14.95	4.03	38.94	47.00	8.06
408.34	11.67	H	3.19	15.71	4.28	31.66	47.00	15.34
445.51	10.83	H	2.44	16.36	4.55	31.74	47.00	15.26
482.63	15.82	V	1.00	17.00	4.82	37.64	47.00	9.36

* H : Horizontal, V : Vertical


- PoE Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
222.73	21.78	V	1.06	11.96	3.08	36.82	40.00	3.18
296.99	16.22	H	4.00	13.35	3.69	33.26	47.00	13.74
371.25	19.66	H	3.29	14.95	4.03	38.64	47.00	8.36
445.74	17.56	H	3.52	16.36	4.55	38.47	47.00	8.53
446.32	17.53	V	1.00	16.37	4.56	38.46	47.00	8.54
482.81	17.90	V	1.17	17.00	4.82	39.72	47.00	7.28

* H : Horizontal, V : Vertical

Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode

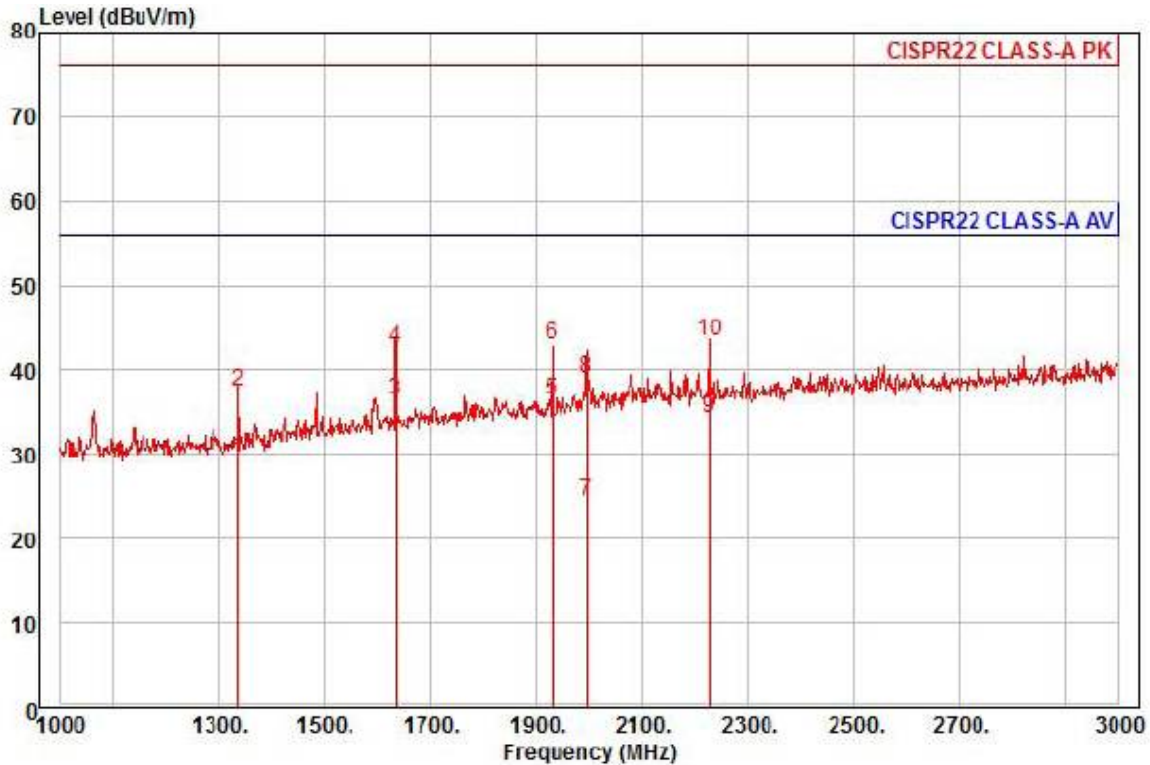

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : QNO-6070RN
Mode : DC12V
Memo : 1 ~ 3 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1336.00	36.79	25.24	7.48	39.96	256	56.00	-26.45	horizontal Average
2	1336.00	44.63	25.24	7.48	39.96	256	76.00	-38.61	horizontal Peak
3 pp	1634.00	41.43	26.43	8.34	39.81	285	56.00	-19.61	horizontal Average
4	1634.00	47.62	26.43	8.34	39.81	285	76.00	-33.42	horizontal Peak
5	1930.00	39.24	27.60	9.16	39.66	125	56.00	-19.66	horizontal Average
6	1930.00	45.85	27.60	9.16	39.66	125	76.00	-33.05	horizontal Peak
7	1996.00	26.89	27.86	9.34	39.63	222	56.00	-31.54	horizontal Average
8	1996.00	41.38	27.86	9.34	39.63	222	76.00	-37.05	horizontal Peak
9	2228.00	35.78	28.44	9.70	39.76	133	56.00	-21.84	horizontal Average
10 pk	2228.00	45.10	28.44	9.70	39.76	133	76.00	-32.52	horizontal Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0324
Page (18) of (37)

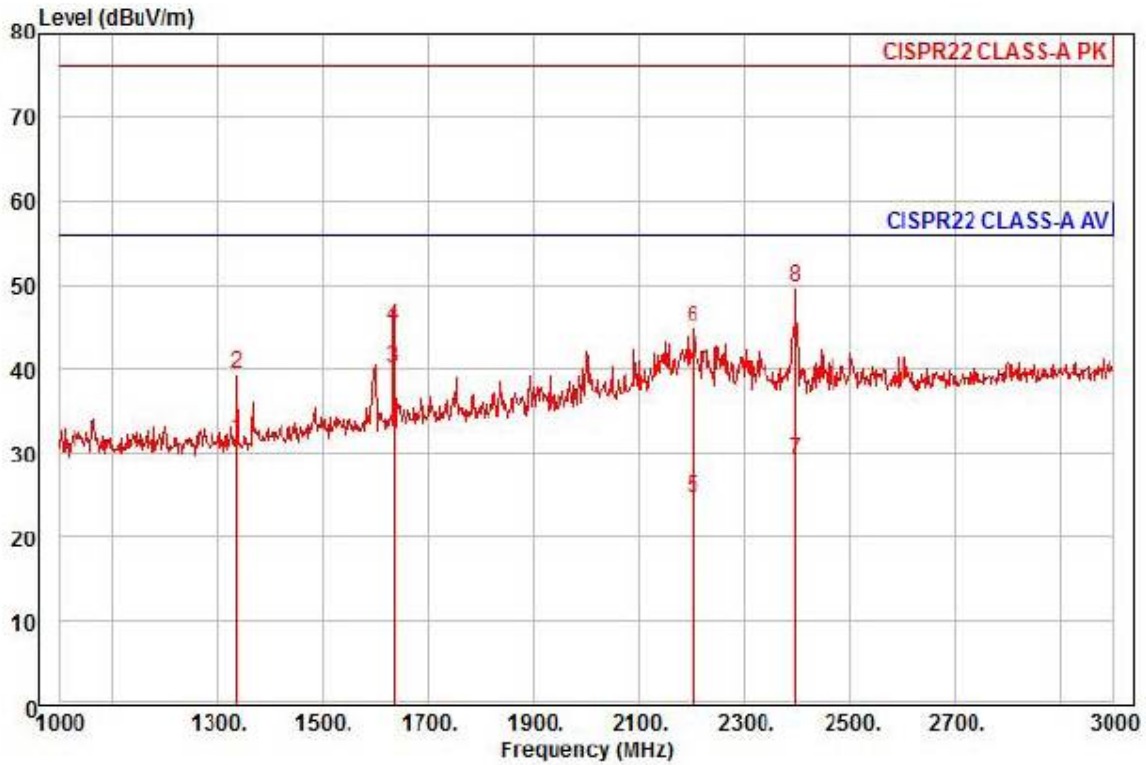

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : QNO-6070RN
Mode : DC12V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1336.00	38.84	25.24	7.48	39.96	199	56.00	-24.40	vertical	Average
2	1336.00	46.79	25.24	7.48	39.96	199	76.00	-36.45	vertical	Peak
3 pp	1634.00	45.16	26.43	8.34	39.81	132	56.00	-15.88	vertical	Average
4	1634.00	50.14	26.43	8.34	39.81	132	76.00	-30.90	vertical	Peak
5	2202.00	26.38	28.37	9.66	39.75	112	56.00	-31.34	vertical	Average
6	2202.00	46.54	28.37	9.66	39.75	112	76.00	-31.18	vertical	Peak
7	2398.00	30.15	28.86	9.96	39.86	195	56.00	-26.89	vertical	Average
8 pk	2398.00	50.83	28.86	9.96	39.86	195	76.00	-26.21	vertical	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-EI-16T0324
Page (19) of (37)

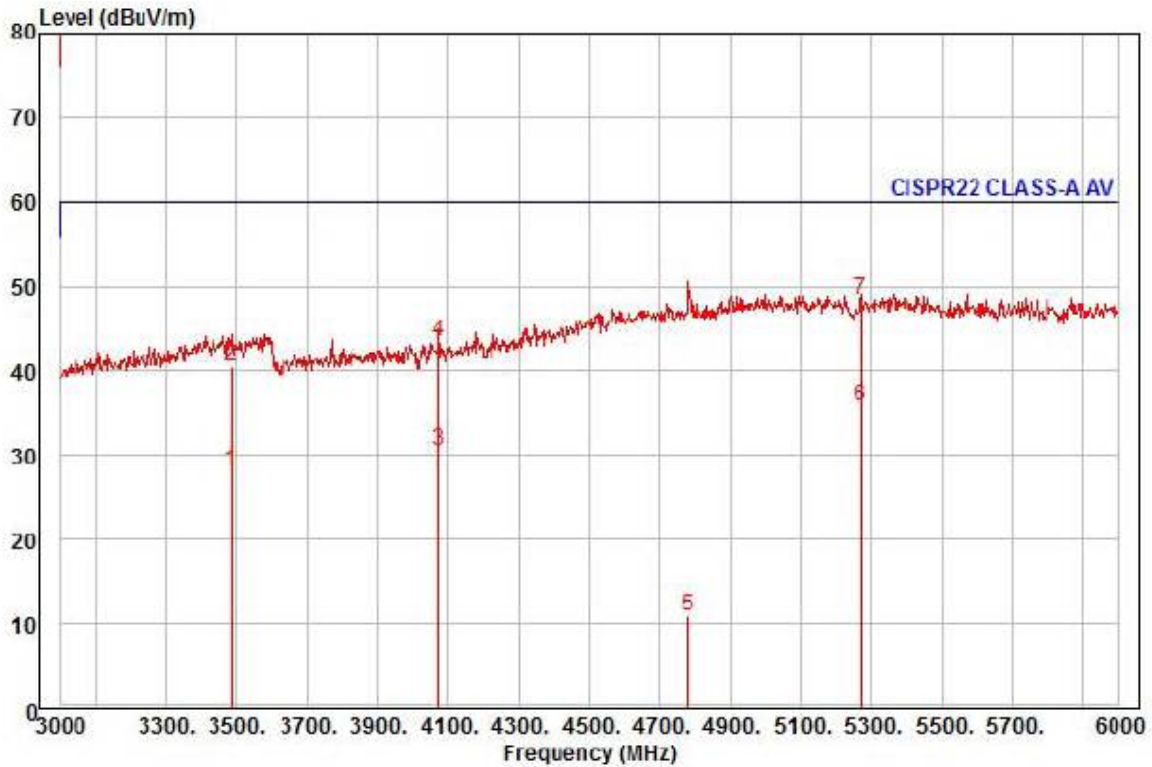

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : QNO-6070RN
Mode : DC12V
Memo : 3 ~ 6 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3486.00	24.81	31.15	12.47	40.31	171	60.00	-31.88	horizontal	Average
2	3486.00	37.28	31.15	12.47	40.31	171	80.00	-39.41	horizontal	Peak
3	4074.00	24.92	32.43	13.65	40.41	30	60.00	-29.41	horizontal	Average
4	4074.00	37.68	32.43	13.65	40.41	30	80.00	-36.65	horizontal	Peak
5	4779.00	0.00	36.46	14.93	40.41	255	80.00	-69.02	horizontal	Peak
6 pp	5271.00	23.36	37.17	15.65	40.37	349	60.00	-24.19	horizontal	Average
7 pk	5271.00	35.95	37.17	15.65	40.37	349	80.00	-31.60	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0324
Page (20) of (37)

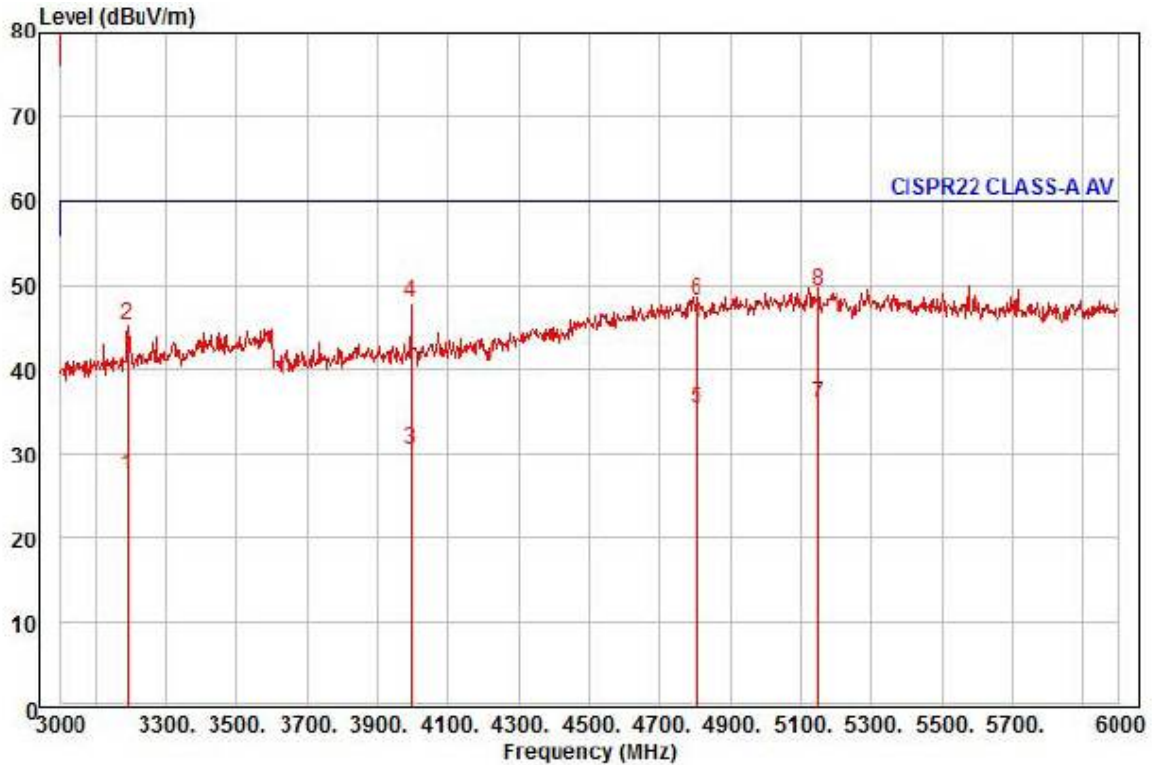


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : QNO-6070RN
Mode : DC12V
Memo : 3 ~ 6 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3189.00	25.33	30.65	11.71	40.25	155	60.00	-32.56	vertical	Average
2	3189.00	43.14	30.65	11.71	40.25	155	80.00	-34.75	vertical	Peak
3	3993.00	25.35	32.00	13.50	40.41	207	60.00	-29.56	vertical	Average
4	3993.00	42.84	32.00	13.50	40.41	207	80.00	-32.07	vertical	Peak
5	4803.00	24.04	36.60	14.98	40.41	223	60.00	-24.79	vertical	Average
6	4803.00	37.00	36.60	14.98	40.41	223	80.00	-31.83	vertical	Peak
7 pp	5148.00	23.50	37.42	15.50	40.39	117	60.00	-23.97	vertical	Average
8 pk	5148.00	36.79	37.42	15.50	40.39	117	80.00	-30.68	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

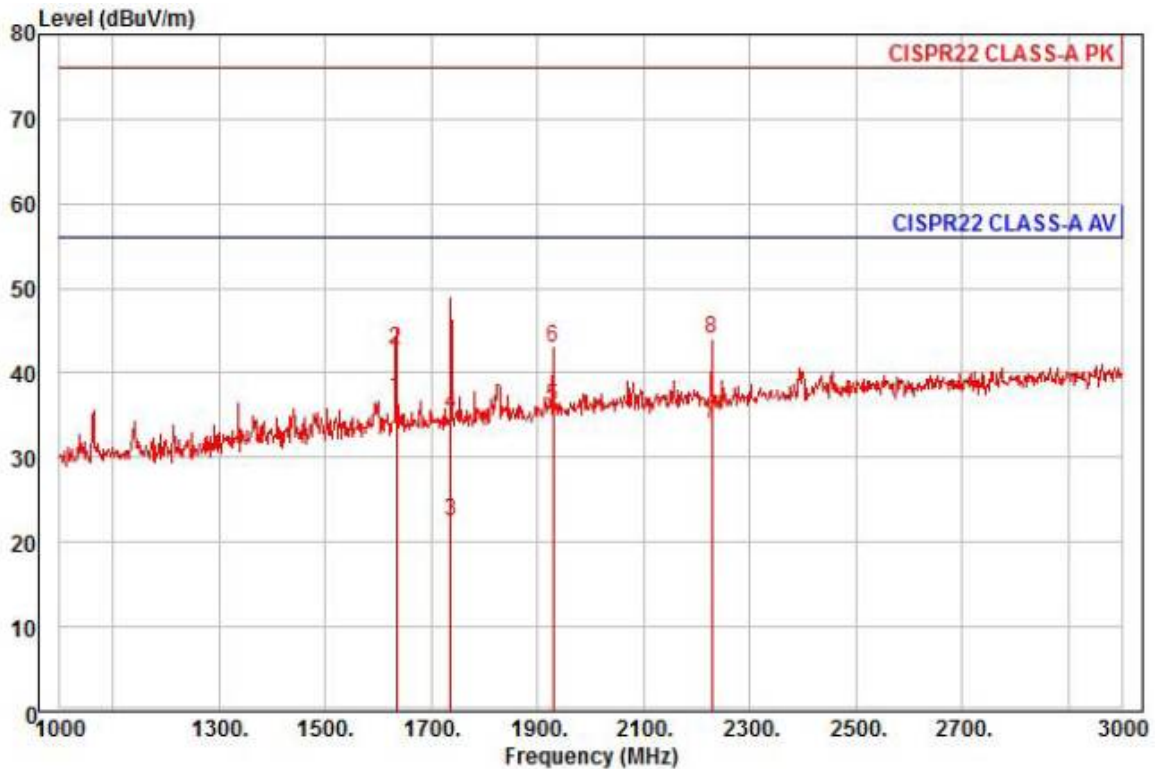

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : QNO-6070RN
Mode : PoE
Memo : 1 ~ 3 GHz


		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1 pp	1634.00	42.16	26.43	8.34	39.81	159	56.00	-18.88	horizontal	Average
2	1634.00	47.85	26.43	8.34	39.81	159	76.00	-33.19	horizontal	Peak
3	1736.00	26.83	26.83	8.62	39.76	159	56.00	-33.48	horizontal	Average
4	1736.00	39.40	26.83	8.62	39.76	159	76.00	-40.91	horizontal	Peak
5	1930.00	38.90	27.60	9.16	39.66	124	56.00	-20.00	horizontal	Average
6	1930.00	45.78	27.60	9.16	39.66	124	76.00	-33.12	horizontal	Peak
7	2228.00	35.53	28.44	9.70	39.76	128	56.00	-22.09	horizontal	Average
8 pk	2228.00	45.76	28.44	9.70	39.76	128	76.00	-31.86	horizontal	Peak



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0324
Page (22) of (37)

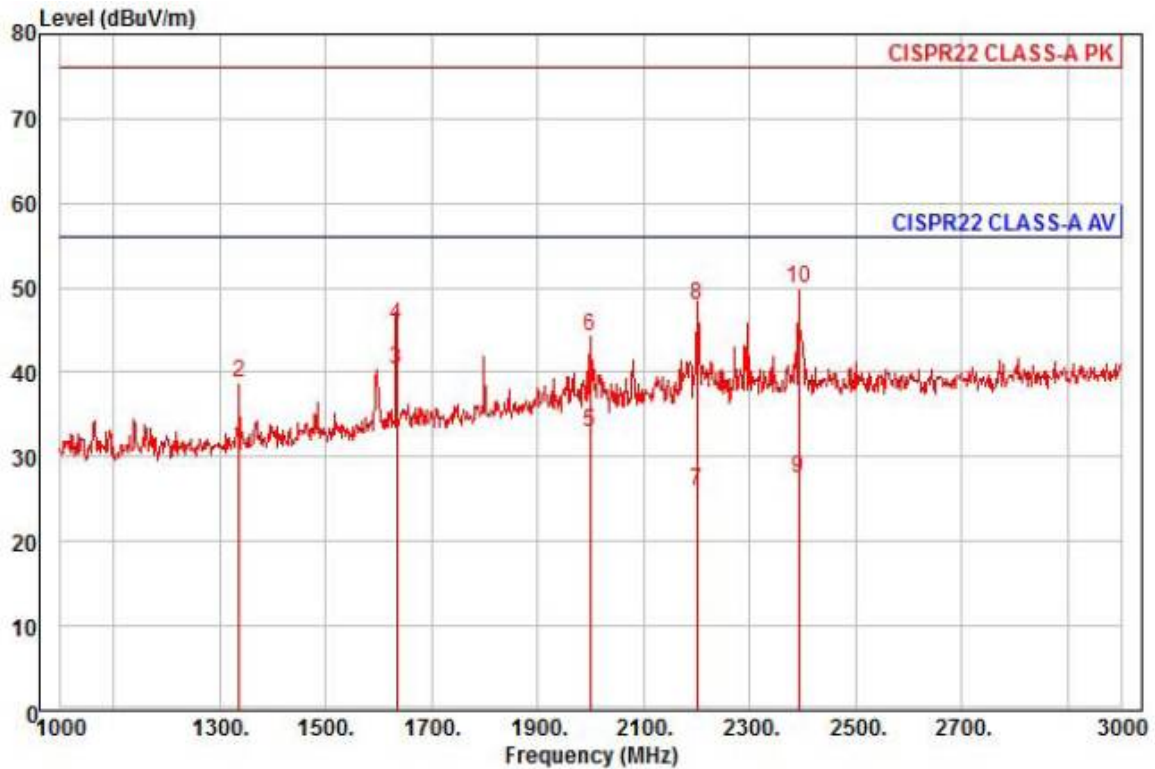

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : QNO-6070RN
Mode : PoE
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1336.00	38.43	25.24	7.48	39.96	16	56.00	-24.81	vertical	Average
2	1336.00	45.98	25.24	7.48	39.96	16	76.00	-37.26	vertical	Peak
3 pp	1634.00	45.31	26.43	8.34	39.81	126	56.00	-15.73	vertical	Average
4	1634.00	50.53	26.43	8.34	39.81	126	76.00	-30.51	vertical	Peak
5	2000.00	35.34	27.88	9.35	39.63	210	56.00	-23.06	vertical	Average
6	2000.00	46.64	27.88	9.35	39.63	210	76.00	-31.76	vertical	Peak
7	2200.00	27.57	28.37	9.66	39.75	204	56.00	-30.15	vertical	Average
8	2200.00	49.73	28.37	9.66	39.75	204	76.00	-27.99	vertical	Peak
9	2392.00	28.50	28.84	9.95	39.86	175	56.00	-28.57	vertical	Average
10 pk	2392.00	50.91	28.84	9.95	39.86	175	76.00	-26.16	vertical	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0324
Page (23) of (37)

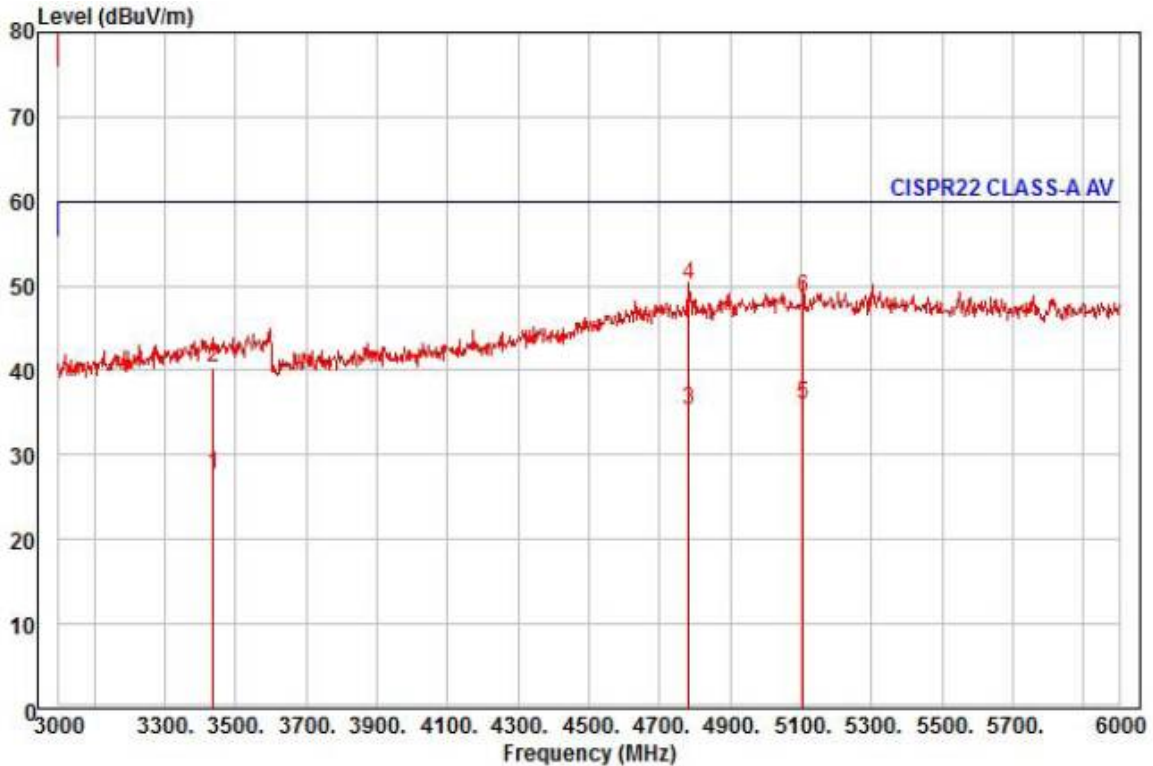

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : QNO-6070RN
Mode : PoE
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3438.00	24.52	31.07	12.35	40.30	178	60.00	-32.36	horizontal	Average
2	3438.00	37.20	31.07	12.35	40.30	178	80.00	-39.68	horizontal	Peak
3	4782.00	24.30	36.48	14.94	40.41	256	60.00	-24.69	horizontal	Average
4 pk	4782.00	39.20	36.48	14.94	40.41	256	80.00	-29.79	horizontal	Peak
5 pp	5106.00	23.37	37.51	15.46	40.40	345	60.00	-24.06	horizontal	Average
6	5106.00	35.96	37.51	15.46	40.40	345	80.00	-31.47	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0324
Page (24) of (37)

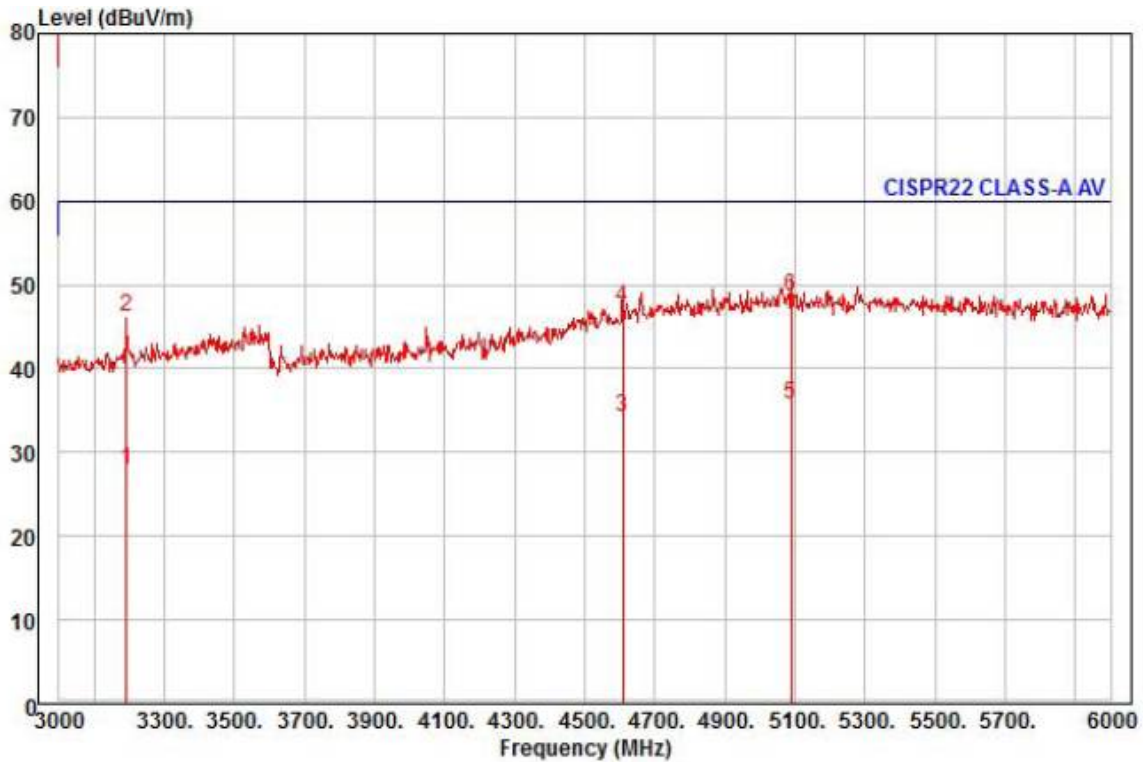

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : QNO-6070RN
Mode : PoE
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3192.00	25.72	30.65	11.72	40.25	161	60.00	-32.16	vertical	Average
2	3192.00	44.00	30.65	11.72	40.25	161	80.00	-33.88	vertical	Peak
3	4608.00	24.45	35.48	14.62	40.41	310	60.00	-25.86	vertical	Average
4	4608.00	37.63	35.48	14.62	40.41	310	80.00	-32.68	vertical	Peak
5 pp	5088.00	23.22	37.54	15.43	40.40	220	60.00	-24.21	vertical	Average
6 pk	5088.00	35.97	37.54	15.43	40.40	220	80.00	-31.46	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0324
Page (25) of (37)

Test Setup Photos and Configuration

Conducted Voltage Emissions

N/A

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

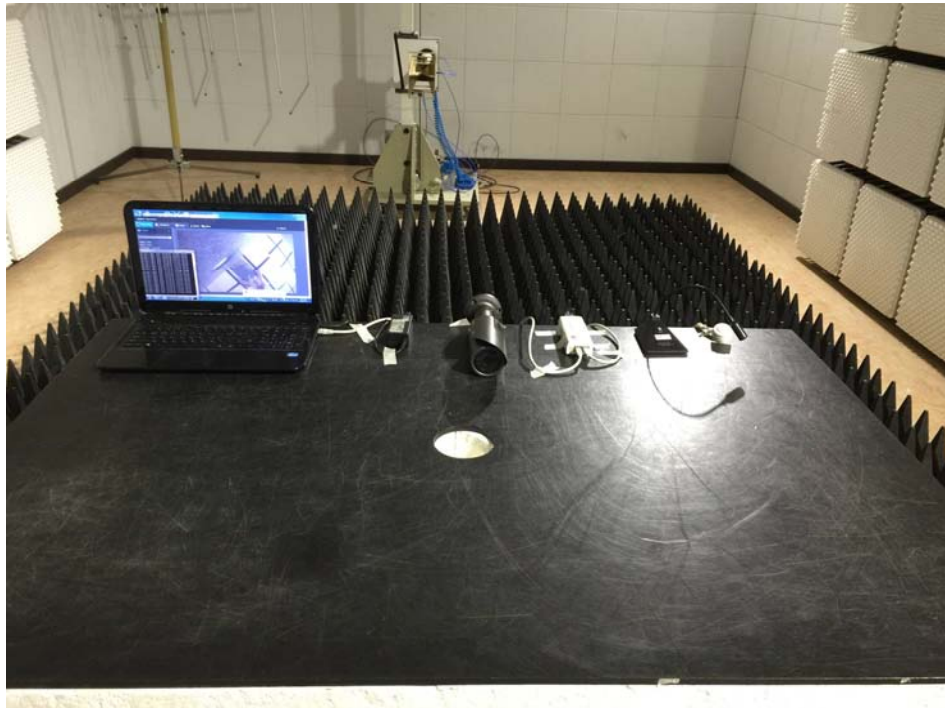

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs


(Internal View)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Main Board

(Top)

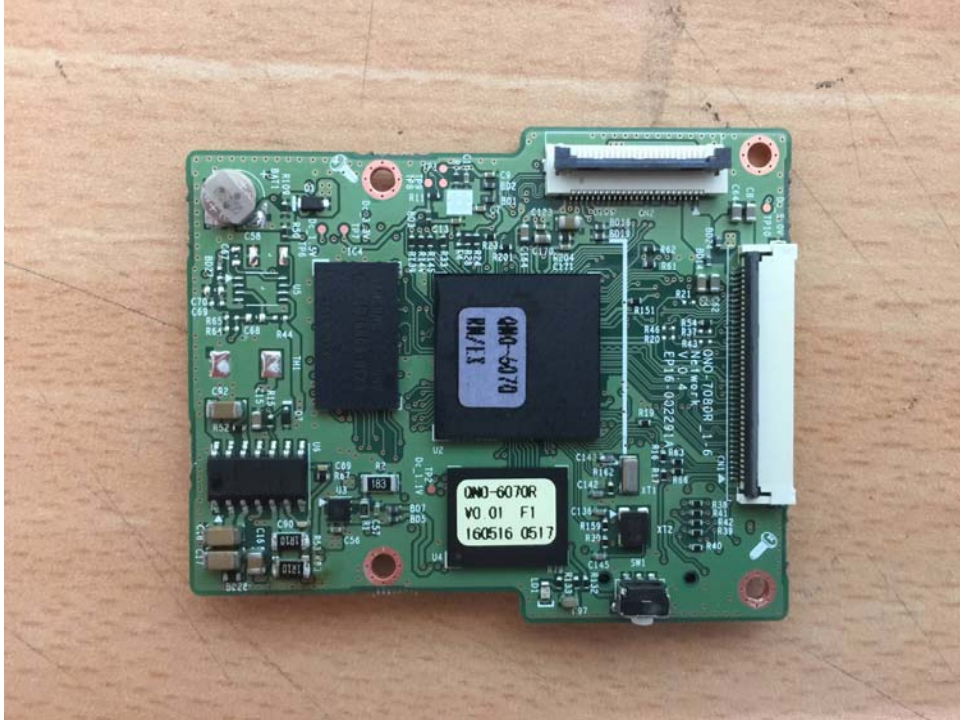

(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Lens

(Top)



(Bottom)

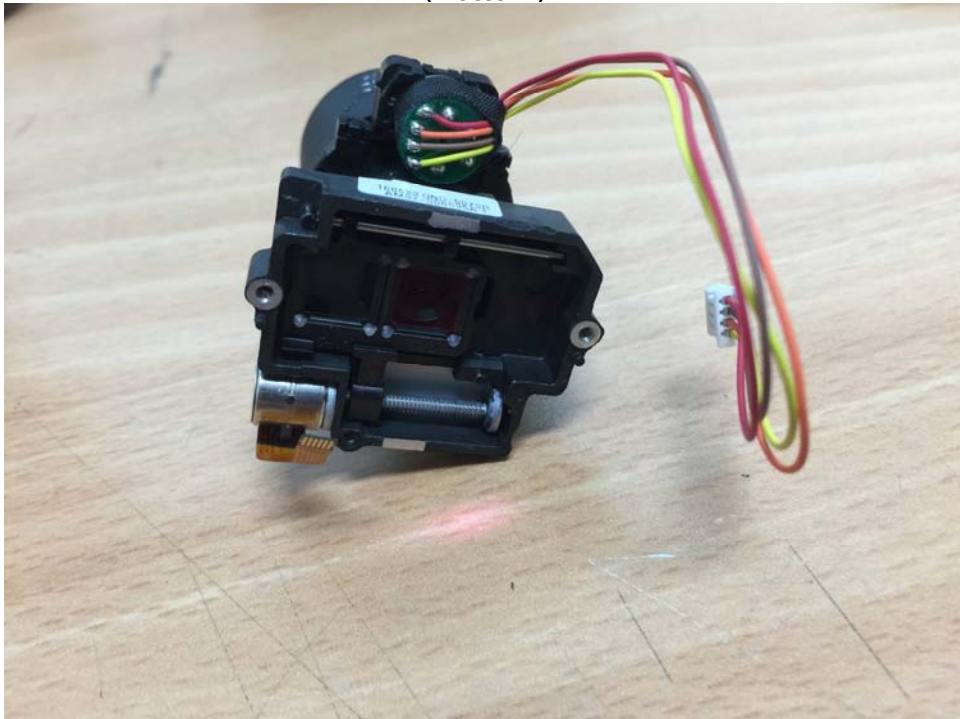

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – LED Board

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Power Board

(Top)



(Bottom)

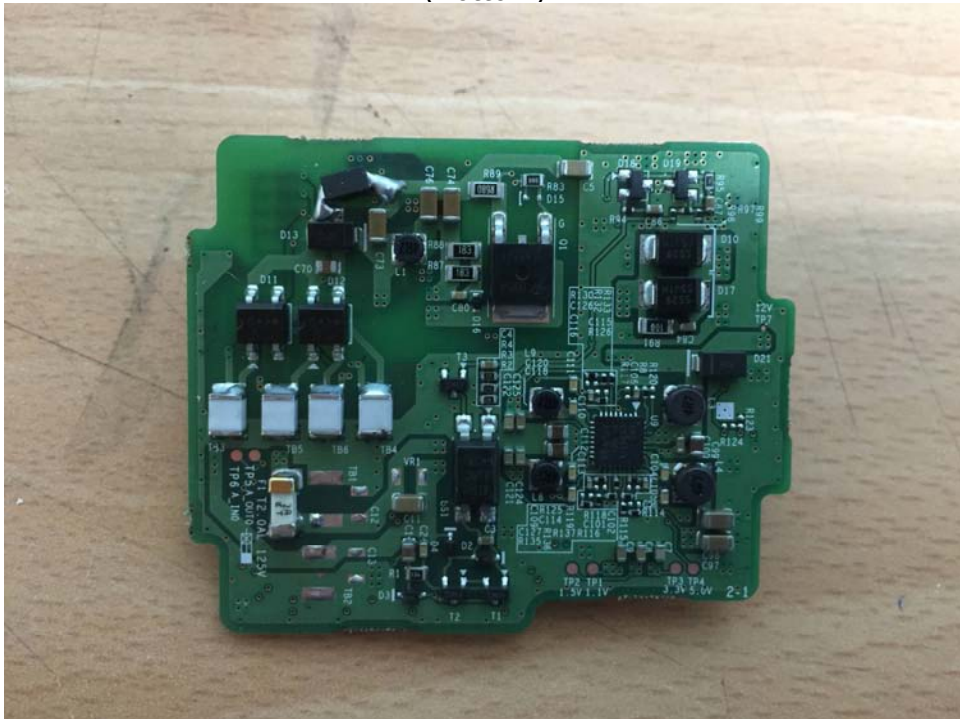


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Sensor Board

(Top)



(Bottom)

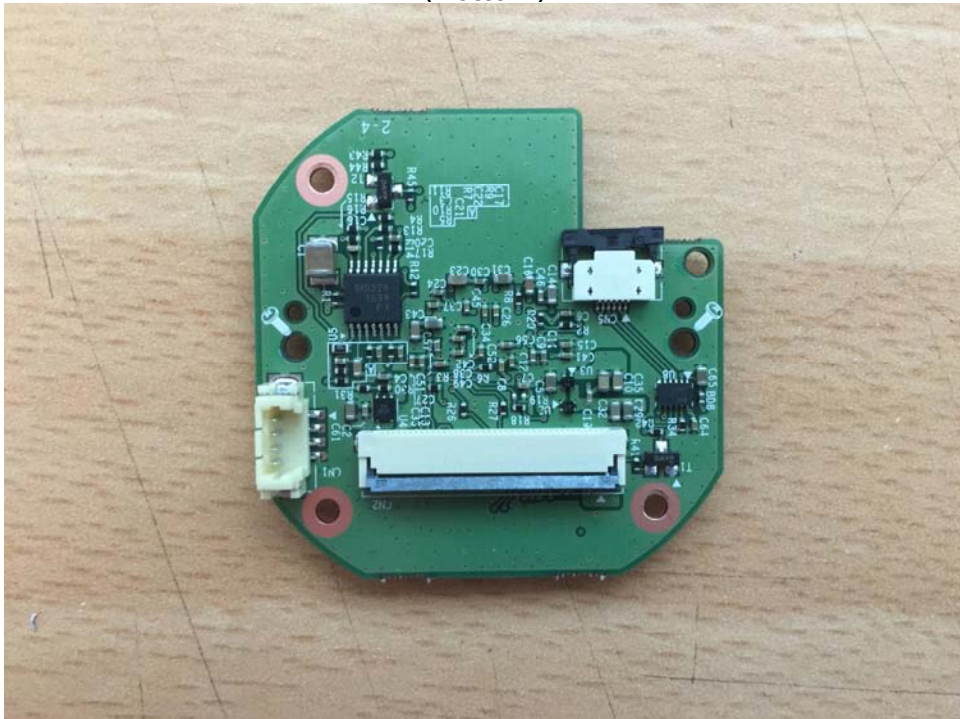

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Label Photographs



[LABEL VIEW]

CAN ICES-3 (A)/NMB-3(A)