



Network

Цилиндрические

# QNO-C6083R

2MP AI IR Bullet Camera



## Key Features

- Max. 2MP resolution
- 3.2~10.2mm(3.2x) motorized varifocal
- Color: 0.04Lux (F1.6, 1/30sec),  
BW: 0.004Lux (F1.6, 1/30sec, 30IRE)
- Maximum 30fps@2MP (H.265/H.264)
- IR viewable length 40m(131.23ft)
- Day & Night (ICR), WDR (120dB), WiseNR II (Using AI engine)
- H.265, H.264, MJPEG, WiseStreamIII (Using AI engine)
- Analytics events based on AI engine (NPU) : Object detection  
(Person/Vehicle - car, truck, bus, bicycle, motorcycle),  
Motion detection, Virtual line(Crossing/Direction),  
Virtual area(Loitering/Intrusion/Enter/Exit)
- IP66, IK10
- PoE: Max 8.9W

# QNO-C6083R

2MP AI IR Bullet Camera



## Specifications

| Video                         |                       |                                                                                                                   |
|-------------------------------|-----------------------|-------------------------------------------------------------------------------------------------------------------|
| Imaging Device                | Size                  | 1/2.8"                                                                                                            |
|                               | Type                  | CMOS                                                                                                              |
| Resolution                    |                       | 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240 |
| Max. Framerate                | H.265/H.264           | 30fps/25fps(60Hz/50Hz)                                                                                            |
|                               | MJPEG                 | 30fps(@2MP Max. 5fps)                                                                                             |
| Min. Illumination (Lux)       | Color(1/30sec, 30IRE) | 0.04                                                                                                              |
|                               | BW(1/30sec, 30IRE)    | 0.004                                                                                                             |
| Video Out                     |                       | USB: Micro USB Type B. Preview and installation ONLY. Requires WiFi dongle.                                       |
| Lens                          |                       |                                                                                                                   |
| Focal Length (mm)             |                       | 3.2~10.2                                                                                                          |
| Zoom Ratio                    | Optical               | 3.2x                                                                                                              |
| Max Aperture Ratio (F number) | Wide                  | 1.6                                                                                                               |
|                               | Tele                  | 3.1                                                                                                               |
| Angular Field of View         | Horizontal            | 102°~32°                                                                                                          |
|                               | Vertical              | 55°~18°                                                                                                           |
|                               | Diagonal              | 119°~36°                                                                                                          |
| Min. Object Distance          |                       | 1.2m(3.93ft)                                                                                                      |
| Focus Control                 |                       | Simple focus                                                                                                      |
| Lens Type                     |                       | DC auto iris(IR corrected)                                                                                        |
| Pan / Tilt / Rotate           |                       |                                                                                                                   |
| Pan / Tilt / Rotate Range     | Pan                   | 0°~360°                                                                                                           |
|                               | Tilt                  | 0°~100°                                                                                                           |
|                               | Rotate                | 0°~360°                                                                                                           |
| Operational                   |                       |                                                                                                                   |
| Day & Night                   |                       | Auto(ICR)                                                                                                         |
| Backlight Compensation        |                       | BLC, WDR, SSDR                                                                                                    |

## Operational

|                                          |                                         |                                                                                                                                                                                                                                       |
|------------------------------------------|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Wide Dynamic Range (dB)                  |                                         | 120                                                                                                                                                                                                                                   |
| Digital Noise Reduction                  |                                         | WiseNR II (Based on AI engine), SSNR V                                                                                                                                                                                                |
| Motion Detection                         | Quantity                                | 8ea                                                                                                                                                                                                                                   |
|                                          | Shape                                   | 8point Polygonal zones                                                                                                                                                                                                                |
| Privacy Masking                          | Quantity                                | 32ea                                                                                                                                                                                                                                  |
|                                          | Shape                                   | 4point Quadrangle zones                                                                                                                                                                                                               |
|                                          | Dynamic Privacy Masking: Color / Option | Mosaic                                                                                                                                                                                                                                |
| Gain Control                             |                                         | Low, Middle, High                                                                                                                                                                                                                     |
| White Balance                            |                                         | ATW, AWC, Manual, Indoor, Outdoor                                                                                                                                                                                                     |
| LDC                                      |                                         | Support                                                                                                                                                                                                                               |
| Electronic Shutter                       | Mode                                    | Minimum, Maximum, Anti flicker, Prefer shutter control(Based on AI engine)                                                                                                                                                            |
|                                          | Speed Range                             | 1/5~1/25,000sec                                                                                                                                                                                                                       |
| Video Rotation                           |                                         | Flip, Mirror, Hallway view(90°/270°)                                                                                                                                                                                                  |
| Alarm Interface                          | In/Out                                  | Input 1ea, Output 1ea                                                                                                                                                                                                                 |
| Alarm Triggers                           |                                         | Analytics, Network disconnect, Alarm input, MQTT subscription                                                                                                                                                                         |
| Alarm Events When Alarm Trigger Occurred |                                         | File upload(image): e-mail/FTP,<br>Notification: e-mail,<br>Recording: SD/SDHC/SDXC or NAS recording at event triggers,Alarm output,<br>Handover: PTZ preset,send message by HTTP/HTTPS/TCP,Audio clip playback,<br>MQTT: publication |
| Audio In                                 |                                         | Selectable(mic in/line in)                                                                                                                                                                                                            |
| Audio Out                                |                                         | Line out                                                                                                                                                                                                                              |
| Light Type                               |                                         | IR LED                                                                                                                                                                                                                                |
| Light Viewable Length                    | IR                                      | 40m(131.23ft)                                                                                                                                                                                                                         |
| IR Wavelength                            |                                         | 850nm                                                                                                                                                                                                                                 |

## Analytics

|                        |                    |                                                                                                                    |
|------------------------|--------------------|--------------------------------------------------------------------------------------------------------------------|
| Classified Object Type |                    | Person, Vehicle                                                                                                    |
| Attributes             | Person             | Upper/Lower clothes color                                                                                          |
|                        | Vehicle            | Type(car, bus, truck, motorcycle, bicycle), Color                                                                  |
| Thumbnail              |                    | BestShot                                                                                                           |
| Analytics Events       | Based on AI Engine | Object detection, Virtual line(Crossing/Direction), Virtual area(Loitering/Intrusion/Enter/Exit), Motion detection |
|                        | Normal             | Defocus detection, Tampering, Virtual area(Appear/Disappear)                                                       |
| Business Intelligence  | Based on AI Engine | People counting, Queue management, Heatmap, Vehicle counting                                                       |

## Network

|                   |  |                               |
|-------------------|--|-------------------------------|
| Ethernet          |  | RJ-45(10/100BASE-T)           |
| Video Compression |  | H.265/H.264: Main/High, MJPEG |

## Network

|                                   |                    |                                                                                                                                                                                                                             |
|-----------------------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Audio Compression                 |                    | G.711 u-law / G.726 selectable, G.726(ADPCM) 8kHz, G.711 8kHz,<br>G.726: 16kbps, 24kbps, 32kbps, 40kbps,<br>AAC-LC: 48kbps at 16kHz                                                                                         |
| Smart Codec                       |                    | Manual, WiseStream III                                                                                                                                                                                                      |
| Bitrate Control                   |                    | H.265/H.264: CBR or VBR,<br>MJPEG: VBR                                                                                                                                                                                      |
| Streaming                         | Unicast            | Up to 20 users                                                                                                                                                                                                              |
|                                   | Multicast          | Support                                                                                                                                                                                                                     |
|                                   | Multiple Streaming | Up to 5 profiles                                                                                                                                                                                                            |
| Protocol                          |                    | IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS,<br>SSL/TLS, DHCP, FTP, SFTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS,<br>QoS, UPnP, Bonjour, LLDP, CDP, SRTP(TCP, UDP Unicast) |
| Application Programming Interface | ONVIF              | S, G, T, M                                                                                                                                                                                                                  |
|                                   | Others             | SUNAPI(HTTP API), Hanwha Vision Open Platform                                                                                                                                                                               |
| Direct Cloud Connection           |                    | Support                                                                                                                                                                                                                     |

## Security

|                        |  |                                                                         |
|------------------------|--|-------------------------------------------------------------------------|
| OS / Firmware Protect  |  | Encrypted firmware, Secure boot, Signed firmware                        |
| User authentication    |  | Digest authentication, Prevent brute-force attack                       |
| Network authentication |  | IEEE 802.1X(EAP-TLS, EAP-LEAP, EAP-PEAP, MSCHAPv2)                      |
| Secure Communication   |  | HTTPS, WSS(WebSocket Secure), SRTP                                      |
| Access Control         |  | IP-based access control                                                 |
| Data Protect           |  | Encryption credentials, Encrypt compress for live recording file export |
| Audit                  |  | Access / System / Event Log management                                  |
| Device ID              |  | Device certificate(Hanwha Vision Root CA)                               |
| Secure Storage         |  | SDcard partition encrypt(AES-256)                                       |

## General

|                       |                    |                                                                                                                       |
|-----------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------|
| Memory                | RAM                | 2GB                                                                                                                   |
|                       | Flash              | 1GB                                                                                                                   |
| Edge Storage          | Micro SD/SDHC/SDXC | Max. 256GB x 1slot                                                                                                    |
| Edge Storage(OnCloud) | Micro SD/SDHC/SDXC | Max. 1TB x 1slot *Hanwha Vision branded microSD cards have been certified and recommended for OnCloud edge recording. |

## Environmental & Electrical

|                     |             |                                |
|---------------------|-------------|--------------------------------|
| Operating Condition | Temperature | -40°C~+55°C(-40°F~+131°F)      |
|                     | Humidity    | 0~95% RH(non-condensing)       |
|                     | Others      | Humidity control with AIR vent |
| Storage Condition   | Temperature | -50°C~+60°C(-58°F~+140°F)      |
|                     | Humidity    | 0~95% RH(non-condensing)       |
| Input Voltage       |             | PoE(IEEE802.3af, Class3)       |

## Environmental & Electrical

|                   |     |                        |
|-------------------|-----|------------------------|
| Power Consumption | PoE | Max 8.9W, typical 3.7W |
|-------------------|-----|------------------------|

## Mechanical

|                     |                            |
|---------------------|----------------------------|
| Color               | White                      |
| Material            | Aluminum                   |
| RAL Code            | RAL9003                    |
| Product Dimensions  | ø93.4x245.8mm(ø3.68x9.68") |
| Product Weight      | 930g(2.05lb)               |
| Compatible Gang Box | Single, Double, 4" Octagon |

## Certifications & Standards

|             |                                                                                                                                                                            |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EMC         | FCC 47 CFR 15 Subpart B Class A, ICES-3(A)/NMB-3(A), CE/UKCA - EN55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3, VCCI CISPR 32 Class A, RCM AS-NZS CISPR 32 Class A |
| Safety      | UL 62368-1, CAN/CSA C22.2 NO. 62368-1, IEC 62471                                                                                                                           |
| Environment | IEC/EN 63000, IEC 60529 IP66, IEC 62262 IK10, NEMA 250 type 4X                                                                                                             |

## DORI (EN62676-4 standard)


|                           |      |                  |
|---------------------------|------|------------------|
| Detect (25PPM/ 8PPF)      | Wide | 31.1m(102.02ft)  |
|                           | Tele | 133.9m(439.36ft) |
| Observe (63PPM/ 19PPF)    | Wide | 12.4m(40.81ft)   |
|                           | Tele | 53.6m(175.74ft)  |
| Recognize (125PPM/ 38PPF) | Wide | 6.2m(20.40ft)    |
|                           | Tele | 26.8m(87.87ft)   |
| Identify (250PPM/ 76PPF)  | Wide | 3.1m(10.20ft)    |
|                           | Tele | 13.4m(43.94ft)   |

QNO-C6083R  
2MP AI IR Bullet Camera



CAD

Unit: mm [inch]

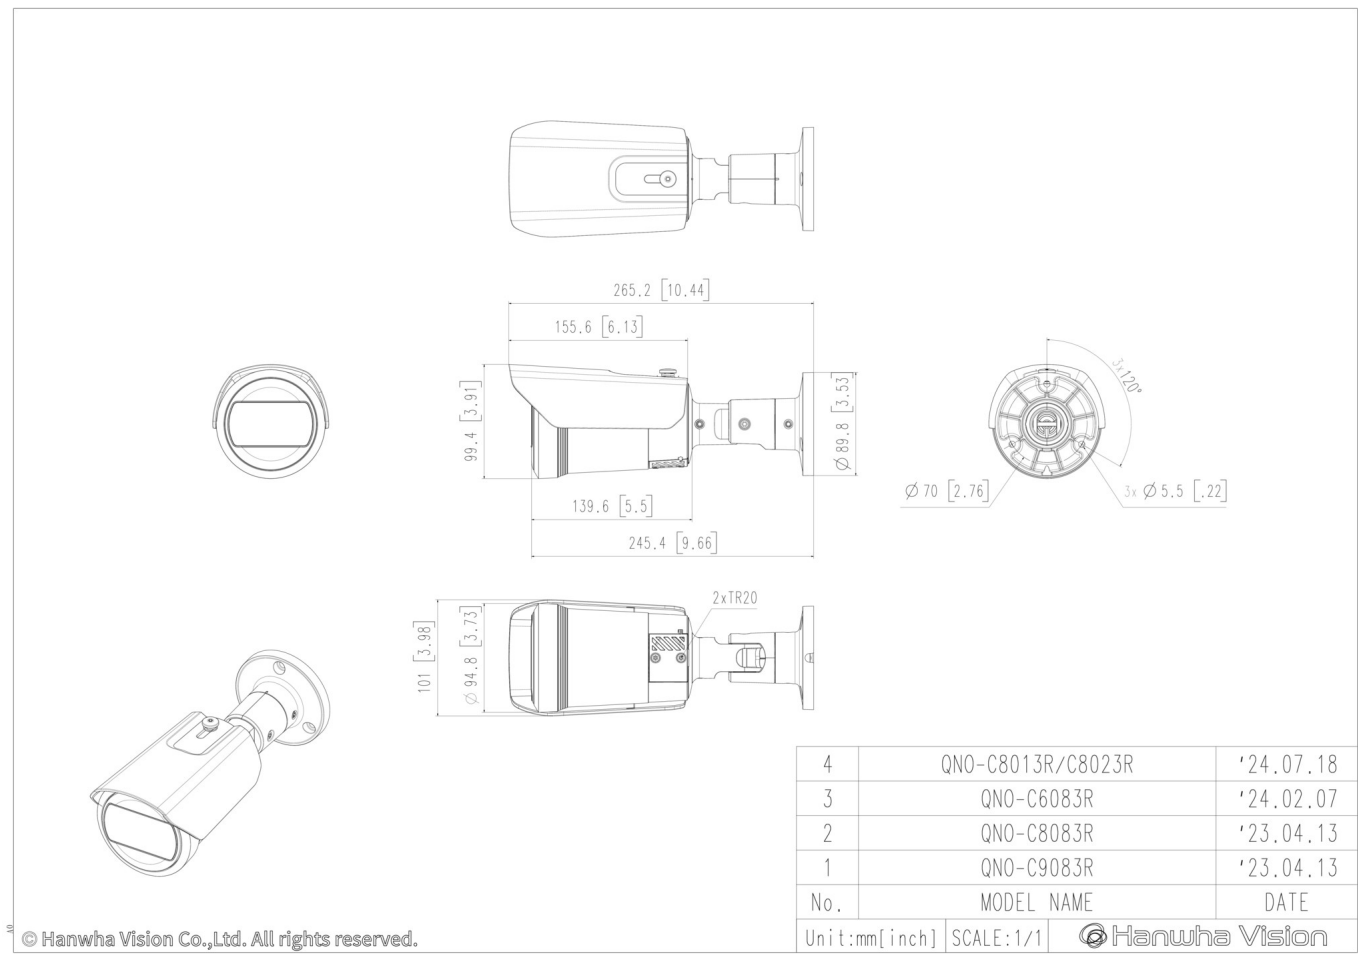

© Hanwha Vision Co.,Ltd. All rights reserved.