

Network Dome

QNV-8080R

5M H.265 NW IR Dome Camera

Key Features

- Max. 5Megapixel (2592 x 1944) resolution
- 3.2~10mm(3.1x) motorised varifocal lens
- 0.15Lux (Colour), 0Lux (B/W, IR LED on)
- Max. 30fps@5MP (H.265 / H.264)
- H.265, H.264, MJPEG codec support, Multiple streaming
- Day & Night, WDR (120dB)
- Tampering, Motion detection, Defocus detection
- Micro SD / SDHC / SDXC memory slot (Max. 128GB)
- Hallway view, WiseStream II support
- IR Viewable length 30m
- IP66, IK10, PoE

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

QNV-8080R

5M H.265 NW IR Dome Camera



Specifications

Video

Bildgebungsgerät	Größe	1-2,8“
	Typ	CMOS
Auflösung		2592x1944, 2560x1440, 1920x1080, 1280x960, 1280x720, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264	30 fps/25 fps (60 Hz/50 Hz)
	MJPEG	15 fps (bei 5 MP Max. 2 fps)
Min. Beleuchtung (Lux)	Farbe (1/30 Sekunde, 30 IRE)	0.15
	S/W (1/30 Sekunde, 30 IRE)	0.015
Video-Ausgang		CVBS: 1,0 Vp-p / 75 Ω Verbund für den Einbau

Linse

Brennweite (mm)		3.2~10
Zoom-Verhältnis	Optisch	3.1x
Max. Öffnungsverhältnis (F-Zahl)	Weit	1.6
	Tele	2.9
Winkel-Sichtfeld	Horizontal	101°~31°
	Vertikal	73°~23°
	Diagonal	134°~38°
Fokussteuerung		Einfacher Fokus
Linsentyp		DC-Autoblende (IR-korrigiert)

Schwenken / Neigen / Drehen

Schwenk- / Neigungs- / Drehbereich	Schwenken	0°~350°
	Neigen	0°~67°
	Drehen	0°~355°

Operativ

Tag & Nacht	Auto (ICR)
Hintergrundbeleuchtungskompensation	BLC, WDR, SSDR

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Operativ

Großer Dynamikbereich (dB)		120
Digitale Rauschunterdrückung		SSNR
Bewegungserkennung	Menge	4EA
	Form	8-Punkt-Polygonzonen
Datenschutzmaskierung	Menge	6ea
	Form	Rechteckige Zonen
Verstärkung		Niedrig, Mittel, Hoch
Weißabgleich		ATW, AWC, Manuell, Innenbereich, Außenbereich
LDC		Unterstützung
Elektronischer Verschluss	Modus	Minimum, Maximum, Anti-Flackern
	Geschwindigkeitsbereich	1/5–1/12.000 Sekunde
Videodrehung		Umdrehen, Spiegeln, Fluransicht (90°/270°)
Alarmschnittstelle	Eingang/Ausgang	Eingang 1EA, Ausgang 1EA
Alarmauslöser		Analysen, Netzwerkverbindung trennen, Alarmeingang
Alarmereignisse beim Auftreten eines Alarmauslösers		Datei-Upload (Bild): E-Mail/FTP, Benachrichtigung: E-Mail, Aufnahme: SD/SDHC/SDXC oder NAS-Aufzeichnung bei Ereignisauslösern,Alarmausgang, Übergabe: PTZ-Voreinstellung
Lichttyp		IR-LED
Licht sichtbare Länge	IR	30m(98.42ft)
IR-Wellenlänge		850 nm

Analysen

Analyseereignisse	Normal	Defokuserkennung, Bewegungserkennung, Manipulation, Virtueller Bereich (Eindringen/Betreten/Verlassen), Virtuelle Linie (Kreuzung, Richtung)

Netzwerk

Ethernet		RJ-45 (10/100 BASE-T)
Videokomprimierung		H.265/H.264: Main/High, MJPEG
Intelligenter Codec		WiseStream II
Bitratenkontrolle		H.265/H.264: CBR oder VBR, MJPEG: VBR
Streaming	Unicast	Bis zu 6 Benutzer
	Multicast	Unterstützung
	Mehrfach-Streaming	Bis zu 3 Profile
Protokoll		IPv4, IPv6, TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMP v1/v2c/v3 (MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Netzwerk

Anwendungsprogrammierschnittstelle	ONVIF	S, G, T
	Andere	SUNAPI (HTTP API), Hanwha Vision Offene Plattform
Direkte Cloud-Verbindung		Optional (benötigt Gateway)

Sicherheit

Betriebssystem- / Firmware-Schutz	Verschlüsselte Firmware
Benutzerauthentifizierung	Digest-Authentifizierung, Brute-Force-Angriffe verhindern
Netzwerkauthentifizierung	IEEE 802.1X (EAP-TLS, EAP-LEAP, EAP-PEAP, MSCHAPv2)
Sichere Kommunikation	HTTPS, WSS (WebSocket Secure), SRTP
Zugangskontrolle	IP-basierte Zugangskontrolle
Datenschutz	Verschlüsselungsanmeldeinformationen, Verschlüsselte Komprimierung für den Export von Live-Aufnahmedateien
Audit	Zugangs- / System- /Ereignisprotokollverwaltung
Geräte-ID	Gerätezertifikat (Hanwha Vision Root CA)
Sichere Speicherung	SD-Card-Partition verschlüsseln (AES-256)

Allgemein

Speicher	RAM	512 MB
	Flash	256 MB
Edge Storage	Micro SD/SDHC/SDXC	Max. 128 GB x 1 Steckplatz

Umwelt & Elektrik

Betriebsbedingung	Temperatur	-30 °C~+55 °C(-22 °F~+131 °F)
	Luftfeuchtigkeit	0–90 % relative Feuchte (nicht kondensierend)
	Andere	Die Inbetriebnahme sollte bei über -20 °C erfolgen
Lagerbedingung	Temperatur	-30 °C~+60 °C(-22 °F~+140 °F)
	Luftfeuchtigkeit	0–90 % relative Feuchte (nicht kondensierend)
Eingangsspannung		PoE (IEEE802.3af, Klasse 3)
Stromverbrauch	PoE	Max. 8.90W, typical 6.60W

Mechanisch

Farbe	Weiß
Material	Aluminium
RAL-Code	RAL9003
Produktabmessungen	ø137.0x106.1mm(ø5.39x4.18")
Produktgewicht	700g(1.54 lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Zertifizierungen & Standards

EMV	FCC 47 CFR 15 Unterabschnitt B Klasse A, ICES-3(A)/NMB-3(A), CE/UKCA – EN55032 Klasse A, EN 50130-4, EN 61000-3-2, EN 61000-3-3, VCCI CISPR 32 Klasse A, RCM AS-NZS CISPR 32 Klasse A, KS C 9832 Klasse A, KS C 9835
Sicherheit	UL 60950-1, CAN/CSA C22.2 NR. 60950-1, IEC 62471
Umwelt	IEC 60529 IP66, IEC 62262 IK10

DORI (Norm EN62676-4)

Erkennen (25PPM/ 8PPF)	Breit	43.3m(141.94ft)
	Tele	185.7m(609.09ft)
Beobachten (63PPM/ 19PPF)	Breit	17.3m(56.78ft)
	Tele	74.3m(243.64ft)
Erkennen (125PPM/ 38PPF)	Breit	8.7m(28.39ft)
	Tele	37.1m(121.82ft)
Identifizieren (250PPM/ 76PPF)	Breit	4.3m(14.19ft)
	Tele	18.6m(60.91ft)

© Hanwha Vision CO., LTD. All rights reserved.


QNV-8080R

5M H.265 NW IR Dome Camera



CAD

Unit: mm [inch]

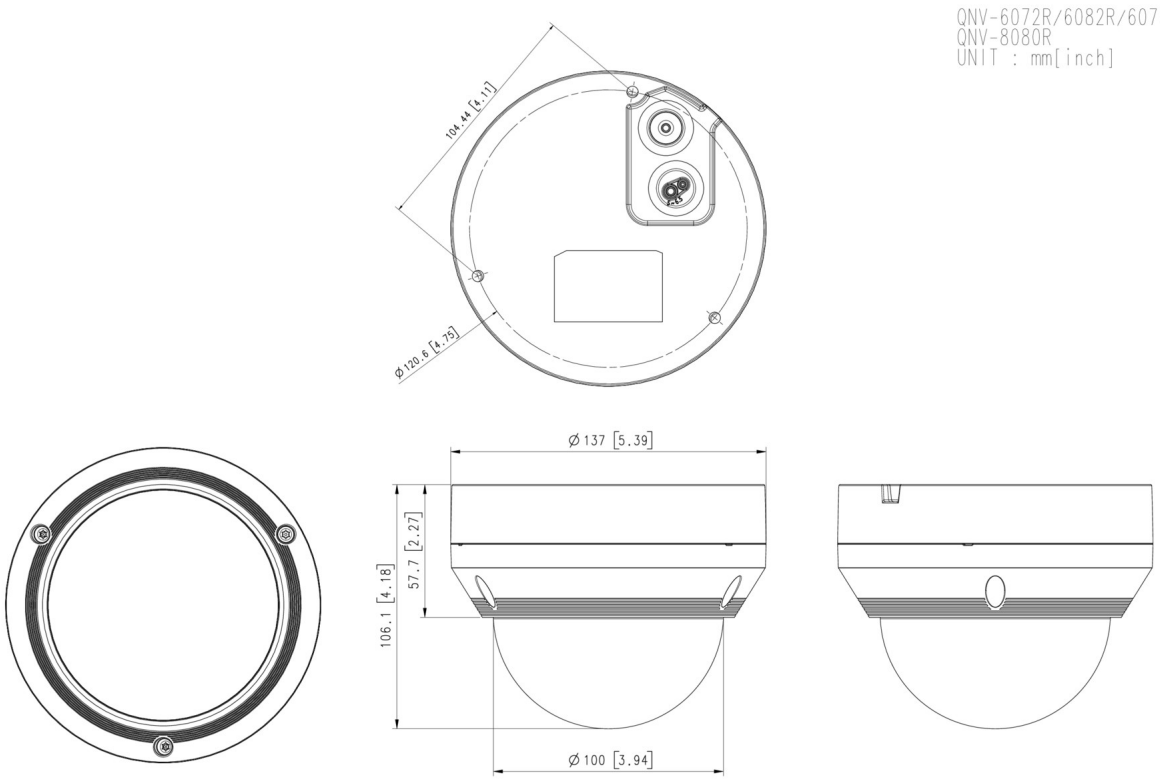

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



SBP-300CMW



SBP-300LMW



SBP-300NBW



SBP-300PMW



SBP-300WMW1



SBP-301HMW2



SBV-138TMW



SHD-1408FW



SPB-VAW72



SPP-C45W

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.