



Network

Dome

QNV-C6083R

2MP AI IR Vandal Dome Camera



Key Features

- Max. 2MP resolution
- 3.2~10.2mm(3.2x) motorized varifocal
- Color: 0.04Lux (F1.6, 1/30sec),
BW: 0.004Lux (F1.6, 1/30sec, 30IRE)
- Maximum 30fps@2MP (H.265/H.264)
- IR viewable length 40m(131.23ft)
- Day & Night (ICR), WDR (120dB), WiseNR II (Using AI engine)
- Hard-coated dome bubble
- H.265, H.264, MJPEG, WiseStreamIII (Using AI engine)
- Analytics events based on AI engine (NPU) : Object detection
(Person/Vehicle - car, truck, bus, bicycle, motorcycle),
Motion detection, Virtual line(Crossing/Direction),
Virtual area(Loitering/Intrusion/Enter/Exit)
- IP66, IK10
- PoE: Max 9.8W
- HDMI Video out: 1080p@30/25fps (60/50Hz)
- HDMI out is supported through an optional cable (SPP-C1900)

QNV-C6083R

2MP AI IR Vandal Dome Camera



Specifications

映像

Imaging Device	サイズ	1/2.8"
	タイプ	CMOS
解像度	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240	
Max. Framerate	H.265/H.264	30fps/25fps(60Hz/50Hz)
	MJPEG	30fps(@2MP Max. 5fps)
Min. Illumination (Lux)	Color(1/30sec, 30IRE)	0.04
	BW(1/30sec, 30IRE)	0.004
Video Out	USB: Micro USB Type B. Preview and installation ONLY. Requires WiFi dongle., HDMI: 1080p@30/25fps(60/50Hz)	

レンズ

Focal Length (mm)		3.2~10.2
Zoom Ratio	Optical	3.2x
Max Aperture Ratio (F number)	Wide	1.6
	Tele	3.1
視野角度	Horizontal	102°~32°
	Vertical	55°~18°
	Diagonal	119°~36°
Min. Object Distance		1.2m(3.93ft)
Focus Control		シンブルフォーカス
Lens Type		DC auto iris(IR corrected)

Pan / Tilt / Rotate

Pan / Tilt / Rotate Range	Pan	0°~350°
	Tilt	-35°~70°
	回転	0°~355°

技能

Day & Night	Auto(ICR)
Backlight Compensation	BLC, WDR, SSDR

技能

Wide Dynamic Range (dB)		120
Digital Noise Reduction		WiseNR II (Based on AI engine), SSNR V
モーション検知	Quantity	8ea
	Shape	8point Polygonal zones
Privacy Masking	Quantity	32ea
	Shape	4point Quadrangle zones
	Color / Option	灰色, 緑, Red, 青, 黒, 白
	Dynamic Privacy Masking: Color / Option	モザイク
ゲイン制御		低, 中, 高
ホワイトバランス		ATW, AWC, 手動, 室内, 屋外
LDC		サポート
Electronic Shutter	モード	最小, 最大, アンチフリッカー, Prefer shutter control(Based on AI engine)
	Speed Range	1/5~1/25,000sec
ビデオ回転		FLIPモード, ミラー, Hallway view(90°/270°)
Alarm Interface	In/Out	Input 1ea, Output 1ea
	その他	Support alarm I/O through an optional cable
Alarm Triggers		分析, ネットワーク切断, アラーム入力, MQTT購読
Alarm Events When Alarm Trigger Occurred		File upload(image): e-mail/FTP, Notification: e-mail, Recording: SD/SDHC/SDXC or NAS recording at event triggers,アラーム出力, Handover: PTZ preset,send message by HTTP/HTTPS/TCP,Audio clip playback, MQTT: publication
オーディオ入力		Selectable(mic in/line in), オプションでオーディオケーブルをサポート
オーディオ出力		Line out, オプションでオーディオケーブルをサポート
Light Type		IR LED
Light Viewable Length	IR	40m(131.23ft)
IR Wavelength		850nm

分析

Classified Object Type		人, 車両
属性	人	Upper/Lower clothes color
	車両	Type(car, bus, truck, motorcycle, bicycle), カラー
サムネイル		ベストショット
分析イベント	Based on AI Engine	対象物検知, 仮想線 (交差・方向), 仮想領域 (ロータリング, 侵入, Enter, Exit), モーション検知
	通常	焦点ぼけ検知, タンパリング, Virtual area(Appear/Disappear)
Business Intelligence	Based on AI Engine	人数カウント, キュー管理, ヒートマップ, 車両カウント

ネットワーク

Ethernet		RJ-45(10/100BASE-T)
映像圧縮		H.265/H.264: Main/High, MJPEG
Audio Compression		G.711 u-law /G.726 selectable,G.726(ADPCM) 8kHz,G.711 8kHz, G.726: 16kbps,24kbps,32kbps,40kbps, AAC-LC: 48kbps at 16kHz
Smart codec		手動, WiseStreamIII
ビットレートコントロール		H.265/H.264: CBR or VBR, MJPEG: VBR
Streaming	Unicast	最大 20ユーザー
	マルチキャスト	サポート
	Multiple Streaming	最大 5プロファイル
プロトコル		IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SFTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, CDP, SRTP(TCP, UDP Unicast), MQTT
Application Programming Interface	ONVIF	s, G, T, M
	その他	SUNAPI(HTTP API), Hanwha Vision Open Platform
Direct Cloud Connection		サポート

セキュリティ

OS / Firmware Protect		Encrypted firmware, Secure boot, Signed firmware
ユーザー認証		ダイジェスト認証, Prevent brute-force attack
Network authentication		IEEE 802.1X(EAP-TLS, EAP-LEAP, EAP-PEAP, MSCHAPv2)
Secure Communication		HTTPS, WSS(WebSocket Secure), SRTP
Access Control		IP-based access control
Data Protect		Encryption credentials, Encrypt compress for live recording file export
Audit		Access / System / Event Log management
デバイスID		Device certificate(Hanwha Vision Root CA)
Secure Storage		SDcard partition encrypt(AES-256)

一般

メモリ	RAM	2GB
	フラッシュ	1GB
Edge Storage	Micro SD/SDHC/SDXC	Max. 256GB x 1slot
Edge Storage(OnCloud)	Micro SD/SDHC/SDXC	Max. 1TB x 1slot *Hanwha Vision branded microSD cards have been certified and recommended for OnCloud edge recording.

Environmental & Electrical

動作条件	温度	-40°C~+55°C(-40°F~+131°F)
	湿度	0~100% RH(condensing)
	その他	Humidity control with AIR vent

Environmental & Electrical

保管条件	温度	-50°C~+60°C(-58°F~+140°F)
	湿度	0~95% RH(non-condensing)
Input Voltage		PoE(IEEE802.3af, Class3)
消費電力	PoE	Max. 9.8W, typical 4.0W

Mechanical

カラー	白
材料	アルミニウム, Hard-coated dome
RAL Code	RAL9003
Product Dimensions	ø140x110.2mm(ø5.51x4.34")
Product Weight	850g(1.87lb)
Compatible Gang Box	シングル, Double, 4" Octagon

Certifications & Standards

EMC	FCC 47 CFR 15 Subpart B Class A, ICES-3(A)/NMB-3(A), CE/UKCA - EN55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3, VCCI CISPR 32 Class A, RCM AS-NZS CISPR 32 Class A
Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1, IEC 62471
環境	IEC/EN 63000, IEC 60529 IP66, IEC 62262 IK10, NEMA 250 type 4X

DORI (EN62676-4 standard)

Detect (25PPM/ 8PPF)	Wide	31.1m(102.02ft)
	Tele	133.9m(439.36ft)
Observe (63PPM/ 19PPF)	Wide	12.4m(40.81ft)
	Tele	53.6m(175.74ft)
Recognize (125PPM/ 38PPF)	Wide	6.2m(20.40ft)
	Tele	26.8m(87.87ft)
Identify (250PPM/ 76PPF)	Wide	3.1m(10.20ft)
	Tele	13.4m(43.94ft)


QNV-C6083R

2MP AI IR Vandal Dome Camera



CAD

Unit: mm [inch]

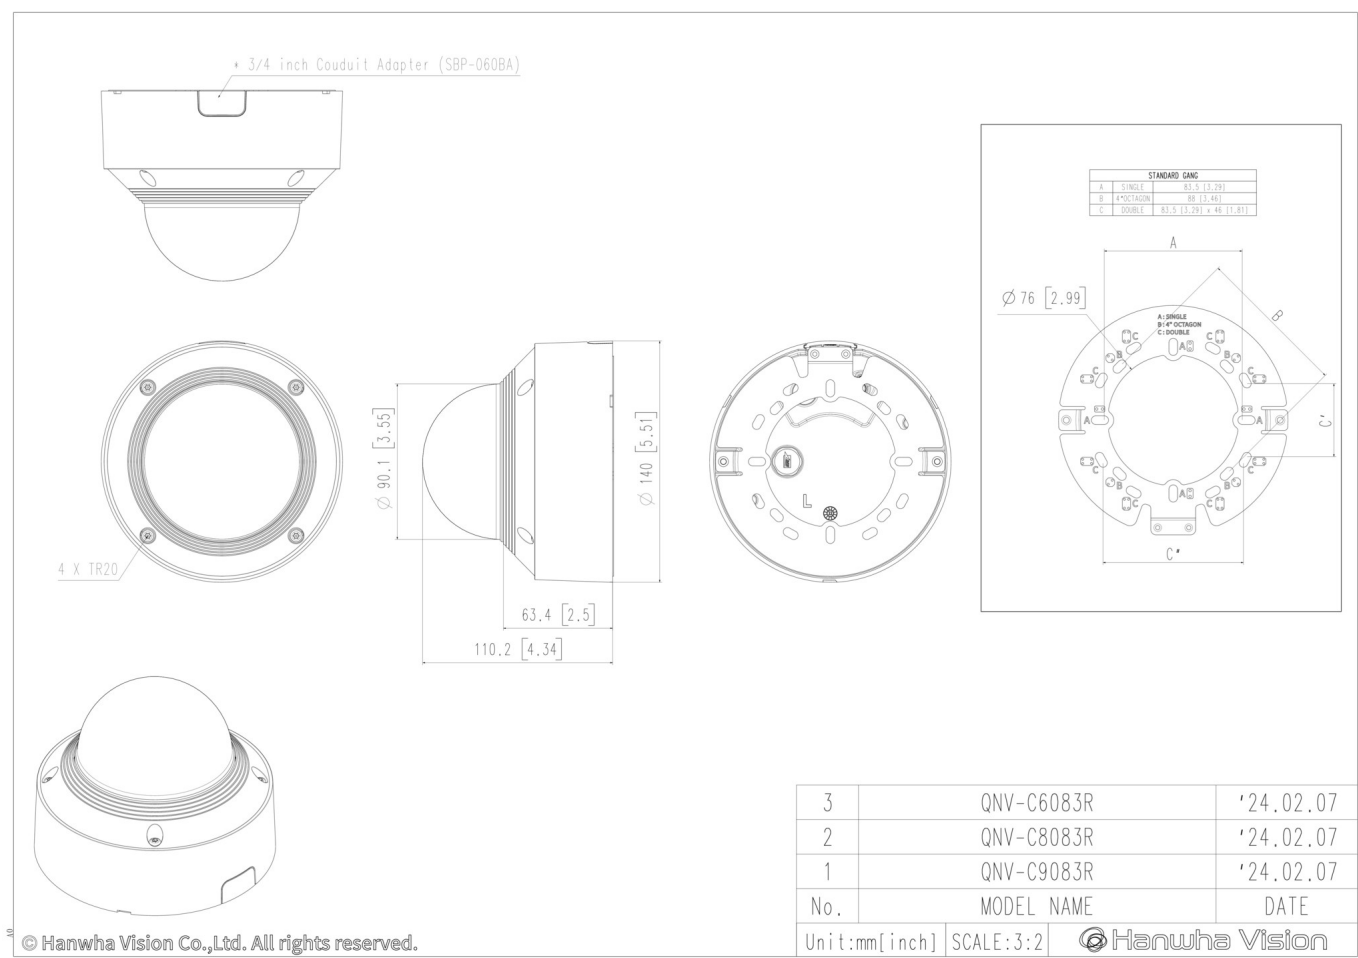

© Hanwha Vision Co.,Ltd. All rights reserved.