



EMC TEST REPORT For VCCI

Test Report No. : KES-EM-21T0448
Date of Issue : Jun. 09, 2021
Product name : Network Video Recorder
Model/Type No. : QRN-430S
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : May. 12, 2021
Test date : May. 16, 2021 ~ May. 17, 2021
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Ki Man, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0448
Page (2) of (31)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jun. 09, 2021	KES-EM-21T0448	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	System Configuration	7
1.6	Support Equipments	8
1.7	External I/O Cabling	8
1.8	EUT Operating Mode(s)	9
1.9	Configuration	9
1.10	Remarks when standards applied	10
1.11	Calibration Details of Equipment Used for Measurement	10
1.12	Test Facility	10
1.13	Laboratory Accreditations and Listings	10
2.0	Test Regulations.....	11
2.1	Conducted Emissions Mains Power Ports.....	13
2.2	Conducted Emissions at Telecommunication Ports.....	14
2.3	Radiated Electric Field Emissions(Below 1 GHz)	15
2.4	Radiated Electric Field Emissions(Above 1 GHz)	16
APPENDIX A – TEST DATA.....		17
Conducted Emissions at Mains Power Ports.....		17
Conducted Emissions at Telecommunication Ports		19
Radiated Electric Field Emissions(Below 1 GHz)		21
Radiated Electric Field Emissions(Above 1 GHz).....		22
Test Setup Photos and Configuration		23
Conducted Emissions at Mains Power Ports.....		23
Conducted Emissions at Telecommunication Ports		24
Radiated Electric Field Emissions(Below 1 GHz)		25
Radiated Electric Field Emissions(Above 1 GHz).....		26
EUT External Photographs		27
EUT Internal Photographs		28



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0448
Page (4) of (31)

1.0 General Product Description

Main Specifications of EUT are:

Display		
Video	Inputs	Max. 4CH
	Resolution	CIF ~ 8MP
	Protocols	sunapi, ONVIF
Live	Local Display	HDMI
	Multi Screen Display	[Local Monitor] 1 / 2V/ 2H / 3V / 4 / Sequence [Web] 1 / 2V/ 2H / 3V / 4
	Resolution	[Local Monitor] 8M(30fps), 1080p(120fps), 720P(120fps), D1(120fps)
Intelligent Analysis		
Search	Object image	N/A
Comparison	Event Trigger	N/A
Attribute (AI)	Person	N/A
	Face	N/A
	Vehicle	N/A
Performance		
System	Operating System	Linux
Record	Compression	H.265, H.264, MJPEG, WiseStream(H.265, H.264)
	Recording Bandwidth	50M bps
	Resolution	CIF ~ 8MP
	Mode	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark
	Event Trigger	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event
	Event Action	e-Mail, Event Push, PTZ Preset, Alarm Out, Buzzer, Monitor Out
Search & Play	Playback Bandwidth	Max 32Mbps
	User	Max. 4 Users (Local 1, Remote 3)
	Mode	Time, Event, Text, Export, ARB, Bookmark
	Simultaneous playback	Max 16CH - Set : 4CH - Remote : 4CH Per User
	Resolution	CIF ~ 8MP
	Fisheye De warping	N/A
	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down
Storage	Built-In	2TB ~ 6TB
	Internal HDD	1ea (Max 6TB)
	External	N/A
	RAID	N/A
Backup	File backup	BU/Exe(GUI), JPG/AVI(Web)
	Function	Multi channel(Upto 4 CH) Play, Date-Time/Title display
Sensor	I/O	N/A
Audio	Input/Output	4CH (network)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0448
Page (5) of (31)

Network			
Interface		4 Port PoE, RJ-45(10/100Mbps)	
Protocol		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)	
DDNS		Hanwha DDNS	
Transmission Bandwidth		50M bps	
Max Remote Users		Search (3), Live Unicast (10), Multicast (20)	
IP Version		IPv4/v6	
Security		IP address filtering, User access Log, 802.1x, Encryption	
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnam	
OS		Window 10, Mac OS X(10.13)	
Web Browser		Google Chrome, Mac Safari, Firefox, Edge	
Viewer Software	Type	WAVE (Sunapi 연동), SSM, Webviewer, Smart Viewer, Wisenet Mobile	
	CMS Support	Support SDK/CGI(SUNAPI) for integration to 3rd party VMS	
Functions			
Camera Setup	Register	Auto, Manual	
	Setup Items	IP address, Add profile edit, Bitrate, Camera MD setup (8 point polygon) Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS), Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage	
PTZ	Control	Via GUI, Webviewer	
	Preset	300 Presets	
Smart phone	Support Model	iOS, Android	
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)	
	Control	Live(4ch) : Multi-Profile Support Playback(4ch)	
	Max Remote Users	Search (3), Live Unicast (10)	
Redundancy	Failover	N+1	
	ARB	Yes	
Easy configuration			P2P(QR code)
System Control			Mouse, Web

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0448
Page (6) of (31)

Indicator/Interface		
Front	Indicator	LED(Status indicator) : - Power(1), Record(1), Network(1)
Connectors	HDMI	3840x2160 30Hz
	VGA	N/A
	Audio	N/A
	Ethernet	PoE RJ-45(LAN, 10/100) 4 ea ,RJ-45 1ea (WAN, 10/100)
	Alarm	N/A
	USB	2EA(Front 1 x USB 2.0, Rear 1 x USB 2.0)
	Storage	N/A
	Serial	N/A
	Reset	Switch(1EA, PW clear)
	Power Cord	DC Adaptor
	POE Budget	Max. 35W
System		
Log	Log List	Max. 100,000 (System, Event each log)
Environmental		
Operating Temperature / Humidity		+0°C to +40°C(+32°F to +104°F)
Humidity		20% ~ 85% RH
Noise		47 db
Electrical		
Power		100 ~ 240 VAC ±10%; 50/60 Hz
Power Consumption		최대 56W(1HDDs, PoE on)
Mechanical		
Color / Material		Black
Dimension (WxHxD)		W370.0 x H44.0 x D320mm (1U)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 100 V, 60 Hz ☐ PoE

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Network Video Recorder	QRN-430S	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT

1.5 System Configuration

Description	Model Number	Serial Number	Manufacturer	Remarks
Mouse	MOKJUO	-	Primax Electronics Ltd.	-
Adaptor	FSP065-DWAN3	-	Zhonghan Electronics (Shenzhen) Co.,Ltd	-
HDD	ST3000VX009	-	SEAGATE	3 TB



1.6 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Camera	QND-7080RN/EX	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	-
Notebook	ProBook4430s	-	HP	-
Notebook Adaptor	SeriesPPP0009H	-	CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD,	-
Monitor	SMT-2233	-	Weihai Daewoo Electronics Co., Ltd.	-
USB Memory	-	-	Sandisk	32 GB

1.7 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Video Recorder (EUT)	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	3.5	U
	USB	USB Memory	USB	-	-
	RJ-45 (PoE)	Camera	RJ-45 (PoE)	3.0	U
	HDMI	Monitor	HDMI	1.6	S
	USB	Mouse (EUT)	USB	1.8	U
	External Ground	Ground	External Ground	2.0	U

* Unshielded=U, Shielded=S


1.8 EUT Operating Mode(s)

Test Mode	operating
Operation	the test was conducted while checking the camera video output from the laptop and making sure that they operate normally while performing a ping test.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Techwin Co., Ltd.

1.9 Configuration

■ AC Main
 □ DC Main

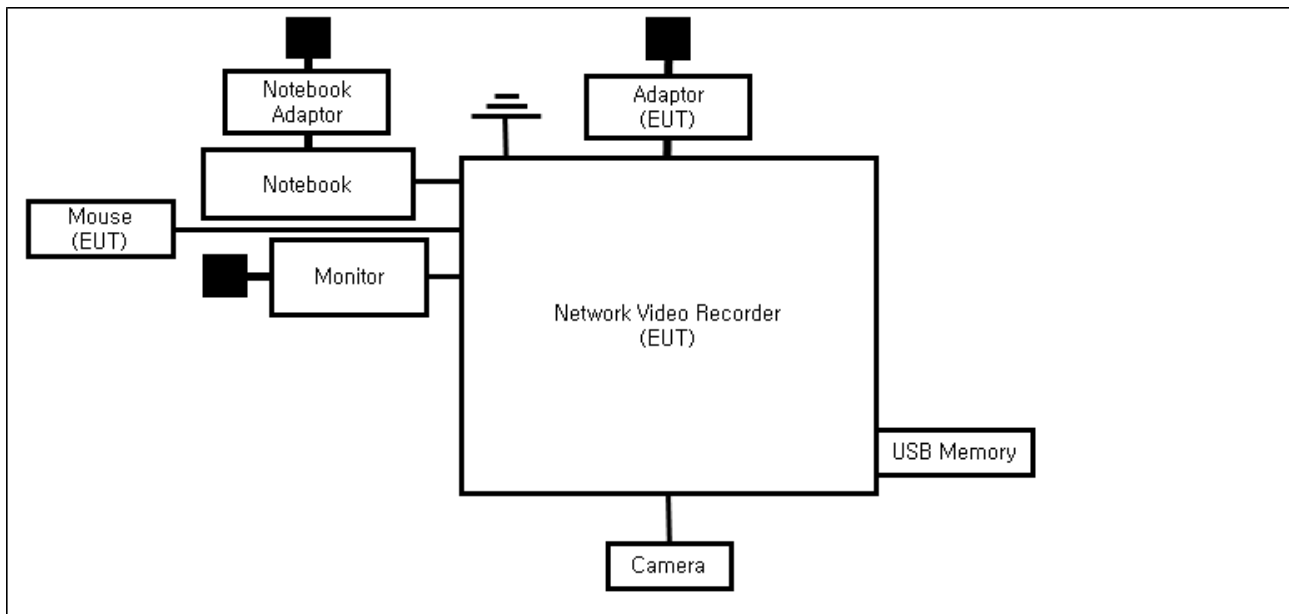

1.10 Remarks when standards applied

N/A

1.11 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.12 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2019

1.13 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547 :2009

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0448
Page (12) of (31)

-
- | | | |
|--|---|----------------------------------|
| ☒ VCCI-CISPR 32:2016 | ☒ Class A | ☐ Class B |
| ☐ AS/NZS CISPR32:2015 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2017 | ☐ Class A | ☐ Class B |
| ☐ IC Regulation ICES-003 Issue 7 | | |
| ☐ CAN/CSA CISPR 32:17 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2017 | ☐ Class A | ☐ Class B |
| ☐ RE- Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V2.2.3 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.1 Conducted Emissions Mains Power Ports

Test Date

May. 16, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021

Test Conditions

Temperature: (23,6 ± 0,1) °C

Relative Humidity: (43,7 ± 0,2) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Conducted Emissions at Telecommunication Ports

Test Date

May. 16, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021
☒	8-WIRE ISN CAT3,5	ENY81	R & S	100174	12, 30, 2021
☐	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	12, 30, 2021
☐	CDN	CDNS502A	TESEQ	40431	12, 29, 2021

Test Conditions

Temperature: (23,6 ± 0,2) °C

Relative Humidity: (43,7 ± 0,2) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

May. 16, 2021

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2021
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2022

Test Conditions

Temperature: (23,7 ± 0,2) °C
Relative Humidity: (44,0 ± 0,2) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

May. 17, 2021

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 05, 2021
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 07, 2022
☐	ATTENUATOR	8491A	HP	35496	03, 10, 2022
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

Test Conditions

Temperature: (23,6 ± 0,2) °C

Relative Humidity: (44,6 ± 0,2) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0448
Page (17) of (31)


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	QRN-430S
Phase:	L1
Mode:	
Operator Name:	KES

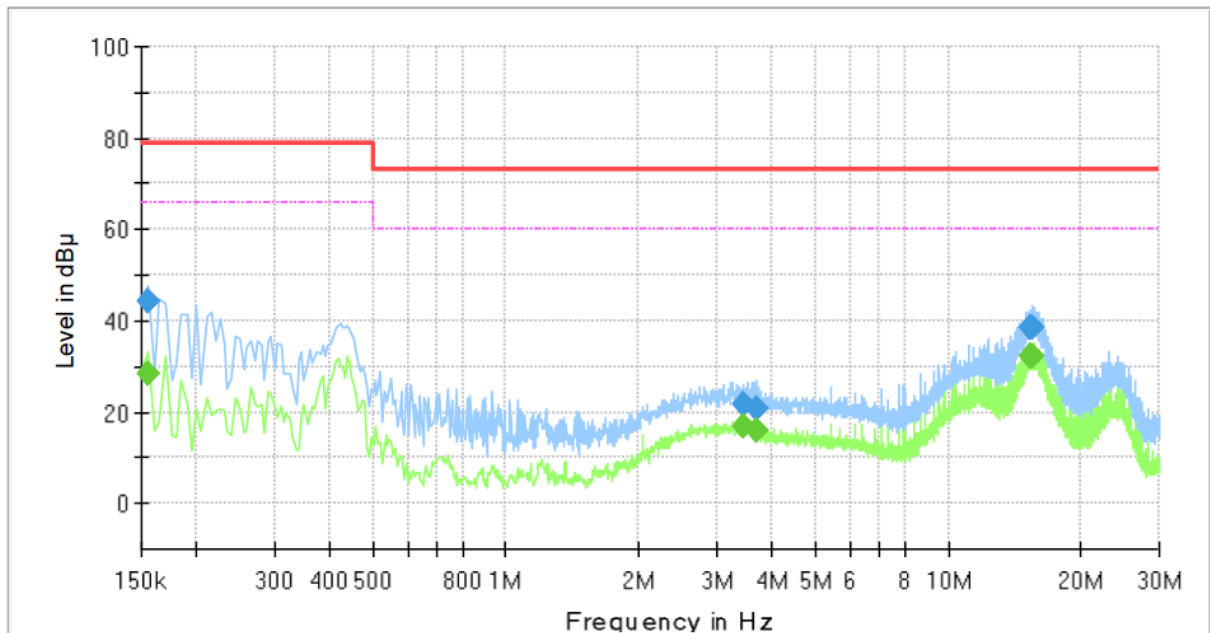

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	28.49	66.00	37.51	1000.0	9.000	L1	19.4
0.155000	44.04	---	79.00	34.96	1000.0	9.000	L1	19.4
3.460000	---	16.68	60.00	43.32	1000.0	9.000	L1	20.0
3.460000	21.70	---	73.00	51.30	1000.0	9.000	L1	20.0
3.695000	---	15.88	60.00	44.12	1000.0	9.000	L1	20.0
3.695000	20.64	---	73.00	52.36	1000.0	9.000	L1	20.0
15.365000	---	32.34	60.00	27.66	1000.0	9.000	L1	19.9
15.365000	38.29	---	73.00	34.71	1000.0	9.000	L1	19.9
15.455000	---	32.41	60.00	27.59	1000.0	9.000	L1	19.9
15.455000	38.58	---	73.00	34.42	1000.0	9.000	L1	19.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0448
Page (18) of (31)

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
Model No.: QRN-430S
Phase: N
Mode:
Operator Name: KES

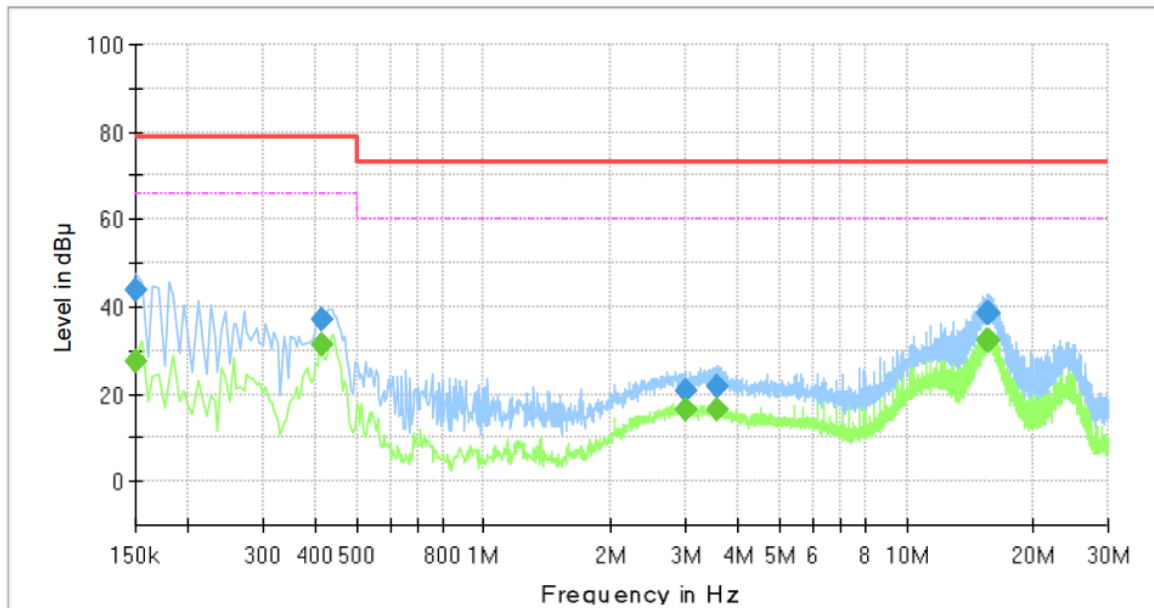

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	27.23	66.00	38.77	1000.0	9.000	N	19.4
0.150000	43.82	---	79.00	35.18	1000.0	9.000	N	19.4
0.415000	---	31.36	66.00	34.64	1000.0	9.000	N	19.6
0.415000	37.22	---	79.00	41.78	1000.0	9.000	N	19.6
3.010000	---	16.45	60.00	43.55	1000.0	9.000	N	20.1
3.010000	20.55	---	73.00	52.45	1000.0	9.000	N	20.1
3.580000	---	16.47	60.00	43.53	1000.0	9.000	N	20.0
3.580000	21.84	---	73.00	51.16	1000.0	9.000	N	20.0
15.580000	---	32.48	60.00	27.52	1000.0	9.000	N	19.9
15.580000	38.53	---	73.00	34.47	1000.0	9.000	N	19.9
15.625000	---	32.40	60.00	27.60	1000.0	9.000	N	19.9
15.625000	38.52	---	73.00	34.48	1000.0	9.000	N	19.9

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0448
Page (19) of (31)


Conducted Emissions at Telecommunication Ports

- LAN

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: QRN-430S
Mode : LAN
Speed : 100 Mbps
Operator Name: KES

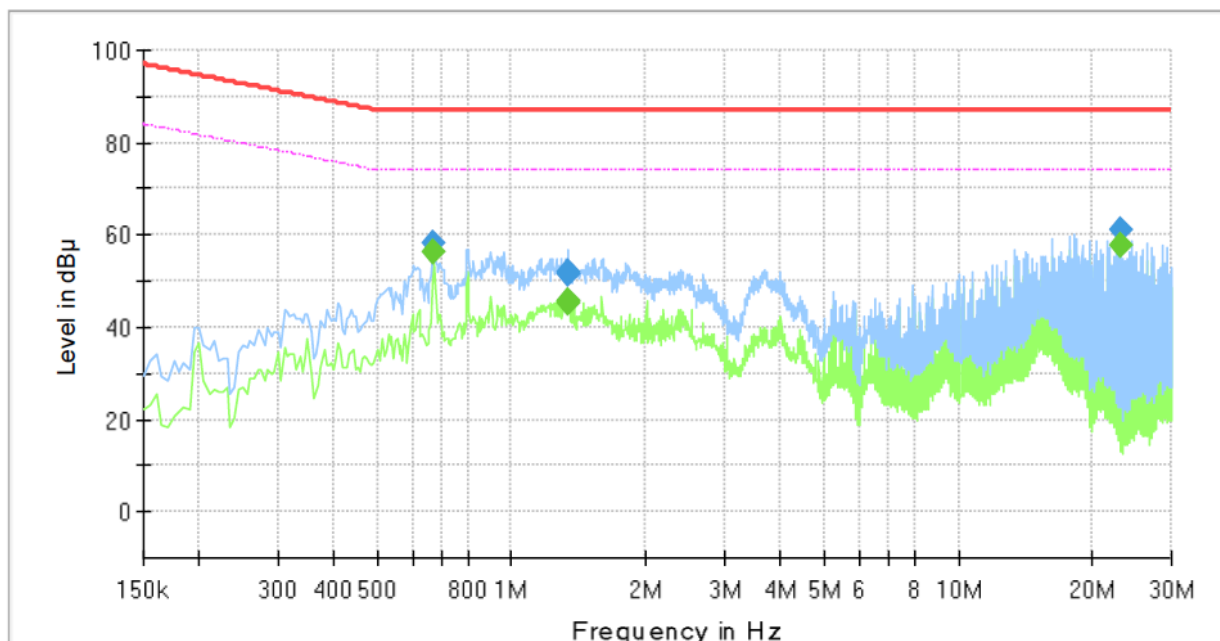

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.670000	---	56.36	74.78	17.64	1000.0	9.000	Single Line	19.8
0.670000	58.40	---	87.78	28.60	1000.0	9.000	Single Line	19.8
1.335000	---	45.18	74.00	28.82	1000.0	9.000	Single Line	20.1
1.335000	51.51	---	87.00	35.49	1000.0	9.000	Single Line	20.1
1.340000	---	45.90	74.00	28.10	1000.0	9.000	Single Line	20.1
1.340000	51.93	---	87.00	35.07	1000.0	9.000	Single Line	20.1
23.130000	---	57.72	74.00	16.28	1000.0	9.000	Single Line	20.1
23.130000	60.96	---	87.00	26.04	1000.0	9.000	Single Line	20.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:
KES-EM-21T0448
Page (20) of (31)

- PoE

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: QRN-430S
Mode : PoE
Speed : 100 Mbps
Operator Name: KES

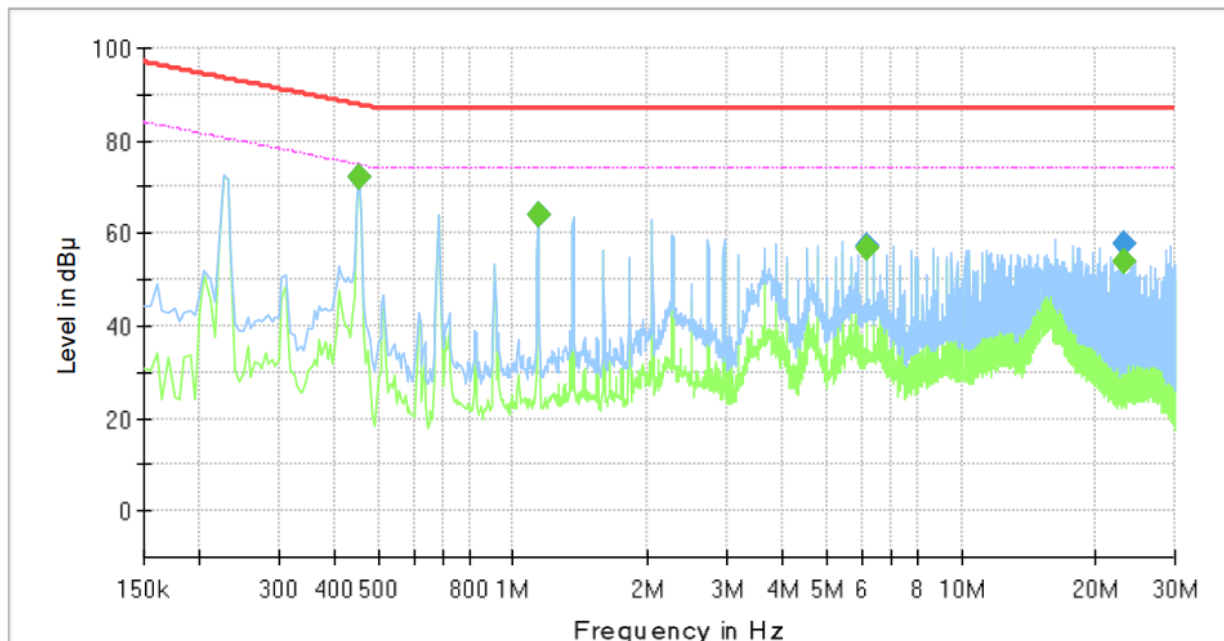

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.455000	---	72.05	74.78	2.73	1000.0	9.000	Single Line	19.8
0.455000	72.08	---	87.78	15.70	1000.0	9.000	Single Line	19.8
1.135000	---	64.18	74.00	9.82	1000.0	9.000	Single Line	20.0
1.135000	64.16	---	87.00	22.84	1000.0	9.000	Single Line	20.0
6.135000	---	56.60	74.00	17.40	1000.0	9.000	Single Line	19.3
6.135000	57.05	---	87.00	29.95	1000.0	9.000	Single Line	19.3
23.130000	---	53.88	74.00	20.12	1000.0	9.000	Single Line	20.1
23.130000	57.74	---	87.00	29.26	1000.0	9.000	Single Line	20.1

◆ Calculation

QuasiPeak [dBuV] / CAverage [dBuV] = Reading Value [dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0448

Page (21) of (31)

Radiated Electric Field Emissions(Below 1 GHz)

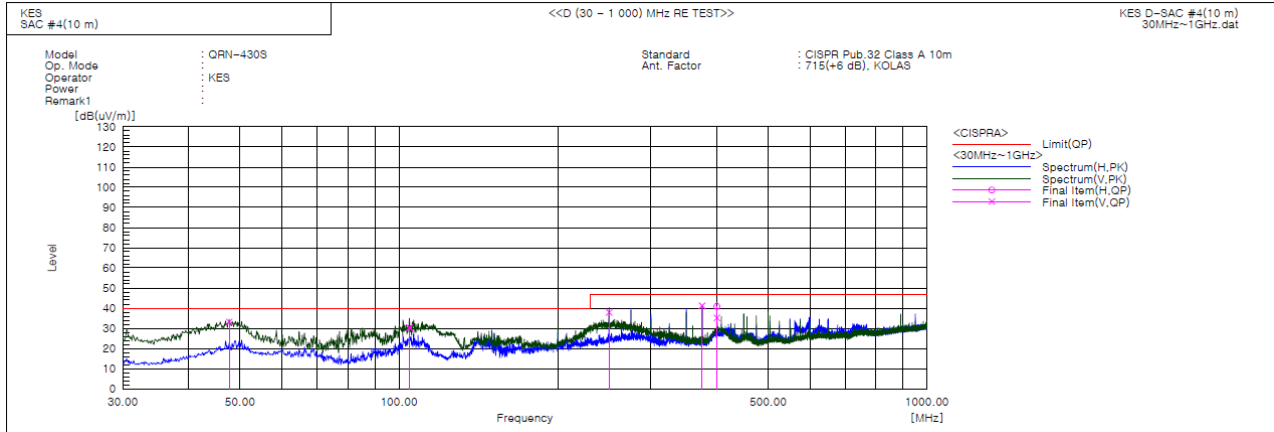

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	47.703	V	54.4	-21.2	33.2	40.0	6.8	100.0	189.0	
2	104.690	V	52.7	-22.4	30.3	40.0	9.7	222.0	133.0	
3	249.948	V	57.1	-19.1	38.0	47.0	9.0	100.0	352.0	
4	374.956	V	56.1	-14.8	41.3	47.0	5.7	152.0	61.0	
5	400.055	H	55.2	-14.3	40.9	47.0	6.1	261.0	73.0	
6	400.055	V	49.5	-14.3	35.2	47.0	11.8	152.0	317.0	

◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0448
Page (22) of (31)

Radiated Electric Field Emissions(Above 1 GHz)

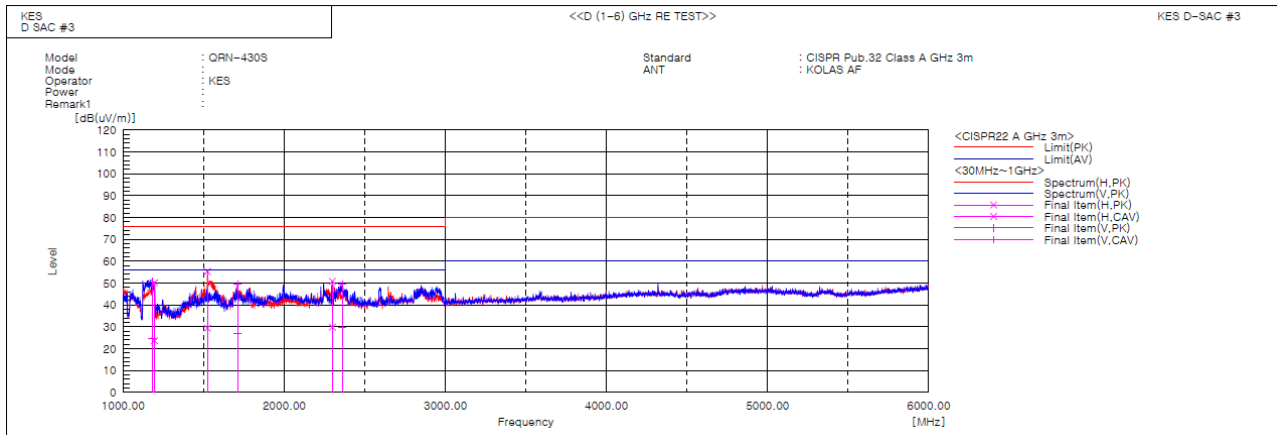

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1180.041	V	59.2	33.3	-8.5	50.7	24.8	76.0	56.0	25.3	31.2	100.0	10.8	
2	1194.859	H	58.6	32.0	-8.4	50.2	23.6	76.0	56.0	25.8	32.4	100.0	21.8	
3	1523.280	H	61.2	35.3	-5.9	55.3	29.4	76.0	56.0	20.7	26.6	100.0	60.9	
4	1710.140	V	53.4	31.1	-4.0	49.4	27.1	76.0	56.0	26.6	28.9	100.0	34.1	
5	2299.169	H	51.1	30.1	-0.2	50.9	29.9	76.0	56.0	25.1	26.1	100.0	61.1	
6	2359.699	V	49.3	29.5	0.1	49.4	29.6	76.0	56.0	26.6	26.4	100.0	55.2	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])


Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

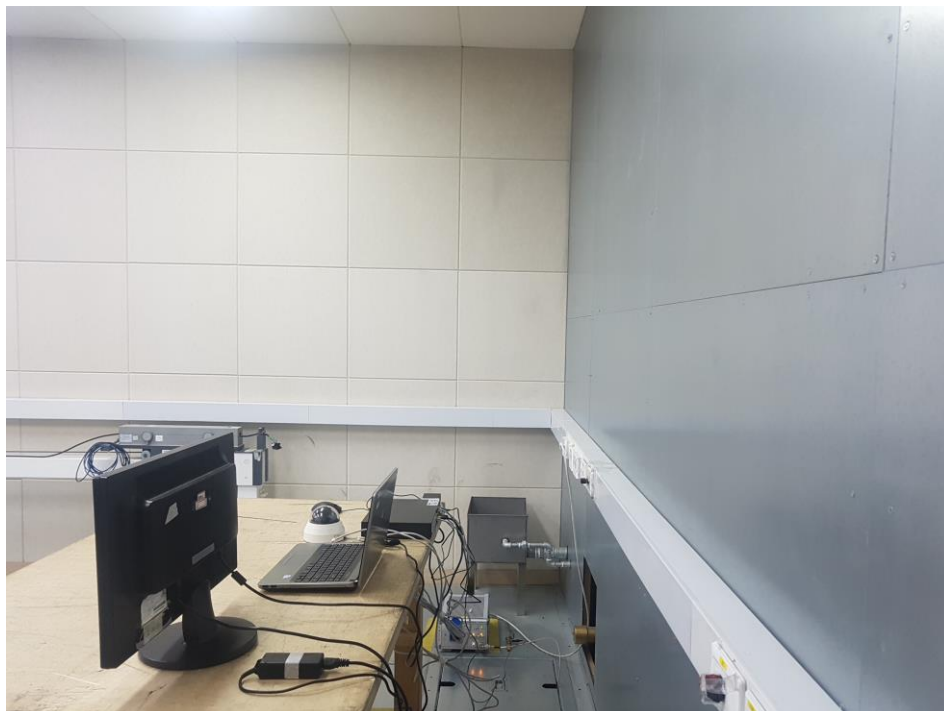


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Emissions at Telecommunication Ports




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

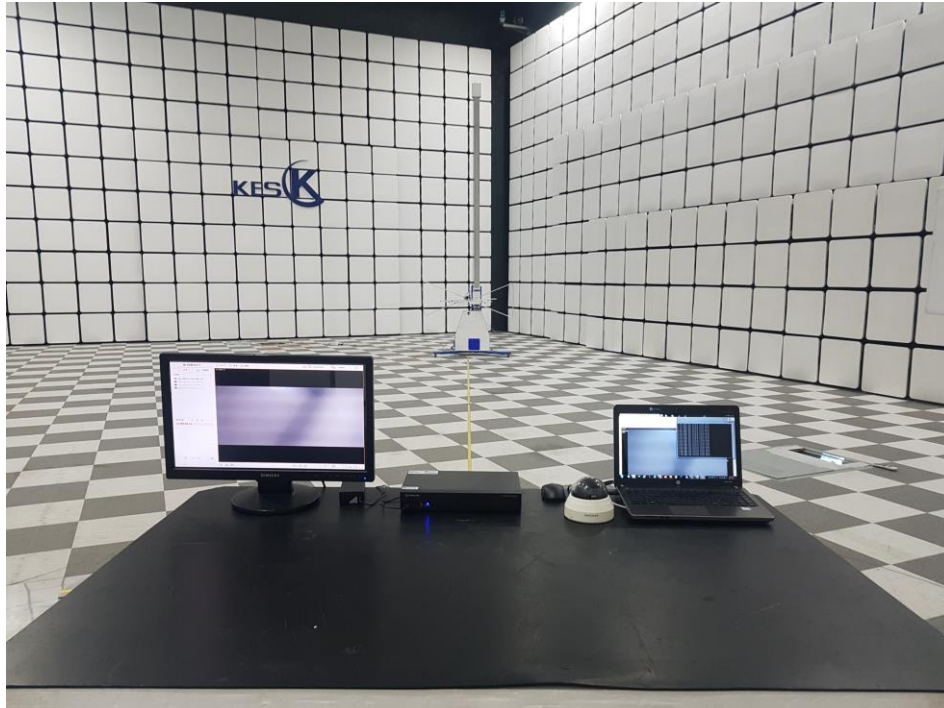

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

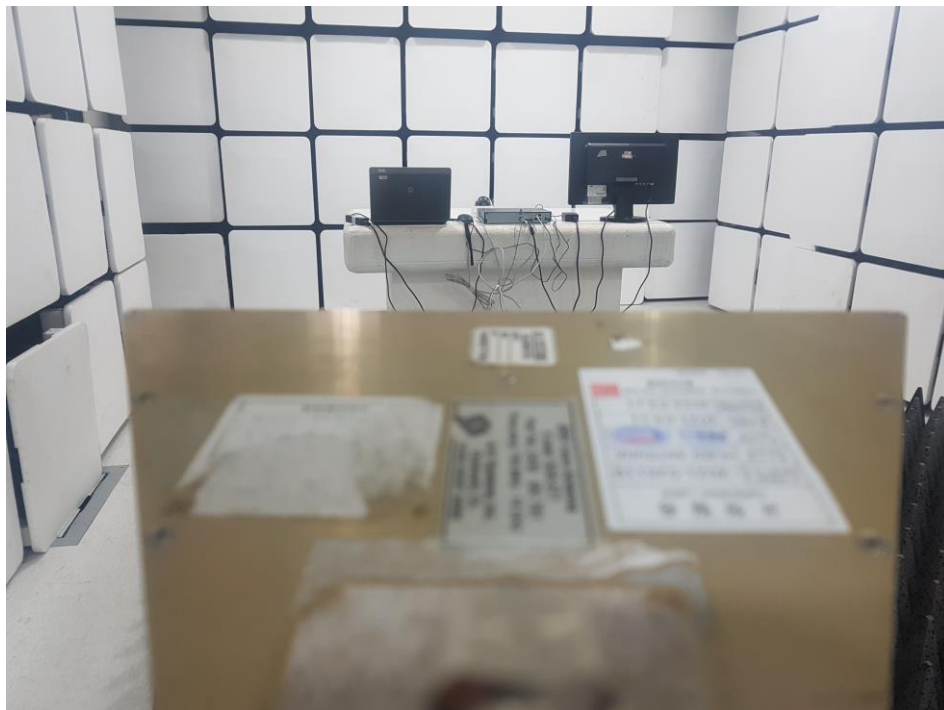

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board

(Top)

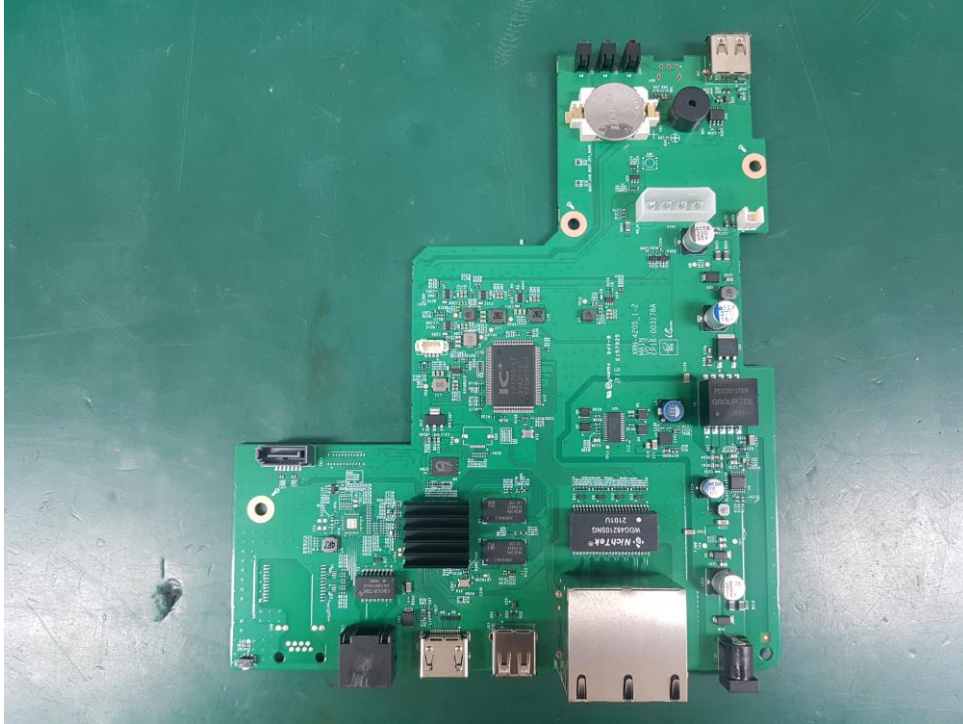

(Bottom)

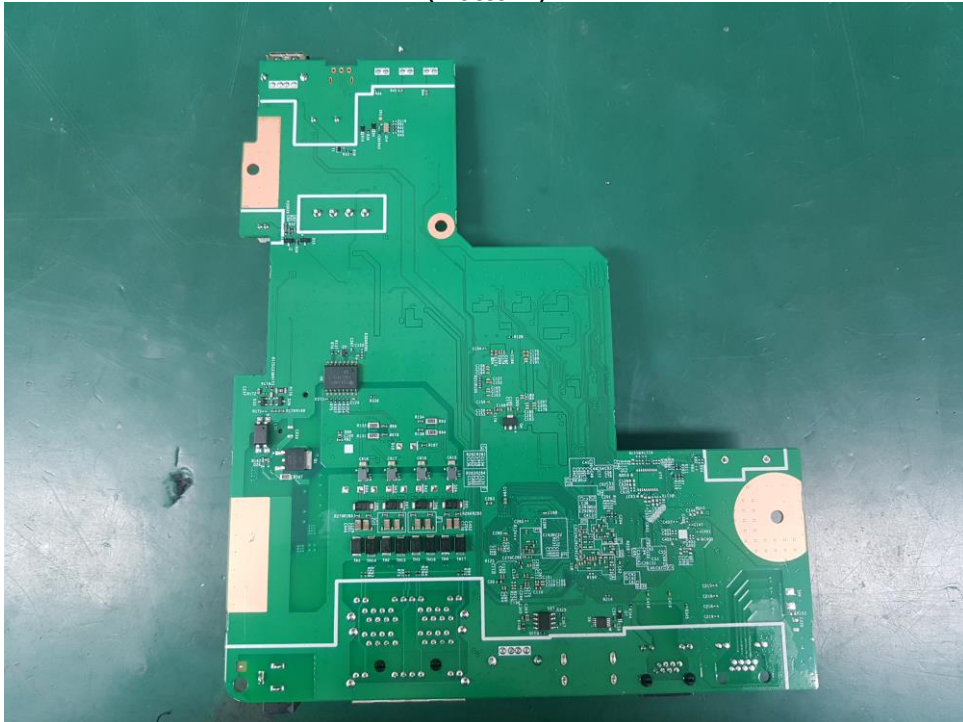

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – HDD

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

Label Photographs

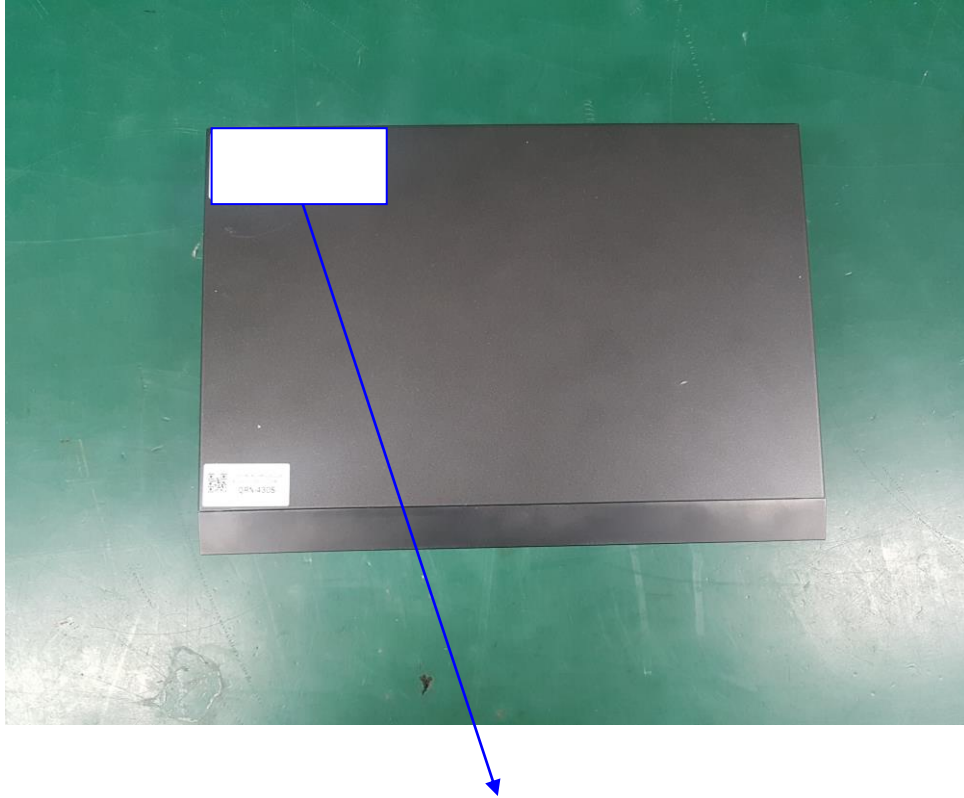

この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI-A