

QRN-830S

NVR de 8 canales 8MP 80Mbps H.265 hasta 6TB PoE

Key Features

- Hasta 8 canales, resolución 8 MP
- Grabación con cámara de red a 80 Mb/s máx.
- Salida HDMI
- Fácil conexión mediante el servicio P2P (conexión con código QR) con la aplicación Wisenet Mobile (para Android e IOS) y Wisenet Viewer gratuito.
- Compatible con compresión H.265, H.264 y MJPEG
- 1 unidad SATA (hasta 6 TB)
- 8 puertos ethernet PoE

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

QRN-830S

NVR de 8 canales 8MP 80Mbps
H.265 hasta 6TB PoE



Specifications

Display

Network camera	Inputs	Max. 8CH
	Resolution	8MP ~ CIF
	Protocols	SUNAPI, ONVIF
Decoding	Local Display	HDMI1: 3840x2160(30Hz), HDMI2: 1920x1080(60Hz)
	Multi Screen Display	[Single Monitor] Dynamic layout [Web] 1/ 2H/ 2V/ 3V/ 4/ 6/ 8/ 9
	Resolution	[Local Monitor] 8M(2ch@30fps), 1080p(8ch@30fps), 720p(8ch@30fps), D1(8ch@30fps)

Performance

Operating System	Embedded	Linux
Record	Compression	H.265, H.264, MJPEG
	Recording Bandwidth	Max. 80Mbps
	Resolution	8MP ~ CIF
	Mode	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark
	Event Trigger	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event, User Event
	Event Action	e-Mail, Event Push, PTZ Preset, Alarm Out, Buzzer, Monitor Out, FTP, SUNAPI Command, Shutdown
Search & Play	Playback Bandwidth	Max. 32Mbps
	User	Max. 4 Users (Local 1, Remote 3)
	Simultaneous playback	Max. 32CH(Local 8CH, Remote 8CH per user)
	Fisheye Dewarping	CMS
	Mode	Date & Time(Calendar), Event list, Text Search, Smart Search
	Resolution	CIF ~ 8MP
	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down
Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA 1ea(Max 6TB)
Backup	File backup	BU/Exe/AVI(GUI), JPG/AVI(Network)
	Function	Multi channel(Up to 8CH) Play, Date-Time/Title display

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Network

Protocol		IPv4, IPv6, TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS		Hanwha DDNS
Transmission Bandwidth		Max. 80Mbps
Audio	Input/Output	8 CH(network)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way
Max Remote Users		Search(3), Live Unicast(10), Multicast(20)
Security		IP address filtering, User access Log, 802.1x, Encryption Device certificate(Hanwha Techwin Root CA), Signed firmware
Web viewer	Supported OS	Windows 10, macOS 11
	Supported browser	Google Chrome, Microsoft Edge, Mac Safari
Viewer Software		WAVE, SSM, Webviewer, Wisenet Viewer, Wisenet mobile Support CGI(SUNAPI) for integration to 3'rd party VMS

Function

Camera Setup	Register	Auto, Manual
	Item	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup (4, 8 point polygon) Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS),, Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
PTZ	Control	Via GUI, Webviewer
	Preset	300 Presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live: Multi-Profile Support, Multi Channel Playback
	Max. Remote Users	Search(3), Live Unicast(10)
Redundancy	Failover	N+1
	ARB	Support
Easy configuration		P2P(QR code)

Interface

Front	Indicator	Power, Record, Network
Storage		OK
Reset		Support
HDMI		1EA
Ethernet		PoE+ RJ-45 8EA (LAN, 10/100), RJ-45 2ea (LAN/WAN 1Gbps)
USB		2EA(Front 2 x USB2.0)
Power inlet		DC Adaptor

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

System

Log	Log List	Max. 100,000 (System Log, Event Log each)
System Control		Mouse, Keyboard, Web
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnamese

Environmental

Operating Temperature	0°C to +40°C(32°F to 104°F)
Operating Humidity	20% ~ 85% RH

Electrical

Power Input	54VDC/1.55A
Power Consumption	Max. 84W(287 BTU with 1HDD, PoE ON)
PoE Budget	65W

Mechanical

Color / Material	Black / Metal
Dimension	300.0 x 47.6 x 238.9 mm (11.81 x 1.87 x 9.41 inch)
Weight	1.32Kg(2.91lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


QRN-830S

NVR de 8 canales 8MP 80Mbps
H.265 hasta 6TB PoE



CAD

Unit: mm [inch]

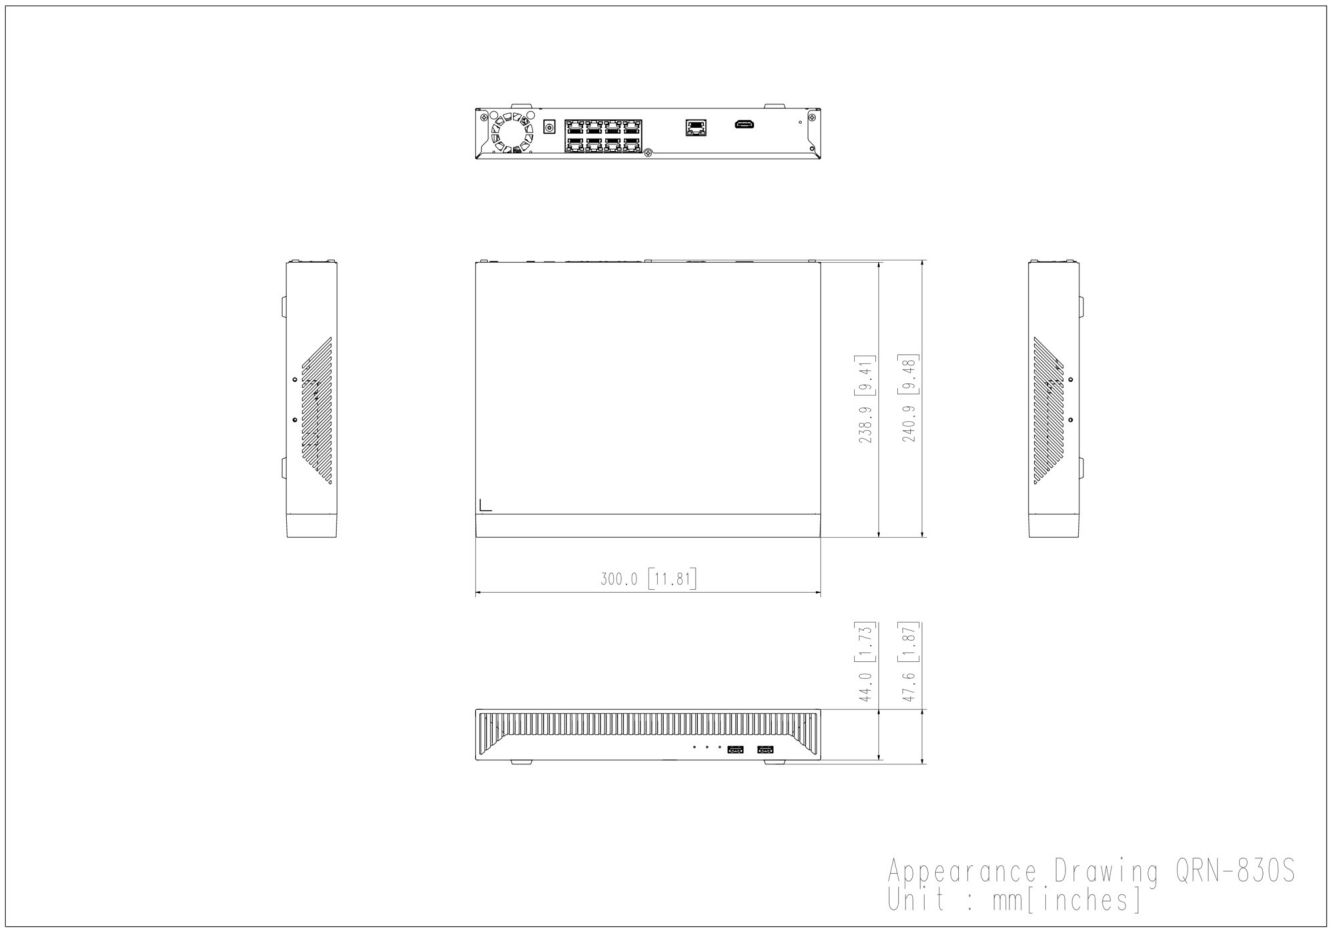

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.