

SBO-BPM0

Uchwyt obrotowy do kamer Mono BCR

Key Features

- Materiał: stal nierdzewna (SUS316L)
- Rozmiar śruby montażowej (śruba sześciokątna): 6mm
- Maks. obciążenie: 5kg
- Kąt regulacji: 0 ~ 120
- Obsługiwane produkty: TNS-7000M

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

SBO-BPM0

Uchwyt obrotowy do kamer Mono BCR



Specifications

Mechaniczne

Kolor	Silver
Materiał	Stainless(SUS316L)
Wymiary / waga produktu	W55mm * H63mm * D59mm / 190g
Kąt regulacji	0 ~ 120°
Rozmiar śruby montażowej	Hexagonal screw, 6mm
Maks. obciążenie	5kg
Obsługiwane produkty	TNS-7000M

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


SBO-BPM0

Uchwyt obrotowy do kamer Mono BCR



CAD

Unit: mm [inch]

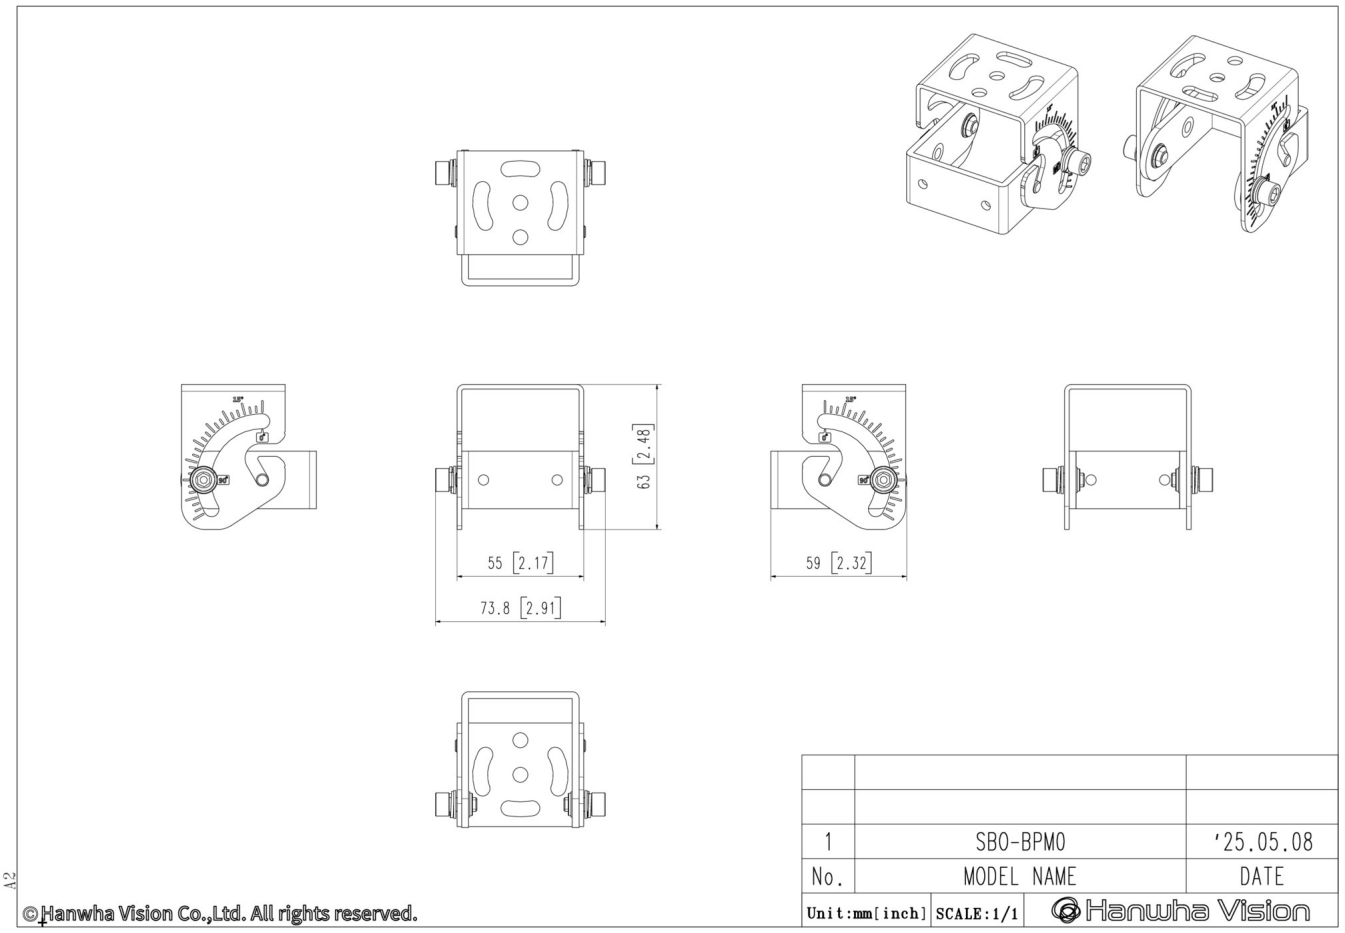

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.