

TESTING CERTIFICATE

EMC Compliance Ltd. 480-5 Sin-dong, Yeongtong-gu, Suwon-city, Gyeonggi-do, 443-390, Korea TEL: 82 31 336 9919 FAX: 82 505 299 8311	Certificate No.: EMC-CE-4240 Page(1) / (28) Pages	 
--	--	---

1. Applicant

Name: Samsung Techwin Co., Ltd.
 Address: #42 Seongju-Dong, Changwon-Shi,
 Kyungsangnam-Do, Korea
 Date of Receipt: August 12, 2013

2. Manufacturer

Name#1: Samsung Techwin Co., Ltd.
 Name#2: TIANJIN SAMSUNG TECHWIN
 OPTO-ELECTRONIC CO., LTD

3. Use of Report:

Completed report

4. Test Sample:

CCTV Camera, SCV-3083P

5. Date of Test:

August 14, 2013

6. Test method used:

AS/NZS CISPR 22:2009, Class A

7. Testing Environment:


Temperature: (27.0) °C,
 Relative Humidity: (56) % R.H.

8. Test Results:

Refer to page 11 ~ page 20
 (Measurement uncertainty: Refer to page 6)

This result shown in this report refer only to the sample(s) tested unless otherwise stated.

This Test Report cannot be reproduced, except in full, without the written approval of
 EMC Compliance Laboratory.

Affirmation	Tested by  Name: CHO, MOON-SUP	Technical Manager  Name: YEOM, HAN-SEOK
-------------	---	---

The above test certificate is the accredited test results by Korea Laboratory Accreditation Scheme, which signed the ILAC-MRA.

2013. 08. 20
EMC Compliance Ltd.
 Accredited by KOLAS, Republic of KOREA

Contents

1. Applicant information	3
2. Laboratory information	4
3. Test system configuration.....	5
3.1 Operation environment	5
3.2 Measurement Uncertainty.....	6
4. Description of E.U.T.	7
4.1 General information.....	7
4.2 Product description	8
4.3 Auxiliary equipments.....	8
4.4 Test configuration	9
4.5 Operating conditions.....	9
5. Summary of test results	10
5.1 Summary of EMI emission test results	10
6. Test results	11
6.1 Radiated Emission	11
7. E.U.T. photographs.....	21

1. Applicant information

Applicant: Samsung Techwin Co., Ltd.
Address: #42 Seongju-Dong, Changwon-Shi,
Kyungsangnam-Do, Korea
Telephone: +82-70-7147-8361
Fax: +82-31-277-2784
E-mail: js2002.kang@samsung.com
Contact name: **Kang Jei Soon**

Manufacturer#1: Samsung Techwin Co., Ltd.
Address: #42 Seongju-Dong, Changwon-Shi,
Kyungsangnam-Do, Korea
Telephone: +82-70-7147-8361
Fax: +82-31-277-2784
E-mail: js2002.kang@samsung.com
Contact name: **Kang Jei Soon**

Manufacturer#2: TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONIC CO., LTD
Address: No.11 Weiliu Road. Micro-Electronic Industrial Park
Jingang Road Tianjin 300385, China

2. Laboratory information

Address

EMC compliance Ltd.

480-5 Sin-dong, Yeongtong-gu, Suwon-city, Gyeonggi-do, 443-390, Korea

Telephone Number: 82 31 336 9919

Facsimile Number: 82 505 299 8311


FCC CAB.: KR0040

VCCI Registration No. : R-3327, G-198, C-3706, T-1849

Industry Canada Registration No.: 8035A

KOLAS NO.: 231

SITE MAP

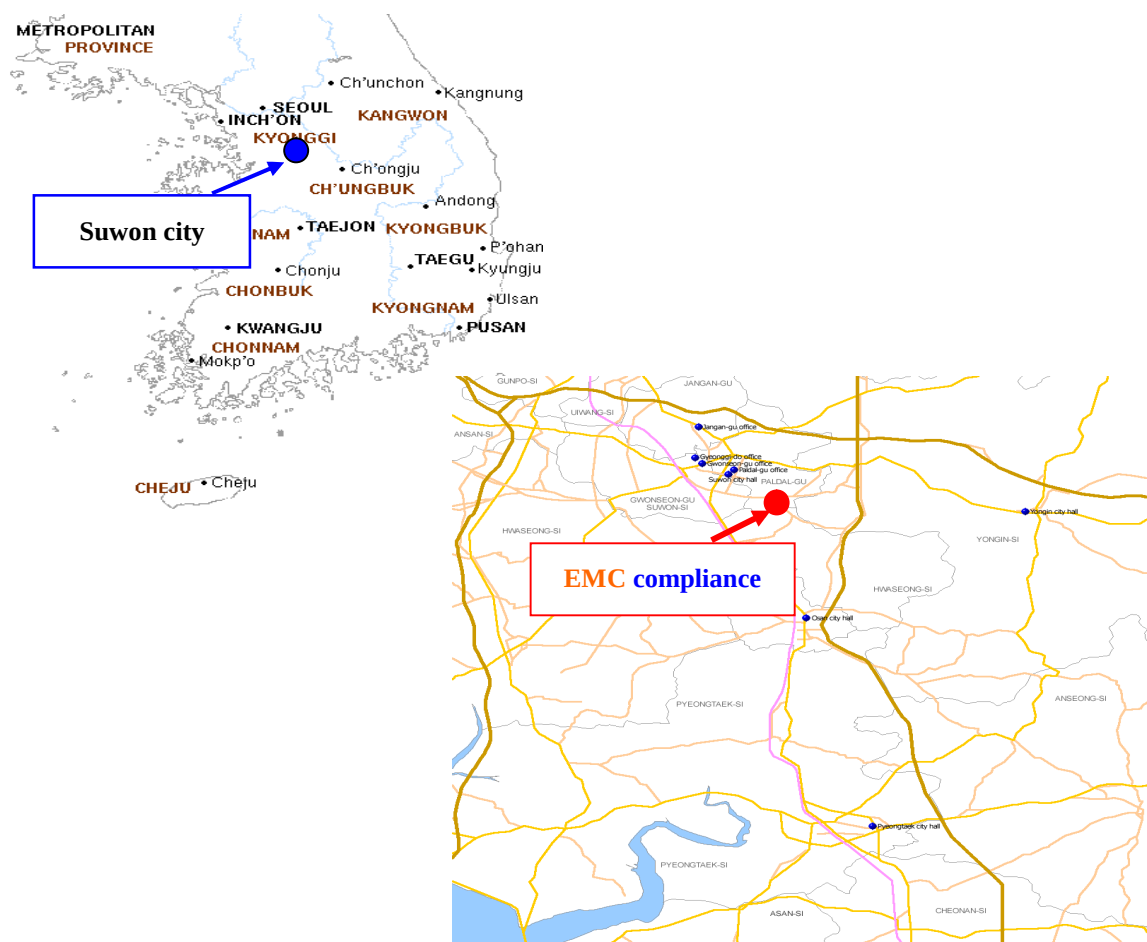

3. Test system configuration

3.1 Operation environment

	Temperature	Humidity	Pressure
Chamber(10 m) :	27 °C	56 % R.H.	-

Test site

These testing items were performed following locations;

Test item	Test site
Conducted Emission	Shielded Room
Radiated Emission	10 m Chamber

3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability. Based on CISPR 16-4-2, the measurement uncertainty level with a 95 % confidence level was applied.

Conducted emission measurement (C.L: Approx 95 %, k = 2)		
Shielded Room (CE#1)	9 kHz ~ 150 kHz: ± 3.82 dB 150 kHz ~ 30 MHz: ± 3.43 dB	
Shielded Room (CE#2)	9 kHz ~ 150 kHz: ± 3.82 dB 150 kHz ~ 30 MHz: ± 3.43 dB	
Shielded Room (CE#3)	9 kHz ~ 150 kHz: ± 4.00 dB 150 kHz ~ 30 MHz: ± 3.63 dB	
Radiated Emission measurement (C.L: Approx 95 %, k = 2)		
10 m Chamber (#F4)	30 MHz ~ 300 MHz	3 m: + 4.56 dB, - 4.58 dB 10 m: + 4.56 dB, - 4.56 dB
	300 MHz ~ 1 000 MHz	3 m: + 4.84 dB, - 4.85 dB 10 m: + 4.71 dB, - 4.72 dB
	1 GHz ~ 6 GHz	3 m: + 6.19 dB, - 6.20 dB
10 m Chamber (#F2)	30 MHz ~ 300 MHz	3 m: + 4.86 dB, - 4.88 dB 10 m: + 4.86 dB, - 4.86 dB
	300 MHz ~ 1 000 MHz	3 m: + 4.98 dB, - 4.99 dB 10 m: + 4.85 dB, - 4.87 dB
	1 GHz ~ 6 GHz	3 m: + 6.19 dB, - 6.20 dB

4. Description of E.U.T.

4.1 General information

Video	SCV-3083N	SCV-3083P
Imaging Device	1/3" Super HAD CCD (Double Scan)	
Total Pixels	811(H) x 508(V)	795(H) x 596(V)
Effective Pixels	768(H) x 494(V)	752(H) x 582(V)
Scanning System	2 : 1 Interface	
Synchronization	Internal/Line Lock	
Frequency	H : 15.734KHz / V : 59.94Hz	H : 15.625KHz / V : 50Hz
Horizontal Resolution	Color : 700 TV lines(ER mode) , B/W : 700 TV lines	
Min. Illumination	Color : 0.3Lux (50IRE@F1.2) , 0.0006Lux(Sens-up, x512) B/W : 0.01Lux(50IRE@F1.2) , 0.00002Lux(Sens-up, x512)	
S / N Ratio	52dB (AGC off, Weight on)	
Video Output	CVBS : 1.0 Vp-p / 75Ω composite	
UTP Output	-	
Lens Type	2.8 ~ 10mm (3.6x) motorized varifocal	
Focal Length (Zoom Ratio)	1:1.2(Wide) ~ 2.8(Tele)	
Max. Aperture Ratio	H: 102° (Wide) ~ 28° (Tele) / V: 73° (Wide) ~ 21° (Tele)	
Angular Field of View	0.2m	
Min. Object Distance	-	
Focus Control	-	
Zoom Movement Speed	-	
Lens Type	DC Auto Iris	
Mount Type	Board Type	
Pan / Tilt	0° ~ 355°	
Pan Range	-	
Pan Speed	0° ~ 90°	
Tilt Range	-	
Tilt Speed	0° ~ 355°	
Rotate Range	-	
Preset	-	
Preset Accuracy	-	
Auto Tracking	-	
Operational	English, French, German, Spanish, Italian, Chinese, Russian Polish, Czech, Romanian, Serbian, Swedish, Danish, Turkish, Portuguese	
On Screen Display	Multi-language Support by Coaxial Cable English, Japanese, Spanish, French, PortugueseKorean	
Camera Title	Off / On (Displayed 15 characters)	
Day & Night	Auto (ICR) / External / Color / B/W	
Backlight Compensation	Off / User BLC / HLC / SSDR / WDR	
Wide Dynamic Range	128x (52dB)	160x (54dB)
Contrast Enhancement	SSDR	
Digital Noise Reduction	SSNR III (Off / On)	
Digital Image Stabilization	Off / On	
Motion Detection	Built-in	
Privacy Masking	Off / On (12 programmable zones)	
Sens-up (Frame Integration)	2x ~ 512x	
Gain Control	Off / Low / High	
White Balance	ATW / Outdoor / Indoor / Manual / AWC (1,700K° ~ 11,000K°)	
Electronic Shutter Speed	1/60 ~ 1/120,000 sec	1/50 ~ 1/120,000 sec
Digital Zoom	Off / On (1x ~ 16x)	
Reverse	Off / H-Rev / V-Rev / HV-Rev	
Profile	Basic, Day & Night, Backlight, ITS, Indoor, User	
VPS	Off / On	
Intelligent Video	Fixed_Moved, Area, FenceDetection, Counting	
PIP	Off / On	
Schedule	-	
Alarm	1 Out	
Communication	Coaxial Control (SPC-300 Compatible)	
Protocol	Coax : Pelco-C (Coaxitron)	
Environmental	Operating Temperature / Humidity : -50°C ~ +50°C (+14°F ~ +122°F) / Less than 90% RH	
Ingress Protection	IP66	
Electrical	Input Voltage : Dual (24VAC±10% & 12VDC±10%), Built-in Fan/Heater(24VAC±10%)	
Power Consumption	TBD	
Mechanical	Color / Material : Light Gray / Aluminum, Plastic (Dome Cover : Clear)	
Dimension (WxH)	Φ137 x 106mm	
Weight	TBD	


4.2 Product description

Type of product	CCTV Camera
Model name (Basic)	SCV-3083P
Model name (Variant)	-
Difference	-
Trade name	-
Serial no	-
Testing voltage	DC 12 V , AC 24 V
Product rating	DC 12 V , AC 24 V
Internal clock frequency	Above 108 MHz
Note	* AC/DC adaptor was not provided by the manufacturer. * AC/AC adaptor was not provided by the manufacturer.

4.3 Auxiliary equipments

Type	Model / Part #	Serial number	Manufacturer
Monitor	PM24KO	YER8HVDBA00052A	SAMSUNG
JIG	-	-	-
AC/DC Adaptor (DC 12 V)	DAD12050STW	EP06-000191A	Dream Electronics
AC/AC Adaptor (AC 24 V)	DRL-241500AC	Z4404007401A	Dream Electronics

4.4 Test configuration

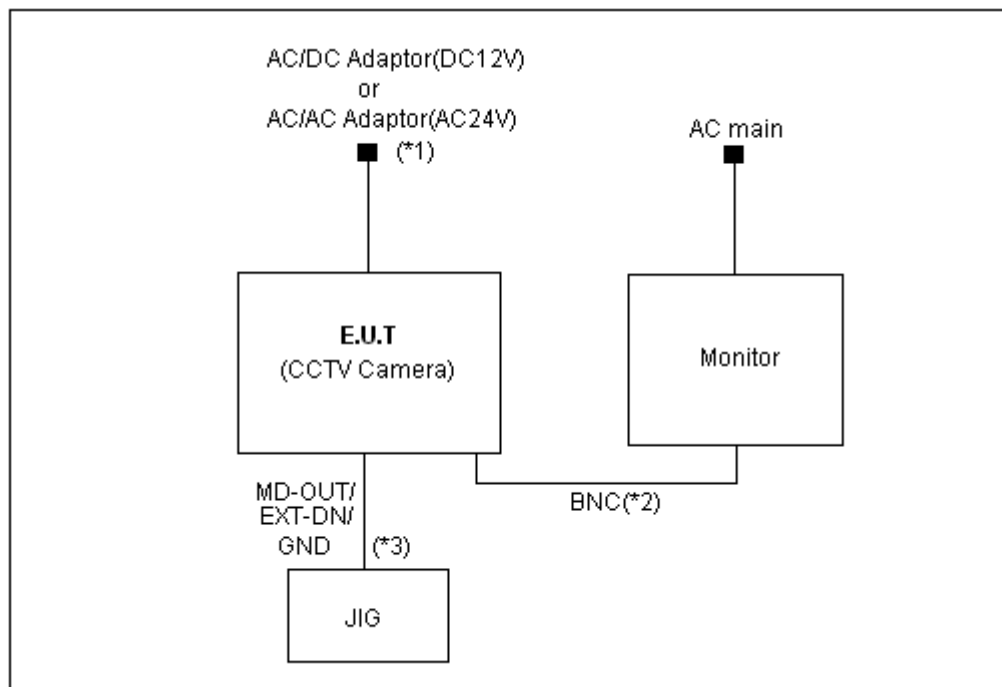

Note	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	EUT (CCTV Camera)	Power	AC/DC Adaptor or AC/AC Adaptor	Power	1.5	Non-Shield
2		BNC	Monitor	BNC	3.0	Shield
3		MD-OUT/ EXT-DN/ GND	JIG	MD-IN/ EXT-DN/ GND	3.0	Non-Shield

4.5 Operating conditions

The EUT was configured as normal intended use.

Test mode	Normal operating
1	Check the video output with monitor.

* Note: 2 types of powers are available for the product, that are DC 12 V , AC 24 V .

Therefore, tests were performed for 2 different types of powers.

5. Summary of test results

5.1 Summary of EMI emission test results

Applied	Test items	Test method	Result
☐	Conducted Emission	AS/NZS CISPR 22:2009, Class A	N/A
☒	Radiated Emission	AS/NZS CISPR 22:2009, Class A	11 Page ~ 20 Page

6. Test results

6.1 Radiated Emission

Test specification	AS/NZS CISPR 22:2009, Class A		
Testing voltage	DC 12 V, AC 24 V		
Test facility	10 m Chamber (#F2)		
Test distance	10 m, 3 m		
Date	2013. 08. 14		
Temperature (°C)	27 °C	Humidity (% R.H.)	56 % R.H.
Remarks	Complied		

6.1.1 Limits of radiated emission measurement

☒ Limits below 1 GHz

Frequency MHz	Class A dB μ V/m @ 10 m	Class B dB μ V/m @ 10 m
30 ~ 230	40	30
230 ~ 1 000	47	37

☒ Limits above 1 GHz

Frequency MHz	Class A @ 3 m		Class B @ 3 m	
	Average limit dB μ V/m	Peak limit dB μ V/m	Average limit dB μ V/m	Peak limit dB μ V/m
1 ~ 3	56	76	50	70
3 ~ 6	60	80	54	74

Note - The lower limit applies at the transition frequency.

6.1.2 Measurement procedure

The test was done at a 10 m chamber with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables were folded back and forth forming a bundle 0.3 m to 0.4 m long and were hanged at a 0.4 m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

6.1.3 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
Test Receiver	ESCI7	100732	R&S	2014.02.18	☒
Test Receiver	ESCI	100001	R&S	2014.07.25	☐
Test Receiver	ESCI	100710	R&S	2013.11.06	☐
Bi-Log Antenna	VULB 9168	440	SCHWARZBECK	2013.10.04	☒
Amplifier	310N	293004	SONOMA INSTRUMENT	2013.11.06	☒
3 dB Attenuator	8491B	22981	HP	2014.03.19	☒
Antenna Mast	MA4000-EP	303	Innco Systems	-	☒
Turn Table	DT2000S-1t	079	Innco Systems	-	☒
Amplifier	8449B	3008A02343	AGILENT	2013.11.06	☒
Horn ANT	3115	00086706	ETS	2013.11.21	☒
Spectrum Analyzer	FSP7	100289	R&S	2013.12.14	☐

6.1.4 Sample calculation

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follow:

$$\text{Result} = \text{M.R} + \text{C.F}(\text{A.F} + \text{C.L} + 3 \text{ dB Att} - \text{A.G})$$

M.R = Meter Reading

C.F = Correction Factor

A.F = Antenna Factor

C.L = Cable Loss

A.G= Amplifier Gain

3 dB Att = 3 dB Attenuator



If M.R is 30 dB, A.F 12 dB, C.L 5 dB, 3 dB, A.G 35 dB

The result is



$$30 + 12 + 5 + 3 - 35 = 15 \text{ dB}\mu\text{V/m}$$

6.1.5 Photographs of test setup


* 30 MHz ~ 1 GHz (DC 12 V)

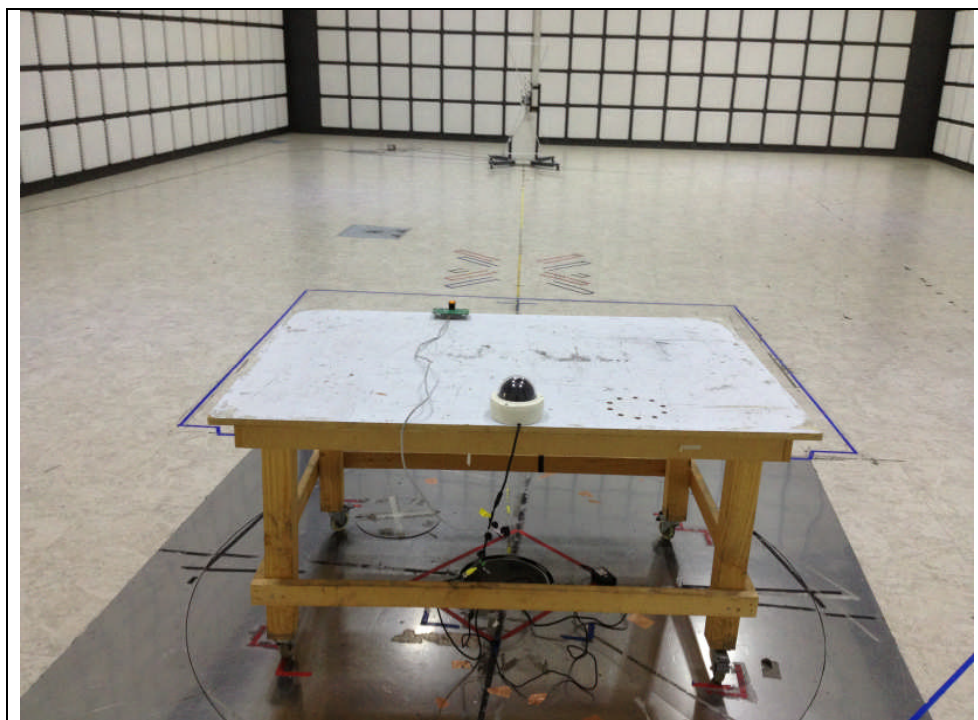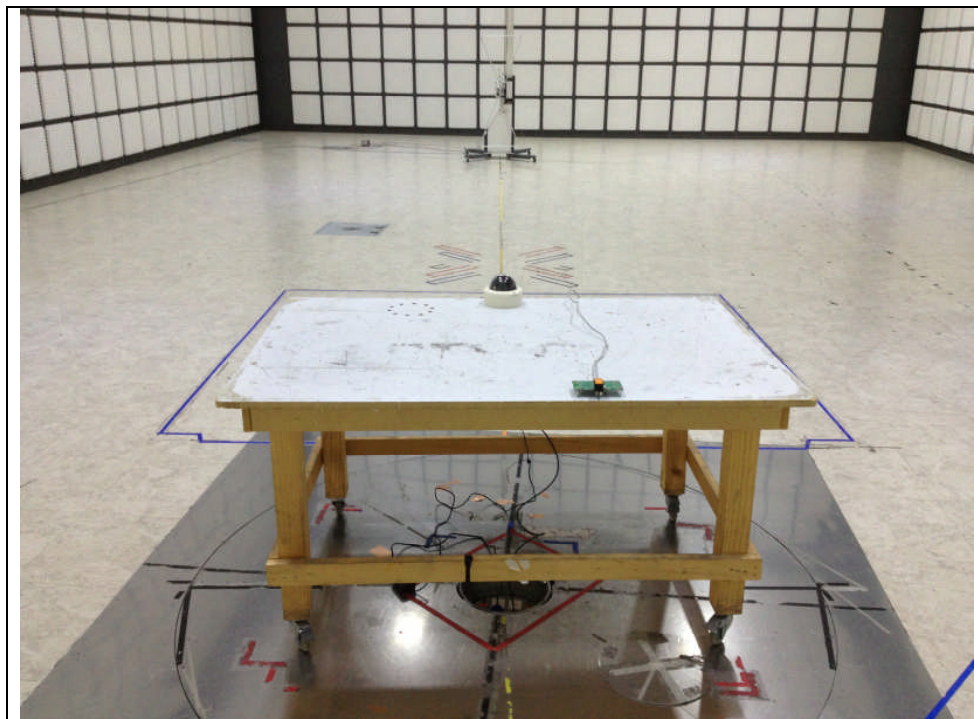



* 1 GHz ~ 6 GHz(DC 12 V)

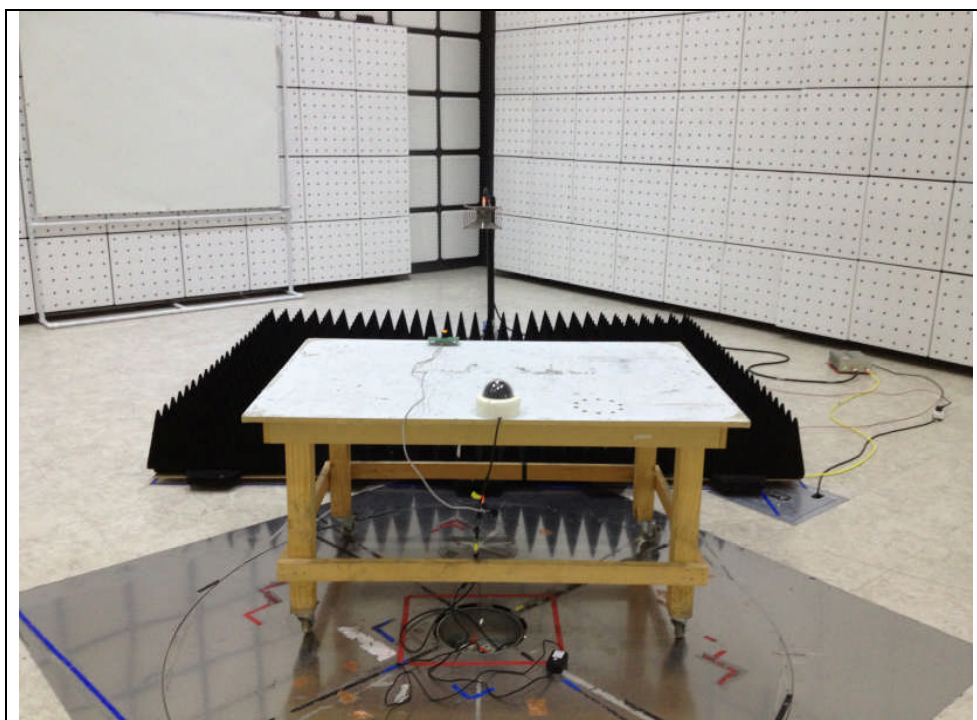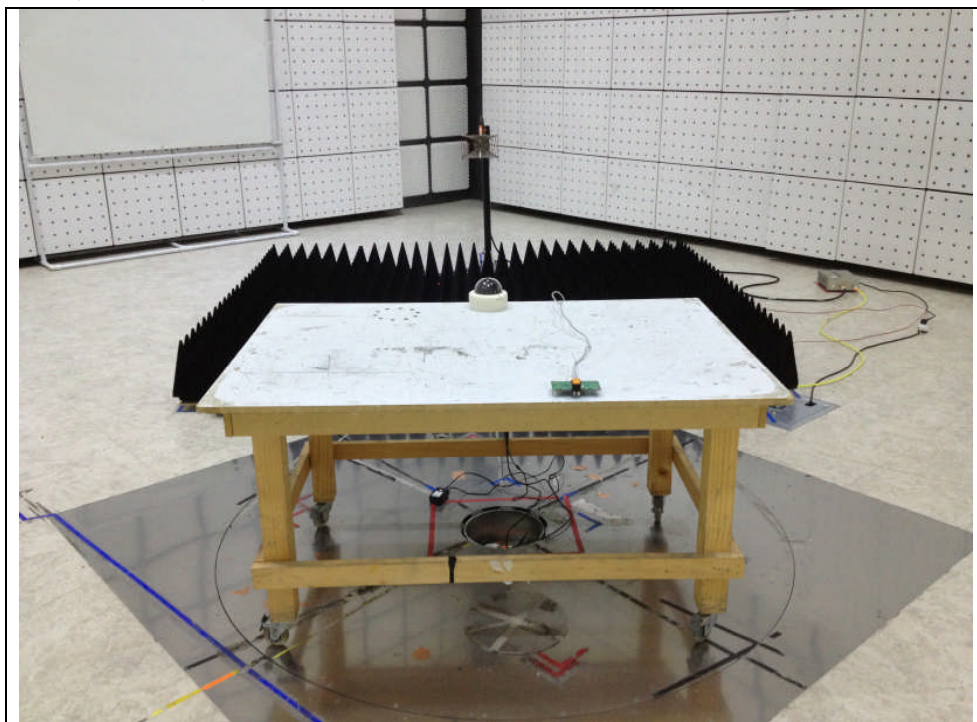

* 30 MHz ~ 1 GHz (AC 24 V)

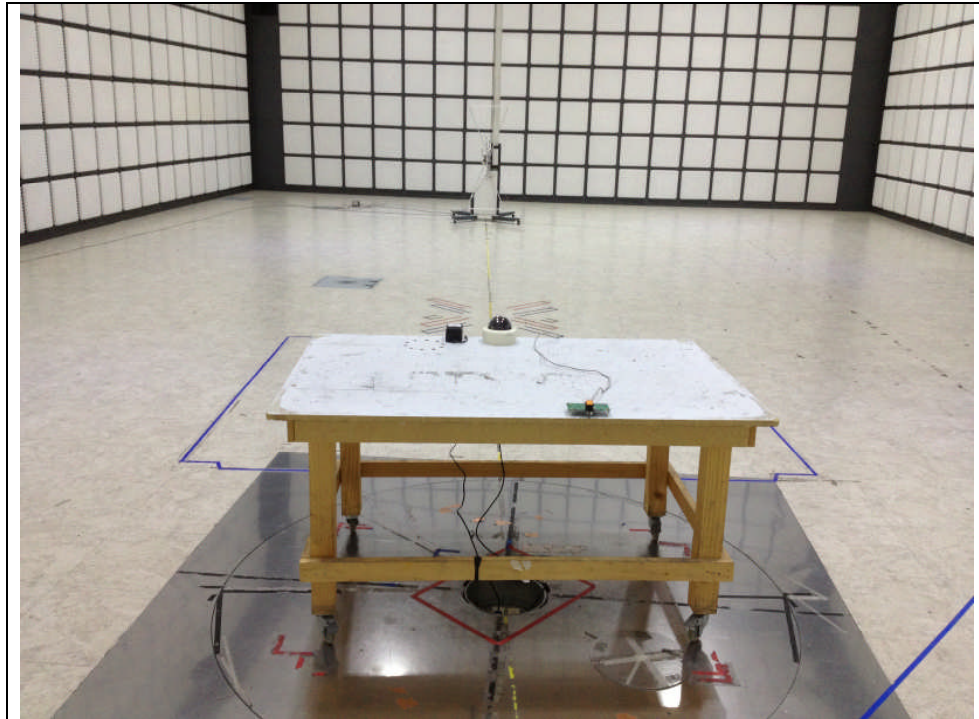


* 1 GHz ~ 6 GHz(AC 24 V)

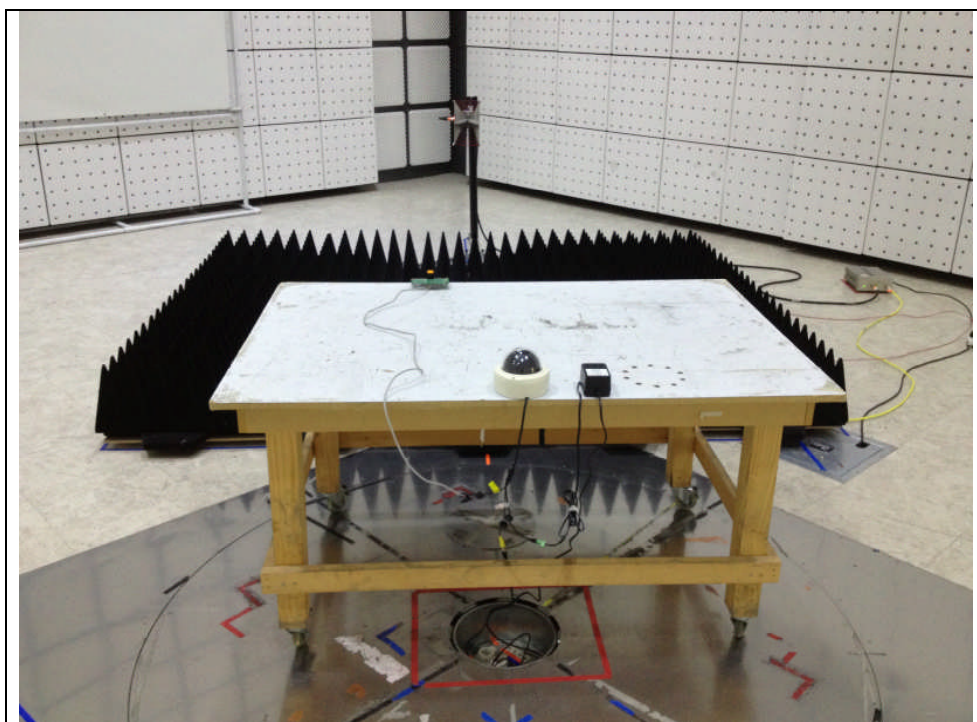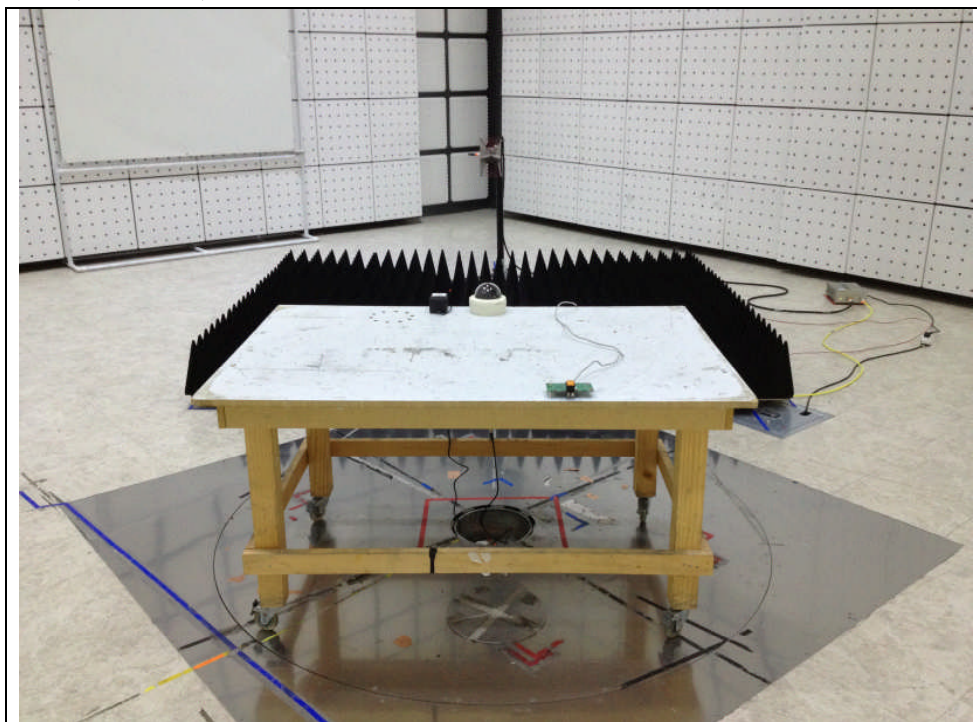

6.1.6 Radiated emission measurement result

* Graph and Data


* 30 MHz ~ 1 GHz (DC 12V)

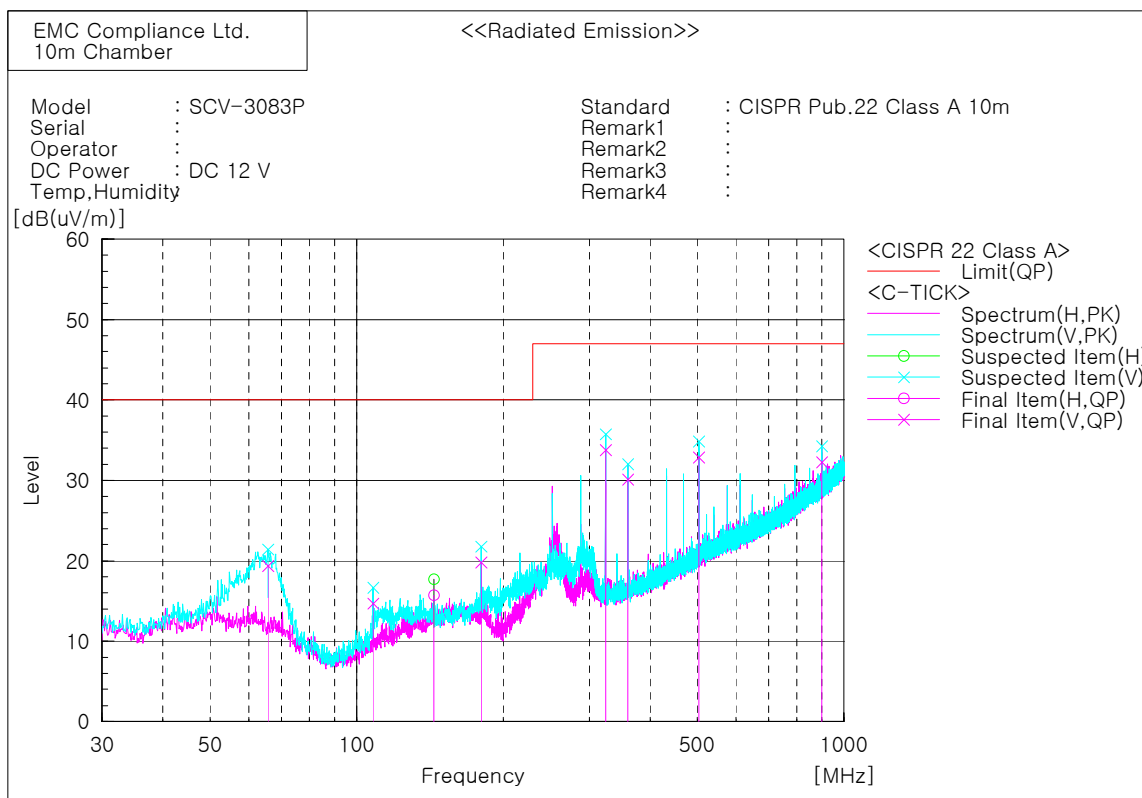

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	65.769	V	33.5	-14.1	19.4	40.0	20.6	100.0	208.2	
2	107.964	V	31.0	-16.3	14.7	40.0	25.3	199.0	64.4	
3	143.975	H	28.5	-12.8	15.7	40.0	24.3	400.0	105.6	
4	179.986	V	33.2	-13.4	19.8	40.0	20.2	100.0	188.7	
5	324.031	V	43.3	-9.5	33.8	47.0	13.2	100.0	20.1	
6	360.043	V	38.6	-8.5	30.1	47.0	16.9	100.0	325.6	
7	503.966	V	37.3	-4.4	32.9	47.0	14.1	400.0	107.4	
8	900.090	V	28.2	4.1	32.3	47.0	14.7	199.0	34.4	


* 1 GHz ~ 6 GHz (DC 12V)

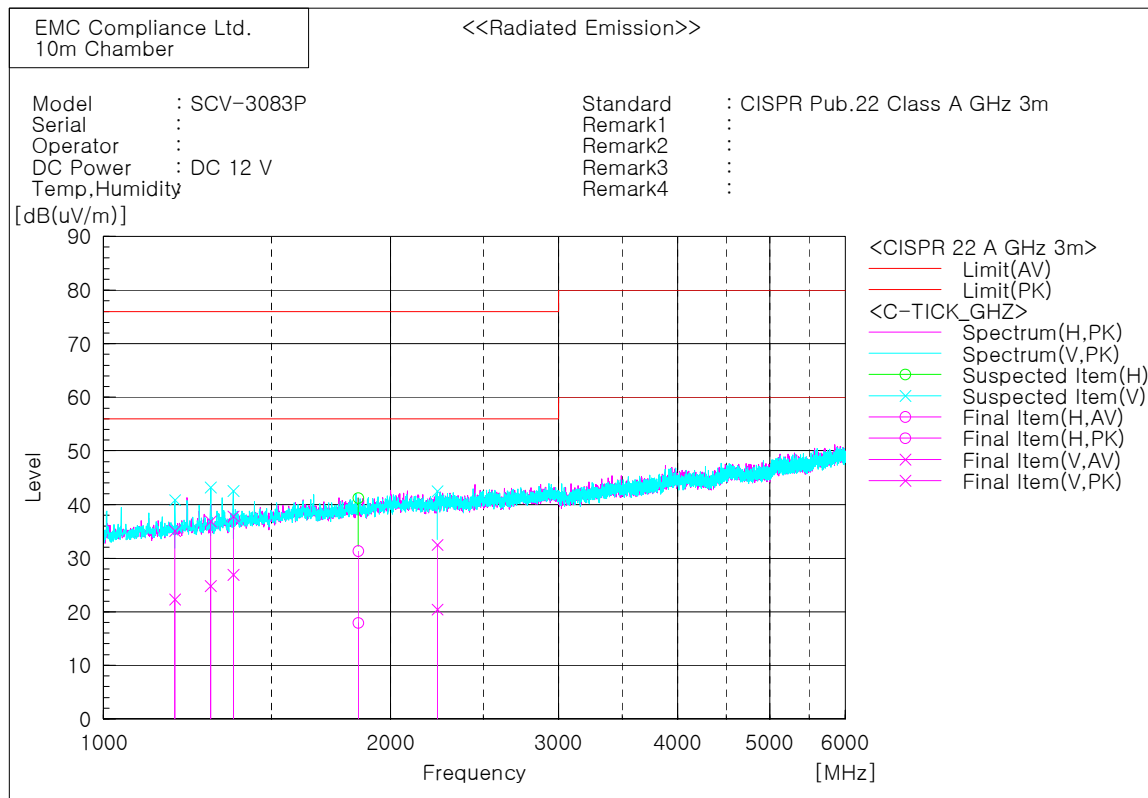

Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	c.f [dB(1/m)]	Result AV [dB(uV/m)]	Result PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1187.500	V	29.4	42.2	-7.1	22.3	35.1	56.0	76.0	33.7	40.9	100.0	166.2	
2	1295.897	V	31.0	43.1	-6.2	24.8	36.9	56.0	76.0	31.2	39.1	100.0	11.4	
3	1367.500	V	32.2	43.1	-5.3	26.9	37.8	56.0	76.0	29.1	38.2	100.0	348.0	
4	1850.625	H	20.2	33.6	-2.3	17.9	31.3	56.0	76.0	38.1	44.7	100.0	171.5	
5	2240.000	V	21.2	33.3	-0.8	20.4	32.5	56.0	76.0	35.6	43.5	100.0	230.9	


* 30 MHz ~ 1 GHz (AC 24 V)

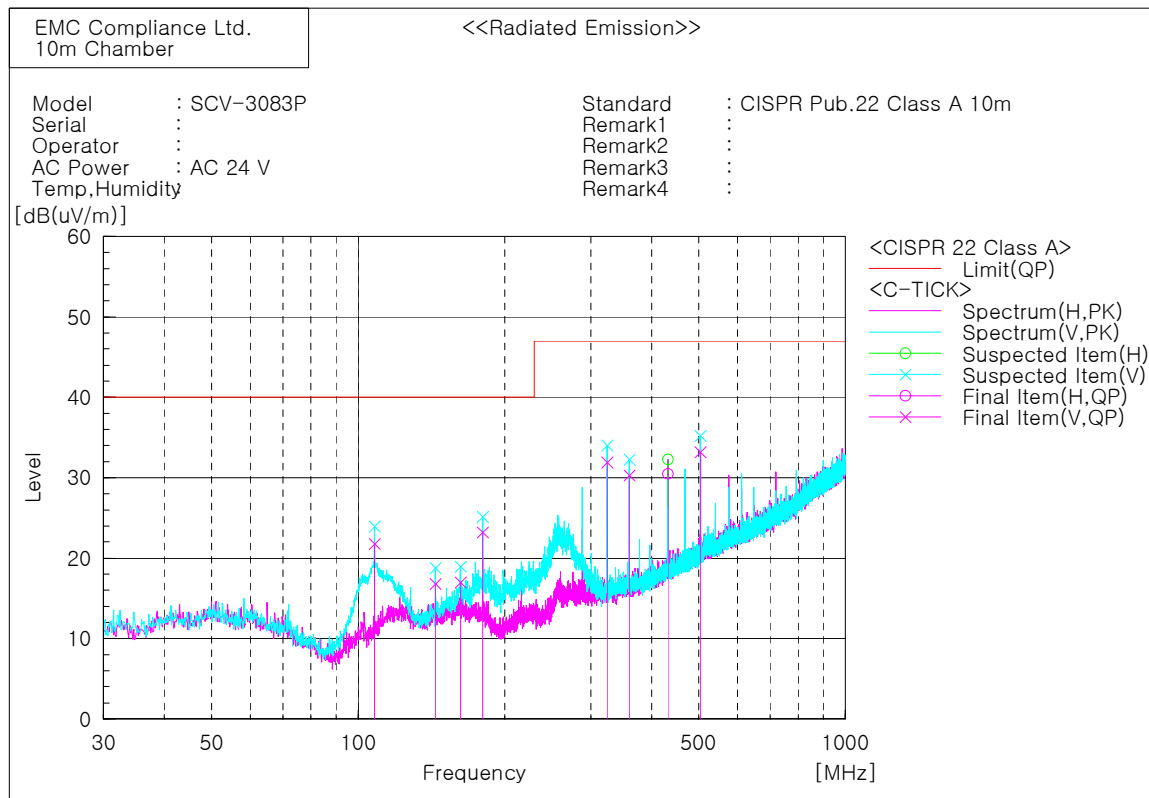

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c. f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	107.964	V	38.1	-16.3	21.8	40.0	18.2	202.0	175.5	
2	143.975	V	29.6	-12.8	16.8	40.0	23.2	100.0	107.6	
3	162.041	V	29.1	-12.1	17.0	40.0	23.0	100.0	145.0	
4	179.986	V	36.6	-13.4	23.2	40.0	16.8	100.0	83.4	
5	324.031	V	41.4	-9.5	31.9	47.0	15.1	100.0	41.6	
6	360.043	V	38.8	-8.5	30.3	47.0	16.7	100.0	330.9	
7	432.065	H	36.9	-6.4	30.5	47.0	16.5	199.0	288.9	
8	503.966	V	37.6	-4.4	33.2	47.0	13.8	100.0	56.5	

* 1 GHz ~ 6 GHz (AC 24 V)

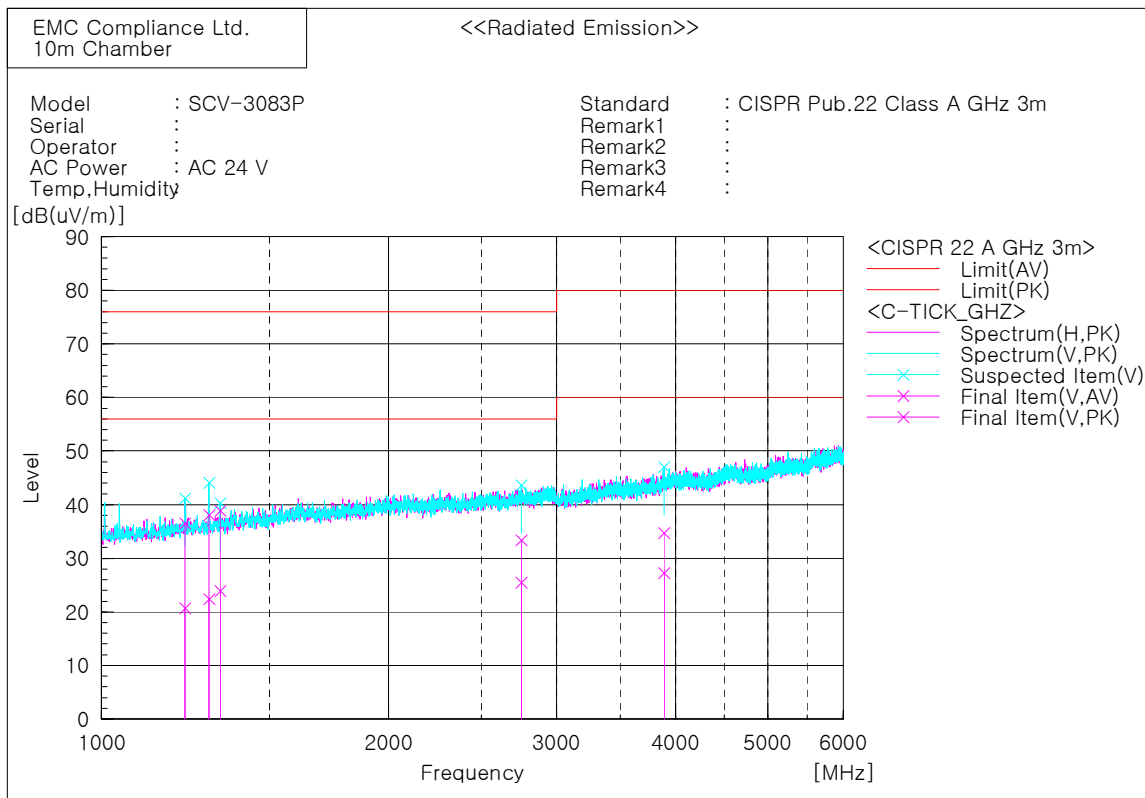

Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1223.750	V	27.5	43.3	-6.8	20.7	36.5	56.0	76.0	35.3	39.5	100.0	54.5	
2	1296.250	V	28.6	44.3	-6.2	22.4	38.1	56.0	76.0	33.6	37.9	100.0	177.9	
3	1331.875	V	29.7	44.7	-5.6	23.9	38.9	56.0	76.0	32.1	37.1	100.0	36.5	
4	2755.625	V	25.6	33.5	-0.1	25.5	33.4	56.0	76.0	30.5	42.6	100.0	11.7	
5	3891.875	V	22.7	30.1	4.6	27.3	34.7	60.0	80.0	32.7	45.3	100.0	350.8	

7. E.U.T. photographs

Front View



Rear View



Left View




Right View



Top View





Bottom View

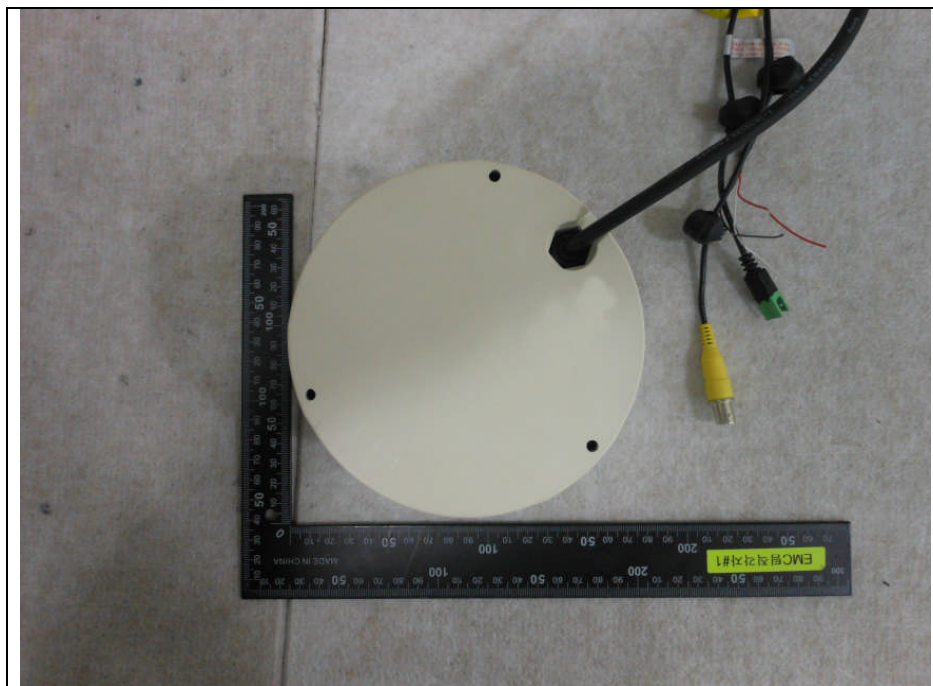



Inside





CCD Board

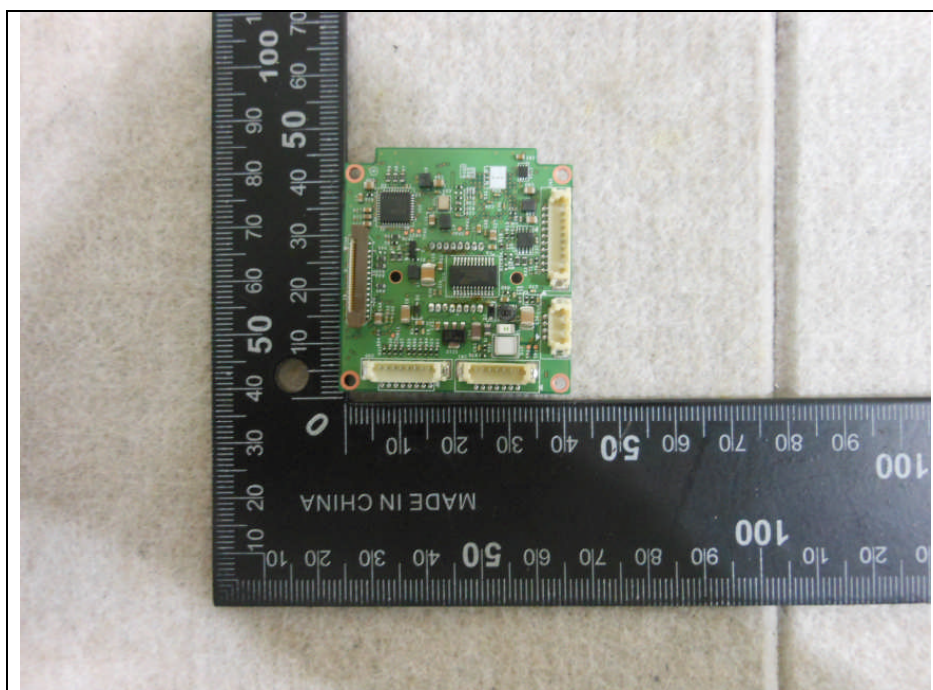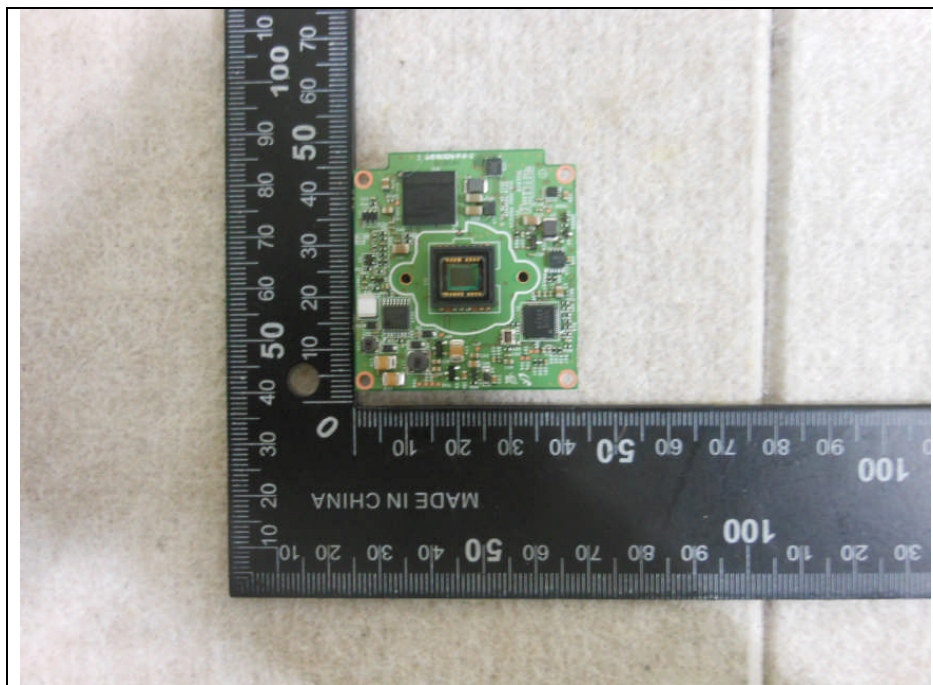

SUB Board#1

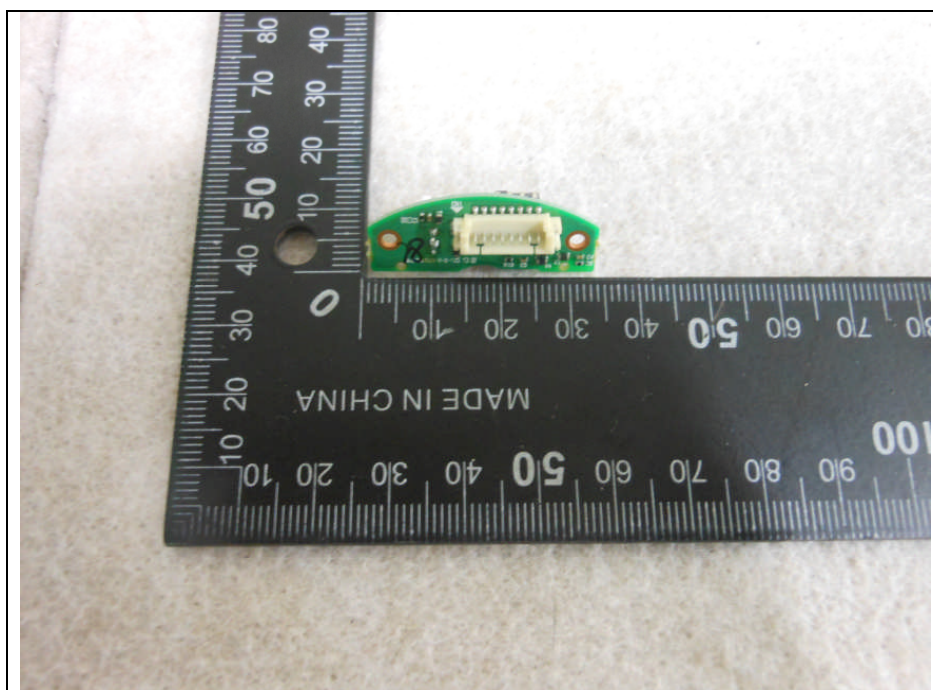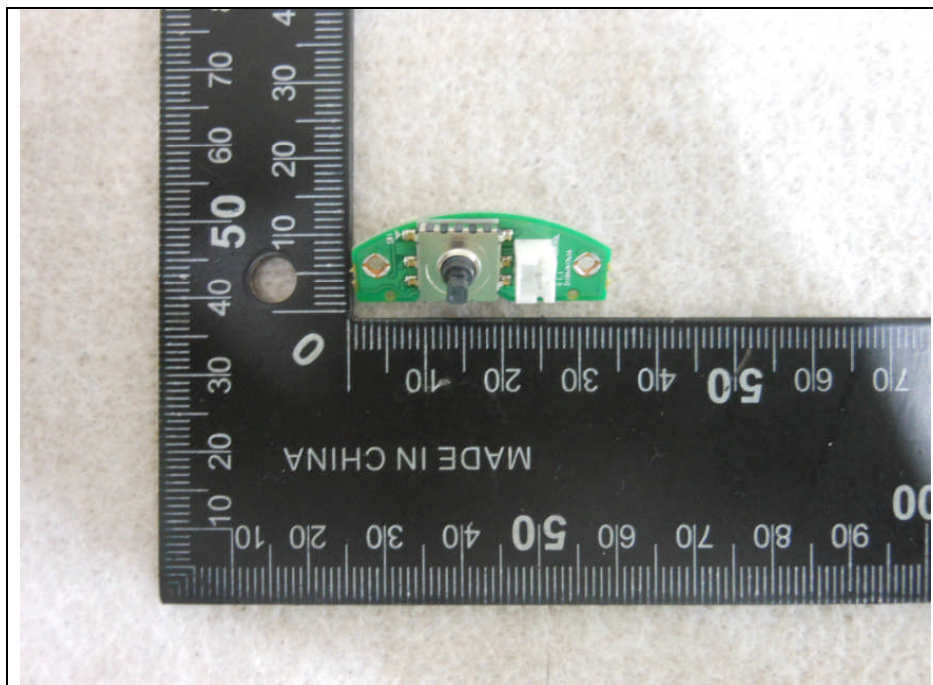

SUB Board#2

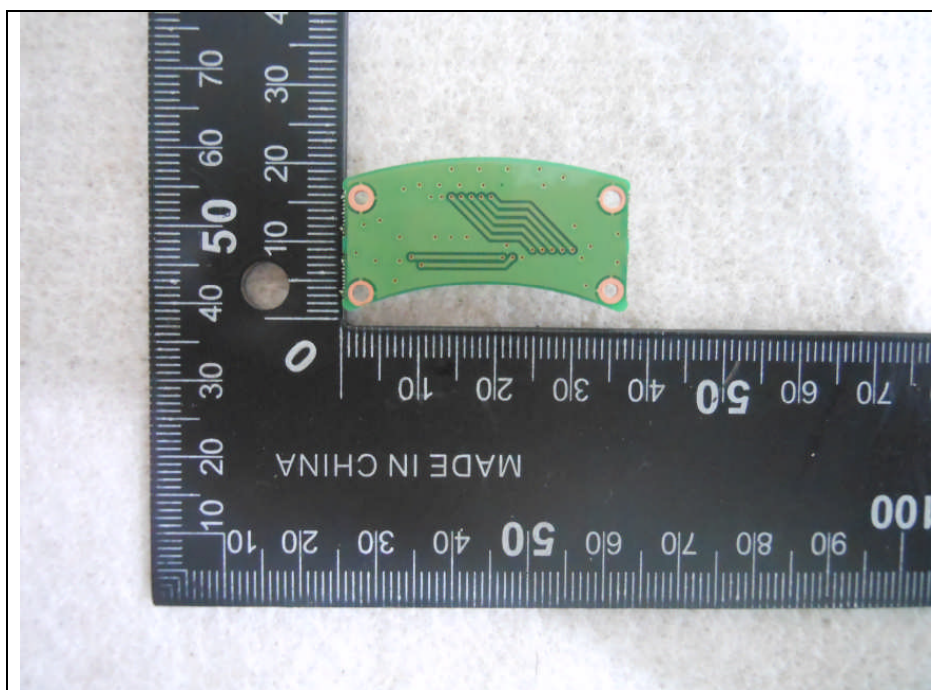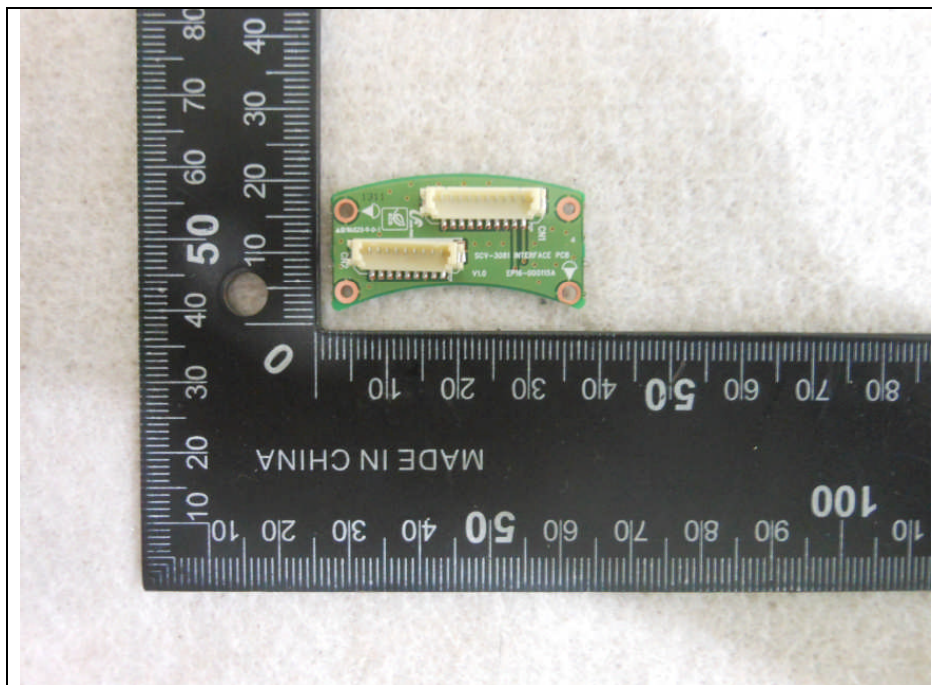

Power Board

